


室内灯具光度数据

实测参数: U:119.5V I:0.3450A P:41.10W PF:0.9960 实检光通:4031.28x1 lm		
灯具名称: 格栅灯4FT 40W 40K下发光 白色外壳	灯具类型:4000K	灯具重量:
外型尺寸:	灯具规格:	测试编号:
制造厂商: YQ	发光口面:1.2*0.06m	保护角:

光源数据		光度数据 光效: 98.08 lm/W			
型号		峰值光强(cd)	1720	S/MH(C0/180)	1.10
标称功率(W)	42	灯具效率(%)	100.0	S/MH(C90/270)	1.19
额定电源电压(V)	120	总光通量(lm)	4031.3	η UP, DN(C0-180)	0.0, 50.0
额定光通量(lm)	4031.28	CIE分类	直接	η UP, DN(C180-360)	0.0, 50.0
灯具内光源数(只)	1	上射光通比(%)	0.1	CIBSE SHR NOM	1.25
实测电源电压(V)	119.5	下射光通比(%)	99.9	CIBSE SHR MAX	1.30

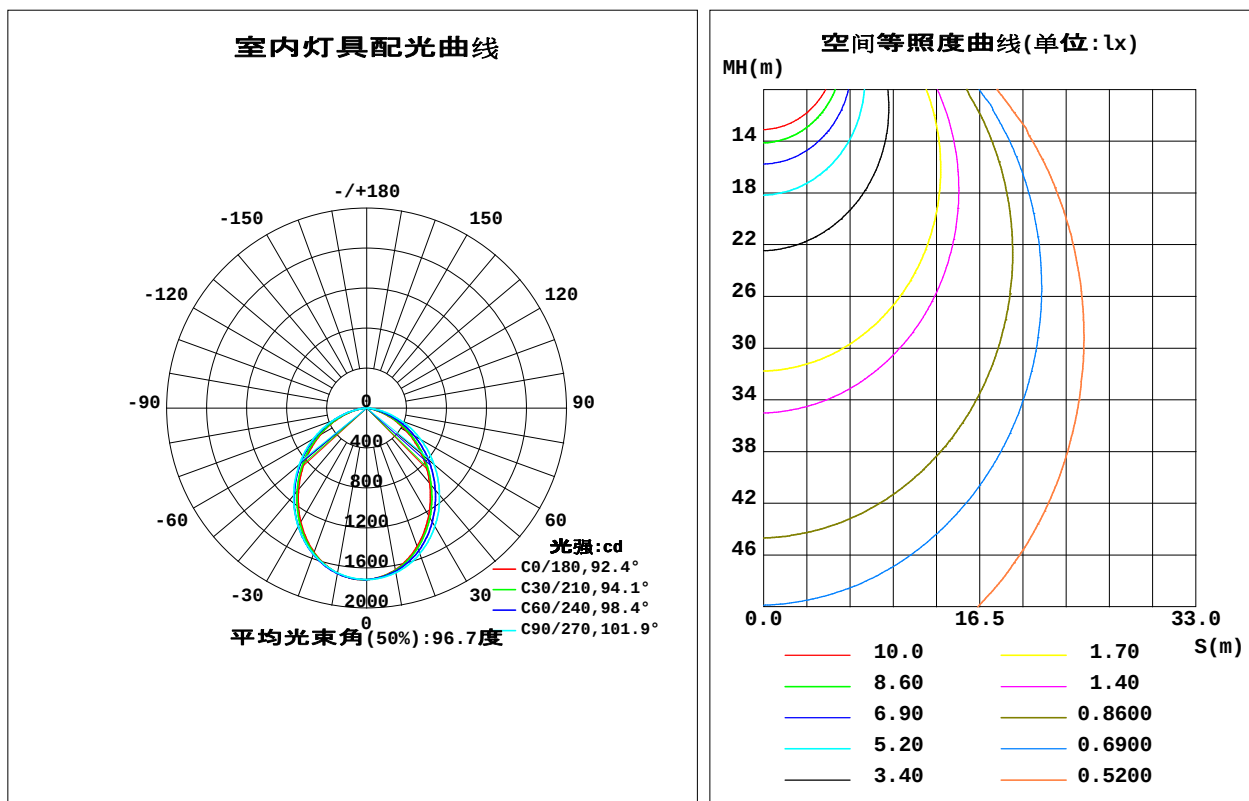

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:26.3℃
测试人员:Ethan
测试日期:2021-12-02

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.268
环境湿度:36%
测试距离:6.770米 [K=1.0000]
备注:

灯具环带光通量和亮度限制曲线


环带光通量:

γ	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	$\Phi_{\text{环}}$	$\Phi_{\text{总}}$	%lum, lamp
5	1692	1696	1704	1714	1711	1710	1706	1694	0- 5	40.87	40.87	1.01, 1.01
10	1644	1654	1673	1688	1678	1680	1674	1649	5- 10	120.6	161.5	4.01, 4.01
15	1569	1589	1621	1639	1619	1626	1624	1581	10- 15	194.3	355.8	8.83, 8.83
20	1475	1507	1551	1570	1537	1552	1555	1496	15- 20	258.7	614.5	15.2, 15.2
25	1365	1404	1465	1480	1436	1460	1470	1393	20- 25	310.8	925.3	23, 23
30	1242	1291	1366	1375	1320	1352	1370	1279	25- 30	348.9	1274	31.6, 31.6
35	1114	1166	1256	1257	1192	1233	1259	1155	30- 35	372.1	1646	40.8, 40.8
40	981.4	1038	1135	1130	1061	1106	1138	1027	35- 40	380.1	2026	50.3, 50.3
45	849.1	906.7	1010	999.7	930.2	975.6	1012	896.8	40- 45	374.2	2401	59.5, 59.5
50	718.3	775.5	882.0	867.6	797.6	843.2	882.1	765.2	45- 50	355.7	2756	68.4, 68.4
55	588.3	645.0	752.1	735.5	665.8	711.1	750.1	634.3	50- 55	325.7	3082	76.5, 76.5
60	459.3	515.8	621.1	604.1	538.2	580.1	617.5	503.5	55- 60	285.8	3368	83.5, 83.5
65	339.4	389.5	491.0	474.9	415.7	451.6	483.9	378.1	60- 65	237.9	3606	89.4, 89.4
70	226.8	270.1	362.4	350.9	299.0	328.2	353.4	258.2	65- 70	184.7	3790	94, 94
75	126.1	159.4	238.4	233.1	190.7	211.6	227.7	148.5	70- 75	128.8	3919	97.2, 97.2
80	48.17	67.15	124.5	126.8	94.64	108.1	113.8	59.02	75- 80	74.56	3994	99.1, 99.1
85	11.33	14.06	34.47	43.05	27.62	31.80	28.36	9.429	80- 85	29.80	4024	99.8, 99.8
90	0.1929	0.2090	0.2045	4.623	1.897	1.022	0.2715	0.2632	85- 90	5.256	4029	99.9, 99.9
95	0.1719	0.1947	0.1981	0.1990	0.2386	0.2549	0.2504	0.2364	90- 95	0.1944	4029	99.9, 99.9
100	0.1661	0.1947	0.2064	0.1907	0.2119	0.2310	0.2351	0.2221	95- 100	0.1155	4029	99.9, 99.9
105	0.1681	0.2071	0.2199	0.1952	0.2005	0.2196	0.2313	0.2192	100- 105	0.1110	4029	100, 100
110	0.1985	0.2329	0.2505	0.2087	0.2006	0.2243	0.2428	0.2346	105- 110	0.1125	4029	100, 100
115	0.2347	0.2730	0.2926	0.2421	0.2292	0.2492	0.2732	0.2709	110- 115	0.1213	4030	100, 100
120	0.2768	0.3216	0.3499	0.2852	0.2655	0.2902	0.3229	0.3197	115- 120	0.1362	4030	100, 100
125	0.3283	0.3713	0.4053	0.3359	0.3133	0.3398	0.3765	0.3628	120- 125	0.1521	4030	100, 100
130	0.3761	0.4209	0.4626	0.3867	0.3686	0.3895	0.4319	0.4164	125- 130	0.1651	4030	100, 100
135	0.4294	0.4686	0.5124	0.4364	0.4240	0.4400	0.4874	0.4652	130- 135	0.1740	4030	100, 100
140	0.4772	0.5135	0.5602	0.4833	0.4718	0.4859	0.5333	0.5121	135- 140	0.1775	4030	100, 100
145	0.5307	0.5622	0.6003	0.5312	0.5119	0.5307	0.5772	0.5570	140- 145	0.1751	4031	100, 100
150	0.5956	0.6128	0.6442	0.5857	0.5692	0.5756	0.6193	0.6050	145- 150	0.1687	4031	100, 100
155	0.6606	0.6662	0.6863	0.6451	0.6264	0.6290	0.6651	0.6576	150- 155	0.1580	4031	100, 100
160	0.7541	0.7379	0.7399	0.7102	0.7163	0.6987	0.7224	0.7284	155- 160	0.1439	4031	100, 100
165	0.8724	0.8142	0.7933	0.7936	0.8461	0.7845	0.7798	0.8020	160- 165	0.1261	4031	100, 100
170	0.9834	0.8619	0.8353	0.8568	0.9258	0.8484	0.8181	0.8365	165- 170	0.0992	4031	100, 100
175	0.9644	0.8666	0.8411	0.8464	0.9070	0.8354	0.8238	0.8376	170- 175	0.0618	4031	100, 100
180	0.9261	0.8466	0.8372	0.8413	0.9242	0.8457	0.8334	0.8413	175- 180	0.0205	4031	100, 100

单位:°

光强:cd

单位:lm

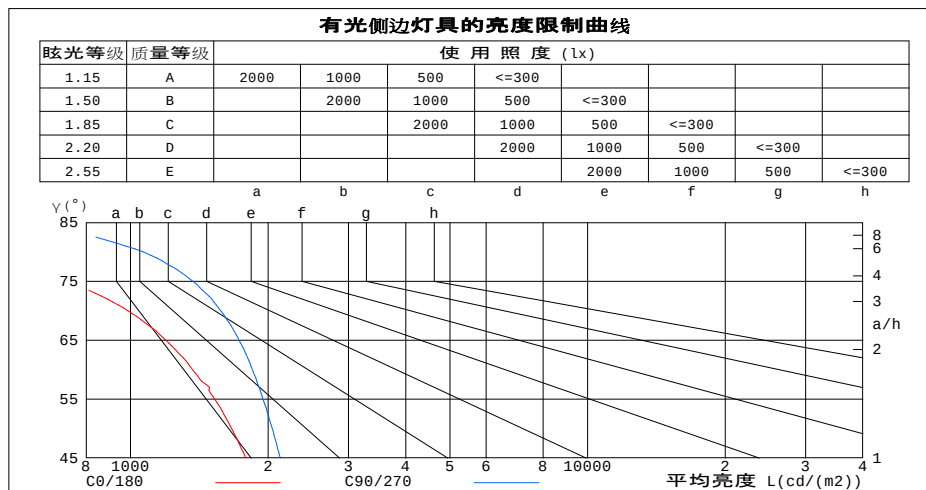

平均亮度值 cd/(m ²)		
$\gamma(^{\circ})$	C0/180	C90/270
85	194	588
80	413	1067
75	726	1370
70	988	1577
65	1196	1729
60	1368	1848
55	1528	1951
50	1664	2042
45	1789	2126

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 26.3°C

测试人员: Ethan

测试日期: 2021-12-02

 γ 角度范围: 0度 - 180度 γ 角度间隔: 0.5度

测试系统: 远方 (EVERFINE) G0-2000B_V1系统 V2.0.268

环境湿度: 36%


测试距离: 6.770米 [K=1.0000]

备注:

工作面利用系数和灯具概算曲线

实测参数: U:119.5V I:0.3450A P:41.10W PF:0.9960 实检光通:4031.28x1 lm		
灯具名称: 格栅灯4FT 40W 40K下发光 白色外壳	灯具类型:4000K	灯具重量:
外型尺寸:	灯具规格:	测试编号:
制造厂商: YQ	发光口面:1.2*0.06m	保护角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.93	.90	.91	.90	.88	.86
2.0	.93	.86	.81	.91	.85	.80	.87	.82	.78	.84	.80	.76	.81	.78	.75	.73
3.0	.82	.74	.68	.80	.73	.68	.78	.71	.66	.75	.70	.65	.72	.68	.64	.62
4.0	.73	.65	.58	.72	.64	.58	.69	.63	.57	.67	.61	.56	.65	.60	.56	.54
5.0	.66	.57	.51	.65	.57	.50	.62	.55	.50	.61	.54	.49	.59	.53	.49	.47
6.0	.59	.51	.45	.58	.50	.44	.57	.49	.44	.55	.49	.44	.53	.48	.43	.41
7.0	.54	.46	.40	.53	.45	.40	.52	.45	.39	.50	.44	.39	.49	.43	.39	.37
8.0	.49	.41	.36	.49	.41	.35	.47	.40	.35	.46	.40	.35	.45	.39	.35	.33
9.0	.46	.38	.32	.45	.37	.32	.44	.37	.32	.43	.36	.32	.42	.36	.32	.30
10.0	.42	.34	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.27

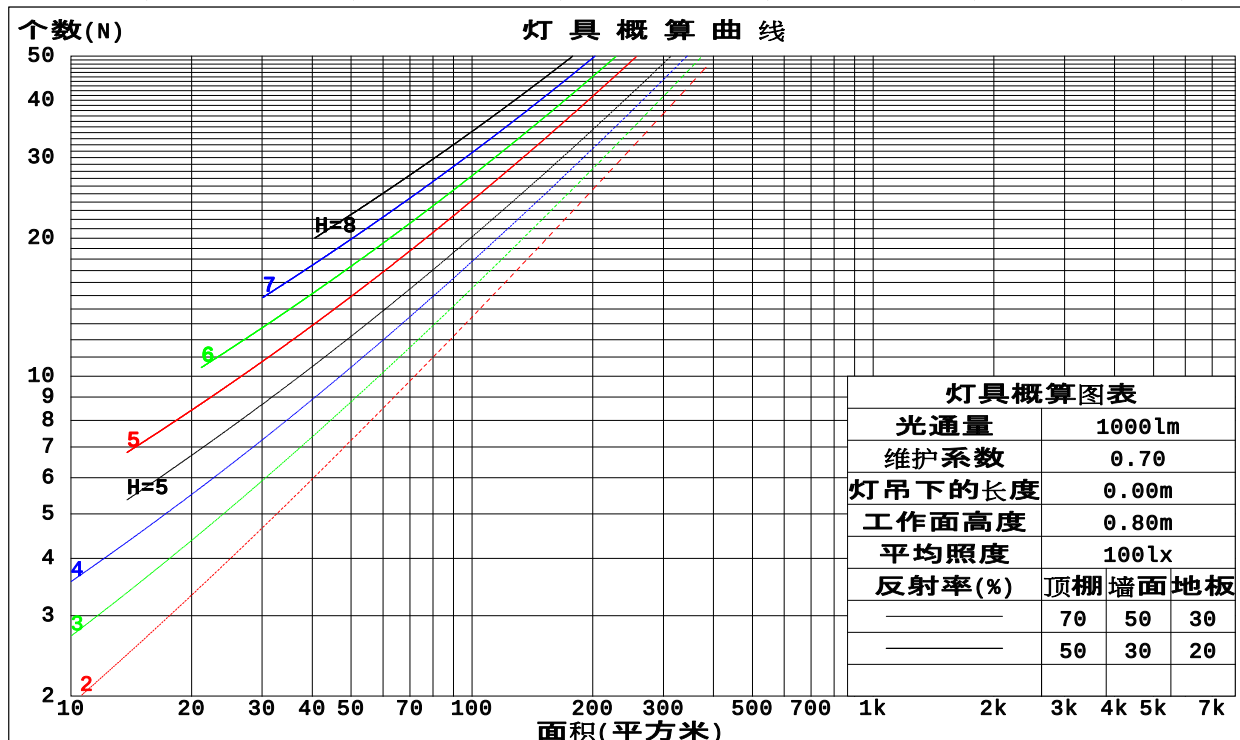

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 26.3℃
 测试人员: Ethan
 测试日期: 2021-12-02

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方 (EVERFINE) G0-2000B_V1系统 V2.0.268
 环境湿度: 36%
 测试距离: 6.770米 [K=1.0000]
 备注:

墙面和天花板利用系数

实测参数: U:119.5V I:0.3450A P:41.10W PF:0.9960 实检光通:4031.28x1 lm					
灯具名称: 格栅灯4FT 40W 40K下发光 白色外壳			灯具类型:4000K		
外型尺寸:			灯具规格:		
制造厂商: YQ			发光口面:1.2*0.06m		
			灯具重量:		
			测试编号:		
			保护角:		

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.281	.160	.051	.274	.156	.050	.261	.150	.048	.249	.144	.046	.238	.138	.044	
2.0	.270	.148	.045	.264	.145	.045	.252	.140	.044	.241	.135	.042	.232	.131	.041	
3.0	.253	.134	.040	.247	.132	.040	.237	.128	.039	.228	.125	.038	.219	.121	.038	
4.0	.235	.122	.036	.230	.121	.036	.221	.117	.035	.213	.114	.035	.205	.112	.034	
5.0	.219	.112	.032	.215	.110	.032	.207	.108	.032	.199	.105	.031	.192	.103	.031	
6.0	.204	.102	.029	.200	.101	.029	.193	.099	.029	.187	.097	.029	.180	.095	.028	
7.0	.191	.094	.027	.187	.093	.027	.181	.092	.026	.175	.090	.026	.170	.088	.026	
8.0	.179	.087	.025	.176	.087	.024	.170	.085	.024	.165	.084	.024	.160	.082	.024	
9.0	.168	.081	.023	.166	.081	.023	.160	.079	.022	.156	.078	.022	.151	.077	.022	
10.0	.159	.076	.021	.156	.075	.021	.152	.074	.021	.147	.073	.021	.143	.072	.021	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天花板利用系数															
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.179	.157	.137	.153	.135	.118	.105	.093	.082	.060	.054	.047	.019	.017	.015	
2.0	.170	.132	.101	.145	.114	.087	.100	.079	.061	.057	.046	.036	.018	.015	.012	
3.0	.162	.115	.077	.139	.099	.067	.095	.069	.047	.055	.040	.028	.018	.013	.009	
4.0	.154	.101	.061	.132	.087	.053	.091	.061	.037	.053	.036	.022	.017	.012	.007	
5.0	.147	.091	.049	.126	.078	.043	.087	.055	.030	.050	.032	.018	.016	.010	.006	
6.0	.140	.082	.041	.120	.071	.036	.083	.050	.025	.048	.029	.015	.015	.010	.005	
7.0	.133	.075	.035	.114	.065	.030	.079	.046	.021	.046	.027	.013	.015	.009	.004	
8.0	.127	.069	.030	.109	.060	.026	.075	.042	.019	.044	.025	.011	.014	.008	.004	
9.0	.121	.064	.026	.104	.056	.023	.072	.039	.016	.042	.023	.010	.014	.008	.003	
10.0	.115	.060	.023	.099	.052	.020	.069	.037	.015	.040	.022	.009	.013	.007	.003	

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 26.3℃
测试人员: Ethan
测试日期: 2021-12-02

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.268
环境湿度: 36%
测试距离: 6.770米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:119.5V I:0.3450A P:41.10W PF:0.9960 实检光通:4031.28x1 lm										
灯具名称: 格栅灯4FT 40W 40K下发光 白色外壳					灯具类型:4000K			灯具重量:		
外型尺寸:					灯具规格:			测试编号:		
制造厂商: YQ					发光口面:1.2*0.06m			保护角:		
反射比天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉(Viewed crosswise)					向前(Viewed endwise)				
x = 2H y = 2H	13.8	15.2	14.1	15.4	15.6	14.9	16.3	15.1	16.5	16.7
3H	14.7	16.1	15.0	16.3	16.5	16.2	17.5	16.5	17.8	18.0
4H	15.0	16.2	15.3	16.5	16.7	16.7	17.9	17.0	18.2	18.4
6H	15.0	16.2	15.3	16.5	16.7	16.9	18.1	17.3	18.4	18.7
8H	15.0	16.1	15.3	16.4	16.7	17.0	18.1	17.3	18.4	18.7
12H	14.9	16.0	15.3	16.3	16.6	17.0	18.1	17.3	18.4	18.7
4H 2H	14.4	15.6	14.7	15.9	16.1	15.2	16.5	15.5	16.7	17.0
3H	15.4	16.5	15.8	16.8	17.1	16.7	17.8	17.0	18.1	18.4
4H	15.7	16.7	16.1	17.0	17.4	17.3	18.3	17.6	18.6	18.9
6H	15.8	16.7	16.2	17.1	17.4	17.6	18.5	18.0	18.8	19.2
8H	15.8	16.6	16.2	17.0	17.4	17.7	18.5	18.1	18.9	19.3
12H	15.8	16.5	16.2	16.9	17.3	17.7	18.5	18.1	18.8	19.2
8H 4H	15.9	16.7	16.3	17.1	17.5	17.3	18.1	17.7	18.5	18.9
6H	16.0	16.7	16.5	17.1	17.5	17.7	18.4	18.2	18.8	19.2
8H	16.0	16.6	16.5	17.1	17.5	17.8	18.4	18.3	18.9	19.3
12H	16.0	16.5	16.5	17.0	17.5	17.9	18.4	18.4	18.8	19.3
12H 4H	15.9	16.6	16.3	17.0	17.4	17.3	18.0	17.7	18.4	18.8
6H	16.0	16.6	16.5	17.1	17.5	17.7	18.3	18.2	18.7	19.2
8H	16.0	16.6	16.5	17.0	17.5	17.8	18.3	18.3	18.8	19.3
不同间隔布灯时,观察者位置引起的UGR变化:										
S = 1.0H	+ 0.3 / - 0.4					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.2				
2.0H	+ 0.5 / - 0.6					+ 0.5 / - 0.6				

依据CIE Pub.117计算,表格已按4031lm光源光通进行修正($8\log(F/F_0) = 4.8$).

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 26.3°C
测试人员: Ethan
测试日期: 2021-12-02

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.268
环境湿度: 36%
测试距离: 6.770米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:119.5V I:0.3450A P:41.10W PF:0.9960 实检光通:4031.28x1 lm		
灯具名称: 格栅灯4FT 40W 40K下发光 白色外壳	灯具类型:4000K	灯具重量:
外型尺寸:	灯具规格:	测试编号:
制造厂商: YQ	发光口面:1.2*0.06m	保护角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
k = 0.60	61	50	43	60	49	43	59	49	43	37
0.80	71	60	53	70	59	53	68	59	52	46
1.00	79	69	62	78	68	62	76	69	61	54
1.25	86	76	70	85	76	69	82	74	68	62
1.50	91	82	75	89	81	75	86	79	74	67
2.00	97	89	83	95	88	83	92	86	81	74
2.50	101	94	88	99	92	87	95	90	85	78
3.00	104	98	93	102	96	92	98	93	89	81
4.00	108	102	98	105	101	97	101	97	94	86
5.00	110	105	102	107	104	100	103	100	97	88
ROOM INDEX	UF(总)									UF(直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 26.3°C
 测试人员: Ethan
 测试日期: 2021-12-02

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.268
 环境湿度: 36%
 测试距离: 6.770米 [K=1.0000]
 备注:

灯 具 等 光 强 曲 线

实测参数: U:119.5V I:0.3450A P:41.10W PF:0.9960 实检光通:4031.28x1 lm		
灯具名称: 格栅灯4FT 40W 40K下发光 白色外壳	灯具类型:4000K	灯具重量:
外型尺寸:	灯具规格:	测试编号:
制造厂商: YQ	发光口面:1.2*0.06m	保护角:

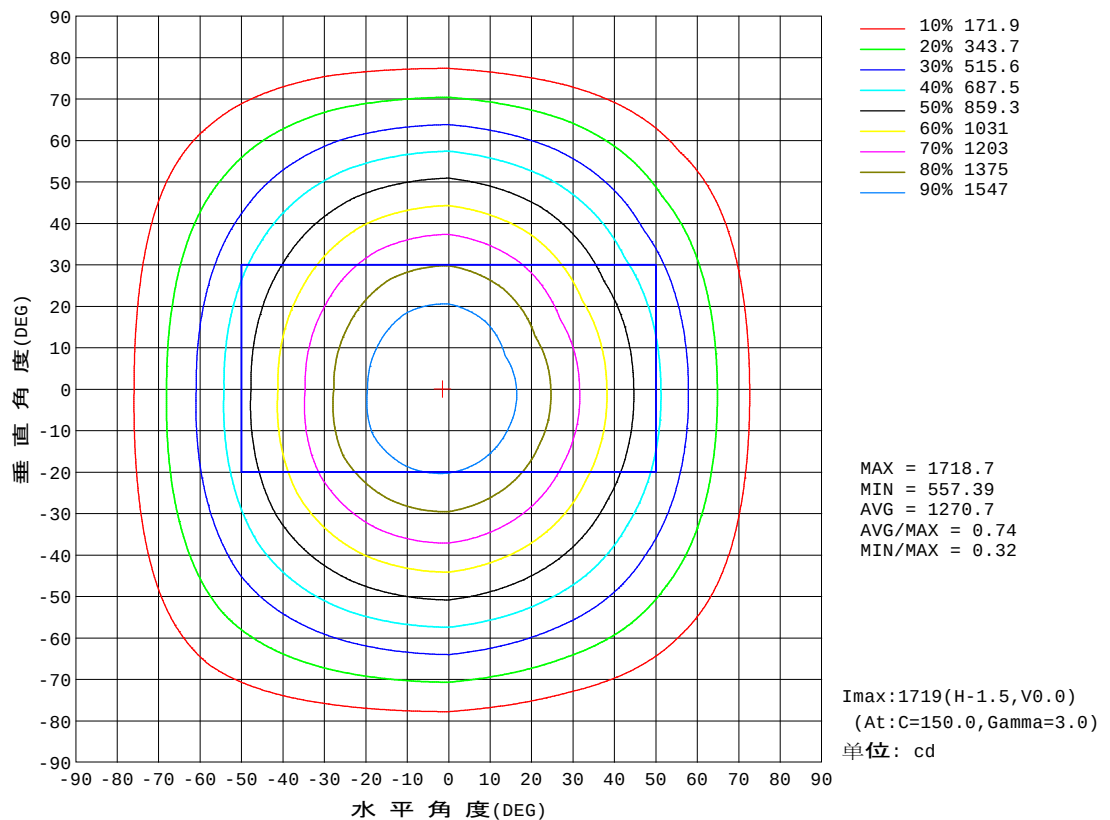


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 26.3°C
测试人员: Ethan
测试日期: 2021-12-02

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.268
环境湿度: 36%
测试距离: 6.770米 [K=1.0000]
备注:

灯具有效平均照度图

实测参数: U:119.5V I:0.3450A P:41.10W PF:0.9960 实检光通:4031.28x1 lm		
灯具名称: 格栅灯4FT 40W 40K下发光 白色外壳	灯具类型:4000K	灯具重量:
外型尺寸:	灯具规格:	测试编号:
制造厂商: YQ	发光口面:1.2*0.06m	保护角:

光通输出:2510 lm

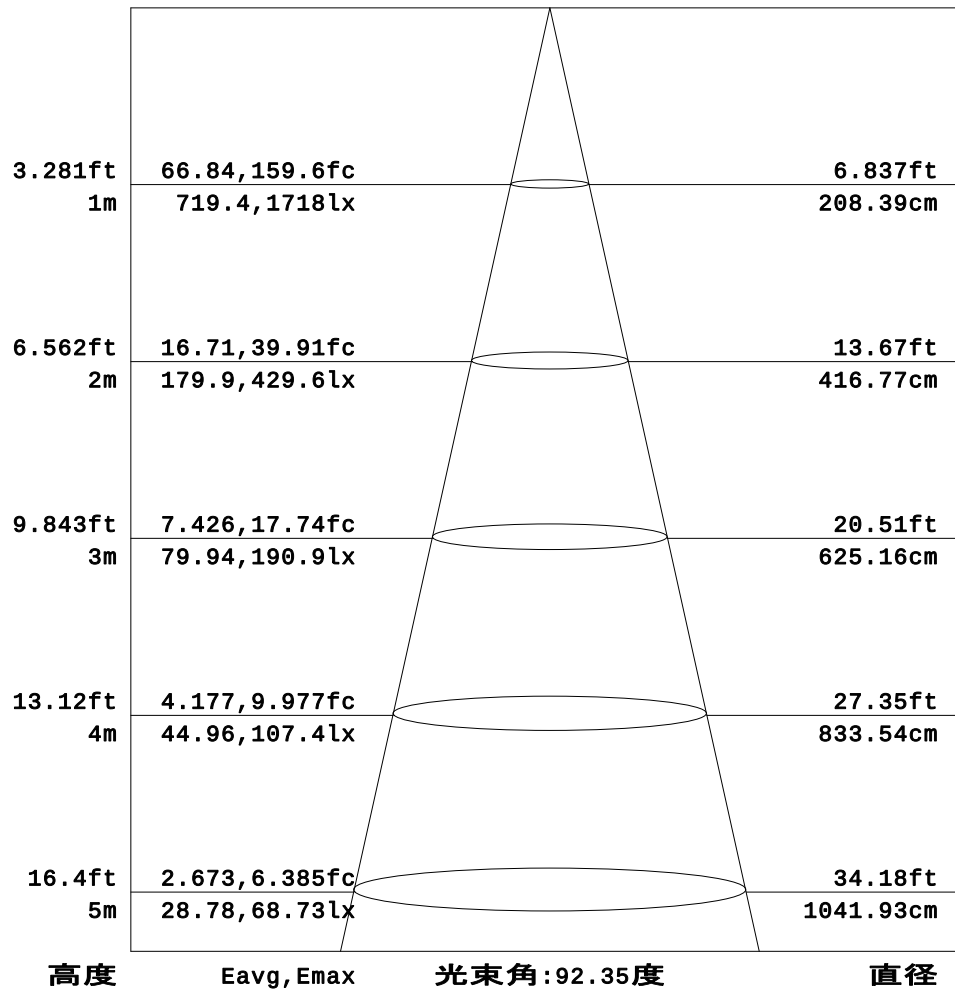


注:曲线为灯具在不同投射距离下的照射区域及区域内平均照度.

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 26.3℃
 测试人员: Ethan
 测试日期: 2021-12-02

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.268
 环境湿度: 36%
 测试距离: 6.770米 [K=1.0000]
 备注:

平面等照度曲线


实测参数: U:119.5V I:0.3450A P:41.10W PF:0.9960 实检光通:4031.28x1 lm		
灯具名称: 格栅灯4FT 40W 40K下发光 白色外壳	灯具类型:4000K	灯具重量:
外型尺寸:	灯具规格:	测试编号:
制造厂商: YQ	发光口面:1.2*0.06m	保护角:

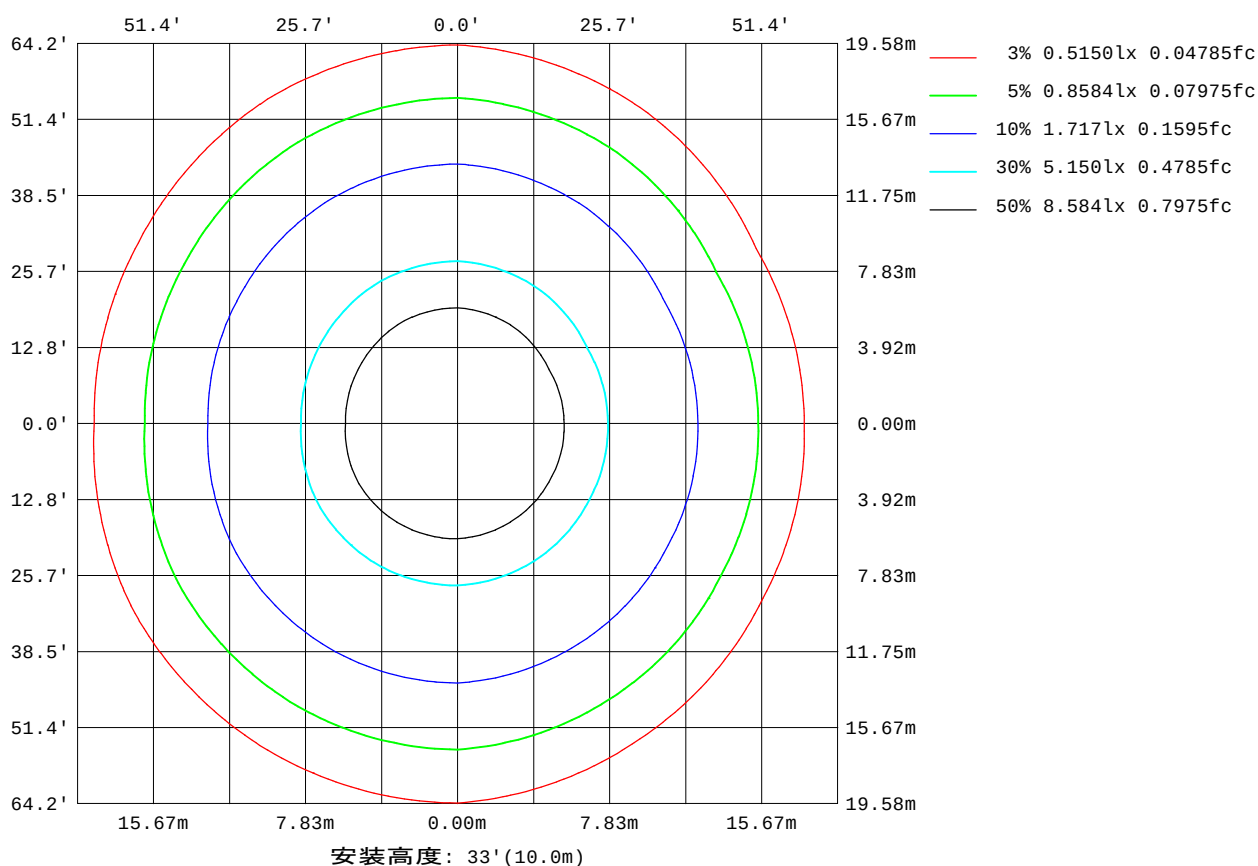

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 26.3°C
 测试人员: Ethan
 测试日期: 2021-12-02

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方 (EVERFINE) G0-2000B_V1系统 V2.0.268
 环境湿度: 36%
 测试距离: 6.770米 [K=1.0000]
 备注:

平面照度曲线

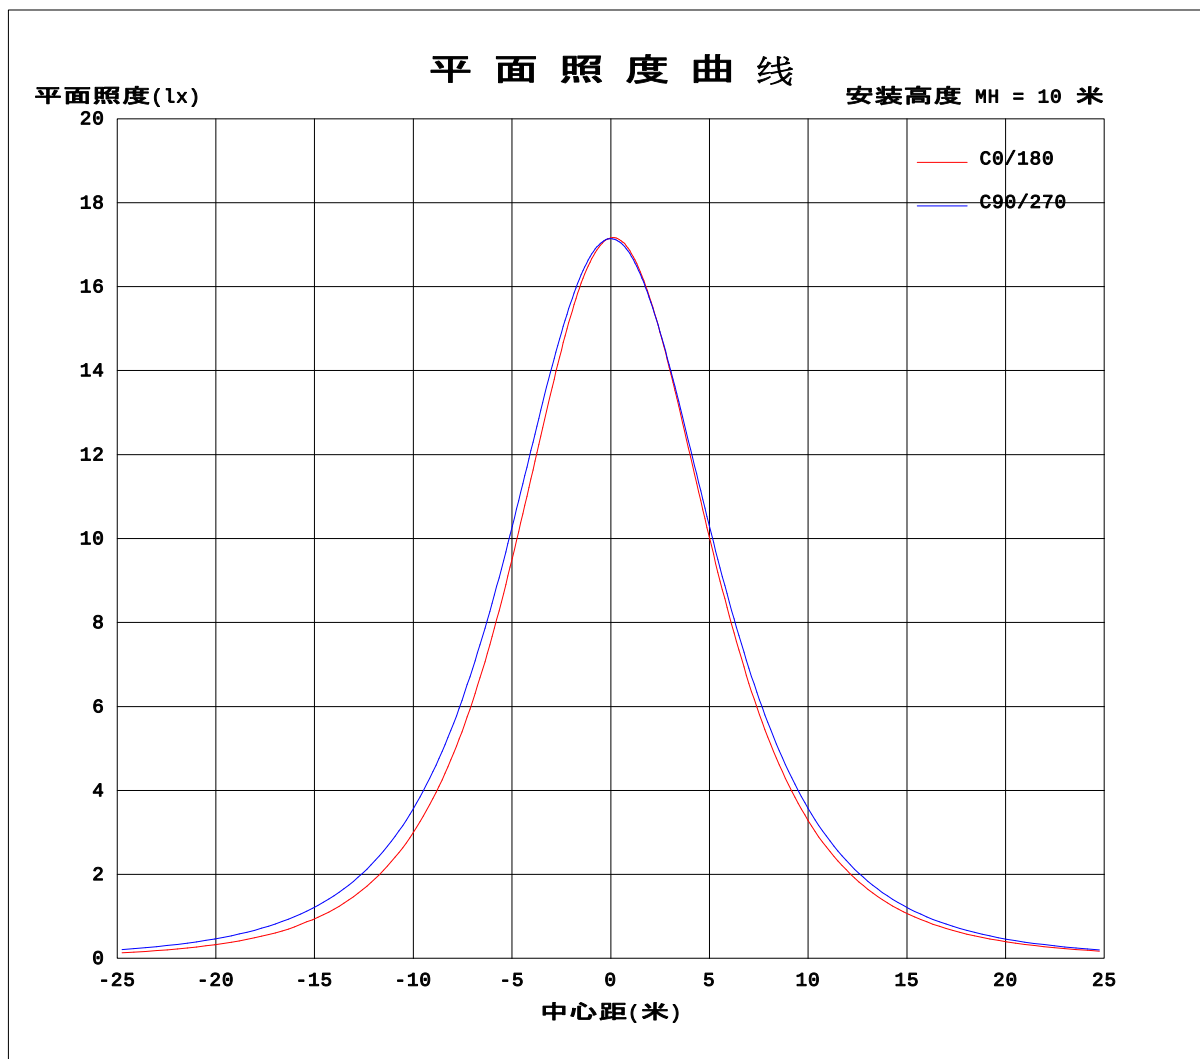

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 26.3°C
测试人员: Ethan
测试日期: 2021-12-02

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.268
环境湿度: 36%
测试距离: 6.770米 [K=1.0000]
备注:

光强分布数据表格

实测参数: U:119.5V I:0.3450A P:41.10W PF:0.9960 实检光通:4031.28x1 lm											
灯具名称: 格栅灯4FT 40W 40K下发光 白色外壳						灯具类型:4000K				灯具重量:	
外型尺寸:						灯具规格:				测试编号:	
制造厂商: YQ						发光口面:1.2*0.06m				保护角:	

表--1

单位: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1715	1715	1715	1715	1715	1715	1715	1715	1715	1715	1715	1715						
5	1692	1695	1698	1704	1712	1716	1711	1710	1710	1706	1699	1690						
10	1644	1650	1658	1673	1685	1692	1678	1678	1681	1674	1659	1639						
15	1569	1580	1598	1621	1635	1643	1619	1622	1630	1624	1599	1563						
20	1475	1491	1522	1551	1568	1571	1537	1545	1559	1555	1521	1470						
25	1365	1384	1424	1465	1478	1481	1436	1448	1471	1470	1425	1361						
30	1242	1267	1315	1366	1376	1373	1320	1336	1368	1370	1318	1241						
35	1114	1137	1196	1256	1262	1252	1192	1213	1253	1259	1198	1112						
40	981	1005	1070	1135	1139	1122	1061	1084	1127	1138	1073	980						
45	849	873	940	1010	1009	990	930	953	998	1012	945	849						
50	718	742	809	882	878	857	798	821	866	882	813	718						
55	588	613	677	752	745	726	666	689	733	750	680	588						
60	459	485	547	621	614	594	538	559	602	617	549	458						
65	339	361	418	491	482	468	416	431	473	484	421	336						
70	227	246	294	362	356	346	299	311	346	353	296	221						
75	126	140	178	238	235	231	191	198	225	228	179	118						
80	48.2	54.6	79.7	125	126	128	94.6	99.7	117	114	77.3	40.7						
85	11.3	12.5	15.6	34.5	40.9	45.2	27.6	29.4	34.2	28.4	13.8	5.01						
90	0.19	0.21	0.21	0.20	1.31	7.94	1.90	1.52	0.52	0.27	0.27	0.26						
95	0.17	0.19	0.20	0.20	0.20	0.19	0.24	0.25	0.26	0.25	0.24	0.23						
100	0.17	0.19	0.20	0.21	0.20	0.18	0.21	0.22	0.24	0.24	0.23	0.21						
105	0.17	0.19	0.22	0.22	0.21	0.18	0.20	0.21	0.23	0.23	0.23	0.21						
110	0.20	0.22	0.24	0.25	0.23	0.19	0.20	0.21	0.24	0.24	0.24	0.23						
115	0.23	0.26	0.28	0.29	0.27	0.22	0.23	0.24	0.26	0.27	0.27	0.27						
120	0.28	0.31	0.34	0.35	0.31	0.26	0.27	0.27	0.31	0.32	0.32	0.32						
125	0.33	0.36	0.39	0.41	0.37	0.30	0.31	0.33	0.35	0.38	0.36	0.36						
130	0.38	0.41	0.43	0.46	0.42	0.36	0.37	0.38	0.40	0.43	0.42	0.42						
135	0.43	0.46	0.48	0.51	0.46	0.41	0.42	0.43	0.45	0.49	0.47	0.47						
140	0.48	0.50	0.52	0.56	0.51	0.46	0.47	0.48	0.49	0.53	0.51	0.51						
145	0.53	0.56	0.57	0.60	0.55	0.51	0.51	0.52	0.54	0.58	0.56	0.56						
150	0.60	0.61	0.62	0.64	0.61	0.56	0.57	0.57	0.58	0.62	0.61	0.60						
155	0.66	0.66	0.67	0.69	0.68	0.61	0.63	0.62	0.64	0.67	0.66	0.66						
160	0.75	0.75	0.73	0.74	0.75	0.67	0.72	0.69	0.70	0.72	0.72	0.74						
165	0.87	0.84	0.79	0.79	0.81	0.78	0.85	0.78	0.78	0.78	0.77	0.83						
170	0.98	0.89	0.83	0.84	0.86	0.86	0.93	0.87	0.82	0.82	0.82	0.85						
175	0.96	0.89	0.85	0.84	0.83	0.86	0.91	0.85	0.82	0.82	0.83	0.85						
180	0.93	0.86	0.84	0.84	0.83	0.85	0.92	0.86	0.83	0.83	0.83	0.85						

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 26.3℃

测试人员: Ethan

测试日期: 2021-12-02

γ角度范围: 0度 - 180度

γ角度间隔: 0.5度

测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.268

环境湿度: 36%

测试距离: 6.770米 [K=1.0000]

备注: