


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:118.2V I:0.1680A P:19.70W PF:0.9950 Lamp Flux:2504.78x1 lm					
NAME: 2FT二代线条灯 20w 30K A档灯珠			TYPE:白色外壳 3000K		WEIGHT:
DIM.:			SPEC.:下发光		SERIAL No.:
MFR.: YQ			SUR.:0.6*0.065		PROTECTION ANGLE:

DATA OF LAMP			PHOTOMETRIC DATA Eff: 116.00 lm/W		
MODEL		I _{max} (cd)	828.2	S/MH(C0/180)	1.21
NOMINAL POWER(W)	20	LOR(%)	91.2	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	118	TOTAL FLUX(lm)	2285.2	η UP, DN(C0-180)	0.0, 45.4
NOMINAL FLUX(lm)	2504.78	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 45.8
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	118.3	η down(%)	91.2	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

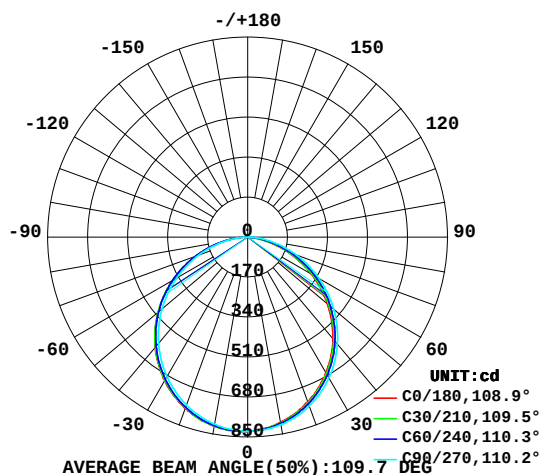

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

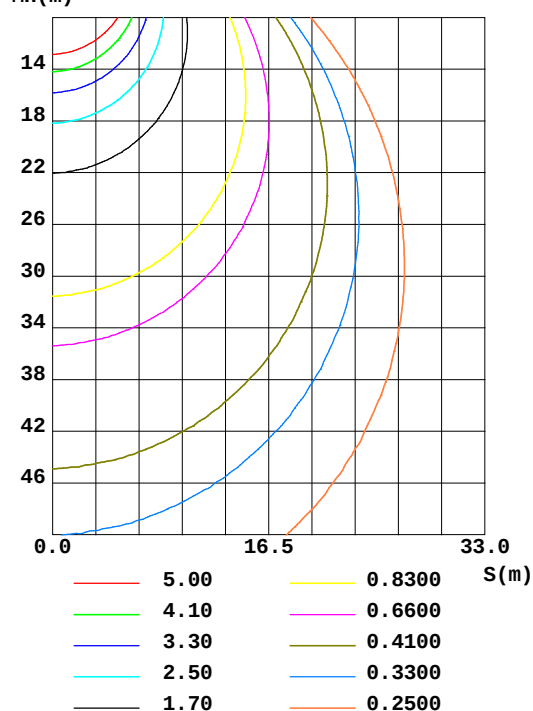


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-10-23

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	ϕ zone	ϕ total	%lum, lamp
5	816.5	819.1	821.4	826.2	824.5	824.8	819.9	817.0	0- 5	19.69	19.69	0.86, 0.79
10	800.4	804.0	810.3	818.0	816.3	815.1	807.8	800.4	5- 10	58.34	78.03	3.41, 3.12
15	776.3	781.4	791.1	801.9	799.8	797.2	787.9	776.8	10- 15	94.81	172.8	7.56, 6.9
20	745.7	751.8	765.0	778.4	776.1	772.4	760.4	745.5	15- 20	127.8	300.7	13.2, 12
25	708.3	715.8	731.5	747.5	743.9	740.4	726.1	708.0	20- 25	156.2	456.9	20, 18.2
30	665.3	673.5	691.7	710.1	704.8	701.8	686.5	664.6	25- 30	179.1	636.0	27.8, 25.4
35	618.5	626.5	646.0	667.3	660.2	657.7	640.4	616.4	30- 35	195.7	831.7	36.4, 33.2
40	564.3	573.6	593.7	617.9	611.5	608.3	589.5	563.9	35- 40	205.6	1037	45.4, 41.4
45	505.6	516.8	538.1	563.8	556.9	554.7	534.2	507.3	40- 45	208.4	1246	54.5, 49.7
50	443.0	455.7	477.9	506.1	498.2	496.5	475.3	446.3	45- 50	204.1	1450	63.4, 57.9
55	378.5	391.1	415.3	443.6	434.1	434.1	413.4	382.3	50- 55	192.8	1643	71.9, 65.6
60	310.1	323.8	349.6	378.2	367.4	369.3	348.5	316.3	55- 60	175.2	1818	79.5, 72.6
65	242.9	255.5	283.8	310.9	300.1	302.0	283.5	249.3	60- 65	151.8	1970	86.2, 78.6
70	175.8	187.6	217.2	242.2	231.0	233.8	217.8	182.4	65- 70	123.9	2093	91.6, 83.6
75	111.3	121.9	152.2	174.6	164.4	166.9	153.7	118.3	70- 75	92.98	2186	95.7, 87.3
80	51.59	61.46	89.48	109.9	98.35	102.3	93.12	58.45	75- 80	60.82	2247	98.3, 89.7
85	4.809	11.12	34.62	51.04	39.24	43.64	37.25	11.09	80- 85	29.78	2277	99.6, 90.9
90	0.1337	0.1443	0.1108	3.942	3.137	2.374	0.1901	0.2304	85- 90	6.641	2284	99.9, 91.2
95	0.1223	0.1233	0.1089	0.1358	0.1719	0.2102	0.1605	0.1817	90- 95	0.2246	2284	99.9, 91.2
100	0.1298	0.1261	0.1165	0.1262	0.1566	0.1730	0.1547	0.1664	95-100	0.0808	2284	99.9, 91.2
105	0.1337	0.1357	0.1299	0.1310	0.1490	0.1643	0.1528	0.1616	100-105	0.0775	2284	100, 91.2
110	0.1489	0.1491	0.1452	0.1415	0.1509	0.1634	0.1604	0.1673	105-110	0.0782	2284	100, 91.2
115	0.1700	0.1710	0.1643	0.1568	0.1585	0.1663	0.1680	0.1788	110-115	0.0807	2284	100, 91.2
120	0.1967	0.1911	0.1910	0.1731	0.1757	0.1815	0.1890	0.1980	115-120	0.0854	2284	100, 91.2
125	0.2196	0.2131	0.2083	0.1970	0.1987	0.2026	0.2120	0.2210	120-125	0.0912	2284	100, 91.2
130	0.2425	0.2341	0.2349	0.2161	0.2235	0.2293	0.2368	0.2448	125-130	0.0958	2284	100, 91.2
135	0.2579	0.2561	0.2559	0.2381	0.2523	0.2485	0.2616	0.2640	130-135	0.0981	2285	100, 91.2
140	0.2750	0.2724	0.2751	0.2572	0.2693	0.2694	0.2807	0.2831	135-140	0.0973	2285	100, 91.2
145	0.2922	0.2906	0.2941	0.2754	0.2846	0.2857	0.2978	0.2984	140-145	0.0935	2285	100, 91.2
150	0.3075	0.3106	0.3114	0.2964	0.2999	0.3030	0.3151	0.3175	145-150	0.0877	2285	100, 91.2
155	0.3266	0.3325	0.3266	0.3156	0.3152	0.3211	0.3322	0.3348	150-155	0.0799	2285	100, 91.2
160	0.3552	0.3622	0.3553	0.3433	0.3439	0.3488	0.3608	0.3643	155-160	0.0711	2285	100, 91.2
165	0.3915	0.3899	0.3801	0.3720	0.3821	0.3794	0.3895	0.3930	160-165	0.0607	2285	100, 91.2
170	0.4202	0.4147	0.4087	0.4036	0.4108	0.4033	0.4086	0.4132	165-170	0.0472	2285	100, 91.2
175	0.4241	0.4176	0.4144	0.4103	0.4145	0.4084	0.4030	0.4055	170-175	0.0295	2285	100, 91.2
180	0.4126	0.4014	0.4010	0.4016	0.4145	0.4023	0.4049	0.4016	175-180	0.0097	2285	100, 91.2
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

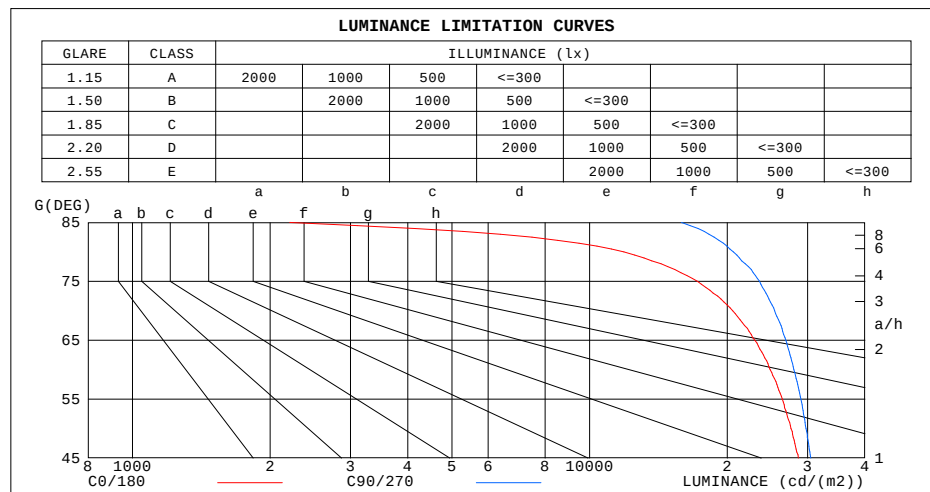

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	2208	15902
80	11891	20628
75	17212	23541
70	20568	25425
65	22999	26880
60	24825	27994
55	26407	28989
50	27582	29763
45	28617	30464


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-10-23

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:118.2V I:0.1680A P:19.70W PF:0.9950 Lamp Flux:2504.78x1 lm		
NAME: 2FT二代线条灯 20w 30K A档灯珠	TYPE:白色外壳 3000K	WEIGHT:
DIM.:	SPEC.:下发光	SERIAL No.:
MFR.: YQ	SUR.:0.6*0.065	PROTECTION ANGLE:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.09	1.09	1.09	1.06	1.06	1.06	1.01	1.01	1.01	.97	.97	.97	.93	.93	.93	.91
1.0	.95	.91	.88	.93	.89	.86	.89	.86	.83	.85	.83	.81	.82	.80	.79	.77
2.0	.83	.77	.71	.81	.75	.71	.78	.73	.69	.75	.71	.67	.72	.69	.66	.64
3.0	.73	.65	.59	.71	.64	.59	.69	.63	.58	.66	.61	.57	.64	.59	.56	.54
4.0	.64	.56	.50	.63	.56	.50	.61	.54	.49	.59	.53	.49	.57	.52	.48	.46
5.0	.58	.49	.43	.57	.49	.43	.55	.48	.43	.53	.47	.42	.51	.46	.42	.40
6.0	.52	.44	.38	.51	.43	.38	.49	.42	.37	.48	.42	.37	.46	.41	.37	.35
7.0	.47	.39	.33	.46	.39	.33	.45	.38	.33	.44	.37	.33	.42	.37	.33	.31
8.0	.43	.35	.30	.42	.35	.30	.41	.34	.30	.40	.34	.29	.39	.33	.29	.27
9.0	.39	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.36	.30	.26	.25
10.0	.36	.29	.24	.36	.29	.24	.35	.29	.24	.34	.28	.24	.33	.28	.24	.22

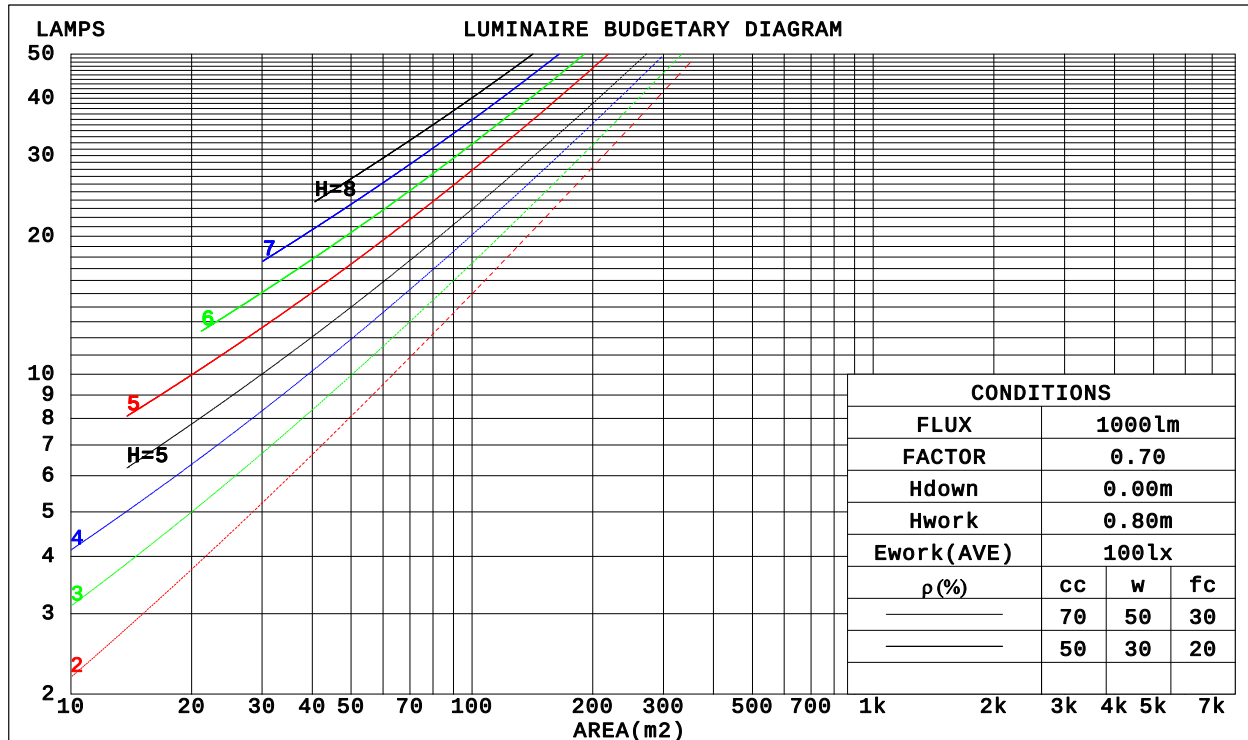

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-10-23

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:118.2V I:0.1680A P:19.70W PF:0.9950 Lamp Flux:2504.78x1 lm					
NAME: 2FT二代线条灯 20w 30K A档灯珠			TYPE:白色外壳 3000K		WEIGHT:
DIM.:			SPEC.:下发光		SERIAL No.:
MFR.: YQ			SUR.:0.6*0.065		PROTECTION ANGLE:

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.278	.158	.050	.271	.155	.049	.259	.149	.047	.248	.143	.046	.238	.138	.044		
2.0	.263	.144	.044	.257	.142	.044	.246	.137	.043	.237	.133	.042	.227	.129	.041		
3.0	.244	.130	.039	.239	.128	.038	.229	.124	.038	.221	.121	.037	.212	.118	.036		
4.0	.225	.117	.034	.221	.116	.034	.213	.113	.034	.205	.110	.033	.198	.107	.033		
5.0	.209	.106	.031	.205	.105	.031	.197	.103	.030	.190	.100	.030	.184	.098	.030		
6.0	.194	.097	.028	.190	.096	.028	.184	.094	.027	.177	.092	.027	.172	.090	.027		
7.0	.180	.089	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	.161	.083	.025		
8.0	.169	.082	.023	.166	.082	.023	.160	.080	.023	.155	.079	.023	.151	.077	.023		
9.0	.158	.076	.021	.156	.076	.021	.151	.075	.021	.146	.073	.021	.142	.072	.021		
10.0	.149	.071	.020	.146	.071	.020	.142	.070	.020	.138	.069	.019	.134	.068	.019		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.174	.174	.174	.149	.149	.149	.102	.102	.102	.058	.058	.058	.019	.019	.019	
1.0	.165	.143	.123	.141	.123	.106	.096	.084	.073	.055	.049	.043	.018	.016	.014	
2.0	.157	.121	.090	.135	.104	.078	.092	.072	.054	.053	.042	.032	.017	.014	.010	
3.0	.150	.105	.069	.129	.090	.059	.088	.063	.042	.051	.037	.025	.016	.012	.008	
4.0	.143	.093	.054	.123	.080	.047	.084	.056	.033	.049	.033	.020	.016	.011	.006	
5.0	.136	.083	.044	.117	.072	.038	.081	.050	.027	.047	.029	.016	.015	.010	.005	
6.0	.130	.075	.036	.112	.065	.032	.077	.046	.022	.045	.027	.013	.014	.009	.004	
7.0	.124	.069	.031	.106	.060	.027	.073	.042	.019	.043	.025	.011	.014	.008	.004	
8.0	.118	.064	.027	.101	.055	.023	.070	.039	.017	.041	.023	.010	.013	.008	.003	
9.0	.112	.059	.024	.097	.051	.021	.067	.036	.015	.039	.021	.009	.013	.007	.003	
10.0	.107	.055	.021	.092	.048	.018	.064	.034	.013	.037	.020	.008	.012	.007	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-10-23

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks:

Uncorrected UGR Table

Test:U:118.2V I:0.1680A P:19.70W PF:0.9950 Lamp Flux:2504.78x1 lm											
NAME: 2FT二代线条灯 20w 30K A档灯珠						TYPE:白色外壳 3000K			WEIGHT:		
DIM.:						SPEC.:下发光			SERIAL No.:		
MFR.: YQ						SUR.:0.6*0.065			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.0	25.5	24.2	25.7	25.9	24.4	25.9	24.7	26.1	26.3	
	3H	25.2	26.6	25.5	26.9	27.1	25.9	27.3	26.2	27.5	27.7
	4H	25.7	27.0	26.0	27.2	27.5	26.4	27.8	26.8	28.0	28.3
	6H	25.8	27.1	26.2	27.4	27.7	26.9	28.1	27.2	28.4	28.7
	8H	25.9	27.1	26.2	27.3	27.6	27.0	28.2	27.3	28.5	28.8
	12H	25.8	27.0	26.2	27.3	27.6	27.0	28.2	27.4	28.5	28.8
4H	2H	24.6	25.9	24.9	26.1	26.4	24.9	26.2	25.2	26.5	26.7
	3H	26.0	27.1	26.3	27.4	27.7	26.5	27.7	26.9	28.0	28.3
	4H	26.5	27.6	26.9	27.9	28.2	27.2	28.3	27.6	28.6	28.9
	6H	26.8	27.7	27.2	28.1	28.4	27.7	28.7	28.1	29.0	29.4
	8H	26.8	27.7	27.2	28.1	28.4	27.9	28.8	28.3	29.1	29.5
	12H	26.8	27.6	27.2	28.0	28.4	28.0	28.8	28.4	29.2	29.6
8H	4H	26.7	27.6	27.1	28.0	28.3	27.4	28.2	27.8	28.6	29.0
	6H	27.1	27.8	27.5	28.2	28.6	28.0	28.7	28.4	29.1	29.5
	8H	27.1	27.8	27.6	28.2	28.7	28.2	28.8	28.6	29.3	29.7
	12H	27.1	27.7	27.6	28.1	28.6	28.3	28.9	28.8	29.3	29.8
12H	4H	26.7	27.5	27.1	27.9	28.3	27.3	28.1	27.8	28.5	28.9
	6H	27.1	27.7	27.6	28.2	28.6	28.0	28.6	28.4	29.0	29.5
	8H	27.2	27.7	27.7	28.2	28.7	28.2	28.8	28.7	29.2	29.7
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.2					
1.5H	+ 0.2 / - 0.4					+ 0.1 / - 0.3					
2.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.3					

CIE Pub.117 Corrected 2505 lm Total Lamp Luminous Flux.(8log(F/F0) = 3.2)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-10-23

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:118.2V I:0.1680A P:19.70W PF:0.9950 Lamp Flux:2504.78x1 lm		
NAME: 2FT二代线条灯 20w 30K A档灯珠	TYPE:白色外壳 3000K	WEIGHT:
DIM.:	SPEC.:下发光	SERIAL No.:
MFR.: YQ	SUR.:0.6*0.065	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	53	42	36	52	42	36	51	42	36	30
0.80	62	51	45	61	51	45	59	50	44	38
1.00	70	60	53	69	59	53	67	60	52	46
1.25	76	67	60	75	66	60	72	65	59	53
1.50	81	72	65	79	71	65	76	69	64	57
2.00	87	79	73	85	78	73	82	76	71	64
2.50	90	83	78	89	82	77	85	80	76	68
3.00	94	87	82	92	86	81	88	83	79	72
4.00	97	92	88	95	90	87	91	87	84	76
5.00	99	95	91	97	93	90	93	90	87	79
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-23

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:118.2V I:0.1680A P:19.70W PF:0.9950 Lamp Flux:2504.78x1 lm		
NAME: 2FT二代线条灯 20w 30K A档灯珠	TYPE:白色外壳 3000K	WEIGHT:
DIM.:	SPEC.:下发光	SERIAL No.:
MFR.: YQ	SUR.:0.6*0.065	PROTECTION ANGLE:

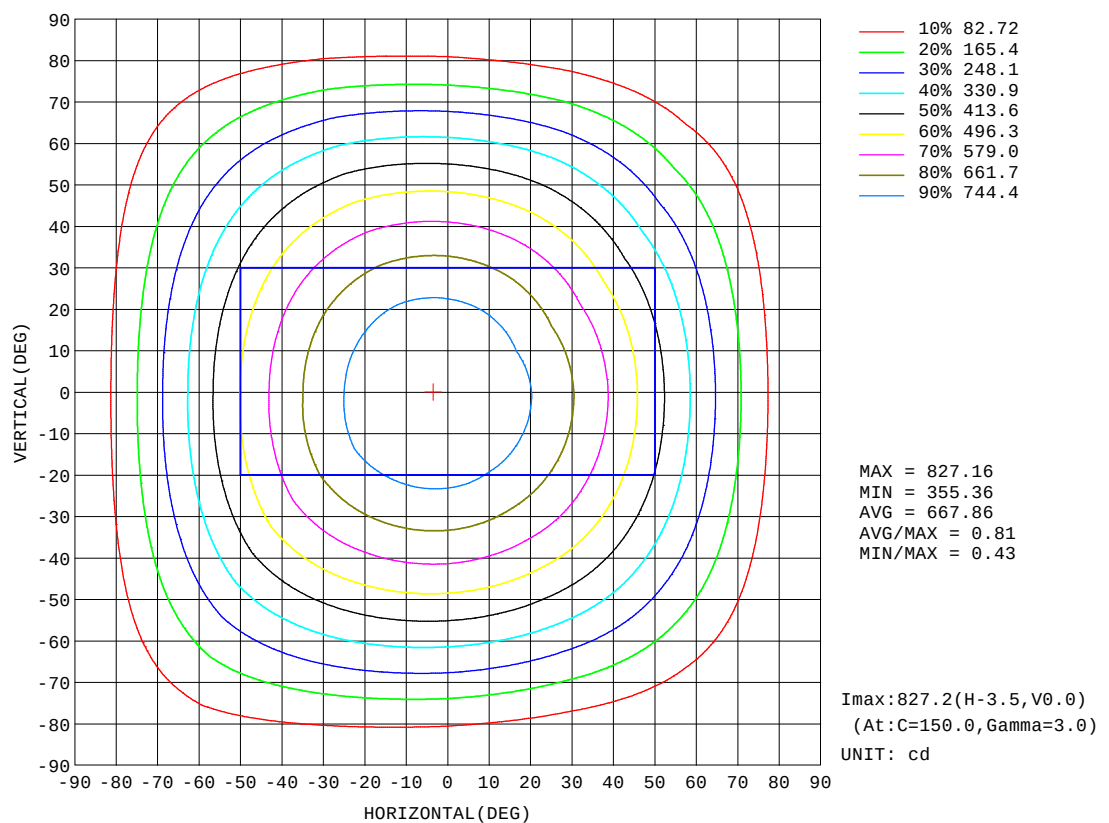


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-10-23

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks:

AAI Figure

Test:U:118.2V I:0.1680A P:19.70W PF:0.9950 Lamp Flux:2504.78x1 lm		
NAME: 2FT二代线条灯 20w 30K A档灯珠	TYPE:白色外壳 3000K	WEIGHT:
DIM.:	SPEC.:下发光	SERIAL No.:
MFR.: YQ	SUR.:0.6*0.065	PROTECTION ANGLE:

Flux out:1624 lm

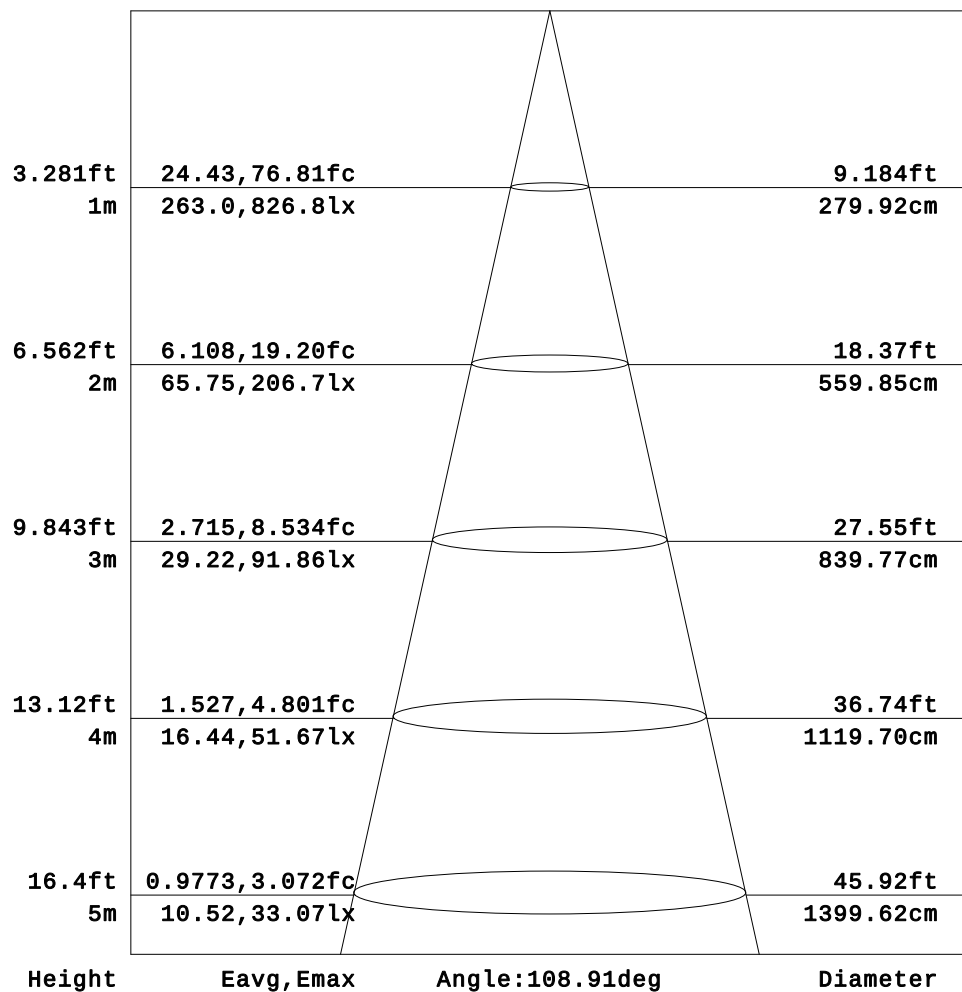


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-10-23

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:118.2V I:0.1680A P:19.70W PF:0.9950 Lamp Flux:2504.78x1 lm		
NAME: 2FT二代线条灯 20w 30K A档灯珠	TYPE:白色外壳 3000K	WEIGHT:
DIM.:	SPEC.:下发光	SERIAL No.:
MFR.: YQ	SUR.:0.6*0.065	PROTECTION ANGLE:

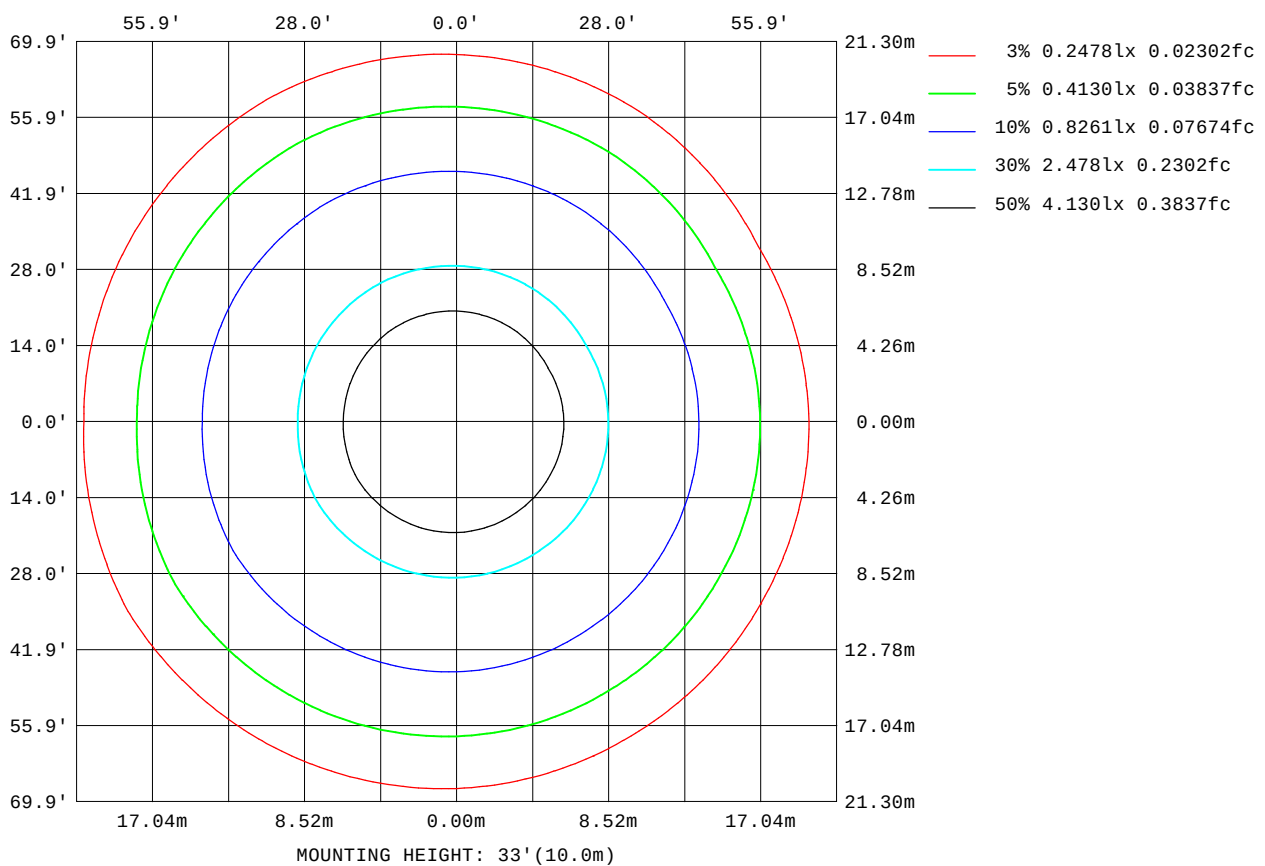

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-10-23

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks:

Planar Illuminance Curve

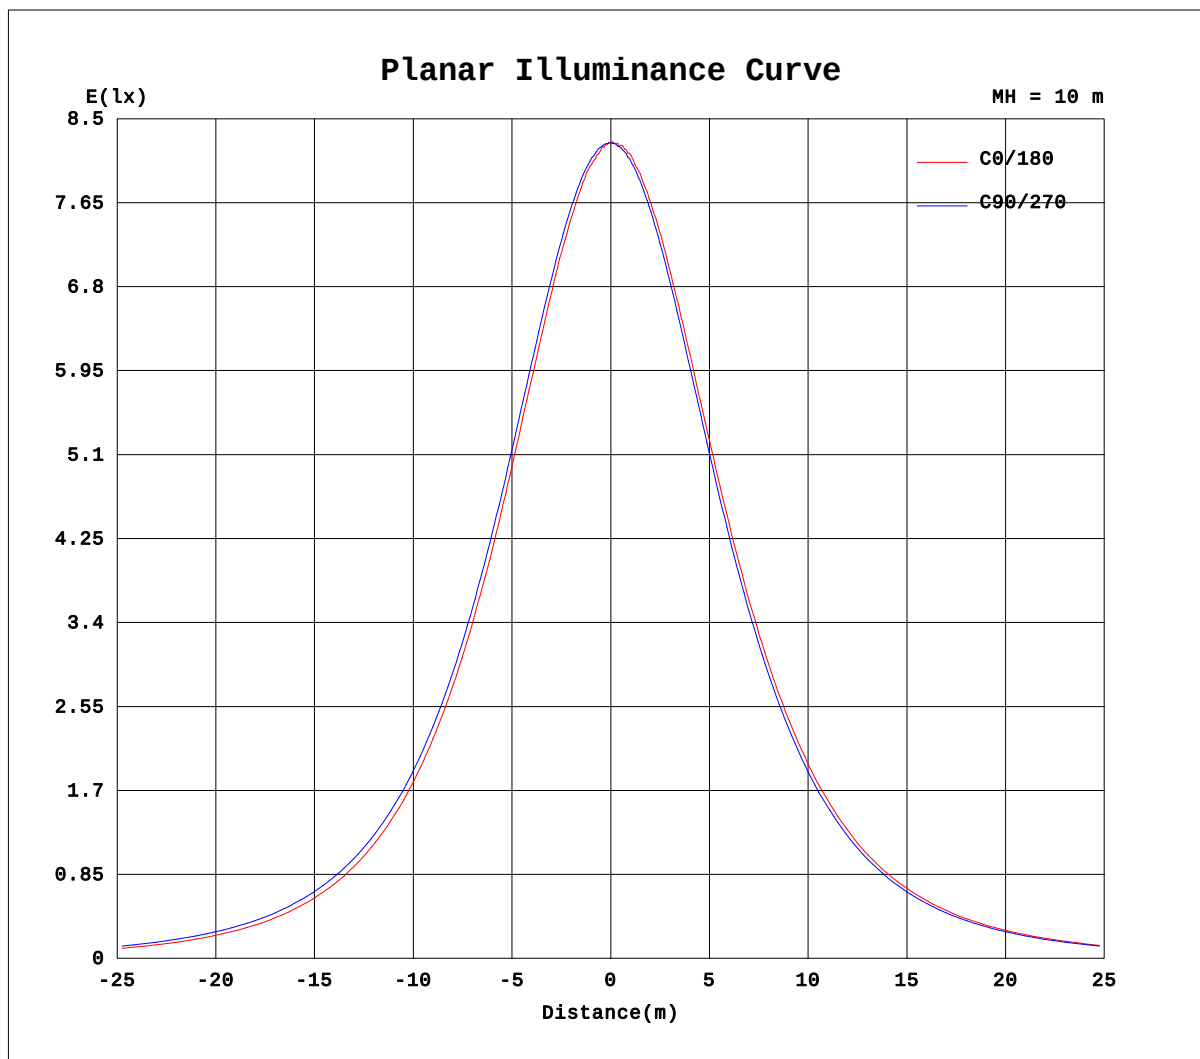

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-10-23

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:118.2V I:0.1680A P:19.70W PF:0.9950 Lamp Flux:2504.78x1 lm		
NAME: 2FT二代线条灯 20w 30K A档灯珠	TYPE:白色外壳 3000K	WEIGHT:
DIM.:	SPEC.:下发光	SERIAL No.:
MFR.: YQ	SUR.:0.6*0.065	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	826	826	826	826	826	826	826	826	826	826	826	826						
5	816	818	820	821	825	827	825	825	824	820	819	815						
10	800	803	805	810	815	821	816	816	814	808	803	797						
15	776	780	783	791	799	805	800	798	796	788	781	772						
20	746	749	754	765	773	784	776	774	771	760	751	740						
25	708	712	719	732	742	753	744	742	739	726	715	701						
30	665	670	677	692	704	716	705	704	699	687	672	657						
35	618	622	631	646	660	675	660	660	655	640	625	607						
40	564	570	578	594	609	626	612	611	606	589	573	554						
45	506	513	521	538	554	574	557	557	552	534	518	496						
50	443	450	461	478	495	517	498	498	495	475	458	434						
55	378	386	396	415	434	454	434	435	433	413	396	369						
60	310	317	331	350	369	387	367	369	369	349	331	301						
65	243	249	262	284	302	319	300	302	302	284	265	234						
70	176	181	194	217	234	250	231	233	234	218	198	167						
75	111	115	129	152	167	182	164	166	168	154	134	103						
80	51.6	54.7	68.2	89.5	103	117	98.4	101	103	93.1	72.2	44.7						
85	4.81	6.00	16.2	34.6	46.3	55.8	39.2	42.3	45.0	37.2	19.1	3.06						
90	0.13	0.14	0.15	0.11	1.90	5.98	3.14	2.91	1.84	0.19	0.24	0.22						
95	0.12	0.12	0.12	0.11	0.13	0.14	0.17	0.21	0.21	0.16	0.18	0.18						
100	0.13	0.13	0.13	0.12	0.13	0.12	0.16	0.17	0.17	0.15	0.16	0.17						
105	0.13	0.13	0.14	0.13	0.13	0.13	0.15	0.16	0.17	0.15	0.16	0.16						
110	0.15	0.15	0.15	0.15	0.15	0.14	0.15	0.16	0.17	0.16	0.17	0.17						
115	0.17	0.17	0.17	0.16	0.16	0.15	0.16	0.16	0.17	0.17	0.18	0.18						
120	0.20	0.19	0.19	0.19	0.18	0.17	0.18	0.18	0.19	0.19	0.19	0.20						
125	0.22	0.21	0.21	0.21	0.20	0.19	0.20	0.20	0.21	0.21	0.22	0.23						
130	0.24	0.23	0.24	0.23	0.22	0.21	0.22	0.22	0.24	0.24	0.24	0.25						
135	0.26	0.26	0.26	0.26	0.24	0.23	0.25	0.25	0.25	0.26	0.26	0.27						
140	0.28	0.27	0.27	0.28	0.26	0.25	0.27	0.27	0.27	0.28	0.28	0.29						
145	0.29	0.29	0.29	0.29	0.28	0.27	0.28	0.28	0.29	0.30	0.30	0.30						
150	0.31	0.31	0.31	0.31	0.30	0.29	0.30	0.30	0.31	0.32	0.31	0.32						
155	0.33	0.33	0.33	0.33	0.32	0.31	0.32	0.32	0.32	0.33	0.33	0.34						
160	0.36	0.36	0.36	0.36	0.35	0.34	0.34	0.35	0.35	0.36	0.36	0.37						
165	0.39	0.40	0.38	0.38	0.38	0.37	0.38	0.38	0.38	0.39	0.39	0.40						
170	0.42	0.42	0.41	0.41	0.40	0.40	0.41	0.40	0.41	0.41	0.41	0.42						
175	0.42	0.42	0.41	0.41	0.41	0.41	0.41	0.40	0.40	0.40	0.40	0.41						
180	0.41	0.40	0.40	0.40	0.40	0.40	0.41	0.40	0.40	0.40	0.40	0.40						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-10-23

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: