


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.4V I:0.1600A P:18.90W PF:0.9900 Lamp Flux:3199.71x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 169.30 lm/W			
MODEL		Imax(cd)	2191	S/MH(C0/180)	1.23
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	1.16
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	3199.7	□ UP,DN(C0-180)	0.2,52.6
NOMINAL FLUX(lm)	3199.71	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.2,47.1
LAMPS INSIDE	1	□ up(%)	0.4	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	119.4	□ down(%)	99.6	CIBSE SHR MAX	1.15

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

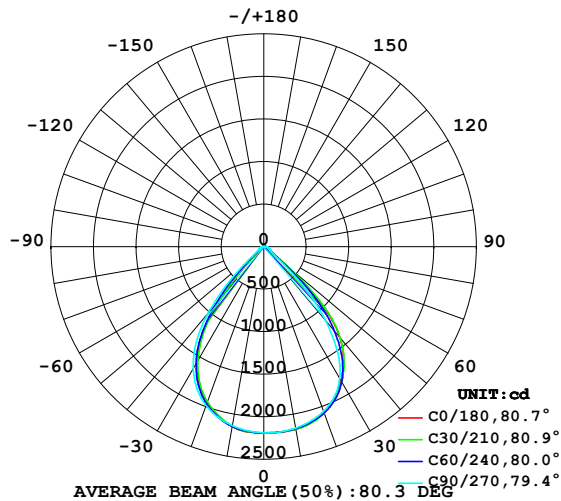

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

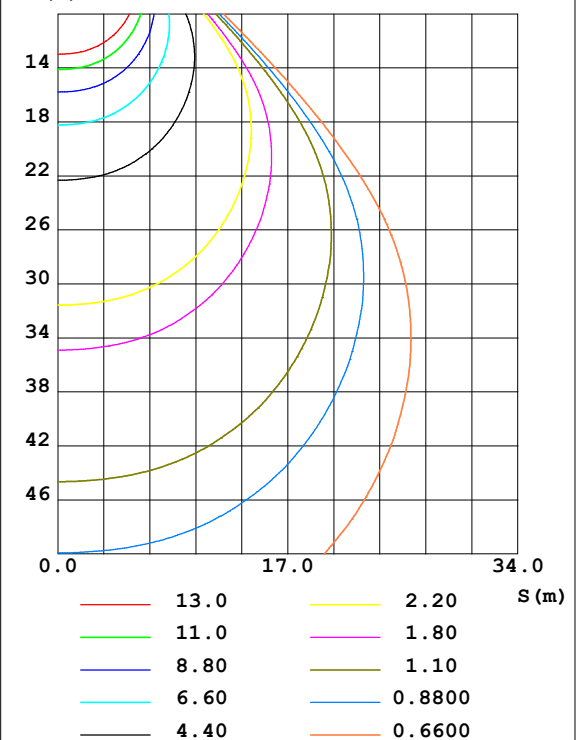


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	zone	total	%lum, lamp
5	2188	2187	2186	2189	2186	2180	2171	2177	0- 5	52.27	52.27	1.63,1.63
10	2180	2175	2165	2169	2146	2145	2135	2149	5- 10	155.4	207.7	6.49,6.49
15	2143	2142	2124	2109	2060	2066	2077	2098	10- 15	252.9	460.5	14.4,14.4
20	2071	2079	2059	2016	1947	1954	1987	2015	15- 20	339.6	800.1	25,25
25	1963	1980	1956	1878	1787	1795	1852	1897	20- 25	409.9	1210	37.8,37.8
30	1820	1833	1789	1662	1566	1571	1659	1734	25- 30	455.1	1665	52,52
35	1638	1627	1516	1347	1252	1261	1394	1515	30- 35	464.2	2129	66.5,66.5
40	1391	1345	1126	949.6	733.1	825.5	1014	1214	35- 40	422.4	2552	79.7,79.7
45	977.5	943.8	665.5	425.8	234.0	319.0	548.7	789.1	40- 45	313.5	2865	89.5,89.5
50	331.1	366.8	232.2	130.6	72.05	96.32	165.2	309.4	45- 50	159.8	3025	94.5,94.5
55	78.15	104.1	107.7	73.95	43.07	57.23	83.87	90.42	50- 55	56.18	3081	96.3,96.3
60	44.80	61.14	82.30	55.15	28.82	41.39	65.02	57.75	55- 60	30.08	3111	97.2,97.2
65	30.11	44.84	69.08	41.51	20.48	30.37	52.93	43.02	60- 65	22.94	3134	98,98
70	20.48	32.71	57.55	29.29	17.72	21.68	43.38	32.55	65- 70	18.12	3152	98.5,98.5
75	14.20	22.15	46.09	19.30	38.34	14.89	34.59	22.89	70- 75	14.27	3167	99,99
80	11.63	12.58	31.58	12.19	34.93	11.63	23.89	12.89	75- 80	10.90	3177	99.3,99.3
85	25.27	6.071	9.200	9.894	16.73	9.763	7.307	6.022	80- 85	6.832	3184	99.5,99.5
90	10.15	4.660	0.0686	6.067	10.40	5.273	0.1320	2.517	85- 90	4.099	3188	99.6,99.6
95	6.240	2.452	0.0708	4.505	4.948	3.040	0.1377	2.843	90- 95	2.026	3190	99.7,99.7
100	4.998	2.473	0.0823	2.532	3.876	2.599	0.1493	2.256	95-100	1.470	3192	99.8,99.8
105	3.667	2.093	0.0937	2.620	3.664	2.458	0.1458	1.738	100-105	1.206	3193	99.8,99.8
110	4.080	1.688	0.0823	2.097	3.683	1.934	0.1073	1.576	105-110	1.040	3194	99.8,99.8
115	4.508	1.399	0.1263	2.022	3.597	1.775	0.1396	1.228	110-115	0.9236	3195	99.9,99.9
120	3.915	1.379	0.1857	1.498	3.080	1.561	0.2161	1.188	115-120	0.7979	3196	99.9,99.9
125	3.180	1.332	0.2450	1.450	2.975	1.434	0.2887	1.061	120-125	0.6872	3197	99.9,99.9
130	2.894	1.238	0.3254	1.640	3.298	1.582	0.3653	0.9626	125-130	0.6332	3197	99.9,99.9
135	2.649	1.093	0.4134	1.403	3.379	1.384	0.4514	1.030	130-135	0.5879	3198	99.9,99.9
140	2.595	1.450	0.5090	1.151	2.401	1.139	0.5394	1.127	135-140	0.4923	3198	100,100
145	2.903	1.049	0.5932	0.8247	1.898	0.8838	0.6178	0.7278	140-145	0.4159	3199	100,100
150	1.325	0.7702	0.6985	0.8201	0.9663	0.8212	0.7001	0.6664	145-150	0.2691	3199	100,100
155	0.8435	0.7646	0.7769	0.8994	0.9366	0.8891	0.7881	0.7552	150-155	0.2068	3199	100,100
160	0.9152	0.8679	0.8572	0.9530	1.013	0.9493	0.8723	0.8565	155-160	0.1819	3199	100,100
165	1.003	0.9655	0.9318	0.9912	1.083	0.9989	0.9507	0.9339	160-165	0.1553	3199	100,100
170	1.087	1.030	0.9930	1.032	1.138	1.038	1.006	1.003	165-170	0.1197	3200	100,100
175	1.072	1.038	1.022	1.027	1.087	1.025	1.016	1.012	170-175	0.0743	3200	100,100
180	1.078	1.022	1.010	1.017	1.076	1.022	1.012	1.019	175-180	0.0246	3200	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

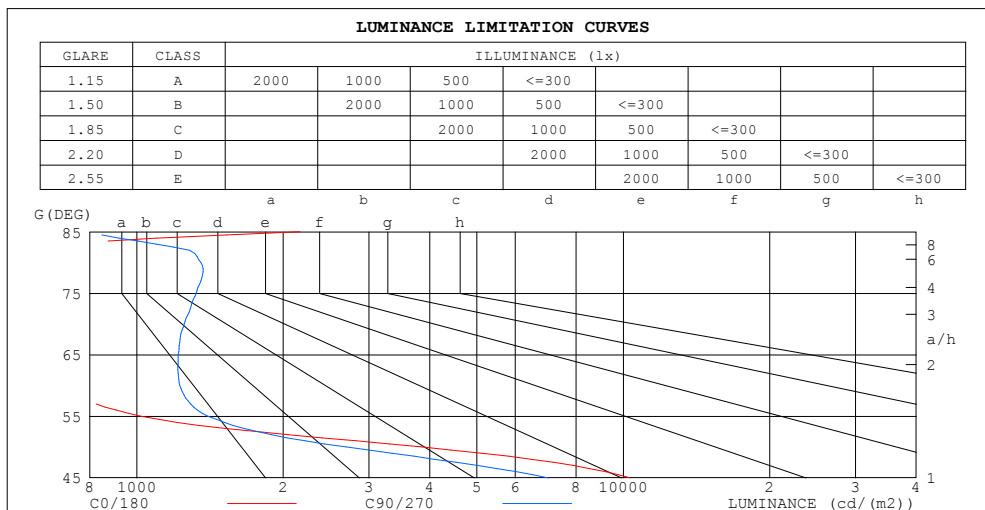

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2166	786
80	500	1354
75	410	1326
70	447	1253
65	532	1217
60	669	1225
55	1018	1398
50	3847	2690
45	10324	7006


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.4V I:0.1600A P:18.90W PF:0.9900 Lamp Flux:3199.71x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

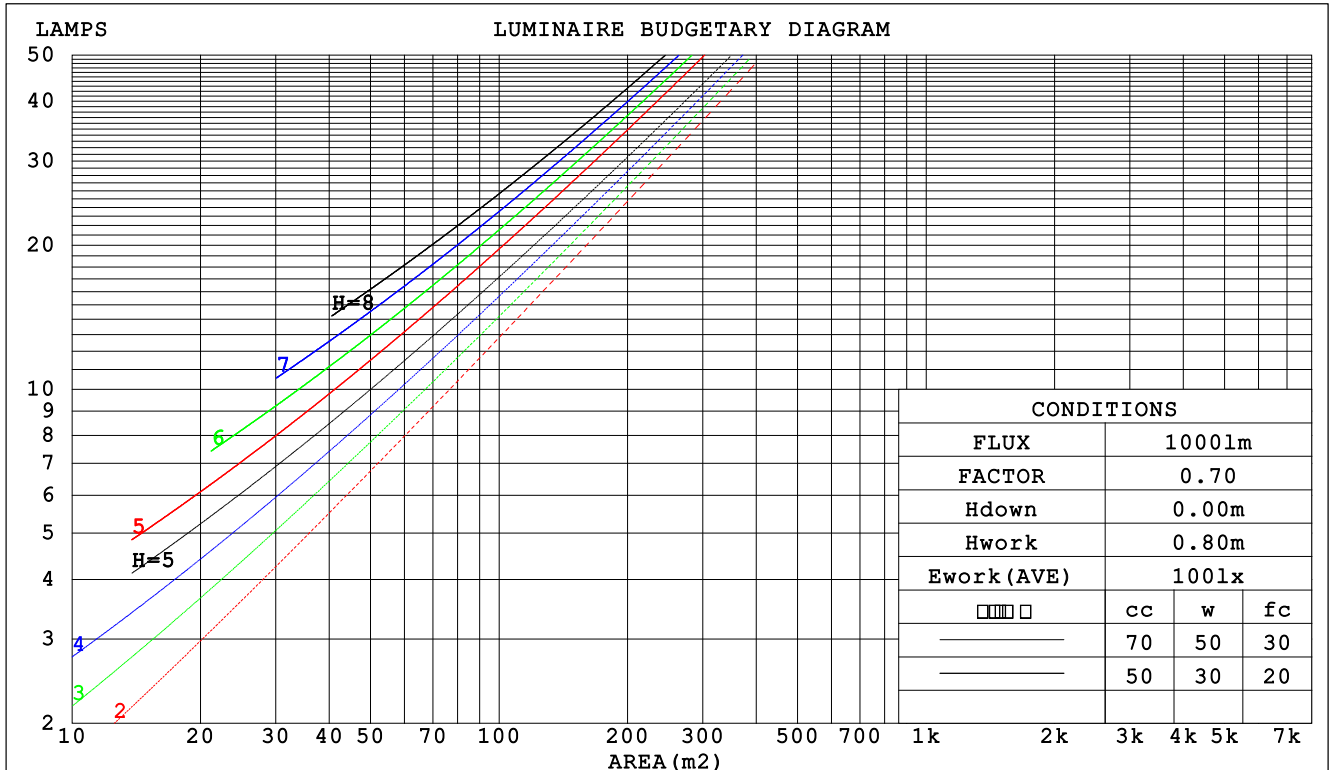

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: WP-KHA-042U0450900

WEC AND CCEC

Test:U:119.4V I:0.1600A P:18.90W PF:0.9900 Lamp Flux:3199.71x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.206 .117 .037	.199 .114 .036	.187 .107 .034	.175 .101 .032	.164 .095 .031	
2.0	.199 .109 .033	.193 .106 .033	.182 .101 .031	.172 .096 .030	.162 .092 .029	
3.0	.190 .101 .030	.185 .099 .030	.175 .095 .029	.166 .091 .028	.158 .087 .027	
4.0	.181 .094 .028	.176 .092 .027	.168 .089 .027	.160 .086 .026	.153 .083 .025	
5.0	.172 .088 .025	.168 .086 .025	.161 .084 .025	.154 .081 .024	.147 .079 .024	
6.0	.164 .082 .023	.160 .081 .023	.154 .079 .023	.147 .077 .023	.142 .075 .022	
7.0	.156 .077 .022	.153 .076 .022	.147 .074 .021	.141 .073 .021	.136 .071 .021	
8.0	.149 .073 .020	.146 .072 .020	.141 .070 .020	.136 .069 .020	.131 .067 .020	
9.0	.142 .069 .019	.139 .068 .019	.135 .067 .019	.130 .065 .019	.126 .064 .018	
10.0	.136 .065 .018	.133 .064 .018	.129 .063 .018	.125 .062 .018	.121 .061 .017	

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.193 .193 .193	.165 .165 .165	.113 .113 .113	.065 .065 .065	.021 .021 .021	
1.0	.176 .160 .145	.150 .137 .125	.103 .094 .086	.059 .055 .050	.019 .018 .016	
2.0	.163 .135 .112	.139 .116 .097	.095 .080 .068	.055 .047 .040	.018 .015 .013	
3.0	.152 .117 .088	.130 .101 .077	.089 .070 .054	.052 .041 .032	.017 .013 .010	
4.0	.143 .102 .071	.122 .088 .062	.084 .062 .044	.049 .036 .026	.016 .012 .008	
5.0	.135 .091 .059	.116 .079 .051	.080 .055 .036	.046 .032 .021	.015 .011 .007	
6.0	.128 .082 .049	.110 .071 .043	.076 .050 .030	.044 .029 .018	.014 .010 .006	
7.0	.122 .075 .042	.105 .065 .036	.072 .045 .026	.042 .027 .015	.014 .009 .005	
8.0	.116 .069 .036	.100 .060 .032	.069 .042 .022	.040 .025 .013	.013 .008 .004	
9.0	.111 .064 .032	.096 .055 .028	.066 .039 .020	.039 .023 .012	.013 .008 .004	
10.0	.107 .060 .028	.092 .052 .025	.064 .036 .018	.037 .022 .010	.012 .007 .003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

Uncorrected UGR Table

Test:U:119.4V I:0.1600A P:18.90W PF:0.9900 Lamp Flux:3199.71x1 lm										
NAME: 磁铁灯条					TYPE:T7宽灯条 3500K			WEIGHT:		
DIM.: 4FT*2					SPEC.:透镜款			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co,ltd					SUR.:1.22*0.11m			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.2	18.3	17.4	18.5	18.7	16.5	17.6	16.7	17.8	18.0
3H	17.0	18.1	17.3	18.3	18.5	16.4	17.5	16.7	17.7	17.9
4H	17.0	17.9	17.3	18.2	18.4	16.5	17.4	16.8	17.7	17.9
6H	16.9	17.8	17.2	18.0	18.3	16.5	17.4	16.8	17.7	17.9
8H	16.9	17.7	17.2	18.0	18.3	16.5	17.4	16.8	17.6	17.9
12H	16.9	17.7	17.2	18.0	18.3	16.5	17.3	16.8	17.6	17.9
4H 2H	17.0	17.9	17.3	18.2	18.4	16.2	17.2	16.5	17.4	17.7
3H	16.8	17.6	17.1	17.9	18.2	16.3	17.1	16.6	17.4	17.7
4H	16.7	17.5	17.1	17.8	18.1	16.3	17.1	16.7	17.4	17.7
6H	16.7	17.3	17.1	17.7	18.0	16.4	17.1	16.8	17.4	17.8
8H	16.6	17.3	17.0	17.6	18.0	16.5	17.1	16.9	17.4	17.8
12H	16.7	17.2	17.1	17.6	18.0	16.5	17.0	16.9	17.4	17.8
8H 4H	16.6	17.2	17.0	17.6	18.0	16.2	16.8	16.6	17.2	17.6
6H	16.6	17.1	17.0	17.5	17.9	16.3	16.8	16.8	17.2	17.7
8H	16.5	17.0	17.0	17.4	17.9	16.4	16.8	16.9	17.3	17.7
12H	16.6	17.0	17.1	17.5	17.9	16.4	16.8	16.9	17.2	17.7
12H 4H	16.6	17.1	17.0	17.5	17.9	16.2	16.7	16.6	17.1	17.5
6H	16.5	17.0	17.0	17.4	17.8	16.3	16.7	16.8	17.2	17.6
8H	16.5	16.9	17.0	17.3	17.8	16.4	16.7	16.8	17.2	17.7
Variations with the observer position at spacings:										
S = 1.0H	+ 2.7 / - 8.9					+ 2.4 / - 5.0				
1.5H	+ 2.7 / - 9.0					+ 2.8 / - 5.3				
2.0H	+ 6.5 / - 7.6					+ 5.2 / - 3.2				

CIE Pub.117 Corrected 3200 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.0)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

UTILIZATION FACTORS TABLE

Test:U:119.4V I:0.1600A P:18.90W PF:0.9900 Lamp Flux:3199.71x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	71	66	78	71	66	77	70	66	62
0.80	88	80	75	87	80	75	85	79	75	70
1.00	94	87	82	93	86	82	91	86	81	77
1.25	99	92	88	97	92	88	95	90	87	82
1.50	102	96	92	101	95	91	98	94	90	85
2.00	106	101	97	104	100	96	101	98	94	89
2.50	108	103	100	106	102	99	103	99	97	90
3.00	110	106	102	108	104	101	104	101	99	92
4.00	112	109	106	110	107	104	106	104	102	94
5.00	113	111	108	111	109	107	107	105	103	95
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: WP-KHA-042U0450900

ISOCANDELA DIAGRAM

Test:U:119.4V I:0.1600A P:18.90W PF:0.9900 Lamp Flux:3199.71x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

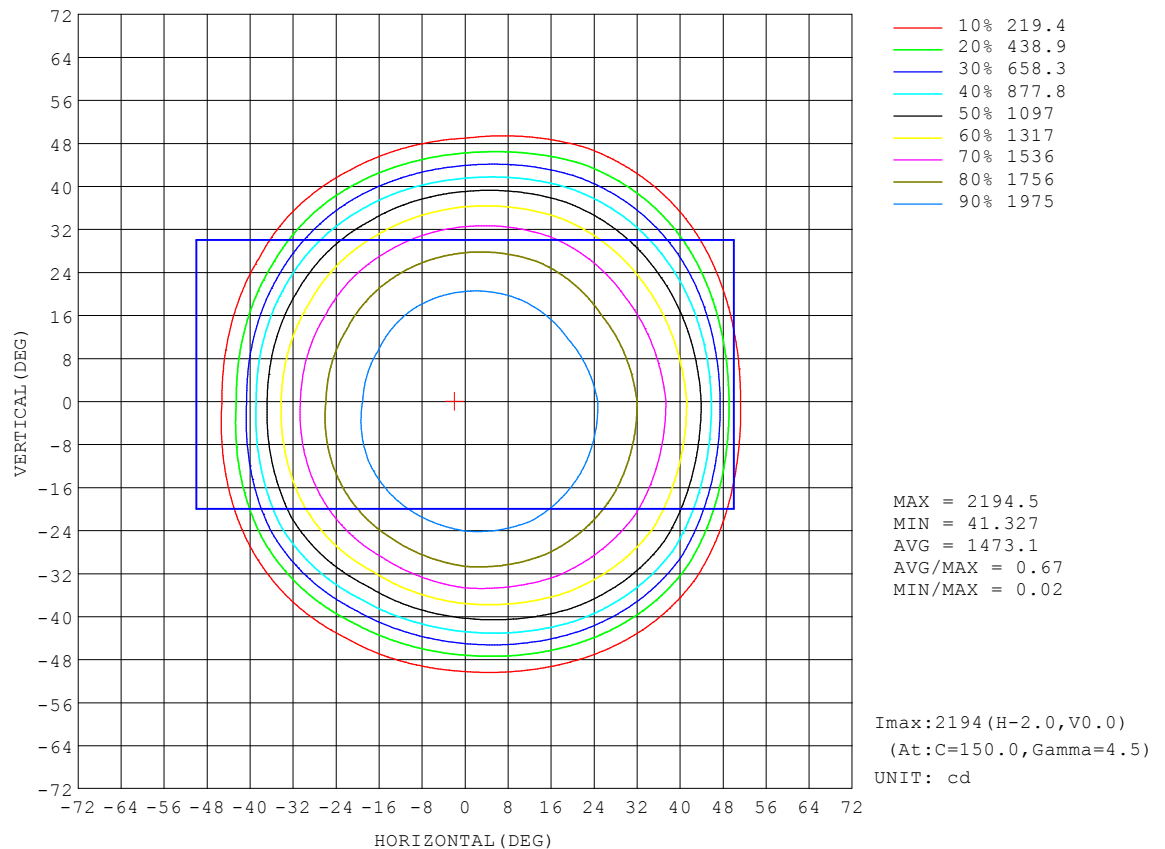


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

AAI Figure

Test:U:119.4V I:0.1600A P:18.90W PF:0.9900 Lamp Flux:3199.71x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

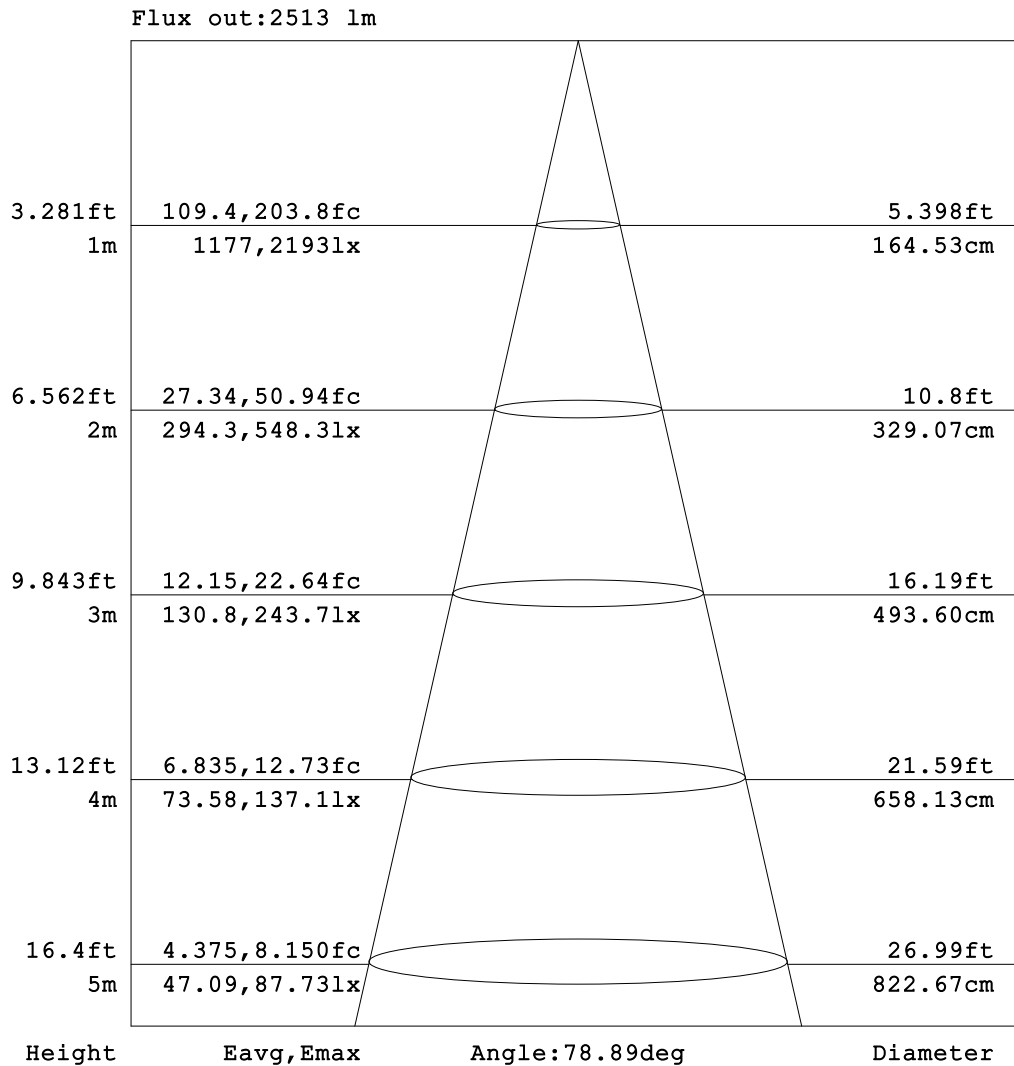


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

ISOLUX DIAGRAM


Test:U:119.4V I:0.1600A P:18.90W PF:0.9900 Lamp Flux:3199.71x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

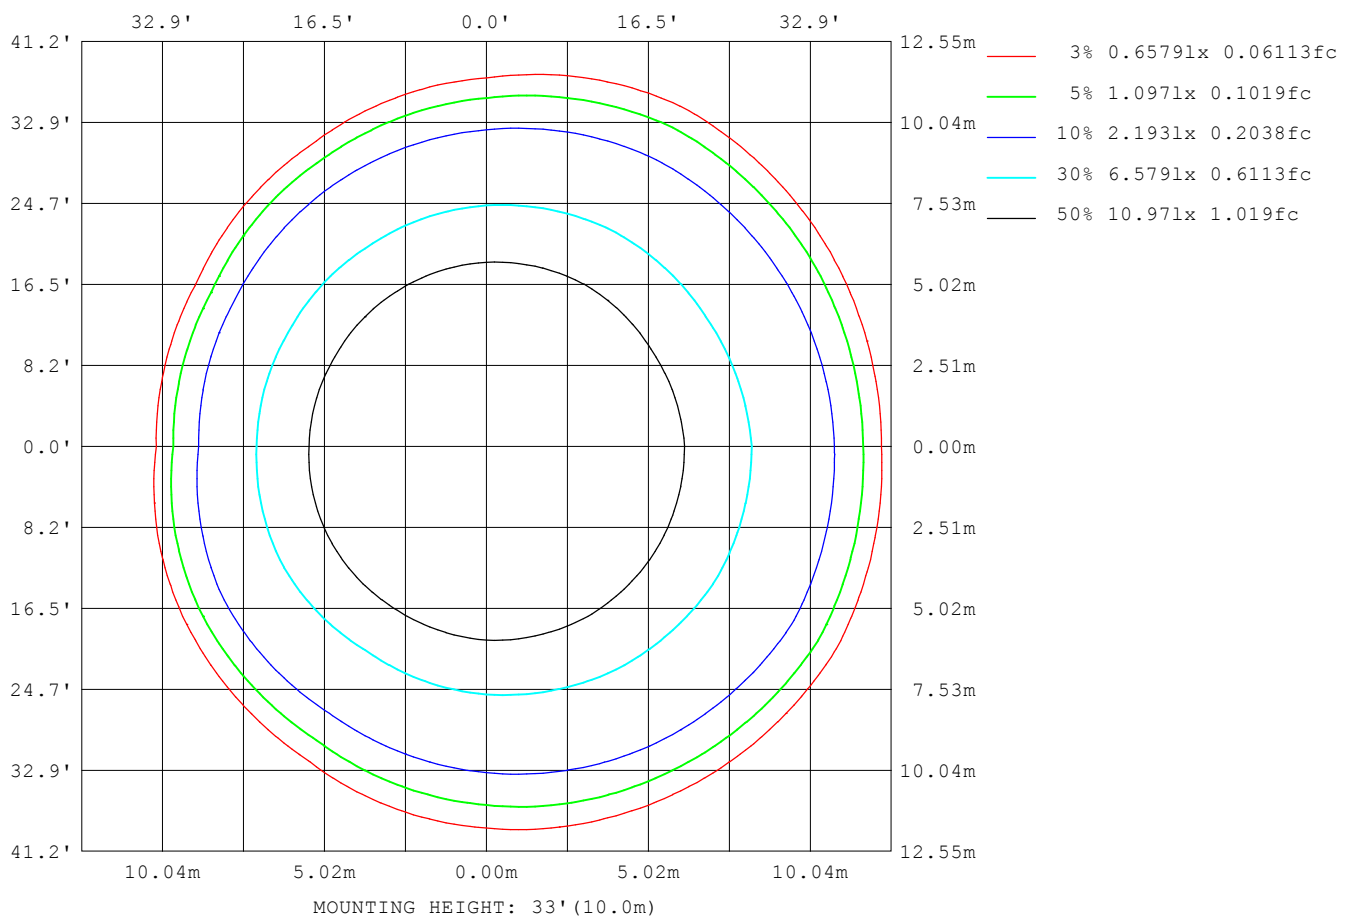

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

Planar Illuminance Curve

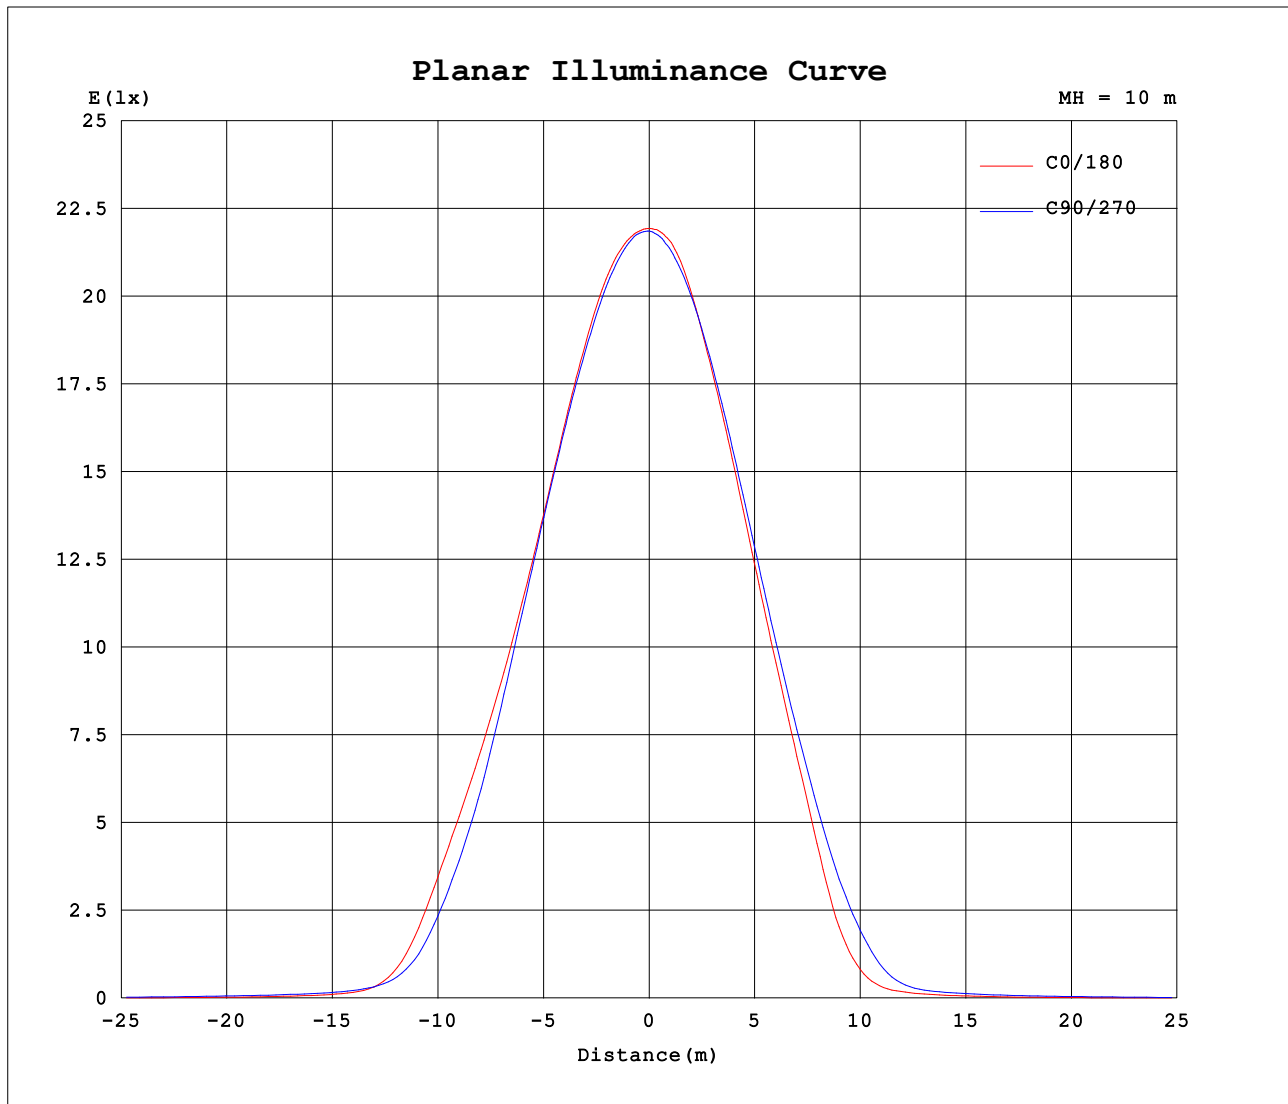

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.4V I:0.1600A P:18.90W PF:0.9900 Lamp Flux:3199.71x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	2188	2188	2188	2188	2188	2188	2188	2188	2188	2188	2188	2188							
5	2188	2188	2185	2186	2188	2191	2186	2183	2178	2171	2174	2181							
10	2180	2178	2171	2165	2167	2170	2146	2143	2146	2135	2142	2157							
15	2143	2147	2137	2124	2117	2101	2060	2057	2075	2077	2088	2107							
20	2071	2082	2077	2059	2034	1998	1947	1941	1966	1987	2006	2023							
25	1963	1978	1982	1956	1904	1852	1787	1779	1811	1852	1889	1906							
30	1820	1834	1833	1789	1691	1632	1566	1549	1593	1659	1723	1745							
35	1638	1647	1607	1516	1363	1332	1252	1232	1290	1394	1492	1538							
40	1391	1398	1292	1126	963	937	733	776	875	1014	1171	1256							
45	978	1020	867	666	468	384	234	250	388	549	739	839							
50	331	411	322	232	156	105	72.0	77.2	115	165	294	325							
55	78.2	95.1	113	108	88.7	59.2	43.1	46.0	68.5	83.9	97.5	83.3							
60	44.8	49.6	72.7	82.3	68.0	42.3	28.8	31.0	51.8	65.0	68.9	46.6							
65	30.1	34.5	55.2	69.1	54.2	28.9	20.5	20.8	39.9	52.9	54.5	31.6							
70	20.5	23.4	42.1	57.6	40.0	18.6	17.7	16.1	27.3	43.4	42.6	22.5							
75	14.2	15.2	29.1	46.1	24.1	14.5	38.3	13.3	16.5	34.6	31.2	14.6							
80	11.6	10.0	15.1	31.6	13.0	11.3	34.9	12.4	10.8	23.9	16.5	9.25							
85	25.3	5.21	6.93	9.20	6.45	13.3	16.7	13.9	5.63	7.31	7.31	4.73							
90	10.2	7.45	1.87	0.07	2.17	9.96	10.4	8.23	2.32	0.13	1.88	3.16							
95	6.24	3.75	1.16	0.07	1.38	7.62	4.95	4.34	1.74	0.14	1.02	4.66							
100	5.00	3.76	1.18	0.08	1.30	3.77	3.88	3.13	2.06	0.15	0.98	3.53							
105	3.67	2.46	1.72	0.09	1.88	3.36	3.66	2.79	2.12	0.15	1.01	2.47							
110	4.08	2.23	1.15	0.08	1.20	3.00	3.68	2.70	1.16	0.11	1.10	2.05							
115	4.51	1.86	0.94	0.13	0.91	3.13	3.60	2.60	0.95	0.14	0.85	1.61							
120	3.91	1.80	0.96	0.19	0.61	2.39	3.08	2.15	0.97	0.22	0.81	1.57							
125	3.18	1.68	0.98	0.24	0.58	2.32	2.98	2.08	0.79	0.29	0.65	1.47							
130	2.89	1.56	0.92	0.33	0.52	2.76	3.30	2.45	0.71	0.37	0.41	1.51							
135	2.65	1.53	0.66	0.41	0.58	2.23	3.38	2.13	0.63	0.45	0.43	1.63							
140	2.59	2.37	0.53	0.51	0.68	1.62	2.40	1.59	0.69	0.54	0.51	1.75							
145	2.90	1.49	0.60	0.59	0.74	0.91	1.90	1.01	0.76	0.62	0.58	0.88							
150	1.32	0.87	0.67	0.70	0.80	0.84	0.97	0.84	0.81	0.70	0.64	0.69							
155	0.84	0.78	0.75	0.78	0.86	0.94	0.94	0.92	0.86	0.79	0.76	0.75							
160	0.92	0.88	0.86	0.86	0.92	0.99	1.01	0.97	0.93	0.87	0.86	0.85							
165	1.00	0.98	0.95	0.93	0.96	1.03	1.08	1.02	0.97	0.95	0.92	0.95							
170	1.09	1.07	0.98	0.99	0.99	1.07	1.14	1.07	1.00	1.01	0.99	1.02							
175	1.07	1.06	1.01	1.02	1.02	1.04	1.09	1.04	1.01	1.02	1.01	1.02							
180	1.08	1.04	1.01	1.01	1.01	1.03	1.08	1.04	1.01	1.01	1.01	1.03							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900