


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.2460A P:29.20W PF:0.9920 Lamp Flux:4747.36x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 162.58 lm/W			
MODEL		I _{max} (cd)	3248	S/MH(C0/180)	1.24
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.16
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	4747.4	□ UP,DN(C0-180)	0.2,53.1
NOMINAL FLUX(lm)	4747.36	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.2,46.6
LAMPS INSIDE	1	□ up(%)	0.3	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	119.5	□ down(%)	99.7	CIBSE SHR MAX	1.15

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

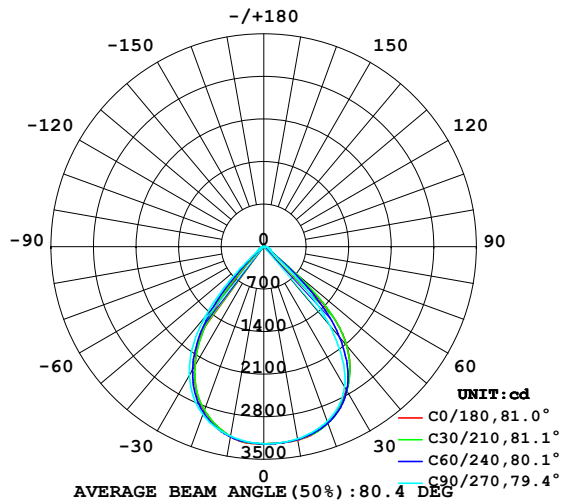

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

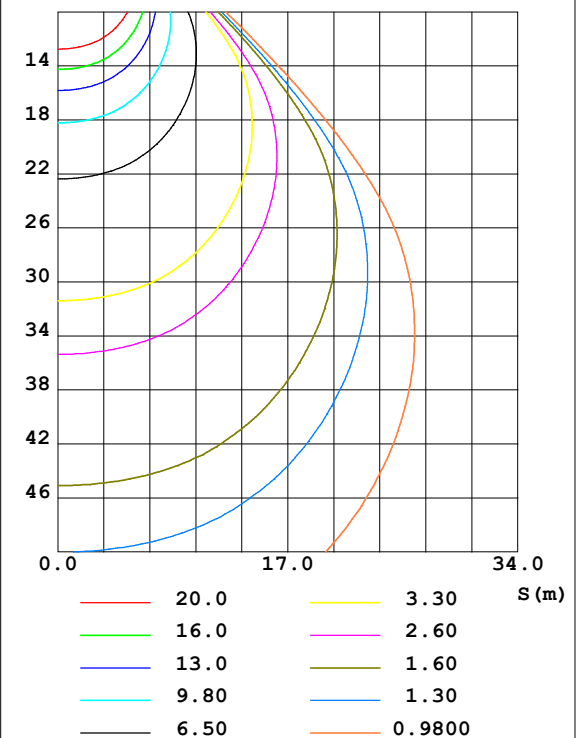


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: WP-KHA-042U0450900

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	zone	total	%lum, lamp
5	3239	3242	3240	3246	3241	3230	3220	3227	0- 5	77.45	77.45	1.63,1.63
10	3230	3221	3209	3214	3170	3172	3165	3184	5- 10	230.2	307.6	6.48,6.48
15	3183	3179	3152	3126	3040	3053	3076	3108	10- 15	374.6	682.2	14.4,14.4
20	3083	3091	3058	2992	2868	2883	2939	2984	15- 20	503.1	1185	25,25
25	2926	2948	2907	2787	2623	2644	2735	2810	20- 25	607.2	1792	37.8,37.8
30	2724	2736	2660	2468	2278	2305	2450	2568	25- 30	674.1	2467	52,52
35	2470	2438	2256	1998	1802	1842	2059	2242	30- 35	687.6	3154	66.4,66.4
40	2123	2029	1679	1408	985.1	1187	1495	1797	35- 40	625.4	3780	79.6,79.6
45	1567	1446	995.9	631.0	245.1	431.5	810.3	1170	40- 45	463.6	4243	89.4,89.4
50	568.0	600.7	348.8	190.9	96.09	134.5	241.4	460.2	45- 50	242.1	4485	94.5,94.5
55	124.3	161.6	162.9	109.7	62.31	82.92	123.3	135.0	50- 55	85.75	4571	96.3,96.3
60	69.42	92.29	123.8	82.08	41.76	60.14	95.82	85.70	55- 60	45.04	4616	97.2,97.2
65	46.37	67.62	103.1	61.85	29.96	44.16	77.79	63.67	60- 65	34.13	4650	98,98
70	31.66	49.55	85.70	43.66	29.53	31.39	63.88	48.10	65- 70	26.98	4677	98.5,98.5
75	21.70	33.51	68.64	28.66	59.86	21.68	50.85	33.90	70- 75	21.29	4698	99,99
80	15.82	18.98	47.12	18.18	35.08	17.27	35.19	19.11	75- 80	16.37	4715	99.3,99.3
85	37.97	9.192	13.81	14.85	24.18	14.11	10.68	8.913	80- 85	9.903	4725	99.5,99.5
90	15.13	6.946	0.1087	8.975	14.55	7.409	0.1876	3.725	85- 90	6.044	4731	99.7,99.7
95	9.157	3.636	0.1129	6.661	7.147	4.235	0.2066	4.225	90- 95	2.937	4734	99.7,99.7
100	7.321	3.708	0.1282	3.735	5.662	3.670	0.2258	3.336	95-100	2.140	4736	99.8,99.8
105	5.421	3.113	0.1427	3.905	5.658	3.515	0.2164	2.563	100-105	1.785	4738	99.8,99.8
110	6.049	2.498	0.1264	3.101	5.657	2.892	0.1610	2.332	105-110	1.543	4739	99.8,99.8
115	6.510	2.079	0.1953	3.014	5.350	2.574	0.2123	1.821	110-115	1.369	4741	99.9,99.9
120	5.677	2.013	0.2834	2.224	4.595	2.264	0.3308	1.758	115-120	1.176	4742	99.9,99.9
125	4.522	1.873	0.3694	2.173	4.522	2.110	0.4323	1.585	120-125	1.012	4743	99.9,99.9
130	4.166	1.775	0.4844	2.439	5.185	2.396	0.5452	1.438	125-130	0.9386	4744	99.9,99.9
135	3.987	1.761	0.6203	2.075	4.707	1.903	0.6774	1.515	130-135	0.8727	4745	99.9,99.9
140	3.513	1.978	0.7581	1.710	3.457	1.604	0.8073	1.654	135-140	0.7187	4745	100,100
145	4.012	1.722	0.8824	1.218	2.266	1.210	0.9166	1.081	140-145	0.5904	4746	100,100
150	2.061	1.158	1.037	1.218	1.292	1.221	1.043	0.9898	145-150	0.3940	4746	100,100
155	1.258	1.130	1.152	1.341	1.399	1.334	1.169	1.119	150-155	0.3072	4747	100,100
160	1.353	1.281	1.271	1.418	1.532	1.422	1.299	1.271	155-160	0.2710	4747	100,100
165	1.486	1.434	1.384	1.473	1.614	1.492	1.416	1.386	160-165	0.2312	4747	100,100
170	1.619	1.529	1.478	1.536	1.699	1.543	1.496	1.489	165-170	0.1779	4747	100,100
175	1.583	1.542	1.516	1.525	1.610	1.524	1.504	1.502	170-175	0.1103	4747	100,100
180	1.597	1.518	1.504	1.511	1.601	1.515	1.502	1.510	175-180	0.0365	4747	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

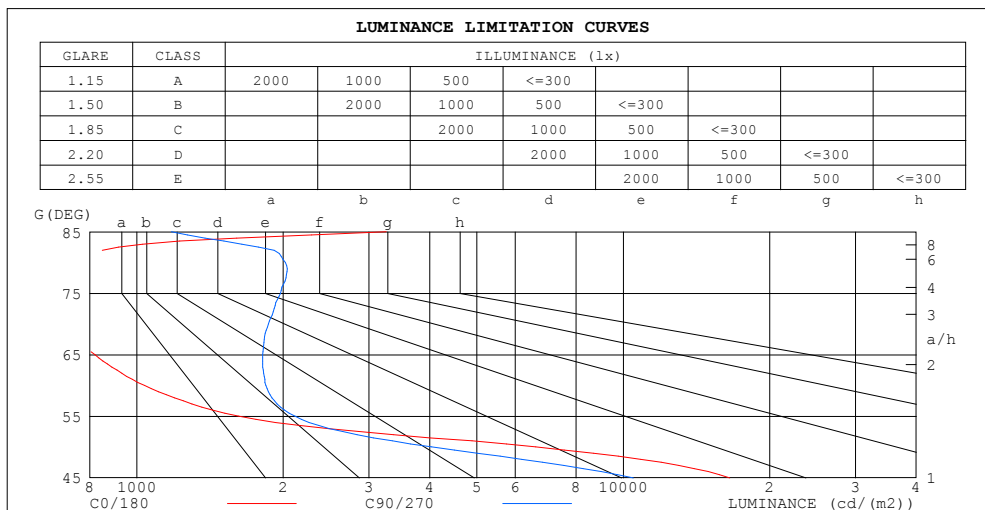

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3256	1179
80	681	2020
75	627	1974
70	692	1865
65	820	1815
60	1038	1843
55	1619	2114
50	6605	4038
45	16558	10481

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

```

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

```

WEC AND CCEC

Test:U:119.5V I:0.2460A P:29.20W PF:0.9920 Lamp Flux:4747.36x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients (WEC)					
0.0						
1.0	.206 .117 .037	.200 .114 .036	.187 .107 .034	.175 .101 .032	.164 .095 .031	
2.0	.199 .109 .033	.193 .106 .033	.182 .101 .031	.172 .096 .030	.162 .092 .029	
3.0	.190 .101 .030	.185 .099 .030	.175 .095 .029	.166 .091 .028	.158 .088 .027	
4.0	.181 .094 .028	.176 .092 .027	.168 .089 .027	.160 .086 .026	.153 .083 .025	
5.0	.172 .088 .025	.168 .086 .025	.161 .084 .025	.154 .081 .024	.147 .079 .024	
6.0	.164 .082 .023	.160 .081 .023	.154 .079 .023	.148 .077 .023	.142 .075 .022	
7.0	.156 .077 .022	.153 .076 .022	.147 .074 .021	.142 .073 .021	.136 .071 .021	
8.0	.149 .073 .020	.146 .072 .020	.141 .070 .020	.136 .069 .020	.131 .067 .020	
9.0	.142 .069 .019	.139 .068 .019	.135 .067 .019	.130 .065 .019	.126 .064 .019	
10.0	.136 .065 .018	.133 .064 .018	.129 .063 .018	.125 .062 .018	.121 .061 .018	

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients (CCEC)					
0.0	.193 .193 .193	.165 .165 .165	.113 .113 .113	.065 .065 .065	.021 .021 .021	
1.0	.176 .160 .145	.150 .137 .125	.103 .094 .086	.059 .055 .050	.019 .018 .016	
2.0	.163 .135 .112	.139 .116 .097	.095 .080 .068	.055 .047 .040	.018 .015 .013	
3.0	.152 .116 .088	.130 .100 .077	.089 .070 .054	.052 .041 .032	.017 .013 .010	
4.0	.143 .102 .071	.122 .088 .062	.084 .062 .044	.049 .036 .026	.016 .012 .008	
5.0	.135 .091 .059	.116 .079 .051	.080 .055 .036	.046 .032 .021	.015 .011 .007	
6.0	.128 .082 .049	.110 .071 .043	.076 .050 .030	.044 .029 .018	.014 .010 .006	
7.0	.122 .075 .042	.105 .065 .036	.072 .045 .026	.042 .027 .015	.014 .009 .005	
8.0	.116 .069 .036	.100 .060 .032	.069 .042 .022	.040 .025 .013	.013 .008 .004	
9.0	.111 .064 .032	.096 .055 .028	.067 .039 .020	.039 .023 .012	.013 .008 .004	
10.0	.107 .060 .028	.092 .052 .025	.064 .036 .017	.037 .022 .010	.012 .007 .003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

Uncorrected UGR Table

Test:U:119.5V I:0.2460A P:29.20W PF:0.9920 Lamp Flux:4747.36x1 lm										
NAME: 磁铁灯条					TYPE:T7宽灯条 3500K			WEIGHT:		
DIM.: 4FT*2					SPEC.:透镜款			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co,ltd					SUR.:1.22*0.11m			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.9	20.0	19.1	20.2	20.4	17.9	19.1	18.2	19.2	19.4
3H	18.7	19.7	19.0	19.9	20.2	17.9	18.9	18.2	19.1	19.4
4H	18.6	19.6	18.9	19.8	20.1	17.9	18.9	18.2	19.1	19.4
6H	18.5	19.4	18.9	19.7	20.0	18.0	18.9	18.3	19.1	19.4
8H	18.5	19.4	18.8	19.6	19.9	18.0	18.8	18.3	19.1	19.4
12H	18.5	19.3	18.8	19.6	19.9	18.0	18.8	18.3	19.1	19.4
4H 2H	18.6	19.6	18.9	19.8	20.1	17.7	18.7	18.0	18.9	19.1
3H	18.5	19.3	18.8	19.6	19.9	17.7	18.6	18.1	18.8	19.1
4H	18.4	19.1	18.8	19.5	19.8	17.8	18.5	18.2	18.9	19.2
6H	18.3	19.0	18.7	19.3	19.7	17.9	18.5	18.3	18.9	19.2
8H	18.3	18.9	18.7	19.3	19.6	17.9	18.5	18.3	18.9	19.3
12H	18.3	18.9	18.7	19.3	19.7	17.9	18.5	18.3	18.9	19.3
8H 4H	18.3	18.9	18.7	19.3	19.6	17.7	18.3	18.1	18.7	19.0
6H	18.2	18.7	18.7	19.1	19.5	17.8	18.3	18.2	18.7	19.1
8H	18.2	18.6	18.6	19.1	19.5	17.9	18.3	18.3	18.7	19.2
12H	18.3	18.6	18.7	19.1	19.6	17.9	18.2	18.3	18.7	19.2
12H 4H	18.2	18.8	18.7	19.2	19.6	17.6	18.2	18.1	18.6	19.0
6H	18.2	18.6	18.6	19.0	19.5	17.8	18.2	18.2	18.6	19.1
8H	18.2	18.5	18.6	19.0	19.5	17.8	18.2	18.3	18.6	19.1
Variations with the observer position at spacings:										
S = 1.0H	+ 2.7 / - 9.0					+ 2.4 / - 5.0				
1.5H	+ 2.5 / - 9.0					+ 2.8 / - 5.4				
2.0H	+ 6.5 / - 8.2					+ 5.2 / - 3.3				

CIE Pub.117 Corrected 4747 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.4)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.2460A P:29.20W PF:0.9920 Lamp Flux:4747.36x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	71	66	78	71	66	77	70	66	62
0.80	87	80	75	87	80	75	85	79	75	70
1.00	94	87	82	93	86	82	91	86	81	77
1.25	99	92	88	97	92	87	95	90	87	82
1.50	102	96	92	101	95	91	98	94	90	85
2.00	106	101	97	104	100	96	101	97	94	89
2.50	108	103	100	106	102	99	103	99	97	90
3.00	110	106	102	108	104	101	104	101	99	92
4.00	112	109	106	110	107	104	106	104	102	94
5.00	113	111	108	111	109	107	107	105	103	95
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.2460A P:29.20W PF:0.9920 Lamp Flux:4747.36x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

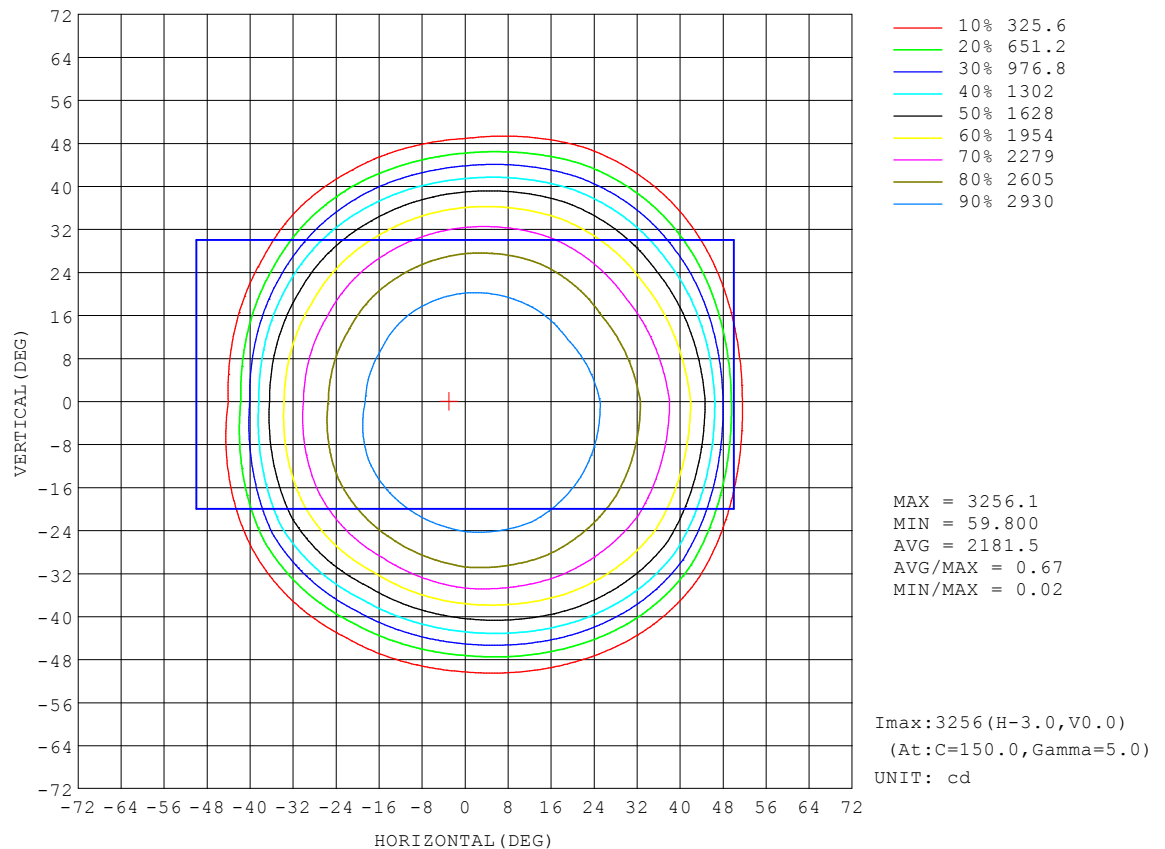


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

AAI Figure

Test:U:119.5V I:0.2460A P:29.20W PF:0.9920 Lamp Flux:4747.36x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co.,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

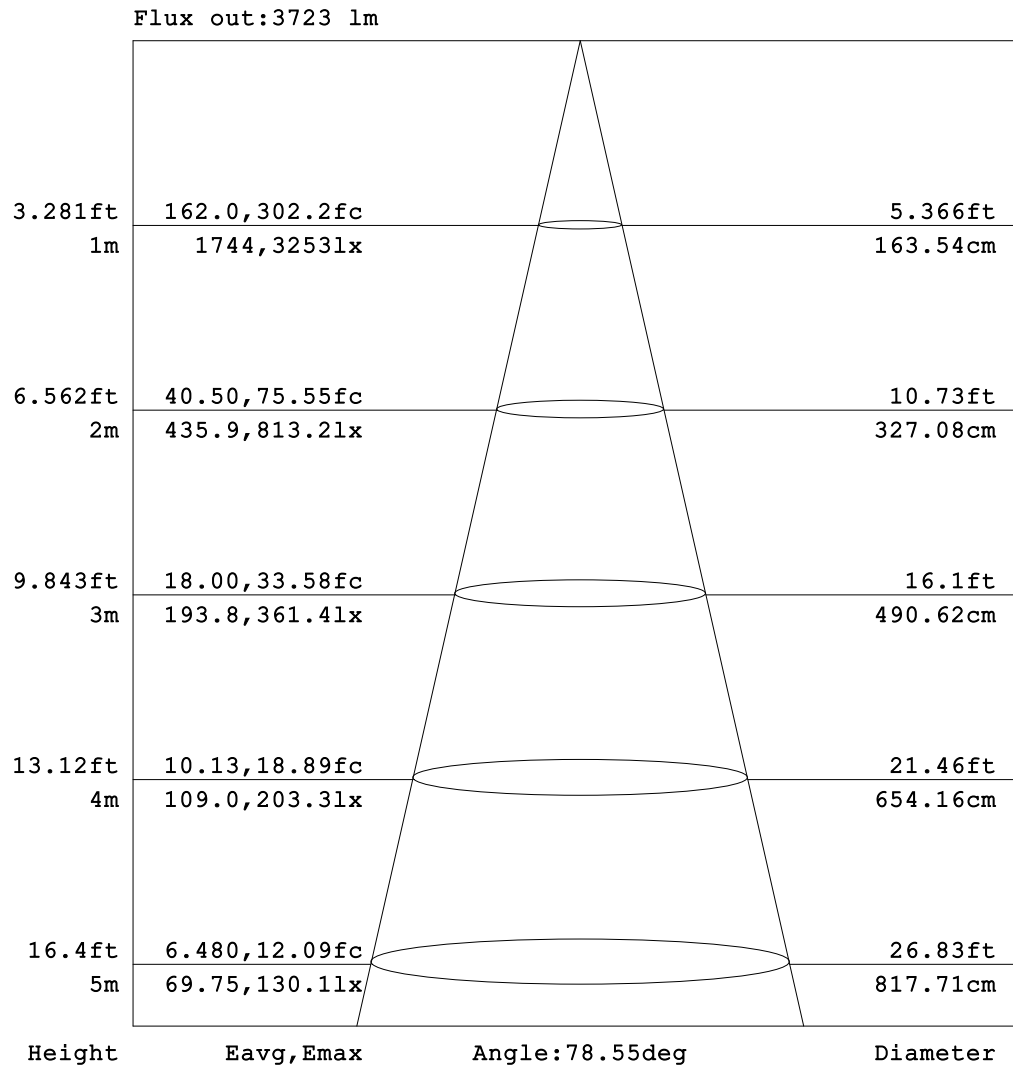


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

ISOLUX DIAGRAM


Test:U:119.5V I:0.2460A P:29.20W PF:0.9920 Lamp Flux:4747.36x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

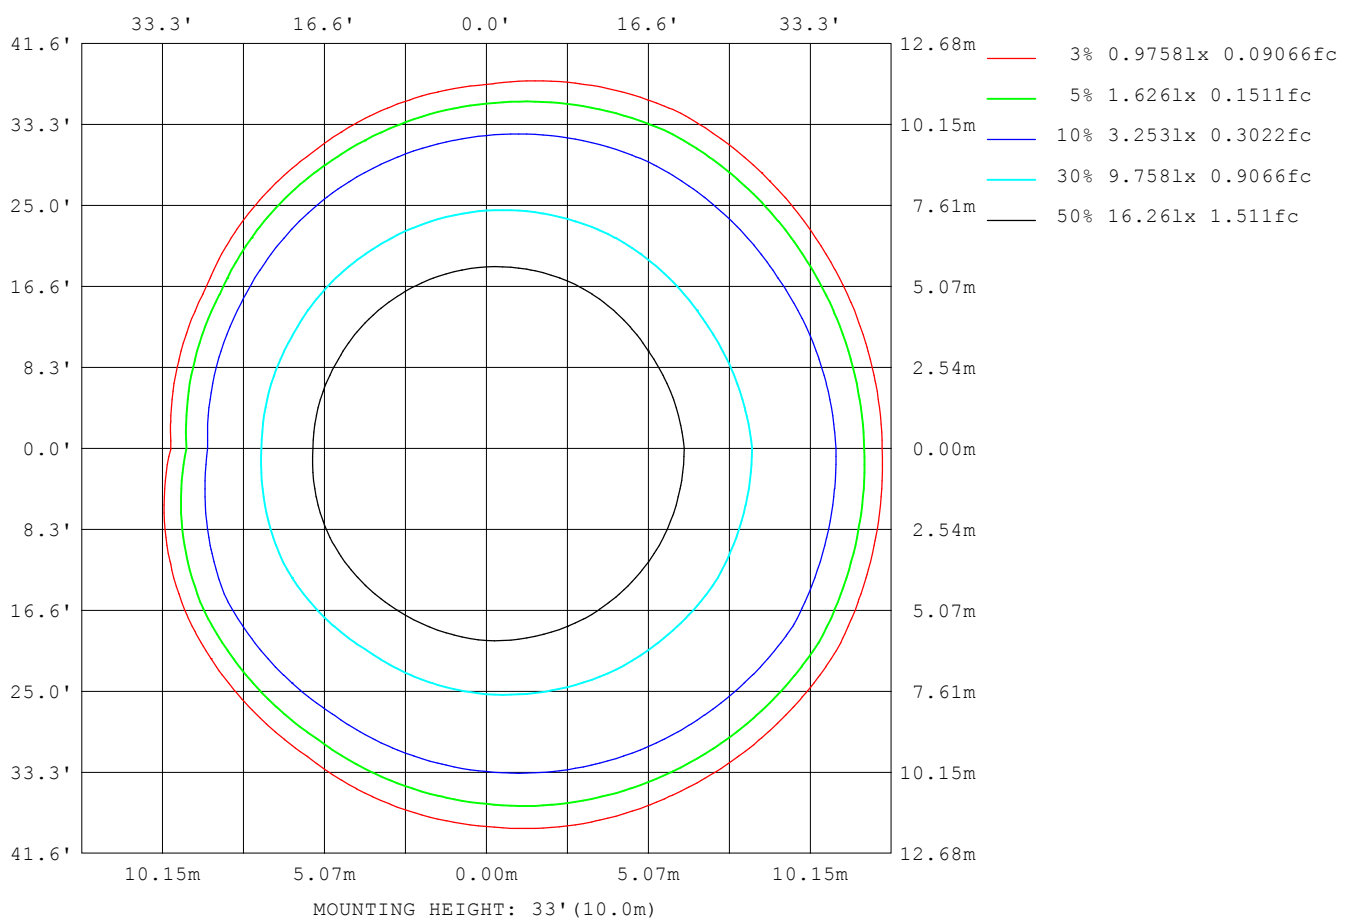

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

Planar Illuminance Curve

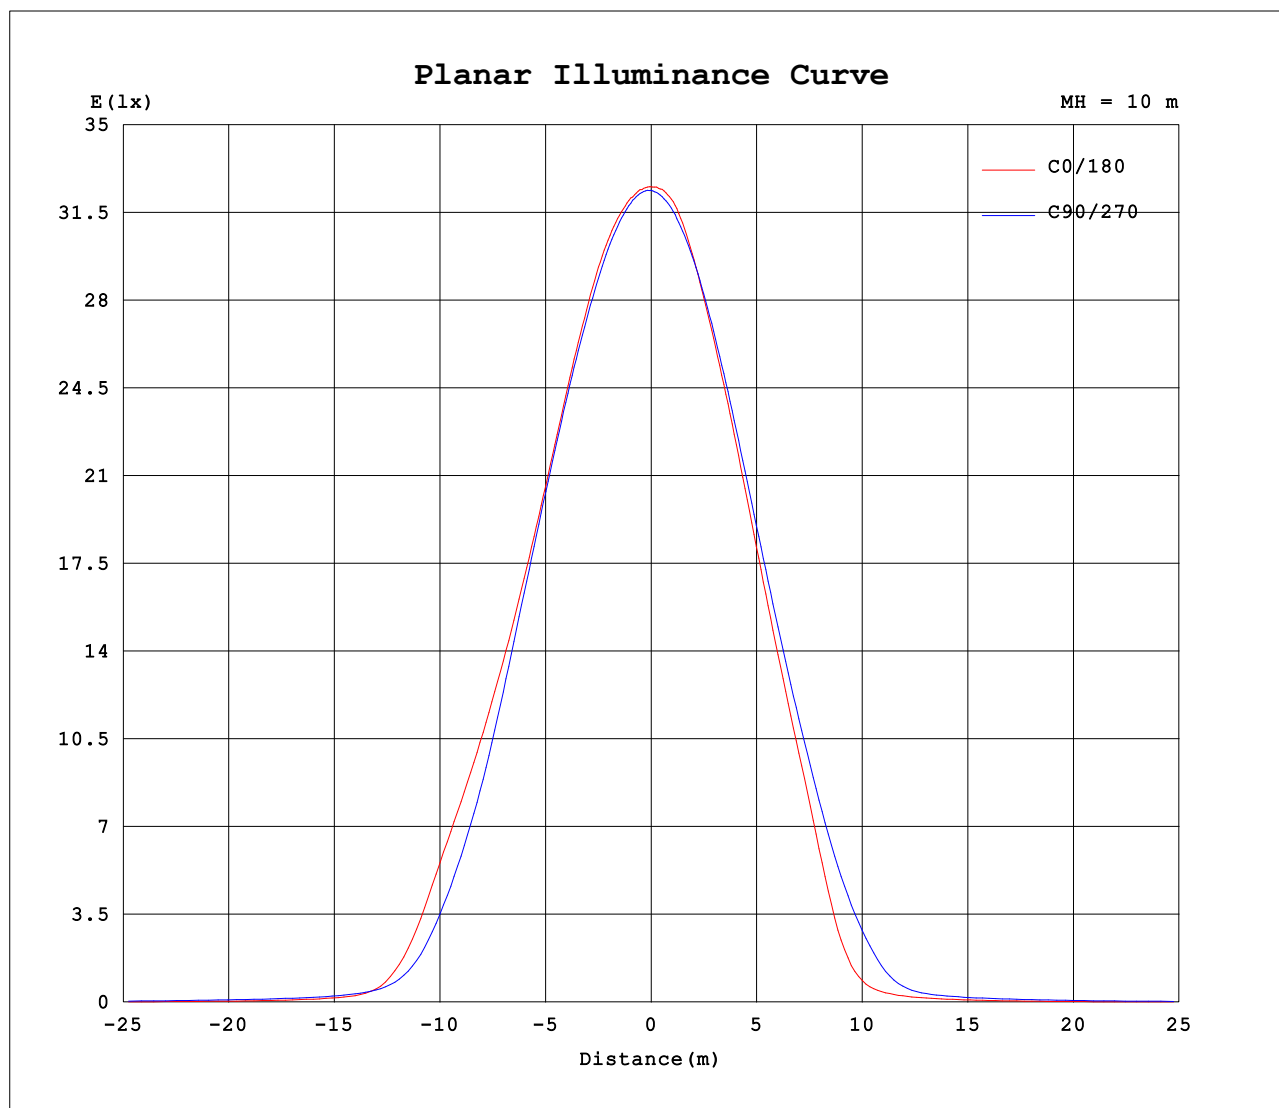

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.2460A P:29.20W PF:0.9920 Lamp Flux:4747.36x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	3243	3243	3243	3243	3243	3243	3243	3243	3243	3243	3243	3243						
5	3239	3241	3243	3240	3244	3248	3241	3231	3229	3220	3222	3232						
10	3230	3222	3220	3209	3213	3215	3170	3167	3178	3165	3174	3194						
15	3183	3184	3173	3152	3141	3112	3040	3037	3069	3076	3093	3123						
20	3083	3093	3089	3058	3019	2964	2868	2861	2905	2939	2969	2999						
25	2926	2946	2950	2907	2828	2746	2623	2615	2673	2735	2796	2824						
30	2724	2740	2733	2660	2514	2422	2278	2263	2348	2450	2548	2588						
35	2470	2473	2403	2256	2026	1971	1802	1789	1895	2059	2204	2281						
40	2123	2120	1939	1679	1425	1390	985	1093	1280	1495	1731	1863						
45	1567	1583	1308	996	701	561	245	312	552	810	1092	1247						
50	568	684	518	349	227	155	96.1	105	164	241	431	489						
55	124	152	171	163	132	87.5	62.3	66.2	99.7	123	146	124						
60	69.4	75.3	109	124	101	62.7	41.8	45.0	75.4	95.8	102	69.6						
65	46.4	52.1	83.2	103	81.1	42.7	30.0	30.3	58.1	77.8	80.4	46.9						
70	31.7	36.0	63.1	85.7	59.7	27.6	29.5	23.5	39.3	63.9	62.8	33.4						
75	21.7	23.0	44.1	68.6	35.7	21.6	59.9	19.5	23.9	50.9	46.0	21.8						
80	15.8	14.9	23.1	47.1	19.4	17.0	35.1	18.8	15.7	35.2	24.4	13.8						
85	38.0	7.91	10.5	13.8	9.62	20.1	24.2	20.1	8.10	10.7	10.8	7.02						
90	15.1	11.1	2.79	0.11	3.18	14.8	14.6	11.5	3.29	0.19	2.77	4.68						
95	9.16	5.54	1.73	0.11	2.04	11.3	7.15	5.89	2.57	0.21	1.52	6.93						
100	7.32	5.64	1.78	0.13	1.88	5.59	5.66	4.57	2.77	0.23	1.46	5.21						
105	5.42	3.65	2.58	0.14	2.79	5.02	5.66	3.97	3.06	0.22	1.49	3.63						
110	6.05	3.31	1.69	0.13	1.76	4.44	5.66	4.10	1.68	0.16	1.63	3.03						
115	6.51	2.75	1.40	0.20	1.35	4.68	5.35	3.78	1.36	0.21	1.25	2.39						
120	5.68	2.60	1.42	0.28	0.89	3.55	4.60	3.15	1.38	0.33	1.19	2.32						
125	4.52	2.28	1.46	0.37	0.85	3.49	4.52	3.09	1.13	0.43	0.98	2.19						
130	4.17	2.17	1.38	0.48	0.76	4.12	5.19	3.74	1.05	0.55	0.62	2.26						
135	3.99	2.50	1.02	0.62	0.86	3.28	4.71	2.92	0.89	0.68	0.64	2.39						
140	3.51	3.16	0.79	0.76	1.02	2.40	3.46	2.18	1.03	0.81	0.76	2.55						
145	4.01	2.54	0.90	0.88	1.11	1.32	2.27	1.29	1.13	0.92	0.86	1.30						
150	2.06	1.32	0.99	1.04	1.19	1.25	1.29	1.24	1.21	1.04	0.96	1.02						
155	1.26	1.15	1.11	1.15	1.27	1.41	1.40	1.39	1.28	1.17	1.12	1.11						
160	1.35	1.29	1.27	1.27	1.37	1.47	1.53	1.46	1.38	1.30	1.28	1.26						
165	1.49	1.46	1.41	1.38	1.42	1.53	1.61	1.54	1.45	1.42	1.36	1.41						
170	1.62	1.60	1.46	1.48	1.48	1.59	1.70	1.59	1.49	1.50	1.47	1.51						
175	1.58	1.58	1.51	1.52	1.51	1.54	1.61	1.54	1.51	1.50	1.49	1.51						
180	1.60	1.54	1.50	1.50	1.50	1.52	1.60	1.54	1.49	1.50	1.50	1.52						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: WP-KHA-042U0450900