


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.3300A P:39.10W PF:0.9900 Lamp Flux:6084.92x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 155.62 lm/W			
MODEL		I _{max} (cd)	4158	S/MH(C0/180)	1.24
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	1.17
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	6084.9	□ UP,DN(C0-180)	0.2,53.3
NOMINAL FLUX(lm)	6084.92	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.2,46.4
LAMPS INSIDE	1	□ up(%)	0.3	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	119.5	□ down(%)	99.7	CIBSE SHR MAX	1.15

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

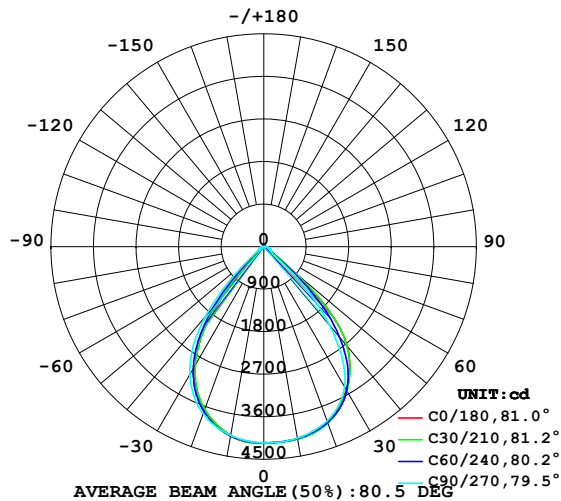

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

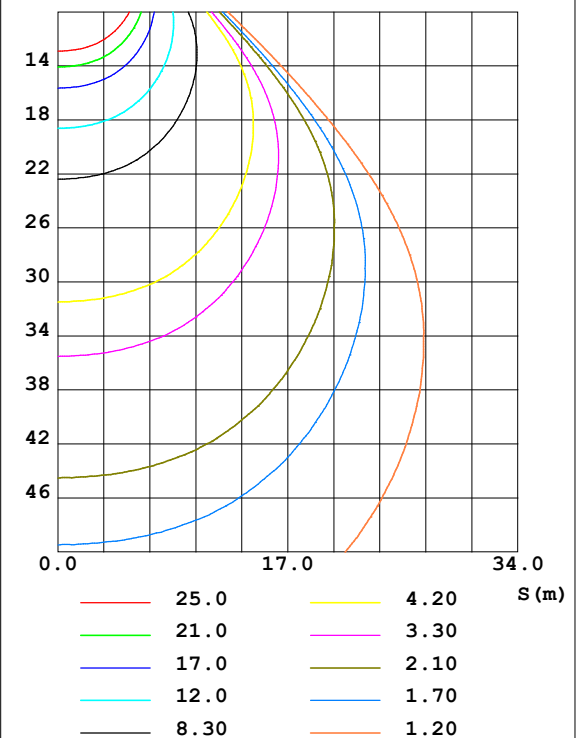


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: WP-KHA-042U0450900

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	zone	total	%lum, lamp
5	4152	4148	4145	4151	4153	4136	4124	4130	0- 5	99.16	99.16	1.63,1.63
10	4134	4124	4110	4117	4054	4063	4052	4080	5- 10	294.7	393.8	6.47,6.47
15	4078	4069	4038	4004	3889	3905	3935	3978	10- 15	479.4	873.3	14.4,14.4
20	3950	3964	3921	3834	3667	3681	3754	3815	15- 20	644.0	1517	24.9,24.9
25	3751	3785	3730	3573	3350	3373	3494	3592	20- 25	777.4	2295	37.7,37.7
30	3496	3519	3420	3168	2903	2938	3130	3280	25- 30	863.3	3158	51.9,51.9
35	3176	3141	2902	2565	2291	2348	2628	2867	30- 35	880.6	4039	66.4,66.4
40	2742	2611	2159	1816	1221	1501	1908	2295	35- 40	800.8	4839	79.5,79.5
45	2023	1880	1289	809.9	294.5	535.7	1029	1499	40- 45	594.0	5433	89.3,89.3
50	794.2	787.2	456.1	248.9	122.3	168.1	306.8	591.8	45- 50	313.1	5746	94.4,94.4
55	165.7	213.2	210.4	141.5	78.90	105.0	156.4	172.8	50- 55	112.2	5859	96.3,96.3
60	90.40	120.4	159.9	105.5	52.84	75.88	121.1	109.4	55- 60	57.94	5917	97.2,97.2
65	60.17	88.19	133.8	79.33	38.30	55.75	98.59	80.78	60- 65	43.79	5960	98,98
70	41.05	64.75	110.3	55.83	38.46	39.55	80.78	61.02	65- 70	34.60	5995	98.5,98.5
75	28.03	43.52	88.17	36.74	77.91	27.51	64.81	42.95	70- 75	27.31	6022	99,99
80	20.26	24.56	60.53	23.31	43.18	22.05	44.77	24.12	75- 80	20.97	6043	99.3,99.3
85	48.40	11.96	17.81	19.07	30.81	17.96	13.58	11.25	80- 85	12.67	6056	99.5,99.5
90	19.47	8.965	0.1469	11.52	17.98	9.180	0.2267	4.687	85- 90	7.705	6064	99.7,99.7
95	11.75	4.660	0.1456	8.512	9.102	5.331	0.2699	5.341	90- 95	3.732	6067	99.7,99.7
100	9.396	4.789	0.1647	4.764	7.253	5.123	0.2949	4.217	95-100	2.733	6070	99.8,99.8
105	6.956	3.997	0.1842	4.972	7.298	4.415	0.2835	3.240	100-105	2.285	6072	99.8,99.8
110	7.518	3.207	0.1609	3.965	7.305	3.724	0.2109	2.937	105-110	1.966	6074	99.8,99.8
115	8.467	2.653	0.2453	3.835	6.852	3.301	0.2774	2.296	110-115	1.744	6076	99.9,99.9
120	7.290	2.595	0.3621	2.843	5.925	2.907	0.4249	2.235	115-120	1.508	6078	99.9,99.9
125	5.901	2.437	0.4731	2.788	5.851	2.726	0.5628	2.007	120-125	1.294	6079	99.9,99.9
130	5.567	2.335	0.6151	3.121	6.767	3.107	0.7024	1.830	125-130	1.213	6080	99.9,99.9
135	5.061	2.378	0.7968	2.640	5.981	2.439	0.8768	1.940	130-135	1.123	6081	99.9,99.9
140	4.542	2.529	0.9711	2.186	4.451	2.039	1.036	2.133	135-140	0.9168	6082	100,100
145	4.903	2.282	1.130	1.555	2.815	1.544	1.181	1.383	140-145	0.7553	6083	100,100
150	2.728	1.485	1.327	1.558	1.639	1.572	1.348	1.274	145-150	0.5051	6083	100,100
155	1.619	1.447	1.473	1.714	1.802	1.721	1.512	1.439	150-155	0.3956	6084	100,100
160	1.732	1.641	1.630	1.817	1.977	1.830	1.675	1.632	155-160	0.3479	6084	100,100
165	1.904	1.833	1.777	1.888	2.074	1.918	1.821	1.785	160-165	0.2968	6085	100,100
170	2.081	1.958	1.894	1.965	2.182	1.983	1.924	1.914	165-170	0.2284	6085	100,100
175	2.032	1.976	1.947	1.958	2.070	1.955	1.928	1.929	170-175	0.1415	6085	100,100
180	2.051	1.946	1.924	1.935	2.053	1.945	1.923	1.937	175-180	0.0469	6085	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

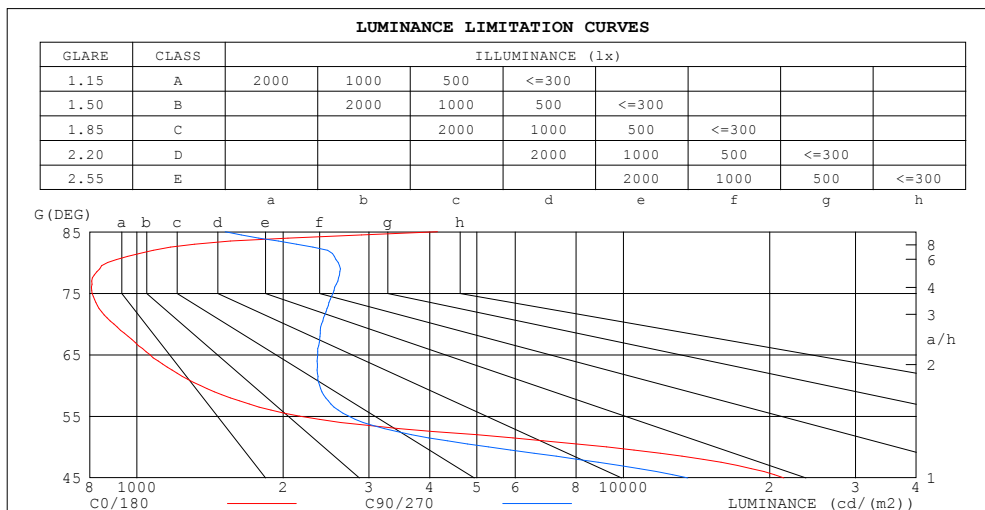

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

```

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

```

WEC AND CCEC

Test:U:119.5V I:0.3300A P:39.10W PF:0.9900 Lamp Flux:6084.92x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.207 .117 .037	.200 .114 .036	.187 .107 .034	.175 .101 .032	.164 .095 .031	
2.0	.199 .109 .033	.193 .106 .033	.182 .101 .031	.172 .096 .030	.162 .092 .029	
3.0	.190 .101 .030	.185 .099 .030	.175 .095 .029	.166 .091 .028	.158 .088 .027	
4.0	.181 .094 .028	.176 .092 .027	.168 .089 .027	.160 .086 .026	.153 .083 .025	
5.0	.172 .088 .025	.168 .086 .025	.161 .084 .025	.154 .081 .024	.148 .079 .024	
6.0	.164 .082 .023	.160 .081 .023	.154 .079 .023	.148 .077 .023	.142 .075 .022	
7.0	.156 .077 .022	.153 .076 .022	.147 .074 .021	.142 .073 .021	.136 .071 .021	
8.0	.149 .073 .020	.146 .072 .020	.141 .070 .020	.136 .069 .020	.131 .067 .020	
9.0	.142 .069 .019	.140 .068 .019	.135 .067 .019	.130 .065 .019	.126 .064 .019	
10.0	.136 .065 .018	.133 .064 .018	.129 .063 .018	.125 .062 .018	.121 .061 .018	

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.193 .193 .193	.165 .165 .165	.113 .113 .113	.065 .065 .065	.021 .021 .021	
1.0	.176 .160 .145	.150 .137 .125	.103 .094 .086	.059 .055 .050	.019 .018 .016	
2.0	.163 .135 .112	.139 .116 .097	.095 .080 .067	.055 .047 .040	.018 .015 .013	
3.0	.152 .116 .088	.130 .100 .077	.089 .070 .054	.052 .041 .032	.017 .013 .010	
4.0	.143 .102 .071	.122 .088 .062	.084 .062 .044	.049 .036 .026	.016 .012 .008	
5.0	.135 .091 .059	.116 .079 .051	.080 .055 .036	.046 .032 .021	.015 .011 .007	
6.0	.128 .082 .049	.110 .071 .043	.076 .050 .030	.044 .029 .018	.014 .010 .006	
7.0	.122 .075 .042	.105 .065 .036	.073 .045 .026	.042 .027 .015	.014 .009 .005	
8.0	.116 .069 .036	.100 .060 .032	.069 .042 .022	.040 .025 .013	.013 .008 .004	
9.0	.111 .064 .032	.096 .055 .028	.067 .039 .020	.039 .023 .012	.013 .008 .004	
10.0	.107 .060 .028	.092 .052 .025	.064 .036 .017	.037 .022 .010	.012 .007 .003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

Uncorrected UGR Table

Test:U:119.5V I:0.3300A P:39.10W PF:0.9900 Lamp Flux:6084.92x1 lm										
NAME: 磁铁灯条					TYPE:T7宽灯条 3500K			WEIGHT:		
DIM.: 4FT*2					SPEC.:透镜款			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co,ltd					SUR.:1.22*0.11m			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.8	21.0	20.1	21.1	21.3	18.9	20.0	19.1	20.2	20.4
3H	19.7	20.7	19.9	20.9	21.1	18.9	19.9	19.1	20.1	20.3
4H	19.6	20.6	19.9	20.8	21.0	18.9	19.8	19.2	20.1	20.3
6H	19.5	20.4	19.8	20.7	20.9	18.9	19.8	19.2	20.1	20.3
8H	19.5	20.3	19.8	20.6	20.9	18.9	19.8	19.2	20.1	20.3
12H	19.5	20.3	19.8	20.6	20.9	18.9	19.7	19.2	20.0	20.3
4H 2H	19.6	20.5	19.9	20.8	21.0	18.6	19.6	18.9	19.9	20.1
3H	19.4	20.3	19.8	20.5	20.8	18.7	19.5	19.0	19.8	20.1
4H	19.4	20.1	19.7	20.4	20.7	18.7	19.5	19.1	19.8	20.1
6H	19.3	19.9	19.7	20.3	20.6	18.8	19.5	19.2	19.8	20.2
8H	19.3	19.9	19.7	20.2	20.6	18.9	19.5	19.3	19.8	20.2
12H	19.3	19.8	19.7	20.2	20.6	18.9	19.4	19.3	19.8	20.2
8H 4H	19.2	19.9	19.6	20.2	20.6	18.6	19.2	19.0	19.6	20.0
6H	19.2	19.7	19.6	20.1	20.5	18.7	19.2	19.2	19.7	20.1
8H	19.2	19.6	19.6	20.0	20.5	18.8	19.2	19.3	19.7	20.1
12H	19.2	19.6	19.7	20.0	20.5	18.8	19.2	19.3	19.6	20.1
12H 4H	19.2	19.8	19.6	20.1	20.5	18.6	19.1	19.0	19.5	19.9
6H	19.1	19.6	19.6	20.0	20.5	18.7	19.1	19.2	19.6	20.0
8H	19.1	19.5	19.6	19.9	20.4	18.8	19.1	19.2	19.6	20.1
Variations with the observer position at spacings:										
S = 1.0H	+ 2.7 / - 9.0					+ 2.4 / - 5.0				
1.5H	+ 2.4 / - 9.1					+ 2.7 / - 5.3				
2.0H	+ 6.5 / - 8.2					+ 5.2 / - 3.3				

CIE Pub.117 Corrected 6085 lm Total Lamp Luminous Flux.(8log(F/F0) = 6.3)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.3300A P:39.10W PF:0.9900 Lamp Flux:6084.92x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	71	66	78	71	66	77	70	66	61
0.80	87	80	75	87	80	75	85	79	75	70
1.00	93	87	82	93	86	82	91	86	81	76
1.25	99	92	88	97	92	87	95	90	87	82
1.50	102	96	92	101	95	91	98	94	90	85
2.00	106	101	97	104	100	96	101	97	94	89
2.50	108	103	99	106	102	99	103	99	97	90
3.00	110	106	102	108	104	101	104	101	99	92
4.00	112	109	106	110	107	104	106	104	102	94
5.00	113	111	108	111	109	107	107	105	103	95
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.3300A P:39.10W PF:0.9900 Lamp Flux:6084.92x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

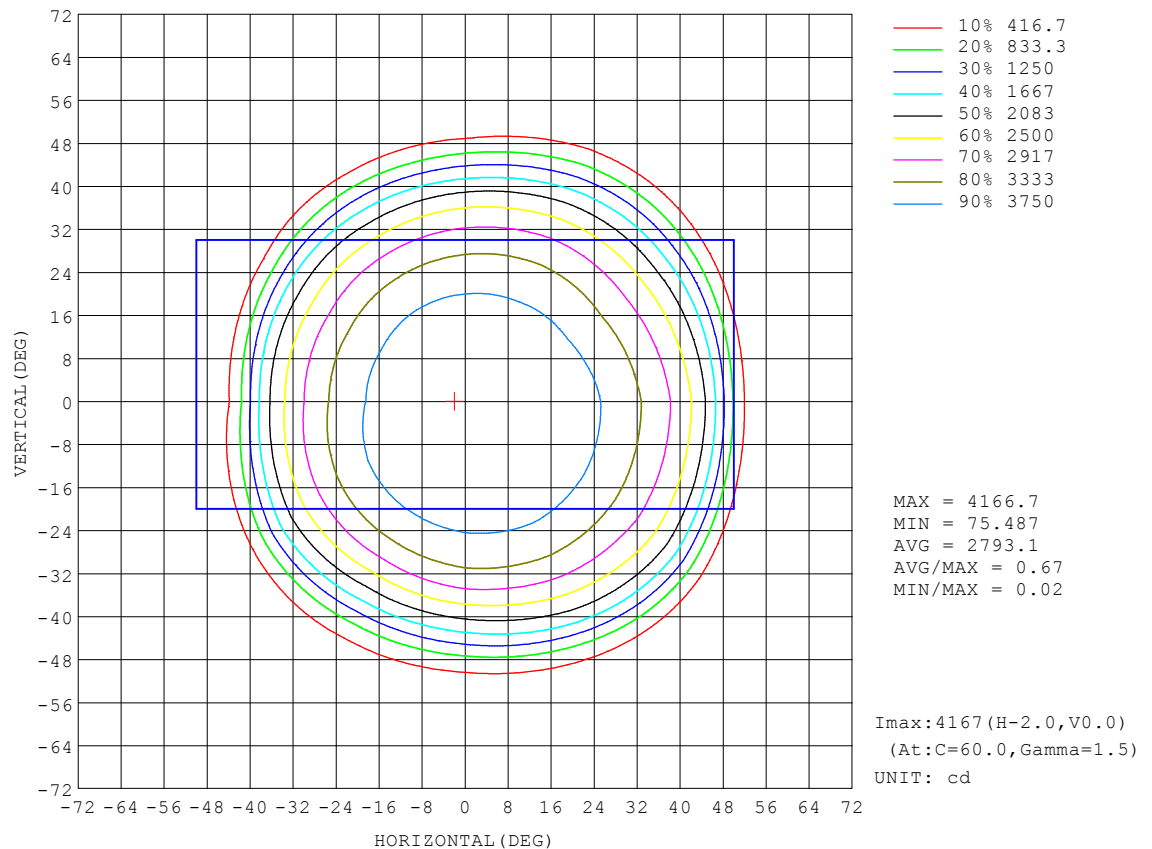


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

AAI Figure

Test:U:119.5V I:0.3300A P:39.10W PF:0.9900 Lamp Flux:6084.92x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

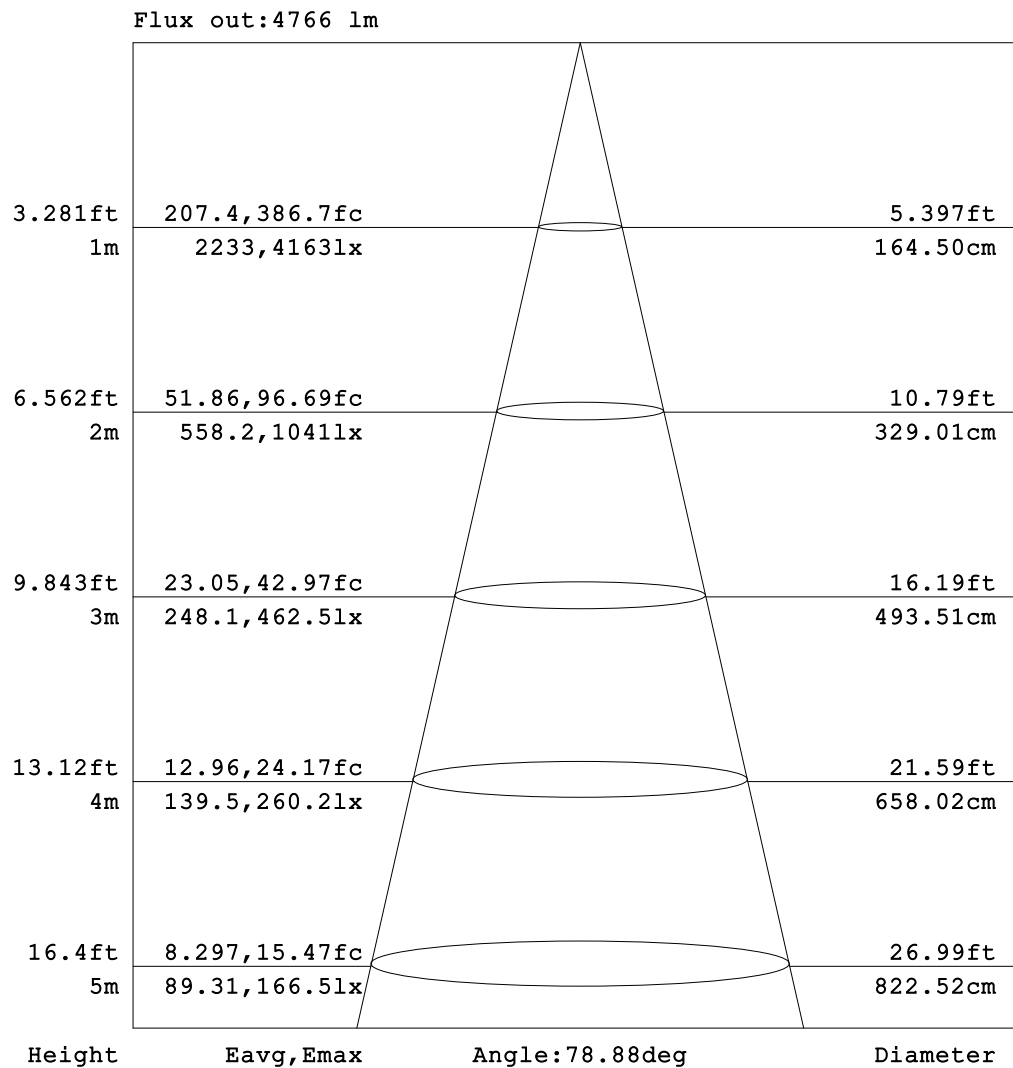


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

ISOLUX DIAGRAM


Test:U:119.5V I:0.3300A P:39.10W PF:0.9900 Lamp Flux:6084.92x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

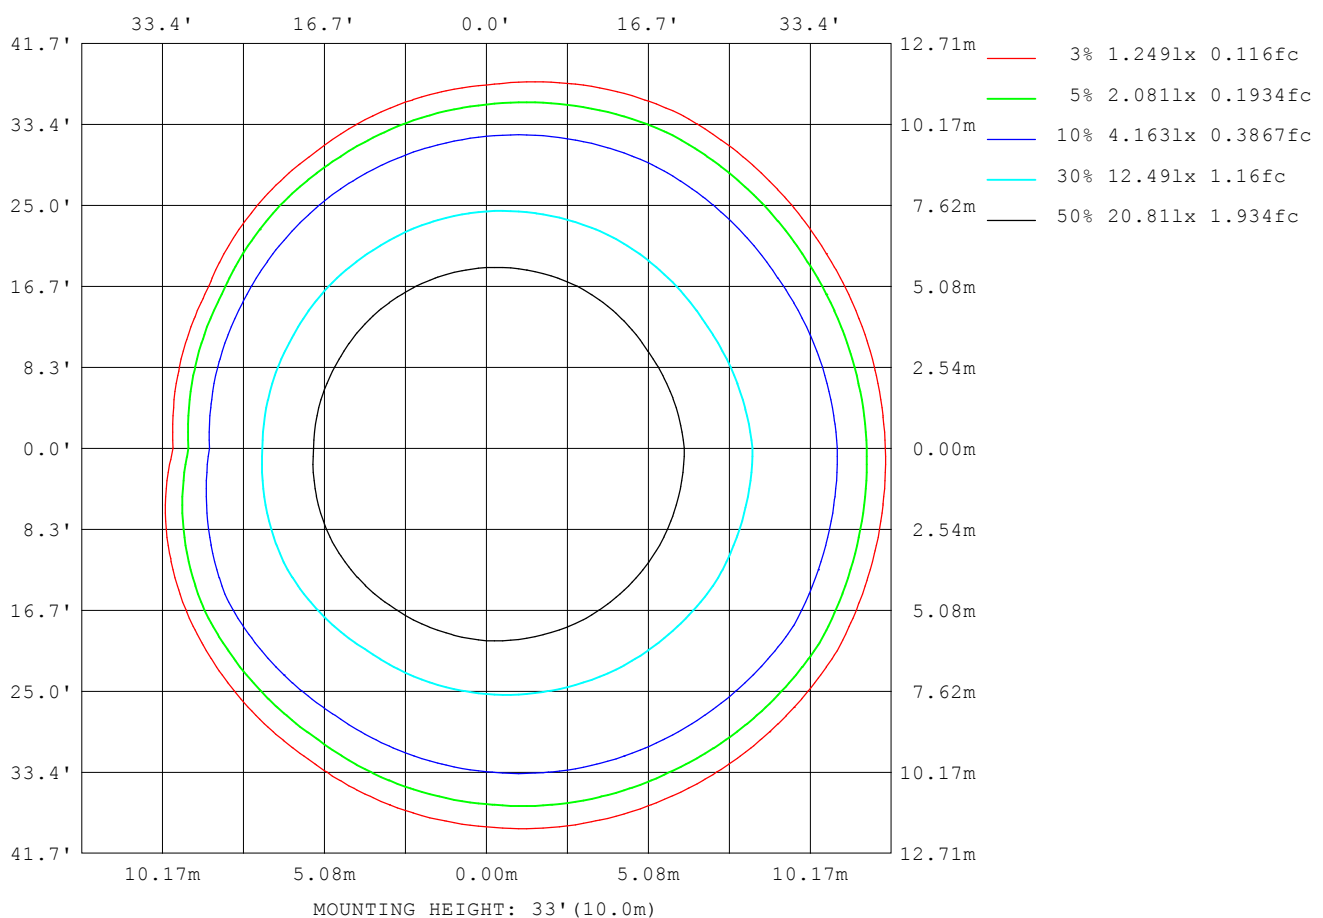

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

Planar Illuminance Curve

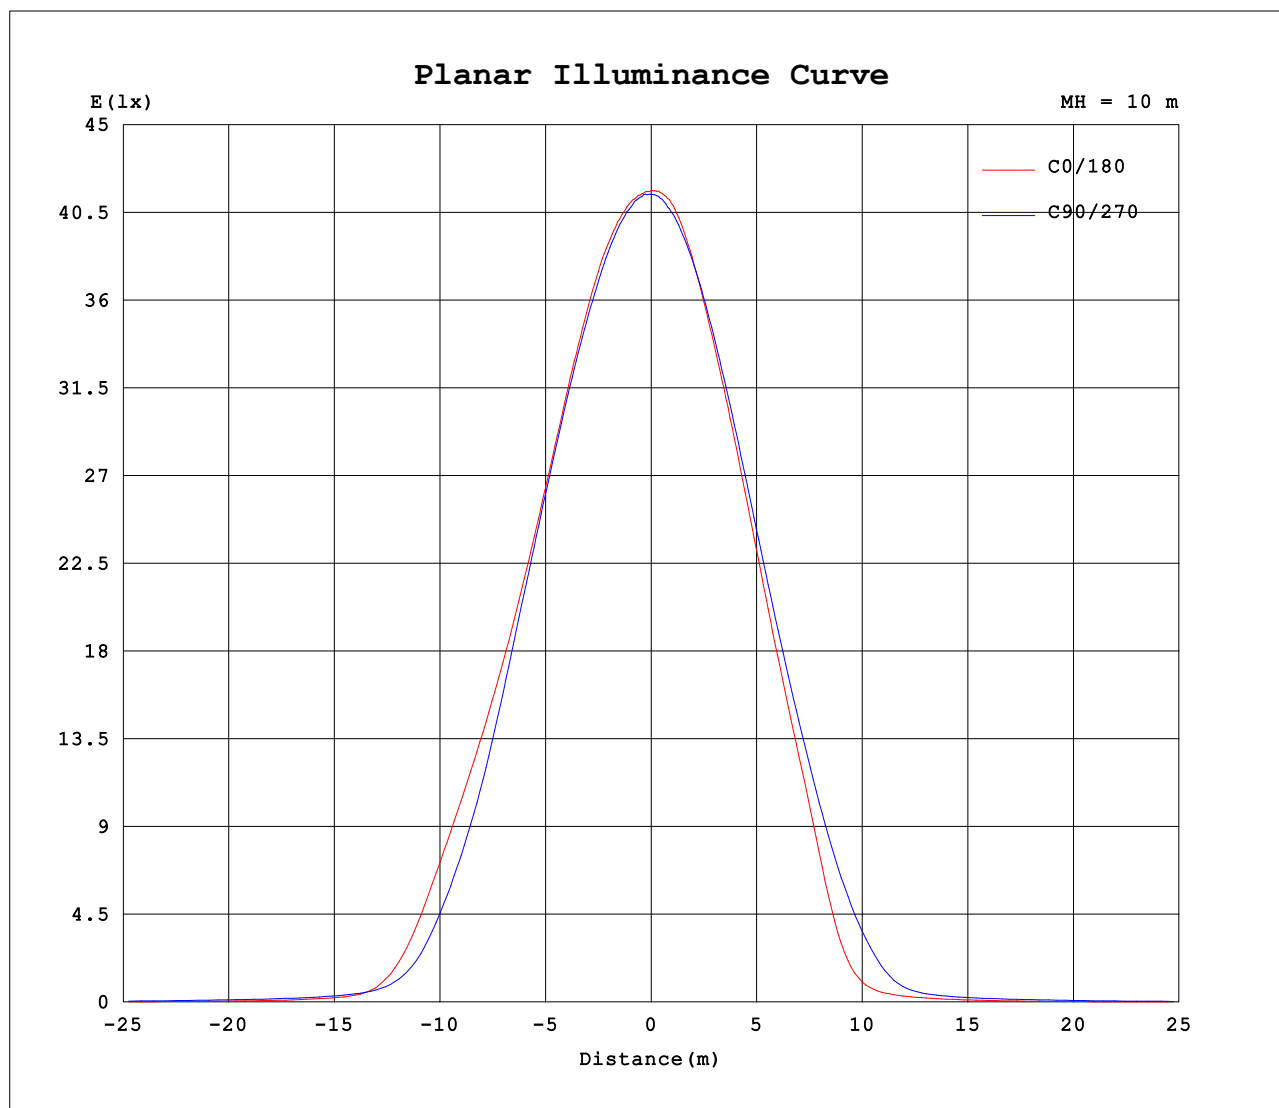

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.3300A P:39.10W PF:0.9900 Lamp Flux:6084.92x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	4152	4152	4152	4152	4152	4152	4152	4152	4152	4152	4152	4152							
5	4152	4152	4145	4145	4149	4154	4153	4141	4132	4124	4124	4136							
10	4134	4127	4121	4110	4116	4118	4054	4056	4069	4052	4067	4092							
15	4078	4080	4058	4038	4024	3985	3889	3887	3923	3935	3956	3999							
20	3950	3970	3959	3921	3874	3795	3667	3655	3708	3754	3793	3836							
25	3751	3783	3786	3730	3627	3518	3350	3340	3407	3494	3569	3614							
30	3496	3524	3513	3420	3234	3103	2903	2890	2987	3130	3252	3308							
35	3176	3186	3096	2902	2600	2530	2291	2287	2408	2628	2814	2920							
40	2742	2731	2491	2159	1851	1781	1221	1379	1623	1908	2206	2385							
45	2023	2053	1707	1289	904	715	294	378	693	1029	1392	1605							
50	794	913	661	456	301	197	122	131	206	307	548	635							
55	166	201	226	210	170	113	78.9	83.5	127	156	185	161							
60	90.4	98.8	142	160	131	80.4	52.8	56.9	94.9	121	130	88.7							
65	60.2	68.4	108	134	104	54.5	38.3	38.6	73.0	98.6	102	59.8							
70	41.1	47.3	82.3	110	76.5	35.2	38.5	30.1	49.0	80.8	79.5	42.5							
75	28.0	29.8	57.3	88.2	45.9	27.6	77.9	24.9	30.1	64.8	58.2	27.7							
80	20.3	19.3	29.8	60.5	24.8	21.8	43.2	24.3	19.8	44.8	30.7	17.6							
85	48.4	10.3	13.6	17.8	12.4	25.8	30.8	25.7	10.2	13.6	13.6	8.90							
90	19.5	14.3	3.61	0.15	4.08	18.9	18.0	14.2	4.11	0.23	3.48	5.89							
95	11.7	7.10	2.22	0.15	2.60	14.4	9.10	7.35	3.31	0.27	1.92	8.76							
100	9.40	7.30	2.27	0.16	2.43	7.10	7.25	5.86	4.38	0.29	1.85	6.58							
105	6.96	4.70	3.29	0.18	3.53	6.41	7.30	5.05	3.78	0.28	1.89	4.58							
110	7.52	4.25	2.16	0.16	2.26	5.66	7.31	5.32	2.12	0.21	2.05	3.82							
115	8.47	3.53	1.77	0.25	1.70	5.96	6.85	4.85	1.75	0.28	1.58	3.01							
120	7.29	3.36	1.82	0.36	1.13	4.55	5.93	4.04	1.77	0.42	1.53	2.94							
125	5.90	2.99	1.88	0.47	1.09	4.48	5.85	4.01	1.44	0.56	1.23	2.78							
130	5.57	2.88	1.79	0.62	0.96	5.28	6.77	4.87	1.34	0.70	0.80	2.86							
135	5.06	3.42	1.34	0.80	1.10	4.18	5.98	3.74	1.13	0.88	0.82	3.06							
140	4.54	4.05	1.01	0.97	1.30	3.07	4.45	2.75	1.32	1.04	0.97	3.29							
145	4.90	3.42	1.14	1.13	1.42	1.69	2.81	1.63	1.46	1.18	1.10	1.66							
150	2.73	1.70	1.27	1.33	1.52	1.60	1.64	1.59	1.55	1.35	1.23	1.31							
155	1.62	1.48	1.42	1.47	1.62	1.80	1.80	1.79	1.65	1.51	1.45	1.43							
160	1.73	1.66	1.62	1.63	1.75	1.88	1.98	1.88	1.78	1.68	1.64	1.62							
165	1.90	1.87	1.80	1.78	1.82	1.96	2.07	1.98	1.86	1.82	1.75	1.82							
170	2.08	2.05	1.87	1.89	1.89	2.04	2.18	2.05	1.92	1.92	1.89	1.94							
175	2.03	2.02	1.93	1.95	1.94	1.98	2.07	1.98	1.93	1.93	1.92	1.94							
180	2.05	1.97	1.92	1.92	1.92	1.95	2.05	1.97	1.92	1.92	1.92	1.95							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-042U0450900