


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.3V I:0.6850A P:81.10W PF:0.9930 Lamp Flux:10717.3x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 132.15 lm/W			
MODEL		I _{max} (cd)	7311	S/MH(C0/180)	1.24
NOMINAL POWER(W)	82	LOR(%)	100.0	S/MH(C90/270)	1.17
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	10717	□ UP,DN(C0-180)	0.2,53.4
NOMINAL FLUX(lm)	10717.3	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.2,46.2
LAMPS INSIDE	1	□ up(%)	0.3	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	119.3	□ down(%)	99.7	CIBSE SHR MAX	1.15

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

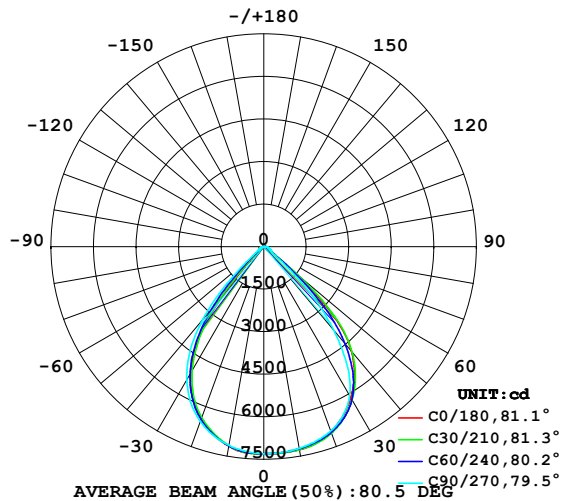

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

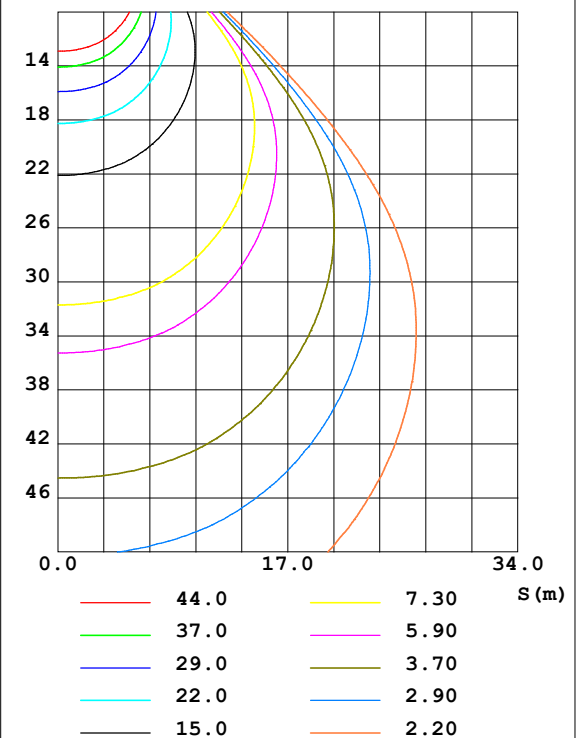


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: WP-KHA-075U0421800

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	zone	total	%lum, lamp
5	7300	7294	7287	7300	7296	7279	7246	7268	0- 5	174.4	174.4	1.63,1.63
10	7280	7247	7220	7234	7141	7128	7109	7160	5- 10	518.0	692.4	6.46,6.46
15	7168	7161	7101	7041	6847	6837	6888	6975	10- 15	842.3	1535	14.3,14.3
20	6945	6980	6912	6742	6462	6443	6550	6683	15- 20	1131	2666	24.9,24.9
25	6599	6679	6595	6290	5922	5896	6085	6287	20- 25	1366	4031	37.6,37.6
30	6147	6223	6065	5569	5136	5129	5431	5741	25- 30	1517	5548	51.8,51.8
35	5570	5565	5139	4487	4065	4095	4556	5020	30- 35	1548	7095	66.2,66.2
40	4816	4649	3828	3170	2208	2638	3340	4050	35- 40	1409	8505	79.4,79.4
45	3555	3353	2327	1417	527.1	949.6	1846	2703	40- 45	1051	9556	89.2,89.2
50	1414	1467	855.3	438.5	213.4	288.4	550.3	1114	45- 50	564.4	10120	94.4,94.4
55	292.5	389.3	376.8	248.1	139.1	177.1	263.2	309.9	50- 55	204.5	10325	96.3,96.3
60	157.7	215.1	280.5	183.6	93.26	128.2	202.7	188.4	55- 60	101.2	10426	97.3,97.3
65	104.3	156.3	233.8	136.4	67.67	94.71	165.1	138.4	60- 65	75.85	10502	98.98
70	71.01	114.0	193.5	95.59	68.16	66.98	135.2	104.6	65- 70	59.66	10562	98.5,98.5
75	48.32	75.81	154.2	62.16	140.6	47.06	109.0	73.40	70- 75	47.06	10609	99.99
80	35.11	42.36	104.5	40.28	75.99	37.96	76.16	40.99	75- 80	36.36	10645	99.3,99.3
85	88.24	20.47	30.49	32.89	54.16	30.72	22.93	19.12	80- 85	21.90	10667	99.5,99.5
90	33.32	15.71	0.5470	20.41	31.37	16.08	0.3725	8.005	85- 90	13.24	10680	99.7,99.7
95	20.01	8.071	0.2588	14.56	15.91	9.176	0.4600	9.331	90- 95	6.480	10687	99.7,99.7
100	15.83	8.435	0.2818	8.180	12.75	8.918	0.5054	7.192	95-100	4.704	10691	99.8,99.8
105	12.00	6.986	0.3182	6.608	13.11	7.974	0.5042	5.570	100-105	4.002	10695	99.8,99.8
110	13.63	5.791	0.2820	6.730	12.87	6.122	0.3684	5.048	105-110	3.409	10699	99.8,99.8
115	15.10	4.997	0.4335	6.514	12.13	5.629	0.4941	3.992	110-115	3.074	10702	99.9,99.9
120	12.96	4.607	0.6424	4.875	10.14	4.962	0.7548	3.895	115-120	2.634	10704	99.9,99.9
125	10.48	4.495	0.8283	4.840	10.41	4.723	0.9964	3.519	120-125	2.278	10707	99.9,99.9
130	9.527	4.469	1.093	5.311	12.16	5.451	1.242	3.269	125-130	2.164	10709	99.9,99.9
135	8.714	4.317	1.394	4.483	10.75	4.318	1.548	3.425	130-135	1.986	10711	99.9,99.9
140	8.320	4.540	1.697	3.821	8.007	3.620	1.834	3.860	135-140	1.631	10713	100,100
145	8.630	4.165	1.973	2.667	4.994	2.701	2.081	2.484	140-145	1.334	10714	100,100
150	4.984	2.638	2.310	2.713	2.842	2.773	2.369	2.242	145-150	0.8964	10715	100,100
155	2.839	2.523	2.567	3.011	3.142	3.037	2.656	2.527	150-155	0.6949	10715	100,100
160	3.041	2.865	2.845	3.186	3.461	3.224	2.929	2.866	155-160	0.6103	10716	100,100
165	3.336	3.202	3.104	3.305	3.661	3.369	3.193	3.139	160-165	0.5200	10717	100,100
170	3.635	3.423	3.318	3.443	3.804	3.476	3.370	3.359	165-170	0.4003	10717	100,100
175	3.567	3.463	3.406	3.432	3.635	3.427	3.381	3.380	170-175	0.2480	10717	100,100
180	3.597	3.405	3.372	3.392	3.609	3.405	3.374	3.392	175-180	0.0821	10717	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

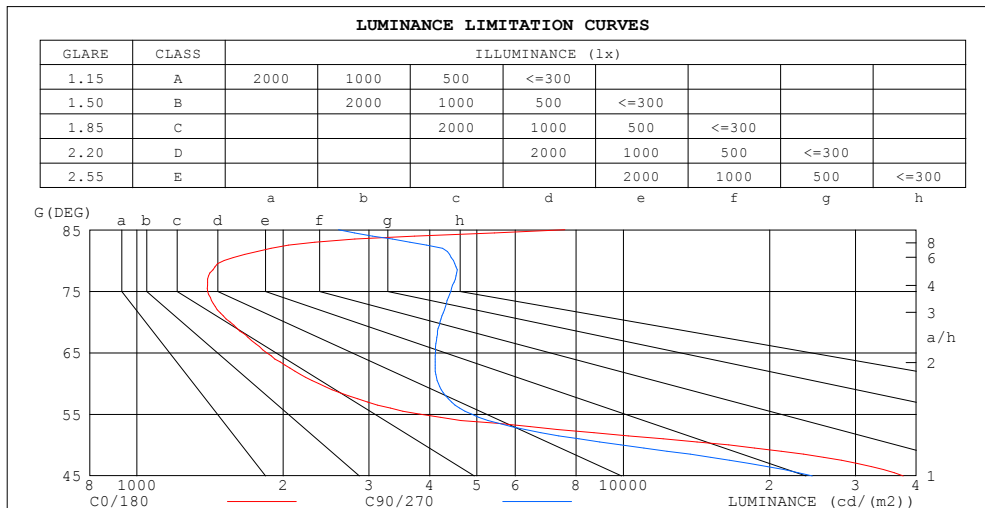

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	7580	2600
80	1514	4473
75	1398	4425
70	1554	4203
65	1847	4111
60	2362	4168
55	3818	4880
50	16471	9886
45	37642	24447


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2022-01-03

Range: 0 - 180DEG
Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: WP-KHA-075U0421800

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.3V I:0.6850A P:81.10W PF:0.9930 Lamp Flux:10717.3x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

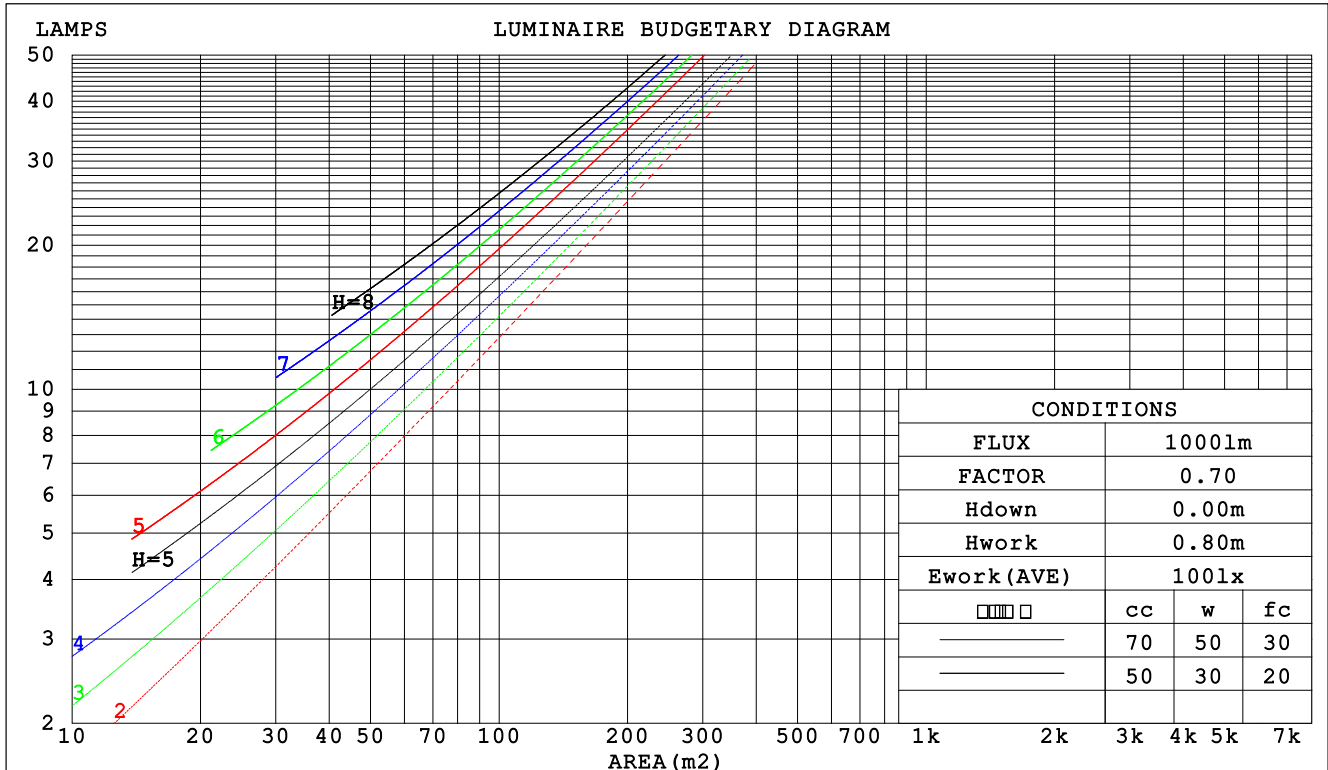

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: WP-KHA-075U0421800

WEC AND CCEC

Test:U:119.3V I:0.6850A P:81.10W PF:0.9930 Lamp Flux:10717.3x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.207 .117 .037	.200 .114 .036	.187 .107 .034	.175 .101 .032	.164 .095 .031	
2.0	.199 .109 .033	.193 .106 .033	.182 .101 .031	.172 .096 .030	.163 .092 .029	
3.0	.190 .101 .030	.185 .099 .030	.175 .095 .029	.167 .091 .028	.158 .088 .027	
4.0	.181 .094 .028	.176 .092 .027	.168 .089 .027	.160 .086 .026	.153 .083 .025	
5.0	.172 .088 .025	.168 .086 .025	.161 .084 .025	.154 .081 .024	.148 .079 .024	
6.0	.164 .082 .024	.160 .081 .023	.154 .079 .023	.148 .077 .023	.142 .075 .022	
7.0	.156 .077 .022	.153 .076 .022	.147 .074 .021	.142 .073 .021	.137 .071 .021	
8.0	.149 .073 .020	.146 .072 .020	.141 .070 .020	.136 .069 .020	.131 .067 .020	
9.0	.142 .069 .019	.140 .068 .019	.135 .067 .019	.130 .065 .019	.126 .064 .019	
10.0	.136 .065 .018	.134 .065 .018	.129 .063 .018	.125 .062 .018	.121 .061 .018	

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.193 .193 .193	.165 .165 .165	.113 .113 .113	.065 .065 .065	.021 .021 .021	
1.0	.176 .160 .145	.150 .137 .125	.103 .094 .086	.059 .055 .050	.019 .018 .016	
2.0	.163 .135 .112	.139 .116 .097	.095 .080 .067	.055 .047 .040	.018 .015 .013	
3.0	.152 .116 .088	.130 .100 .077	.089 .070 .054	.052 .041 .032	.017 .013 .010	
4.0	.143 .102 .071	.122 .088 .062	.084 .062 .044	.049 .036 .026	.016 .012 .008	
5.0	.135 .091 .059	.116 .079 .051	.080 .055 .036	.046 .032 .021	.015 .011 .007	
6.0	.128 .082 .049	.110 .071 .043	.076 .050 .030	.044 .029 .018	.014 .010 .006	
7.0	.122 .075 .042	.105 .065 .036	.073 .045 .026	.042 .027 .015	.014 .009 .005	
8.0	.117 .069 .036	.100 .060 .032	.069 .042 .022	.040 .025 .013	.013 .008 .004	
9.0	.111 .064 .032	.096 .055 .028	.067 .039 .020	.039 .023 .012	.013 .008 .004	
10.0	.107 .060 .028	.092 .052 .025	.064 .036 .017	.037 .022 .010	.012 .007 .003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-075U0421800

Uncorrected UGR Table

Test:U:119.3V I:0.6850A P:81.10W PF:0.9930 Lamp Flux:10717.3x1 lm										
NAME: 磁铁灯条					TYPE:T7宽灯条 3500K			WEIGHT:		
DIM.: 4FT*2					SPEC.:透镜款			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co,ltd					SUR.:1.22*0.11m			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.9	23.0	22.1	23.2	23.4	21.0	22.1	21.2	22.3	22.5
3H	21.7	22.7	22.0	22.9	23.2	20.9	22.0	21.2	22.2	22.4
4H	21.6	22.6	21.9	22.8	23.1	20.9	21.9	21.2	22.1	22.4
6H	21.5	22.4	21.9	22.7	23.0	21.0	21.9	21.3	22.1	22.4
8H	21.5	22.4	21.8	22.6	22.9	21.0	21.8	21.3	22.1	22.4
12H	21.5	22.3	21.8	22.6	22.9	21.0	21.8	21.3	22.1	22.4
4H 2H	21.6	22.6	21.9	22.8	23.1	20.7	21.7	21.0	21.9	22.2
3H	21.5	22.3	21.8	22.6	22.9	20.7	21.6	21.1	21.9	22.1
4H	21.4	22.1	21.8	22.5	22.8	20.8	21.6	21.2	21.9	22.2
6H	21.3	22.0	21.7	22.3	22.7	20.9	21.5	21.3	21.9	22.2
8H	21.3	21.9	21.7	22.3	22.6	20.9	21.5	21.3	21.9	22.3
12H	21.3	21.9	21.7	22.3	22.7	20.9	21.5	21.3	21.8	22.2
8H 4H	21.3	21.9	21.7	22.3	22.6	20.7	21.3	21.1	21.7	22.0
6H	21.2	21.7	21.7	22.1	22.5	20.8	21.3	21.2	21.7	22.1
8H	21.2	21.6	21.6	22.1	22.5	20.8	21.3	21.3	21.7	22.2
12H	21.3	21.6	21.7	22.1	22.6	20.9	21.2	21.3	21.7	22.2
12H 4H	21.2	21.8	21.7	22.2	22.6	20.6	21.2	21.1	21.6	22.0
6H	21.2	21.6	21.6	22.0	22.5	20.8	21.2	21.2	21.6	22.1
8H	21.2	21.5	21.6	22.0	22.5	20.8	21.2	21.3	21.6	22.1
Variations with the observer position at spacings:										
S = 1.0H	+ 2.7 / - 9.0					+ 2.4 / - 5.1				
1.5H	+ 2.4 / - 9.0					+ 2.7 / - 5.4				
2.0H	+ 6.4 / - 8.3					+ 5.2 / - 3.5				

CIE Pub.117 Corrected 10717 lm Total Lamp Luminous Flux.(8log(F/F0) = 8.2)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-075U0421800

UTILIZATION FACTORS TABLE

Test:U:119.3V I:0.6850A P:81.10W PF:0.9930 Lamp Flux:10717.3x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	71	66	78	70	66	77	70	66	61
0.80	87	80	75	87	79	75	85	79	75	70
1.00	93	86	82	92	86	82	91	86	81	76
1.25	98	92	88	97	91	87	95	90	87	82
1.50	102	96	92	101	95	91	98	94	90	85
2.00	106	101	97	104	99	96	101	97	94	89
2.50	108	103	99	106	102	99	103	99	97	90
3.00	110	106	102	108	104	101	104	101	99	92
4.00	112	109	106	110	107	104	106	104	102	94
5.00	113	110	108	111	109	106	107	105	103	95
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: WP-KHA-075U0421800

ISOCANDELA DIAGRAM

Test:U:119.3V I:0.6850A P:81.10W PF:0.9930 Lamp Flux:10717.3x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

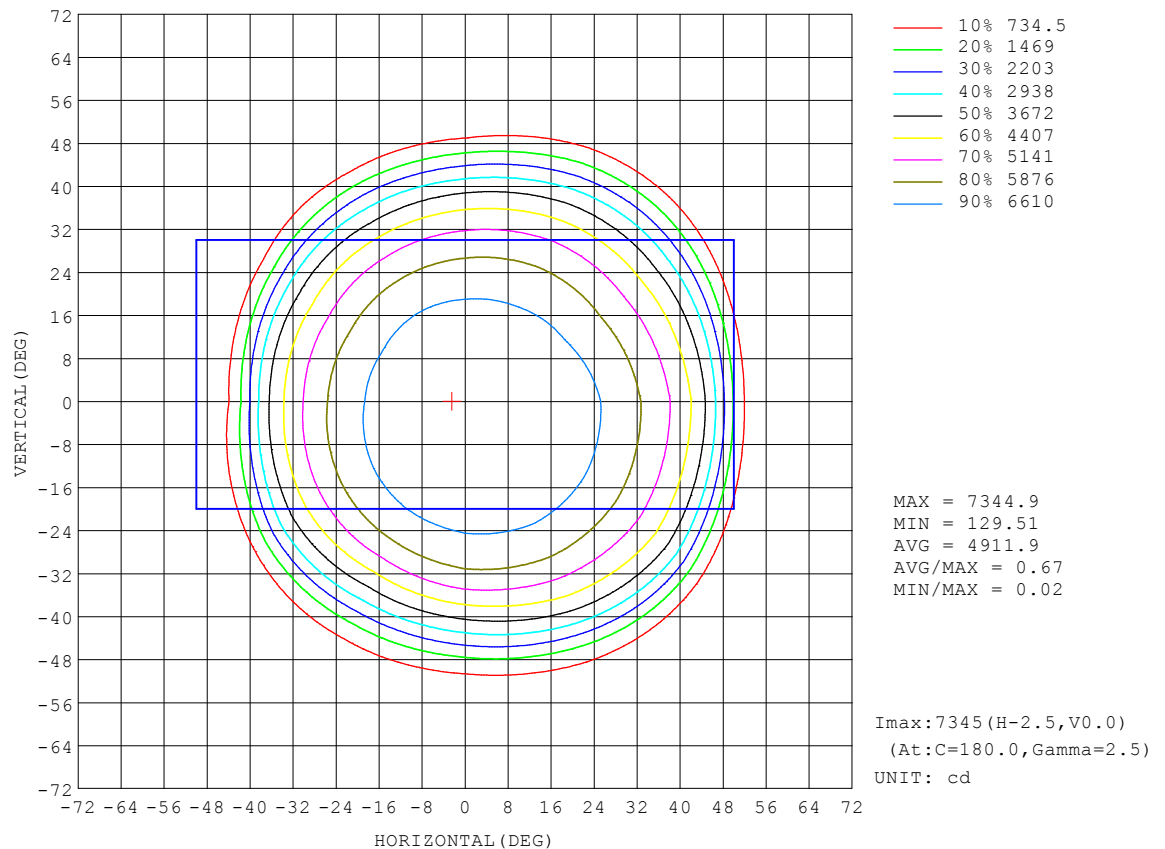


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-075U0421800

AAI Figure

Test:U:119.3V I:0.6850A P:81.10W PF:0.9930 Lamp Flux:10717.3x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

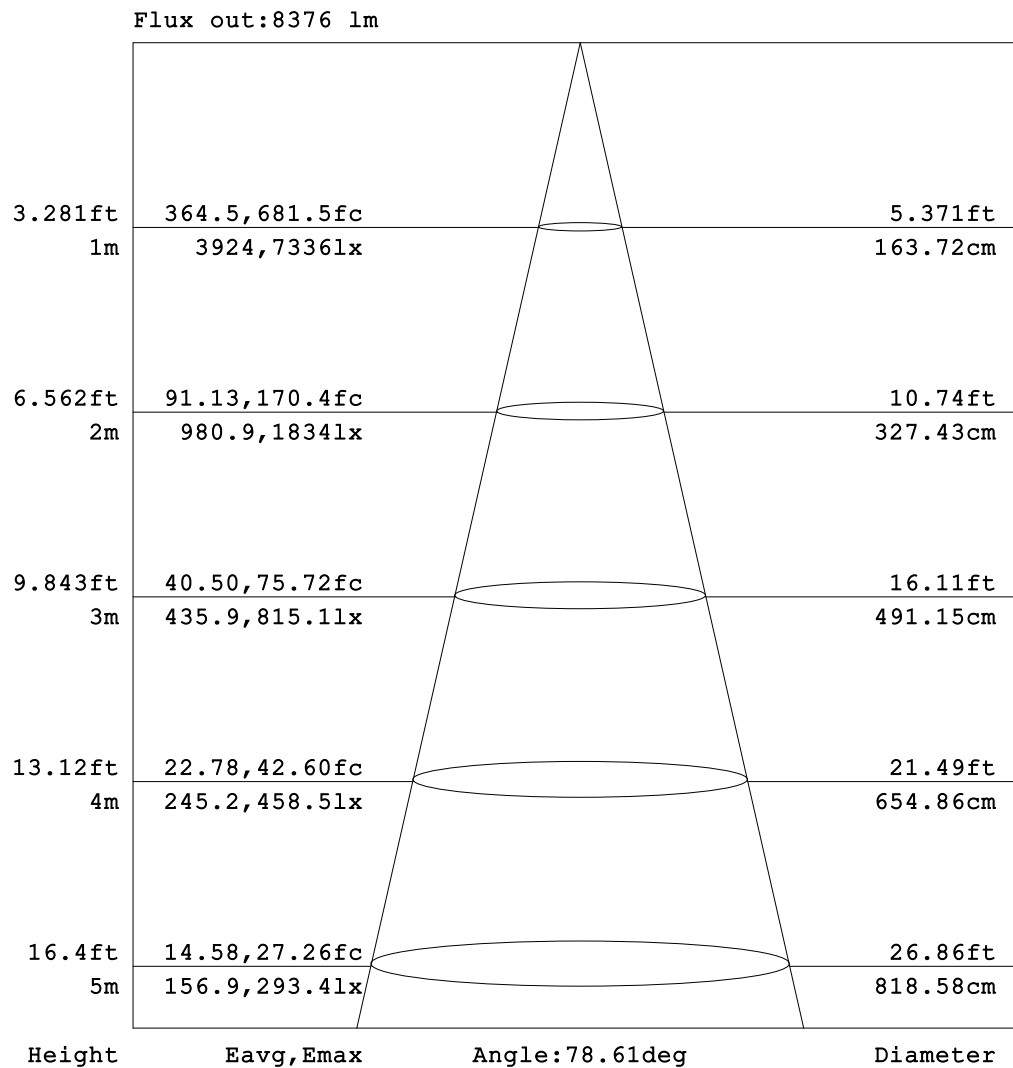


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-075U0421800

ISOLUX DIAGRAM


Test:U:119.3V I:0.6850A P:81.10W PF:0.9930 Lamp Flux:10717.3x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

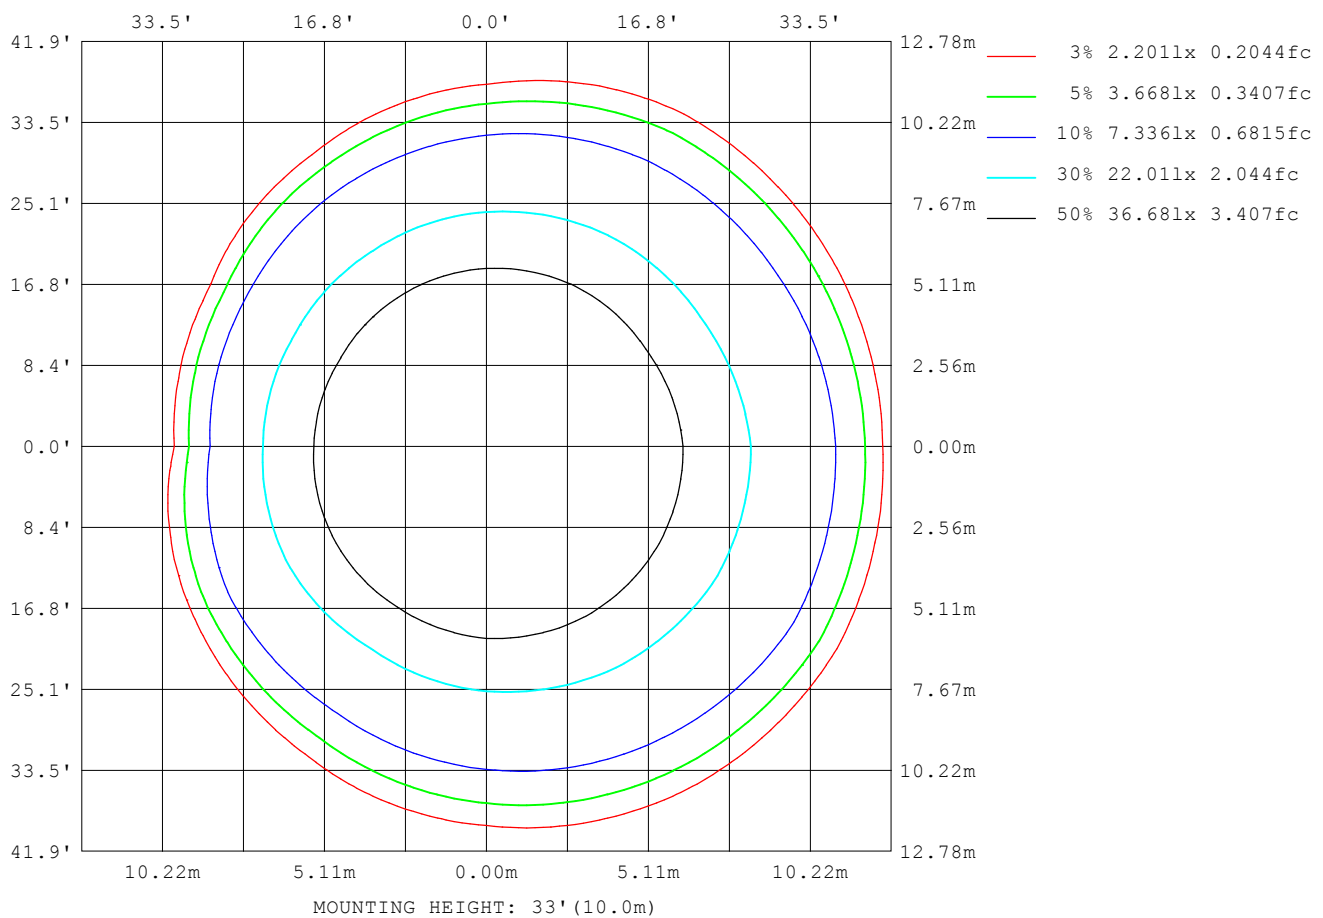

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-075U0421800

Planar Illuminance Curve

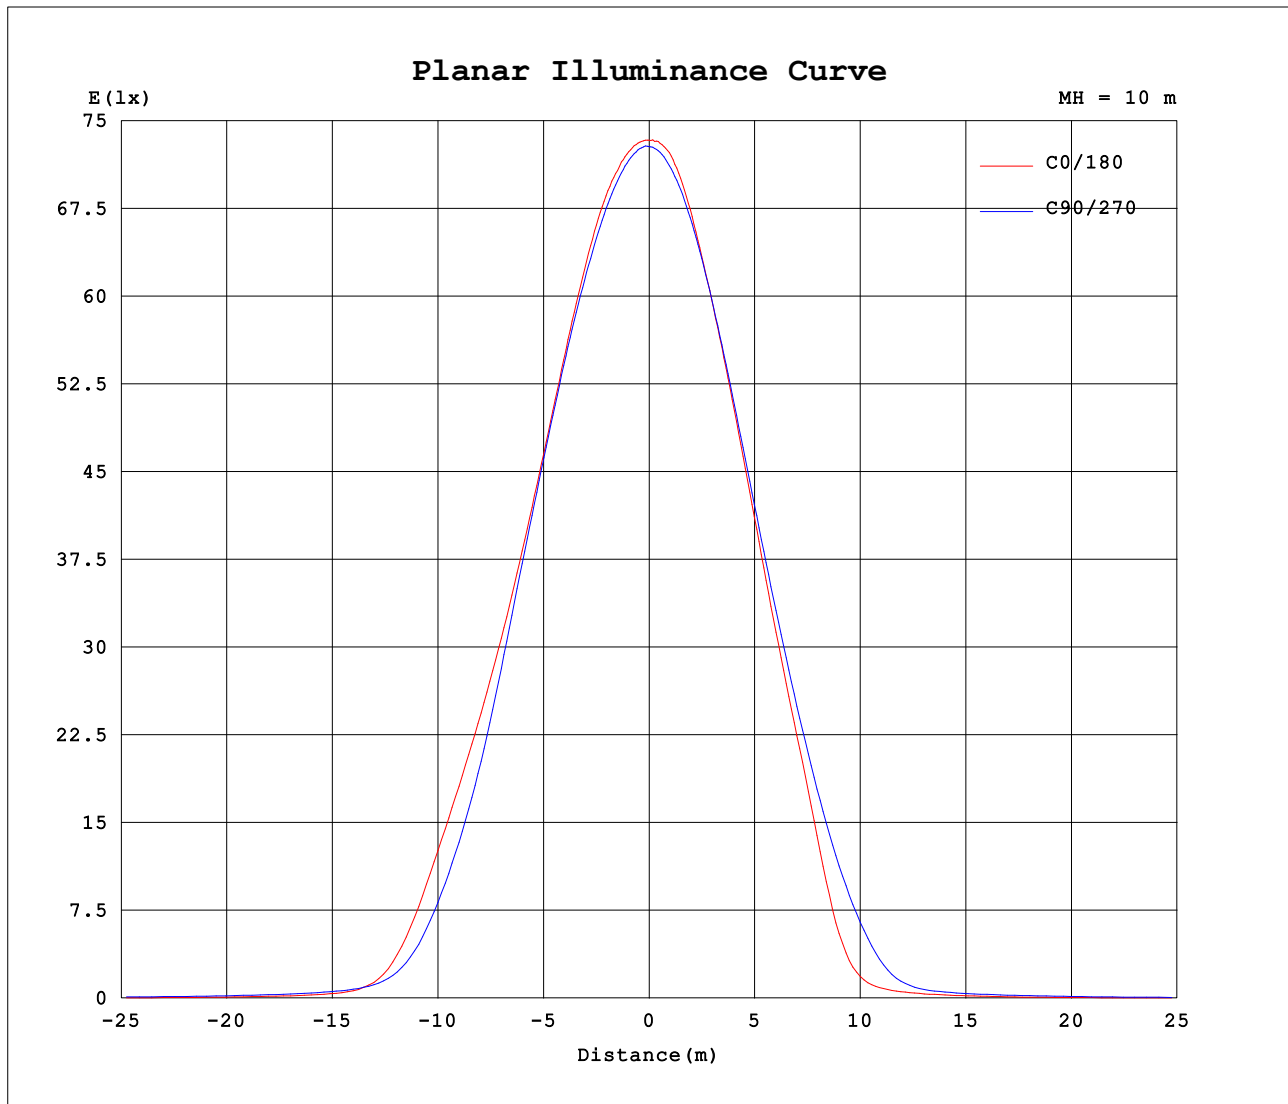

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: WP-KHA-075U0421800

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.3V I:0.6850A P:81.10W PF:0.9930 Lamp Flux:10717.3x1 lm		
NAME: 磁铁灯条	TYPE:T7宽灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	7301	7301	7301	7301	7301	7301	7301	7301	7301	7301	7301	7301						
5	7300	7303	7285	7287	7296	7304	7296	7289	7269	7246	7252	7283						
10	7280	7266	7227	7220	7234	7234	7141	7120	7136	7109	7126	7194						
15	7168	7181	7141	7101	7080	7002	6847	6813	6861	6888	6920	7031						
20	6945	6995	6965	6912	6818	6666	6462	6410	6476	6550	6628	6739						
25	6599	6680	6678	6595	6397	6182	5922	5846	5945	6085	6227	6347						
30	6147	6227	6219	6065	5693	5444	5136	5057	5201	5431	5666	5816						
35	5570	5635	5495	5139	4556	4419	4065	3998	4192	4556	4904	5135						
40	4816	4842	4456	3828	3235	3104	2208	2426	2851	3340	3877	4222						
45	3555	3662	3043	2327	1619	1216	527	667	1233	1846	2505	2901						
50	1414	1655	1279	855	545	332	213	223	354	550	1015	1213						
55	293	367	412	377	302	195	139	142	212	263	325	294						
60	158	179	251	280	228	139	93.3	97.0	159	203	221	156						
65	104	124	189	234	180	92.4	67.7	67.0	122	165	173	104						
70	71.0	84.1	144	193	131	60.3	68.2	52.8	81.2	135	136	73.5						
75	48.3	51.9	99.8	154	76.7	47.6	141	43.1	51.0	109	99.1	47.7						
80	35.1	33.2	51.5	105	41.9	38.6	76.0	42.2	33.7	76.2	52.1	29.9						
85	88.2	17.8	23.1	30.5	20.8	45.0	54.2	44.3	17.1	22.9	23.1	15.2						
90	33.3	25.2	6.19	0.55	7.07	33.7	31.4	25.0	7.18	0.37	6.02	9.99						
95	20.0	12.3	3.84	0.26	4.81	24.3	15.9	12.5	5.82	0.46	3.27	15.4						
100	15.8	12.9	3.94	0.28	3.99	12.4	12.7	10.3	7.56	0.51	3.14	11.2						
105	12.0	8.25	5.72	0.32	6.24	11.0	13.1	9.27	6.67	0.50	3.23	7.91						
110	13.6	7.46	4.12	0.28	3.63	9.83	12.9	9.29	2.95	0.37	3.51	6.59						
115	15.1	6.20	3.79	0.43	2.79	10.2	12.1	8.39	2.86	0.49	2.81	5.17						
120	13.0	5.95	3.26	0.64	1.89	7.86	10.1	6.92	3.00	0.75	2.72	5.07						
125	10.5	5.60	3.39	0.83	1.83	7.85	10.4	6.91	2.53	1.00	2.24	4.80						
130	9.53	5.81	3.13	1.09	1.57	9.05	12.2	8.56	2.33	1.24	1.48	5.06						
135	8.71	6.15	2.48	1.39	1.88	7.08	10.7	6.67	1.96	1.55	1.43	5.41						
140	8.32	7.32	1.76	1.70	2.28	5.36	8.01	4.92	2.32	1.83	1.69	6.02						
145	8.63	6.34	1.98	1.97	2.48	2.86	4.99	2.82	2.58	2.08	1.93	3.03						
150	4.98	3.09	2.19	2.31	2.65	2.78	2.84	2.81	2.74	2.37	2.17	2.31						
155	2.84	2.59	2.46	2.57	2.84	3.18	3.14	3.17	2.91	2.66	2.54	2.51						
160	3.04	2.90	2.83	2.85	3.06	3.32	3.46	3.32	3.12	2.93	2.89	2.85						
165	3.34	3.26	3.14	3.10	3.16	3.45	3.66	3.48	3.26	3.19	3.07	3.21						
170	3.63	3.58	3.27	3.32	3.31	3.58	3.80	3.59	3.36	3.37	3.31	3.41						
175	3.57	3.54	3.38	3.41	3.39	3.47	3.64	3.47	3.38	3.38	3.36	3.40						
180	3.60	3.46	3.35	3.37	3.36	3.42	3.61	3.45	3.36	3.37	3.36	3.42						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: WP-KHA-075U0421800