WISDOM LIGHT



REASONABLE LINEAR

We certainly can't predict the future. However, we can conduct thorough research on the current market, understand its direction, and assess how these trends will impact the lighting community.


2026-V9.0

www.wisdomled.com

ARCHITECTURE COMMERCIAL LIGHTING EXPERT

LED commercial & Industrial Lighting



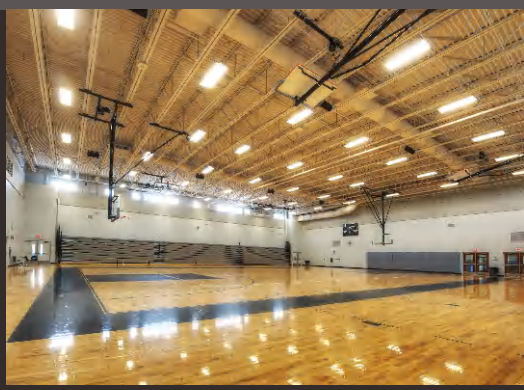





Leading OEM/ODM manufacturer of architectural linear lights for **North America market.**

14TH YEARS IN LIGHTING

Since its inception in 2011, Wisdom Lighting has proudly remained a family-owned enterprise, distinguishing itself as a premier lighting manufacturer. Over the past decade, the company has steadfastly upheld its dedication to providing cost-effective, energy-efficient lighting solutions, notably exemplified by the introduction of the Dense and Sense Linear Product Family.

Wisdom has successfully established lighting manufacturing facilities in Indonesia; Fueled by a fervent passion and an extensive reservoir of expertise, Wisdom Lighting offers tailored lighting solutions and manufacturing plans crafted precisely to your specifications.

- 20+ SKUs QuickShip
- 15 days China Quickship
- 10,000 m² production facilities
- 25+ experienced R&D engineers



OVERVIEW OF WISDOM LIGHT

Shenzhen Wisdom established	2011
Foshan Wisdom factory start	2021
Factory size	8,000m²(26,246ft²)
Production capacity per month	300,000pcs
Employees	110
Production cycle	25-35 days
Indonesia factory start	2019
Indonesia factory size	3,000m² (32,292ft²)
Production Capacity per month	450,000pcs
Workers	60
Production cycle	55-75 days

c UL us LISTED E476234

DLC QPL LISTED PREMIUM

ETL CLASSIFIED c ETL us Intertek 5004942

c ETL us Intertek 5004942

TITLE 24 COMPLIANT

FC CE DVE

WORKSHOP IN CHINA



Foshan Factory


Wire Processing Equipment


SMT Workshop


Production Workshop

RELIABILITY TESTING



Integrating Sphere Test


Parameter test machine


IES test mad


Waterproof Testing Equipment


High Temperature and High Humidity Test

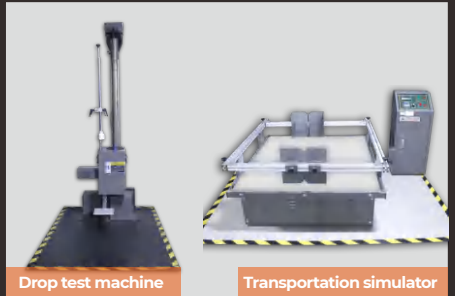
Drop test machine

Transportation simulator

INDONESIA FACTORY



INDONESIA FACTORY



Integrating Sphere Test


Production Workshop


Production Workshop


Soldering Equipment



Burn-in Room

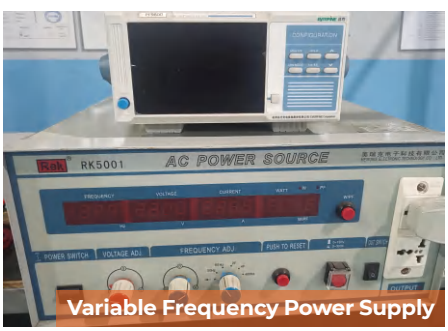

Variable Frequency Power Supply

Architectural

Best



Led linear light(GEN24)

P02



Verse G2

P03



Ring linear light

P04




Drum linear light

P05




Curve 275

P06



Warden 354(GEN20)

P07



Warden 445(GEN9)


P08



Windows 214 (GEN10)

P09

Better



Windows 787 (GEN14)

P10




Dense Blade 050(GEN11)

P11




Dense Sense Blade 063

P12




Sense Blade 091(GEN12)

P13




Sense Blade 106(GEN23)

P14




DENSE SENSE 177

P15




Dense Sense 198 (GEN17)

P18




Dense Sense 199 (GEN21)

P19




Dense Sense 275 (GEN2)

P21




Dense 276(GEN22) IP66

P23



Dense Sense 375 (GE N8)

P24



DENSE SENSE 178 (GEN13)

P25




P26



IP65

P27

Good



Dense Sense 197E (GEN3)

P29

Commercial

New Building



Downlight

P30



Cylinder G1

P31




Troffer

P32



Troffer

P34



Right-angle Strip

P35



G5 Linear Highbay

P36

Retrofit




Troffer Retrofit

P37




Magnetic strip kit

P38



Yacht & Boat Light

P40

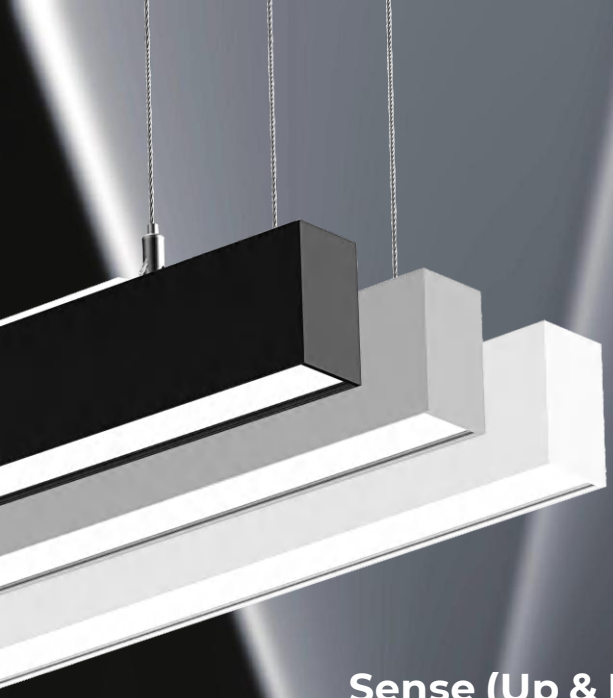

Sense (Up & Down)




Dense (Down)




Artistic
linear lights



Sense
Dense Blade (Slim)

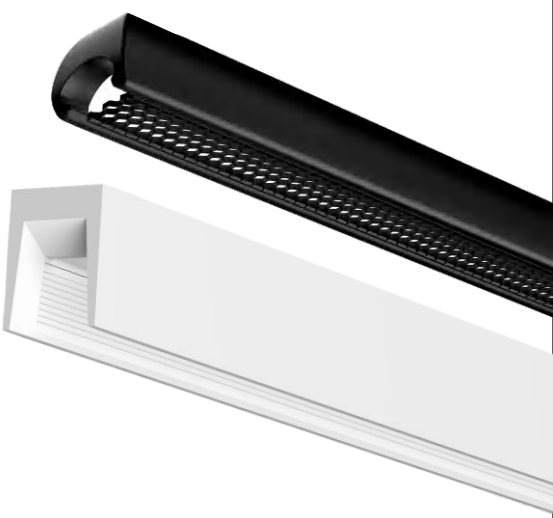

LED Linear Light

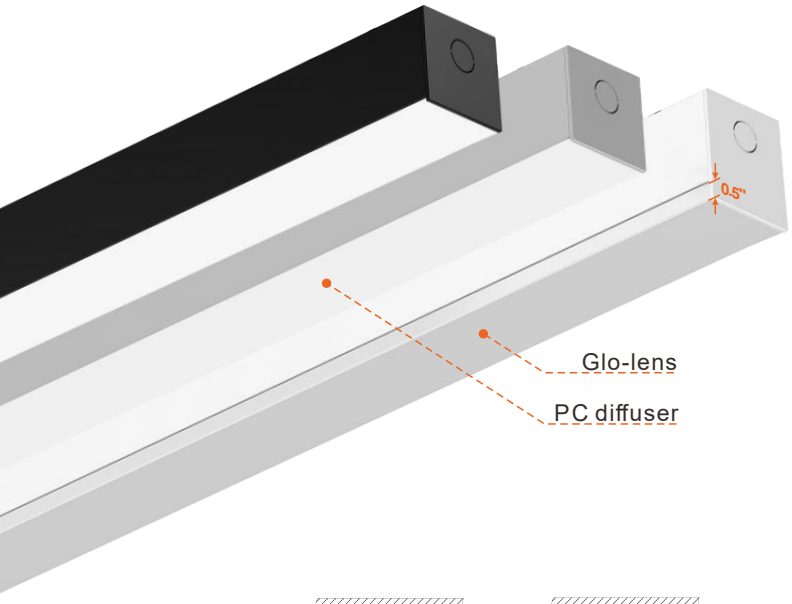

LED Linear Light

Eco GEN24 Linear Light

Specifications

Switch Select


2,800 - 12,000 Lumens

CCT Select


3000K/3500K/4000K CCT

Wattage Select


20 - 80 Watts



Linkable

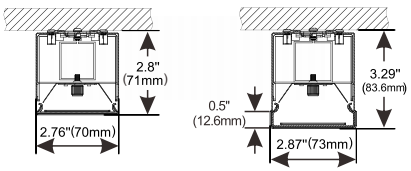


Mounting

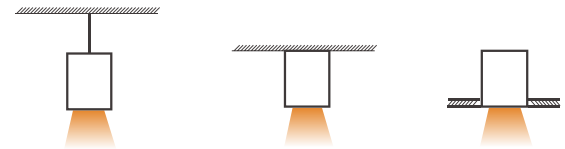

Pendant Mount | Surface Mount | Recessed Mount

Beam Angles



120°

Features


PC Diffuser- snap on





Glo-lens -snap on



Easily removable from the bottom






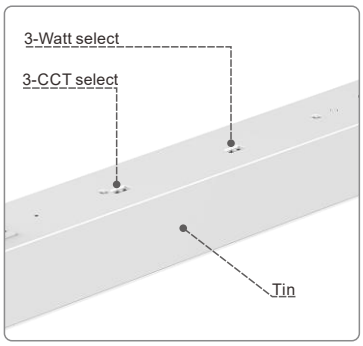

Model	Length	Wattage	Output Lumen	Beam angle	Nominal Efficacy	CCT	Input Voltage	Dimmable	CRI
WL-24LSD4FT40WB3D1HV(30K-35K-40K)	4'	20W/30W/40W	600lm/900lm/1200lm	120°	140-150 lm/W	3000K 3500K 4000K	AC120-347V	0-10V (1%-100%)	>80
WL-24LSD8FT80WB3D1HV(30K-35K-40K)	8'	40W/60W/80W	2400lm/3600lm/4800lm						

VERSE G2



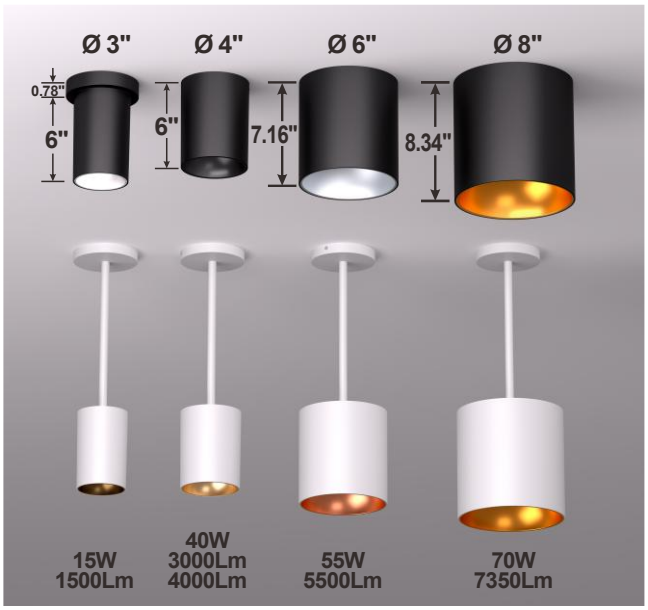

Mounting



Steam Pendant Mount Surface Mount

Optic Lens



20° 40° 60°

VERSE G2

Wet Location Cylinder

Specifications

Switch Select

765 - 7,350 Lumens

CCT Select


2700K/3000K/3500K/ 4000K/5000K CCT

Wattage Select

9 - 80 Watts

Intertek 5 YEAR WARRANTY Wet location

Features

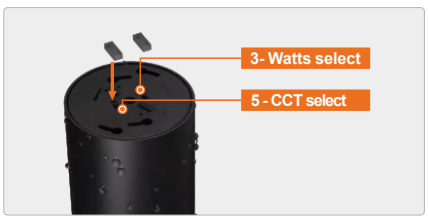




Model	Dimension	Watt select	Lumens	Optical	Distribution	Efficacy	CCT	Voltage	Dimmable	CRI
WL-2CLD3IN15WB5D1HV5A -RA-VV-YY-G2RY03-YY	3" (Ø3.74"xH6")	9W/12W/15W Select	765Lm-1350Lm(90CRI) 900Lm-1575Lm(80CRI)	Lens	20°/40°/60° Optics Lens	85-90Lm/W (90CRI) / 100-105Lm/W (80CRI)	2700K-3000K-3500K-4000K-5000K-Select	120-347V	0-10V (5%-100%)	>90 / >80
WL-2CLD3IN15WB5TRSV5A -RA-VV-YY-G2RY03-YY	3" (Ø3.74"xH6")	9W/12W/15W Select	765Lm-1350Lm(90CRI) 900Lm-1575Lm(80CRI)					120V	Triac/ELV	
WL-2CLD4IN30WB5D3HV5A -RA-VV-YY-G2RY04-YY	4" (Ø4.52"xH6")	18W/24W/30W Select	1530Lm - 2700Lm(90CRI) 1800Lm - 3150Lm(80CRI)					120-347V	0-10V&Triac / ELV,3 in 1	
WL-2CLD6IN35WB5D3HV5A -RA-VV-YY-G2RY06-YY	6" (Ø6.69"xH7.16")	25W/30W/35W Select	2125Lm - 3150Lm(90CRI) 2500Lm - 3675Lm(80CRI)							
WL-2CLD8IN70WB3D3HVXXK -RA-VV-YY-G2RY08-YY	8" (Ø8.07"xH8.34")	60W/65W/70W Select	5100 Lm - 6300 Lm(90CRI) 6000Lm - 7350 Lm(80CRI)	Reflector	15°/24°/38°/60° Aluminum Reflector		Single CCT			

RING LINEAR LIGHT




Ø18"/Ø24"/Ø36"/Ø48"/Ø60"/Ø72"

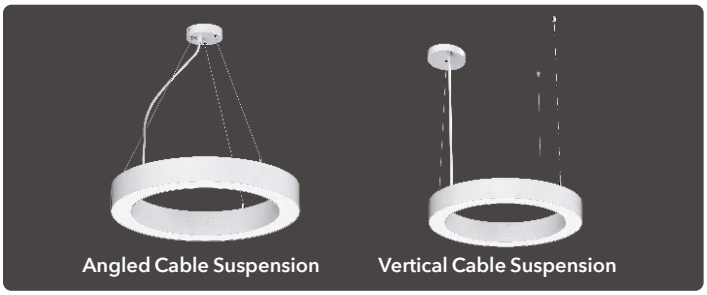

Angled Cable Suspension Vertical Cable Suspension

Mounting



Pendant Mount

RING LINEAR LIGHT

Architectural-grade hollow ring profile

Specifications

Switch Select

1,380 - 24,300 Lumens

CCT Select

3000K/3500K/4000K CCT


Wattage Select

12 - 180 Watts

c ETL LISTED us Intertek

WARRANTY 5 YEAR WARRANTY

Features

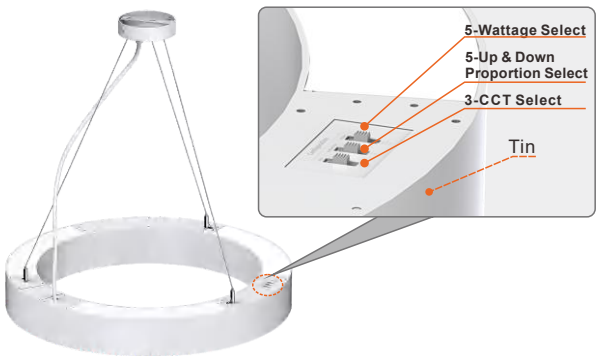

Model No.	Nominal Diameter	Wattage Select	Output Lumen	Nominal Efficacy	Up & Down Proportion	CCT Select	Input Voltage	Dimming	CRI
WL-26LSUD18IN35WE5D1HV (XXK-XXK-XXK)-YY-ZZ	18" (D456XW65XH82mm)	12/18/22/28/34W Select	1620-4590Lm (CRI80) 1380-3910 Lm (CRI90)	135Lm/W(CRI80) 115Lm/W(CRI90)	50%+50% 70%+30% 30%+70% 10%+90% 0%+100% Select	3000K - 3500K - 4000K Select	120-347V	0-10V (1-100%)	>80
WL-26LSUD24IN60WE5D1HV (XXK-XXK-XXK)-YY-ZZ	24" (D600XW65XH82mm)	20/30/40/50/60W Select	2700-8100Lm	135Lm/W					
WL-26LSUD36IN90WE5D1HV (XXK-XXK-XXK)-YY-ZZ	36" (D900XW65XH82mm)	30/45/60/75/90W Select	4050-12150 Lm	135Lm/W					
WL-26LSUD48IN120WE5D1HV (XXK-XXK-XXK)-YY-ZZ	48" (D1200XW65XH82mm)	40/60/80/100/120W Select	5400-16200Lm	135Lm/W					
WL-26LSUD60IN150WE5D1HV (XXK-XXK-XXK)-YY-ZZ	60" (D1500XW65XH82mm)	50/75/100/125/150W Select	6750-20250Lm	135Lm/W					
WL-26LSUD72IN180WE5D1HV (XXK-XXK-XXK)-YY-ZZ	72" (D1800XW65XH82mm)	60/90/120/150/180W Select	8100-24300Lm	135Lm/W					

DRUM LINEAR LIGHT



DRUM LINEAR LIGHT

Cable / Stem Pendant,Wall /Ceiling Mount

Specifications

Switch Select

1,380 - 24,300 Lumens

CCT Select

3000K/3500K/4000K CCT

Wattage Select

12 - 180 Watts

Intertek


5 YEAR WARRANTY

Ø18"/Ø24"/Ø36"/Ø48"

Custom Color




Silver Red Green Orange Purple

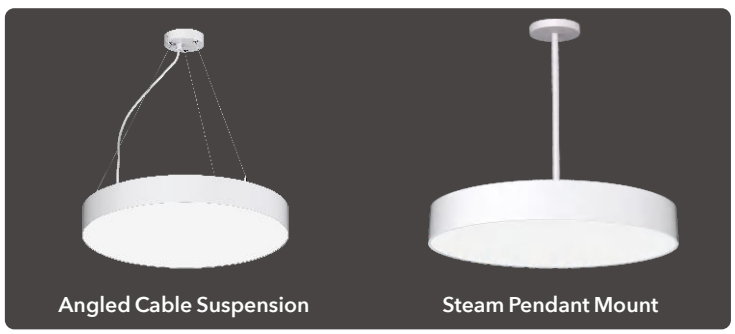


Angled Cable Suspension Steam Pendant Mount

Features

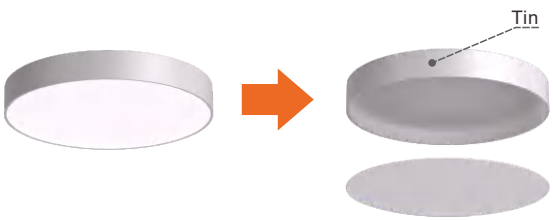

Quick maintenance design


Mounting

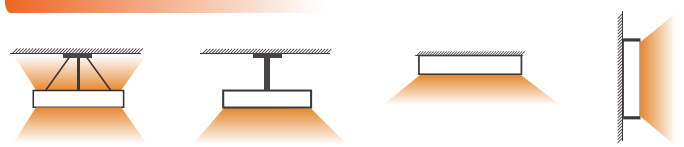

Pendant Mount Pendant Mount Surface Mount Wall Mount

Model No.	Nominal Diameter	Wattage Select	Output Lumen	Nominal Efficacy	CCT Select	Up & Down Proportion	Input Voltage	Dimming	CRI
WL-25LSUD18IN35WE5D1HV (XXK-XXK-XXK)	1.5FT (D18"X H3.2")	12/18/22/28/34W Select	1620-4590Lm(CRI80) 1380-3910 Lm(CRI90)	135Lm/W(CRI80) 115Lm/W(CRI90	3000K - 3500K - 4000K Select	50%+50% 70%+30% 30%+70% 10%+90% 0%+100% Select	120-347V	0-10V (1-100%)	>80
WL-25LSUD24IN60WE5D1HV (XXK-XXK-XXK)	2FT (D24"X H3.2")	20/30/40/50/60W Select	2700-8100 Lm(CRI80) 2300-6900Lm(CRI90)						
WL-25LSUD36IN90WE5D1HV (XXK-XXK-XXK)	3FT (D36"X H3.9")	30/45/60/75/90W Select	4050-12150 Lm(CRI80) 3450-10350L m(CRI80)						
WL-25LSUD48IN120WE5D1HV (XXK-XXK-XXK)	4FT (D48"X H3.9")	40/60/80/100/120W Select	5400-16200 Lm(CRI80) 4600-13800L m(CRI80)						

Curve 275

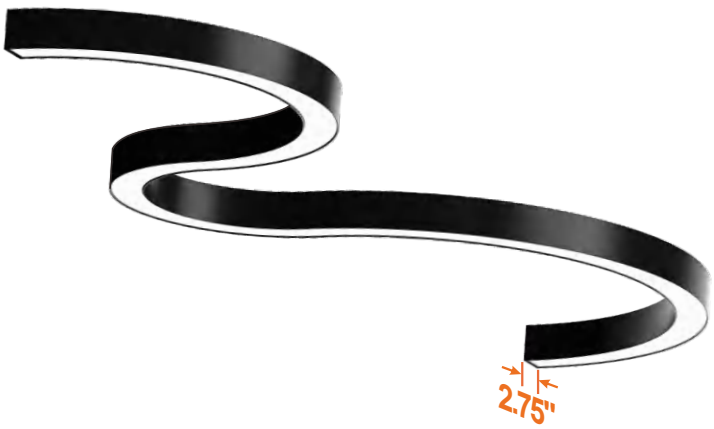

Curve 275

1/4 Radius LED Linear Light.

Specifications

Switch Select

1,840 - 7,695 Lumens


CCT Select

2700K/3000K/3500K/ 4000K /5000K CCT


Wattage Select

16 - 57 Watts


Mounting



Pendant **Mount**

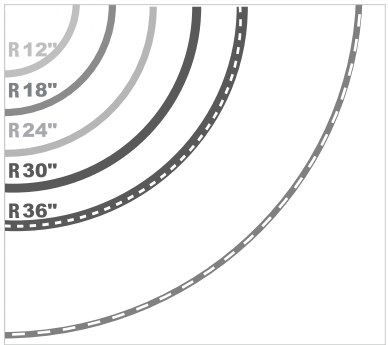


Features

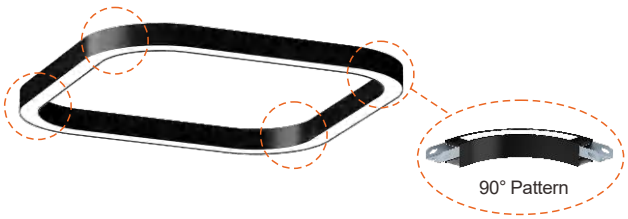

Model No.	Size	Wattage Select	Nominal Efficacy	Output Lumen	CCT Select	Input Voltage	Dimming	CRI
WL-27LSUDS12 -YY	R12"x3.15"H (R300xH80mm)	⁄	⁄	⁄	⁄	⁄	⁄	⁄
WL-27LS1827WB5D1HV5A-90-YY	R18"x3.15"H (R450xH80mm)	16W/21W/27W Select	1840/2415/3105Lm	115 Lm/W	2700K-3000K-3500K-4000K-5000K- 5 CCT Select	120-347V	0-10V (1-100%)	CRI>90
WL-27LS2437WB5D1HV5A-90-YY	R24"x3.15"H (R600xH80mm)	22W/30W/37W Select	2530/3450/4255Lm					
WL-27LS3047WB5D1HV5A-90-YY	R30"x3.15"H (R750xH80mm)	28W/38W/47W Select	3220/4370/5405Lm					
WL-27LS3657WB5D1HV5A-90-YY	R36"x3.15"H (R900xH80mm)	34W/46W/57W Select	3910/5290/6555Lm					
WL-27LS1827WB5D1HV5A-80-YY	R18"x3.15"H (R450xH80mm)	16W/21W/27W Select	2160/2835/3645Lm	135 Lm/W				CRI>80
WL-27LS2437WB5D1HV5A-80-YY	R24"x3.15"H (R600xH80mm)	22W/30W/37W Select	2970/4050/4995Lm					
WL-27LS3047WB5D1HV5A-80-YY	R30"x3.15"H (R750xH80mm)	28W/38W/47W Select	3780/5130/6345Lm					
WL-27LS3657WB5D1HV5A-80-YY	R36"x3.15"H (R900xH80mm)	34W/46W/57W Select	4590/6210/7695Lm					

WARDEN 354

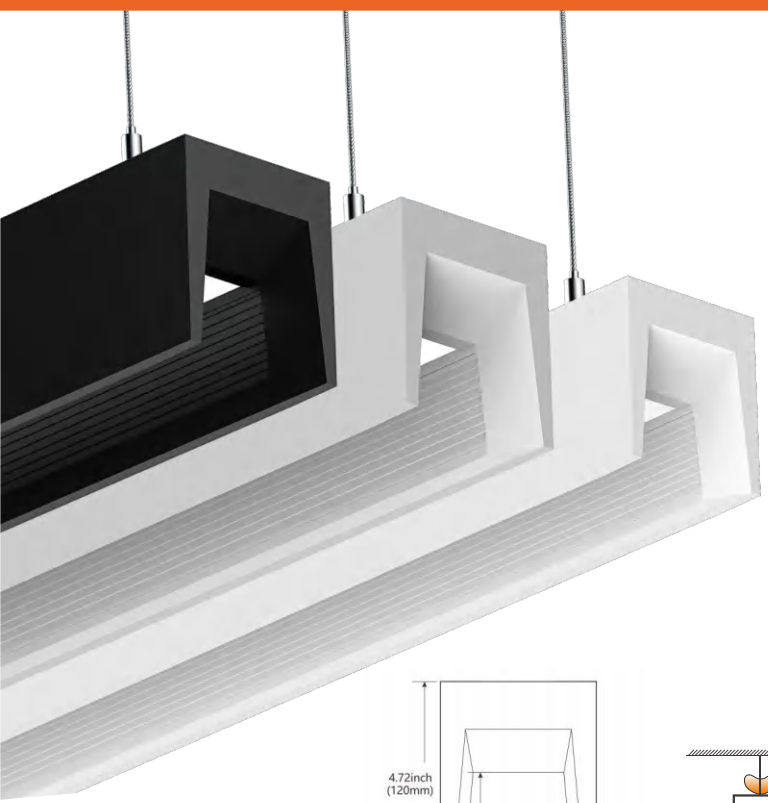

WARDEN 354
GEN20 Arch Linear Light

Specifications


Switch Select
2,400 - 8,000 Lumens

CCT Select
3000K/3500K/4000K CCT


Wattage Select
30 - 100 Watts


Intertek

5 YEAR WARRANTY



Linkable






Pendant **Mount**

Features


Single-Sided Light Output Version

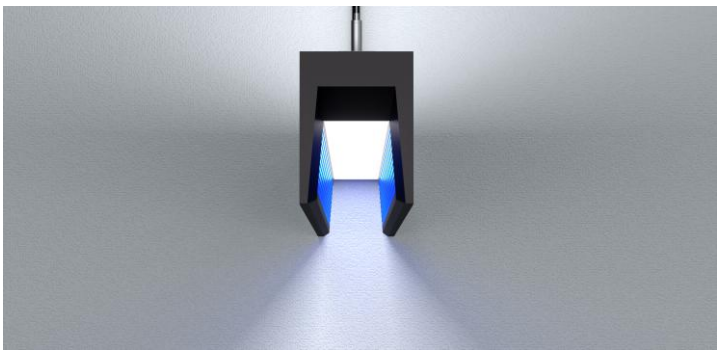

Light from the top only, providing
focused and clean lighting.

Features

Internal watt & CCT selectable

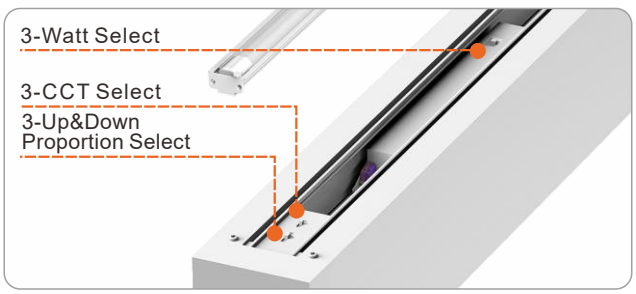

Flexible Design | Customizable Side Panels

Aluminum panels for single-sided version, available in multiple finishes and colors.



Red



Purple



Blue



Yellow



Custom Color

Model	Size	Watts Select	Lumens	Efficacy	CCT Select	Voltage	Dimming	CRI	Flicker
WL-20LSUD4FT50WA2D1HV(XXK-XXK-XXK)-YY	4FT	30W/40W/50W	2400Lm/3200Lm/4000Lm	80Lm/W	3000K 3500K 4000K	AC120-277V	0-10V (1%-100%)	>90	<5%
WL-20LSUD8FT100WA2D1HV(XXK-XXK-XXK)-YY	8FT	60W/80W/100W	4800Lm/6400Lm/8000Lm						
WL-20LSUD4FT50WA3D1HV(XXK-XXK-XXK)-YY	4FT	30W/40W/50W	2400Lm/3200Lm/4000Lm						
WL-20LSUD8FT100WA3D1HV(XXK-XXK-XXK)-YY	8FT	60W/80W/100W	4800Lm/6400Lm/8000Lm						

WARDEN 445



WARDEN 445

Diffuse reflection GEN9 Linear Light

Specifications

Switch Select


3,000 - 10,000 Lumens

CCT Select


3000K/3500K/4000K CCT

Wattage Select


30 - 100 Watts




Linkable




Pendant **Mount**



Features

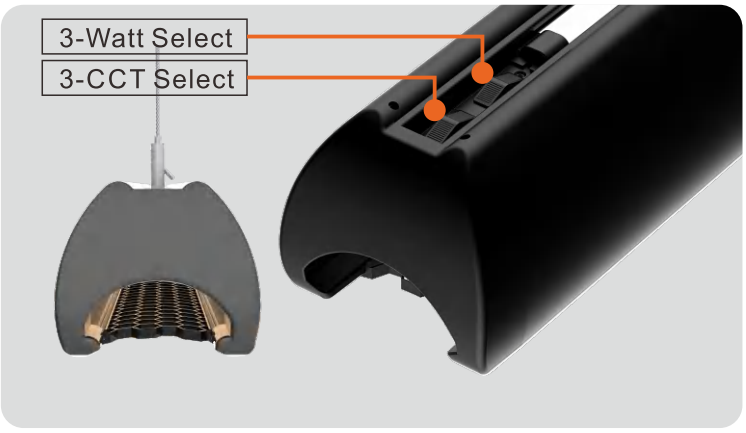

Beam Angles

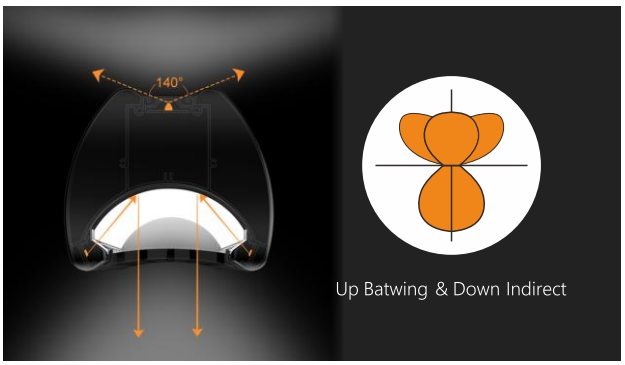


Wardan 445	Length	Wattage Select	Output Lumen Up 30% Down 70%	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-9LSUD4FT50WB2D1HV	4'	30W/40W/50W	3000lm/4000lm/5000lm	100lm/W	3000K 3500K 4000K	AC120-347V	(1%-100%) 0-10V	>90
WL-9LSUD8FT100WB2D1HV	8'	60W/80W/100W	6000lm/8000lm/10000lm					

WINDOWS 214



Mesh Control

Batwing & LGP & Spotoptics optic

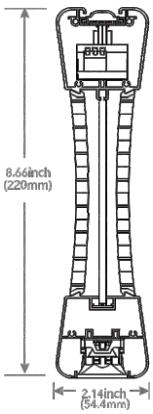

WINDOW 214

Gen10 Linear Light with 360 Illumination

Specifications


Switch Select
2,970- 10,080 Lumens

CCT Select
2700K - 6500K+RGB

Wattage Select
33 - 112 Watts


Intertek

5 YEAR WARRANTY




Mesh + RGB

Features

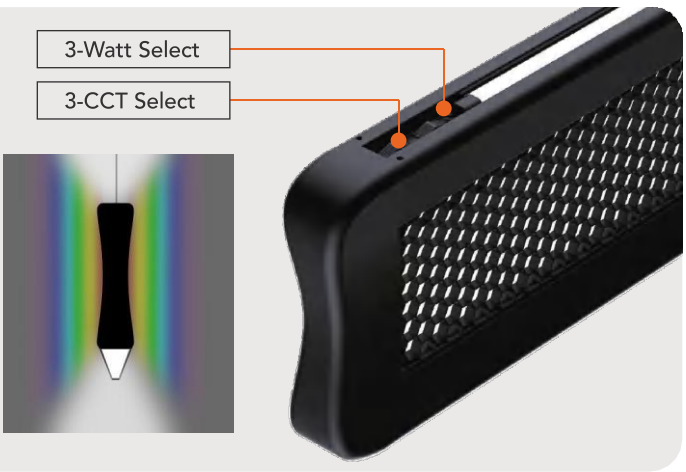

Beam Angles

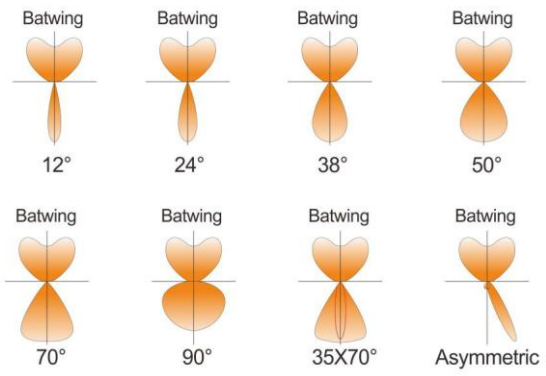

Windows 214	Length	Wattage	Output Lumen	Nominal Efficacy	CCT	Input Voltage	Dimmable	CRI
			Up 18% Middle 28% Down 54%					
WL-10LSUD4FT56WB2D1HV	4'	33W/45W/56W Select	2970lm/4050lm/5040lm	90lm/W	3000K 3500K 4000K Select	AC120-347V	(1%-100%) 0-10V	>90
WL-10LSUD8FT112WB2D1HV	8'	66W/90W/112W Select	5940lm/8100lm/10080lm					
WL-10LSUD4FT56WBHV (BLE)	4'	56W	4480lm	80lm/W	Up & Down 2700-6500K Middle RGB	AC120-347V	Lumos Mesh control	>90
WL-10LSUD8FT112WBHV(BLE)	8'	112W	8960lm					

WINDOWS 787




WINDOWS 787
Open-center GEN14 Linear Light

Specifications


Switch Select
690-11,500 Lumens


CCT Select
3000K/3500K/4000K CCT

Wattage Select
6 - 100 Watts



Suspend Mount

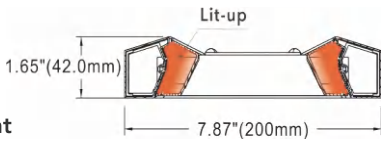





Linkable

Intertek


5 YEAR WARRANTY

Features

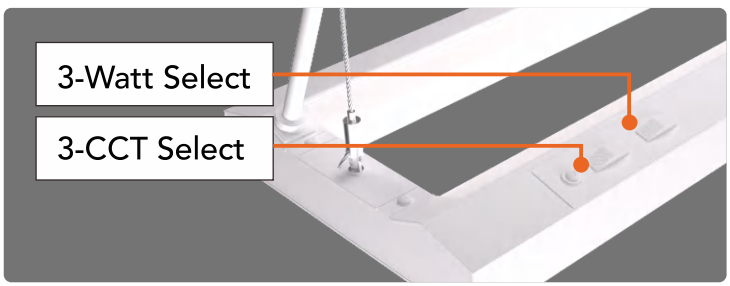




L-shape




T-shape



X-shape

Feature Customization




indicate light & test switch

Optional side panel modules:
Bluetooth / PIR sensor or indicate light & test switch module.




Bluetooth / PIR sensor



Optional side panel colors:
Custom colors

Windows 787	Length	Wattage Select	Output Lumen Up 30%Down 70%	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-14LSUD2FT25WB2D1HV	2'	15W/20W/25W	17251m/2300lm/2875lm	115 lm/W	3000K 3500K 4000K	AC120-347V / AC120-277V	0-10V (1-100%)	Ra>90
WL-14LSUD4FT50WB2D1HV	4'	30W/40W/50W	3450lm/4600lm/5750lm					
WL-14LSUD8FT100WB2D1HV	8'	60W/80W/100W	6900lm/9200lm/11500lm					
WL-14LSUDL10WB2D1HV	L Pattern	6W/8W/10W	690lm/920lm/1150lm					
WL-14LSUDT10WB2D1HV	T Pattern	6W/8W/10W	690lm/920lm/1150lm					
WL-14LSUDC12WB2D1HV	X Pattern	8W/10/12W	920lm/1150lm/1380lm					

DENSE BLADE 050

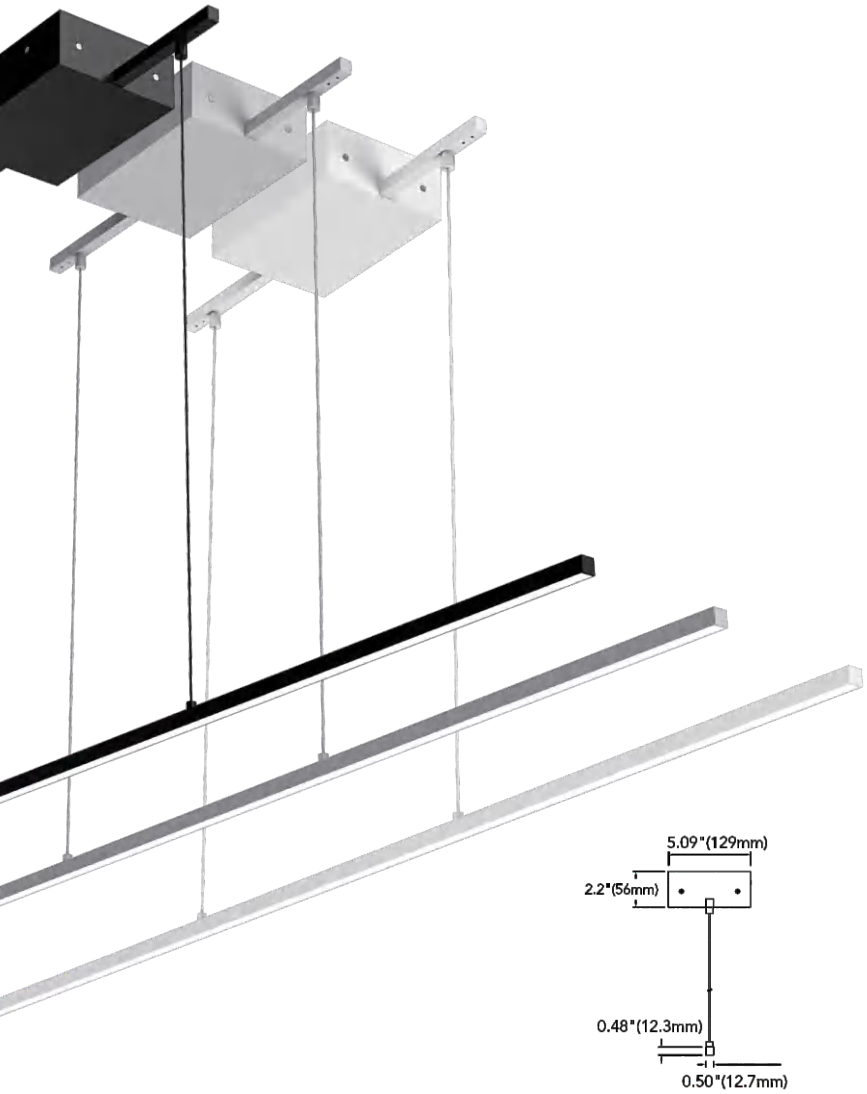

DENSE BLADE 050

Kitchen Island GEN11 Linear Light


Specifications

Lumen Output
2,700 - 3,150 Lumens

Single CCT
2700K/3000K/4000K CCT


Single Wattage
30 - 35 Watts

Mounting



Pendant **Mount**

Beam Angles



120°



Dense Blade 050	Length	Wattage	Max Output Lumen Up 0% Down 100%	Nominal Efficacy	Single CCT	Input Voltage	Dimmable	CRI
WL -11LSD4FT30WATUV	4'	30W	2700lm	90lm/W(White)	2700K 3000K 4000K	AC120V; AC120-277V	Triac (Standard) /ELV/0-10V	>80
WL -11LSD5FT35WATUV	5'	35W	3150lm	80lm/W(Black)				



DENSE | SENSE BLADE 063

Kitchen Island Slim Linear Light


Specifications

Lumen Output
1,800 - 3,060 Lumens

Single CCT
3000K/3500K/4000K CCT

Single Wattage
18 - 36 Watts


Mounting

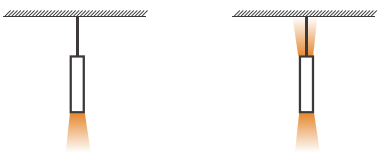

Pendant **Mount**

Pendant **Mount**

Beam Angles

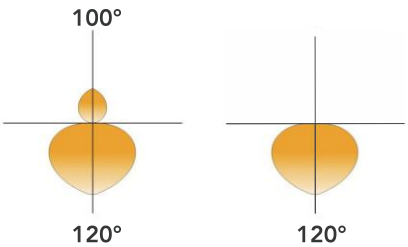

Sense Blade 063	Length	Wattage	Max Output Lumen Up 30% Down 70%	Nominal Efficacy	Single CCT	Input Voltage	Dimmable	CRI
WL-SSUD3FT25WADHV	3'	25W	2125lm	85lm/W	3000K 3500K 4000K	AC120-347V	0-10V	>80
WL-SSUD4FT36WADHV	4'	36W	3060lm					

Dense Blade 063	Length	Wattage	Max Output Lumen Up 0% Down 100%	Nominal Efficacy	Single CCT	Input Voltage	Dimmable	CRI
WL -SSD3FT18WADHV	3'	18W	1800lm	100lm/W	3000K 3500K 4000K	AC120-347V	0-10V	>80
WL -SSD4FT25WADHV	4'	25W	2500lm					

SENSE BLADE 091



SENSE BLADE 091
Wall Mount GEN12
Linear Light


Specifications

Switch Select
1,500 - 3,000 Lumens


CCT Select
3000K/3500K/4000K CCT

Wattage Select
7.5 - 30 Watts


Mounting




Wall Mount



Features

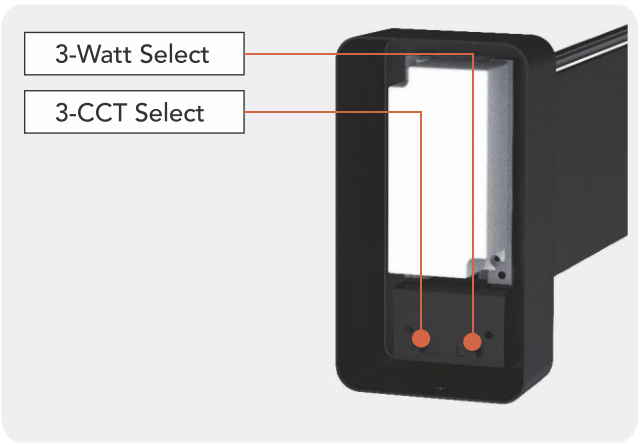


Beam Angles

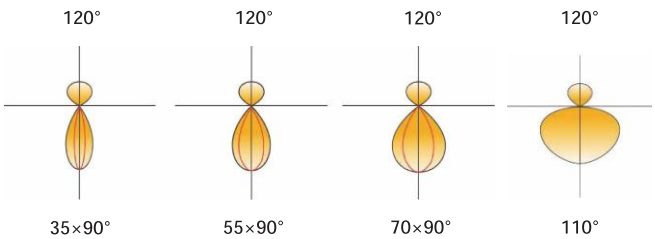

ITEM	Length	Wattage Select	Max Output Lumen Up 30%Down 70%	Beam Angle	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-12LSUD1FT15WB3DHV	1'	7.5W/10W/15W	1500lm	110°/ 35×90°/ 55×90°/ 70×90°	100lm/W (Black)	3000K 3500K 4000K	AC120-347V	0-10V (10%-100%)	>90
WL-12LSUD1.5FT22WB3DHV	1.5'	11W/16.5W/22W	2200lm						
WL-12LSUD2FT30WB3DHV	2'	20W/25W/30W	3000lm						

SENSE BLADE 106

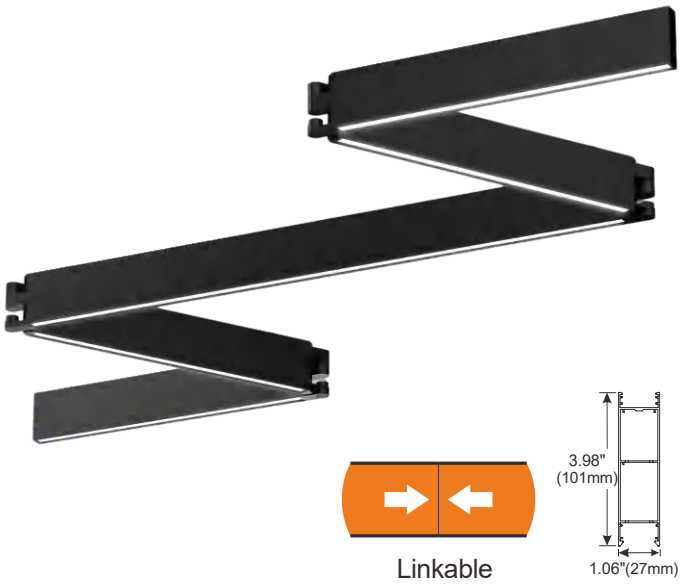

SENSE BLADE 106

GEN23 Linear Light

Specifications

Switch Select

2,025 - 13,500 Lumens


CCT Select

3000K/3500K/4000K CCT

Wattage Select

15 - 100 Watts


Features

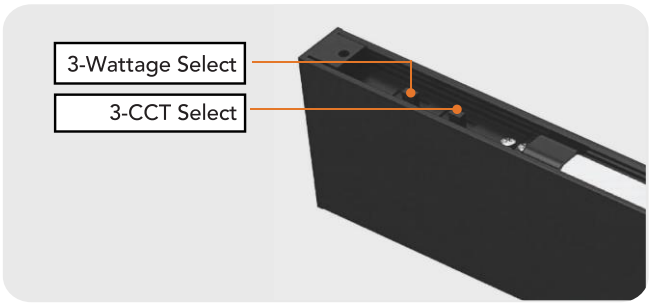


Mounting




Beam Angles

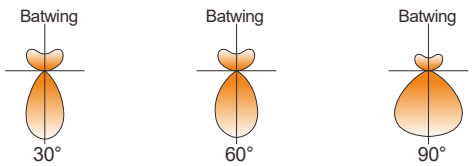

Linkable

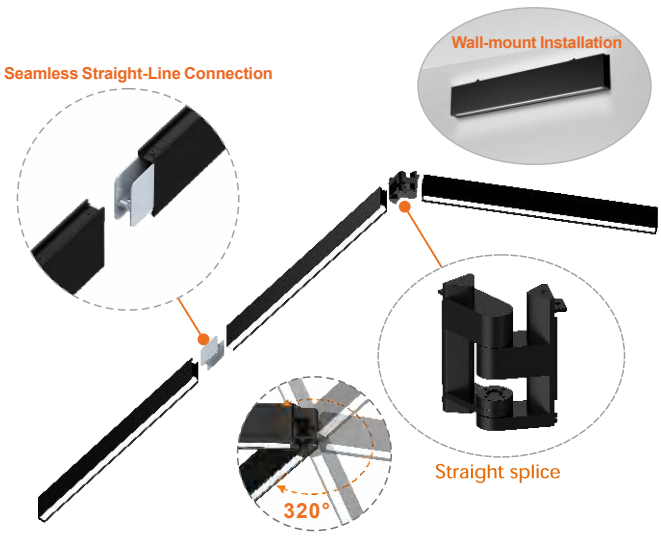

Model	Length	Wattage Select	Lumen	Efficacy	CCT Select	Voltage	Dimming	CRI
WL-23LSUD2FT25WE3D1HV (XXK)-XXXX-XX-YY-ZZ	2'	15W/20W/25W Select	2025lm/2700lm/3375lm	135lm/W	3000K 3500K 4000K	120-277V / 120-347V	0-10V (1-100%)	Ra>80
WL-23LSUD4FT50WE3D1HV (XXK)-XXXX-XX-YY-ZZ	4'	30W/40W/50W Select	4050lm/5400lm/6750lm					
WL-23LSUD8FT100WE3D1HV (XXK)-XXXX-XX-YY-ZZ	8'	60W/80W/100W Select	8100lm/10800lm/13500lm					

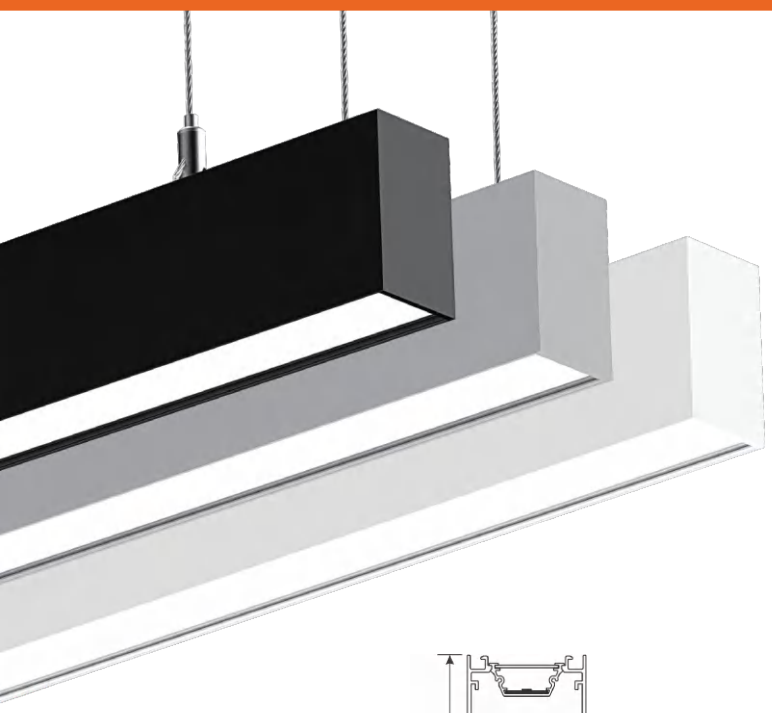

DENSE | SENSE 177

MS series Linear Light


Specifications

Switch Select
2,000 - 10,000 Lumens

CCT Select
3000K/3500K/4000K CCT

Single Wattage
20 - 100 Watts

Linkable




Linkable Pattern

L - Shape

T - Shape

X - Shape

Features

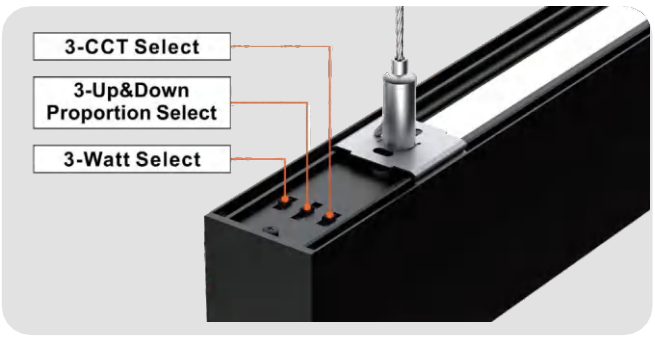

Mounting

Wall Mount


Pendant Mount

Surface Mount


Recessed

Wall Mount

Pendant Mount

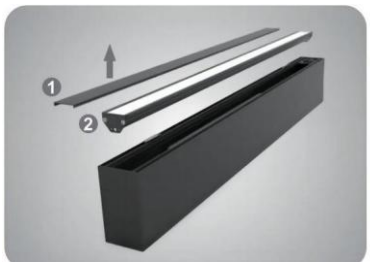


Modular Upper Light,
easier Maintenance

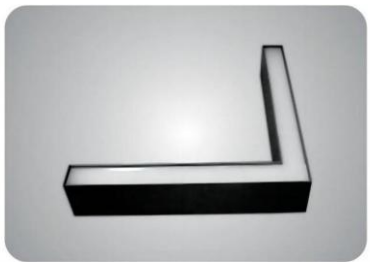

Down:20W
Up&Down: 30W



Down: 30W
Up&Down: 40W

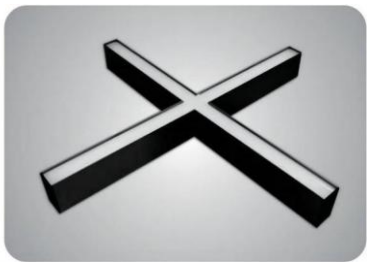

Down:40W
Up&Down: 50W

Sense 177	Length/ Pattern	Wattage	Max Output Lumen	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
			Up 30% Down 70%					
WL-MSUD2FT25WBDHV	2'	25W	2500lm	100lm/W	3000K 3500K 4000K	AC120-347V	1%-100%	>90
WL-MSUD4FT50WBDHV	4'	50W	5000lm					
WL-MSUD6FT75WBDHV	6'	75W	7500lm					
WL-MSUD8FT100WBDHV	8'	100W	10000lm					
WL-MSUDL30WBDHV	L Pattern	30W	3000lm					
WL-MSUDT40WBDHV	T Pattern	40W	4000lm					
WL-MSUDC50WBDHV	X Pattern	50W	5000lm					

Dense 177	Length/ Pattern	Wattage	Max Output Lumen	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
			Up 0% Down 100%					
WL -MSD2FT20WBDHV	2'	20W	2000lm	100lm/W	3000K 3500K 4000K	AC120-347V	1%-100%	>90
WL -MSD4FT40WBDHV	4'	40W	4000lm					
WL -MSD6FT60WBDHV	6'	60W	6000lm					
WL -MSD8FT80WBDHV	8'	80W	8000lm					
WL -MSDL20WBDHV	L Pattern	20W	2000lm					
WL -MSDT30WBDHV	T Pattern	30W	3000lm					
WL -MSDC40WBDHV	X Pattern	40W	4000lm					



Linkable

DENSE | SENSE 177

MS series Linear Light (Optics)

Specifications

Lumen Output

2,880 - 8,640 Lumens


Single CCT


3000K/3500K/4000K CCT

Single Wattage


24 - 72 Watts


Mounting

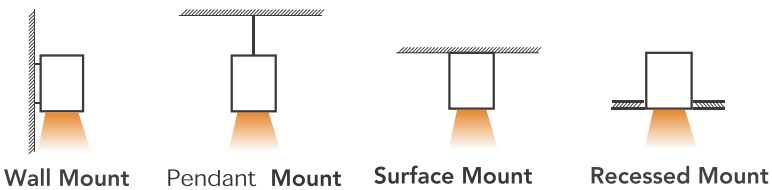




Beam Angles

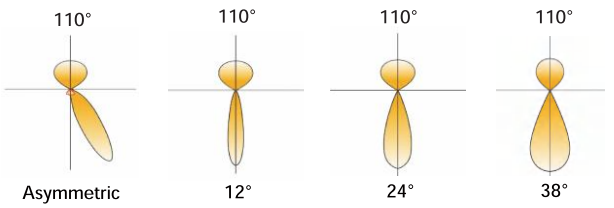

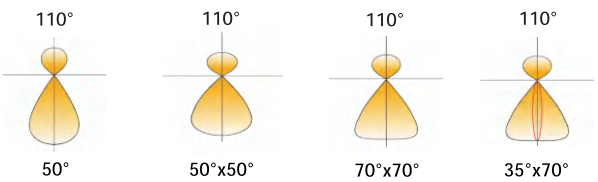


Sense 177	Length	Wattage	Max Output Lumen Up 30% Down 70%	Nominal Efficacy	Single CCT	Input Voltage	Dimmable	CRI
WL-MSUD4FT54WADHV	4'	54W	5670lm	105lm/W	3000K 3500K 4000K	AC120-347V	0-10V	>90

Dense 177	Length	Wattage	Max Output Lumen Up 0% Down 100%	Nominal Efficacy	Single CCT	Input Voltage	Dimmable	CRI
WL-MSD4FT24WADHV	4'	24W	2880lm	120lm/W	3000K 3500K 4000K	AC120-347V	0-10V	>90
WL-MSD4FT36WADHV	4'	36W	4320lm					
WL-MSD8FT72WADHV	8'	72W	8640lm					

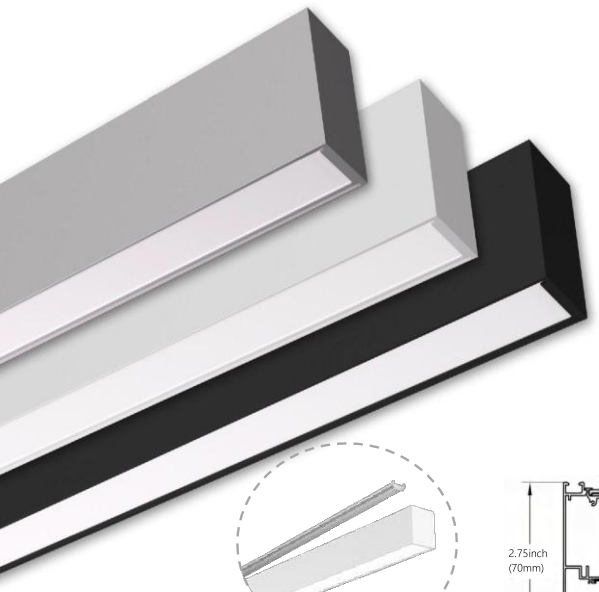


DENSE | SENSE 198

2"GEN17 Linear Light



Linkable

Up modular design



Specifications

Switch Select

1,050 - 10,500 Lumens


CCT Select

3000K/3500K/4000K CCT

Wattage Select

10 - 100 Watts

Mounting




Linkable Pattern




L - Shape T - Shape X - Shape

Features

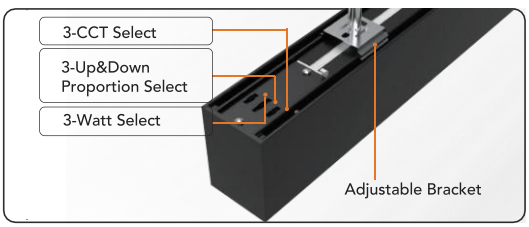

Sense 198	Length	Wattage Select	Output Lumen Up 30%Down 70%	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-17LSUD2FT25WE3DUV	2'	15W/20W/25W	1575lm/2100lm/2625lm	105lm/W	3000K 3500K 4000K	AC120-277V	0-10V(10%-100%)	>80
WL-17LSUD4FT50WE3DUV	4'	30W/40W/50W	3150lm/4200lm/5250lm					
WL-17LSUD8FT100WE3DUV	8'	60W/80W/100W	6300lm/8400lm/10500lm					

Dense 198	Length	Wattage Select	Output Lumen (White &3000K)	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-17LSD2FT20WB2DUV	2'	10W/15W/20W	1050lm/1575lm/2100lm	105lm/W	3000K 3500K 4000K	AC120-277V	0-10V(10%-100%)	>80
WL-17LSD4FT40WB2DUV	4'	20W/30W/40W	2100lm/3150lm/4200lm					
WL-17LSD8FT80WB2DUV	8'	40W/60W/80W	4200lm/6300lm/8400lm					

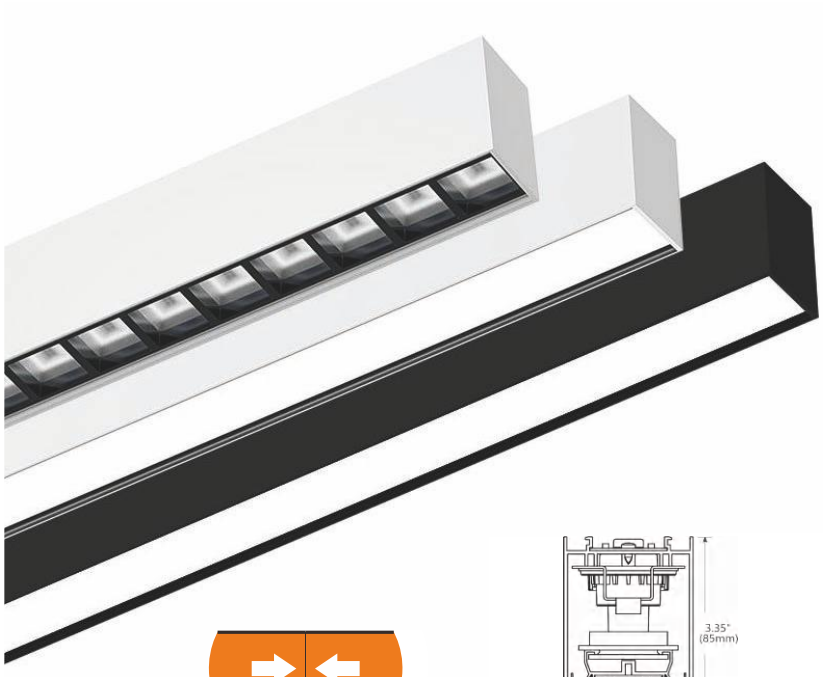

Linkable

DENSE | SENSE 199

2"FLUSH GEN21 Linear Light

Specifications

Switch Select

1,150 - 11,500 Lumens

CCT Select

3000K/3500K/4000K CCT

Wattage Select


10 - 100 Watts

Intertek

5 YEAR WARRANTY

UGR<16


Features

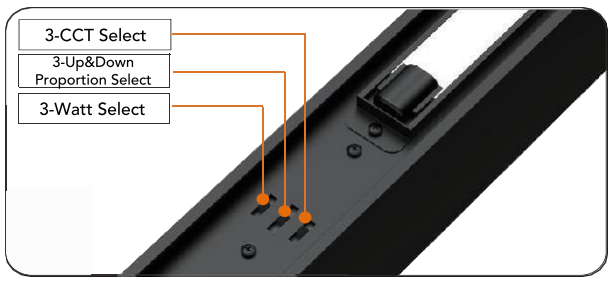


Module Structure







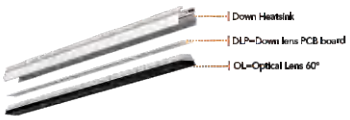


Beam Angles

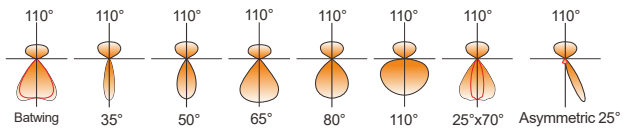

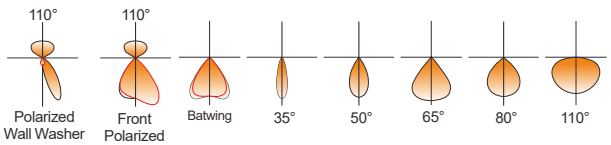

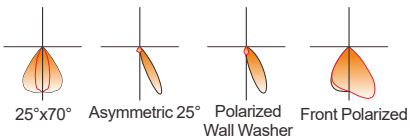

Mounting



Sense 199	Length (mm)	Watt select	Lumens	Beam Angles	Nominal Efficacy	CCT Select	Voltage	Dimmable	CRI
WL-13LSUD2FT30W1EDUV (30K-35K-40K)-110	570mm	18W/24W/30W	2070Lm/2760Lm/3450Lm	110°(PC)	115lm/W	3000K 3500K 4000K	AC120-277V	Non-Dimming 0-10V DALI	>80
WL-13LSUD2FT30W1EDUV (30K-35K-40K)-110	570mm	18W/24W/30W	2340Lm/3120Lm/3900Lm	65° / 80° (Lens)	130lm/W				
WL-13LSUD4FT60W1EDUV (30K-35K-40K)-XXX	1200mm	36W/48W/60W	4140Lm/5520Lm/6900Lm	110°(PC)	115lm/W				
WL-13LSUD4FT60W1EDUV (30K-35K-40K)-XXX	1200mm	36W/48W/60W	4680Lm/6240Lm/7800Lm	65° / 80° (Lens)	130lm/W				
WL-13LSUD8FT120WE1DUV (30K-35K-40K)-XXX	2300mm	72W/96W/120W	8280Lm/11040Lm/13800Lm	110°(PC)	115lm/W				
WL-13LSUD8FT120WE1DUV (30K-35K-40K)-XXX	2300mm	72W/96W/120W	9360Lm/12480Lm/15600Lm	65° / 80° (Lens)	130lm/W				


Dense 199	Length (mm)	Watt select	Lumens	Beam Angles	Nominal Efficacy	CCT Select	Voltage	Dimmable	CRI
WL-13LSD2FT25WBDUV (30K-35K-40K)-110	570mm	15W/20W/25W	1725Lm/2300Lm/2875Lm	110°(PC)	115lm/W	3000K 3500K 4000K	AC120-277V	Non-Dimming 0-10V DALI	>80
WL-13LSD2FT25WBDUV (30K-35K-40K)-XXX	570mm	15W/20W/25W	1950Lm/2600Lm/3250Lm	65° / 80° (Lens)	130lm/W				
WL-13LSD4FT50WBDUV (30K-35K-40K)-110	1200mm	30W/40W/50W	3450Lm/4600Lm/5750Lm	110°(PC)	115lm/W				
WL-13LSD4FT50WBDUV (30K-35K-40K)-XXX	1200mm	30W/40W/50W	3900Lm/5200Lm/6500Lm	65° / 80° (Lens)	130lm/W				
WL-13LSD8FT100WBDUV (30K-35K-40K)-110	2300mm	60W/80W/100W	6900Lm/9200Lm/11500Lm	110°(PC)	115lm/W				
WL-13LSD8FT100WBDUV (30K-35K-40K)-XXX	2300mm	60W/80W/100W	7800Lm/10400Lm/13000Lm	65° / 80° (Lens)	130lm/W				



DENSE | SENSE 275



Linkable



DENSE | SENSE 275

2.75" GEN2 Linear Light

Specifications

Switch Select

2,300 - 11,500 Lumens

CCT Select

3000K/3500K/4000K CCT

Wattage Select


15 - 100 Watts

Linkable Pattern




L - Shape | T - Shape | X - Shape | Y - Shape | 120° Shape

Mounting

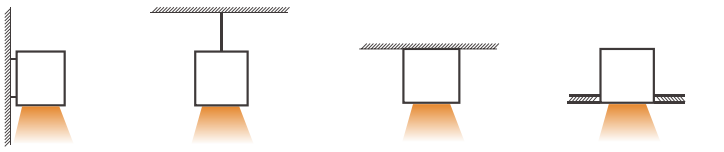


Wall Mount | Pendant Mount | Surface Mount | Recessed Mount




Wall Mount | Pendant Mount

Selectable Distribution

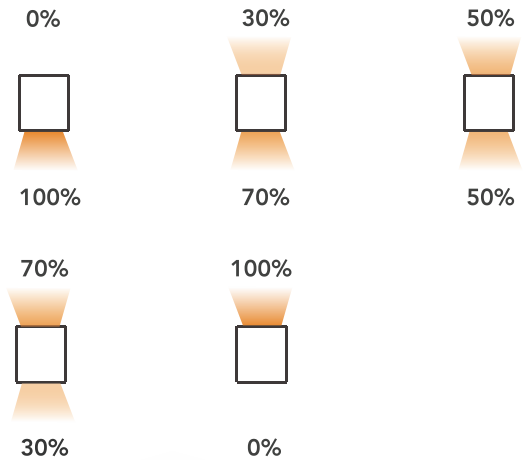



Lens & Diffusers

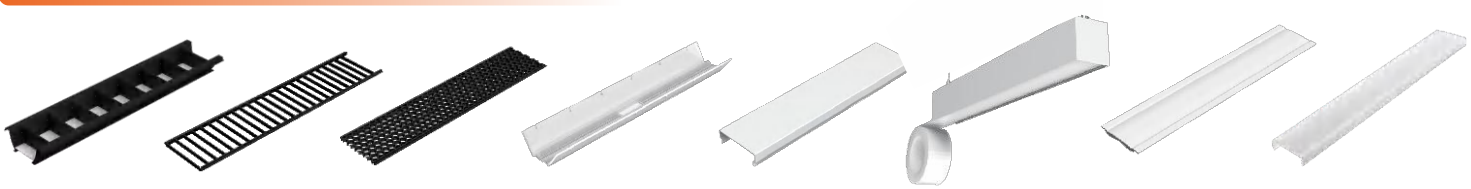


Parabolic | Louver | Hex louver | Asymmetric | Glo lens | Continous lens | Batwing | Prismatic PC

Features



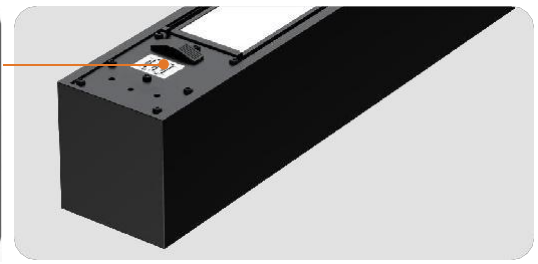

B Series

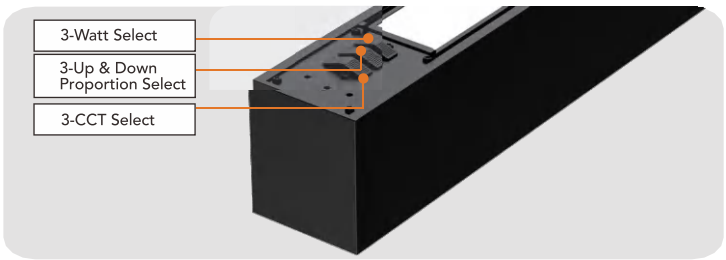


E Series

Sense 275 B	Length /Pattern	Wattage	Max Output Lumen UP 30% Down 70%	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-2LSUD2FT25WBDHV	2'	25W	2875lm	115lm/W	3000K 3500K 4000K	AC120-347V	0-10V	>80
WL-2LSUD3FT38WBDHV	3'	38W	4370lm					
WL-2LSUD4FT50WBDHV	4'	50W	5750lm					
WL-2LSUD6FT75WBDHV	6'	75W	8625lm					
WL-2LSUD8FT100WBDHV	8'	100W	11500lm					
WL-2LSUDL30WBDHV	L Pattern	30W	3450lm					
WL-2LSUDT40WBDHV	T Pattern	40W	4600lm					
WL-2LSUDC50WBDHV	X Pattern	50W	5750lm					
WL-2LSUDL50WBDHV	120° Pattern	50W	5750lm					
WL-2LSUDY75WBDHV	Y Pattern	75W	8625lm					


Sense 275 E	Length/ Pattern	Wattage Select	Max Output Lumen UP 0% Down 100%	Max Output Lumen UP 50% Down 50%	Max Output Lumen UP 30% Down 70%	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-2LSUD2FT25WEDHV	2'	25W/20W/15W	2875lm/2300lm/1725lm			115lm/W	3000K 3500K 4000K	AC 120-347V	0-10V	>80
WL-2LSUD3FT38WEDHV	3'	38W/30W/22W	4370lm/3450lm/2530lm							
WL-2LSUD4FT50WEDHV	4'	50W/40W/30W	5750lm/4600lm/3450lm							
WL-2LSUD8FT100WEDHV	8'	100W/80W/60W	11500lm/9200lm6900lm							
WL-2LSUDL30WEDHV	L Pattern	30W/25W/20W	3450lm/2875lm/2300lm							
WL-2LSUDT50WEDHV	T Pattern	50W/40W/30W	5750lm/4600lm/3450lm							
WL-2LSUDC60WEDHV	X Pattern	60W/50W/40W	6900lm5750lm/4600lm							

Dense 275	Length /Pattern	Wattage	Max Output Lumen UP 0% Down 100%	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-2LSD2FT20WBDHV	2'	20W	2300lm	115lm/W	3000K 3500K 4000K	AC120-347V	0-10V	>80
WL-2LSD3FT30WBDHV	3'	30W	3450lm					
WL-2LSD4FT20WBDHV	4'	40W	4600lm					
WL-2LSD6FT60WBDHV	6'	60W	6900lm					
WL-2LSD8FT80WBDHV	8'	80W	9200lm					
WL-2LSDL20WBDHV	L Pattern	20W	2300lm					
WL-2LSDT30WBDHV	T Pattern	30W	3450lm					
WL-2LSDC40WBDHV	X Pattern	40W	4600lm					
WL-2LSDL40WBDHV	120° Pattern	40W	4600lm					
WL-2LSDY60WBDHV	Y Pattern	60W	6900lm					

DENSE 276

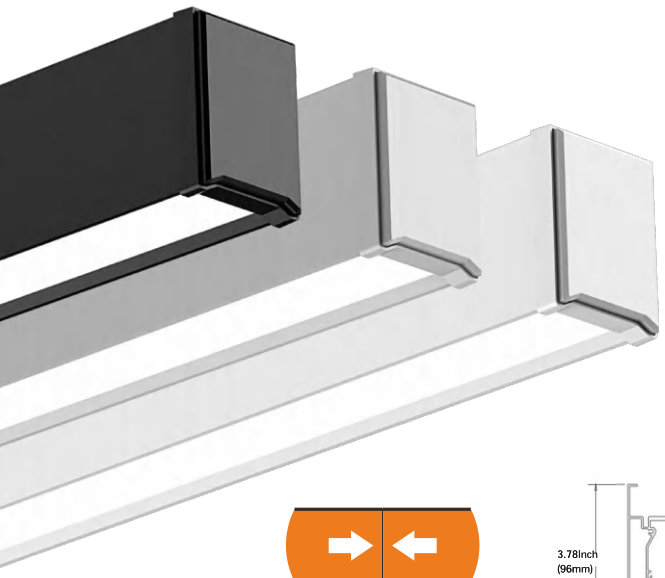

Linkable



DENSE 276

IP66 GEN22 Linear Light

Specifications

Switch Select

1,050 - 14,700 Lumens

CCT Select

3000K/3500K/4000K CCT

Wattage Select

30 - 140 Watts

Intertek · 5 YEAR WARRANTY · IP66 · Wet location · IK10

Available versions




Top Exit Wiring




Side Exit Route

Mounting

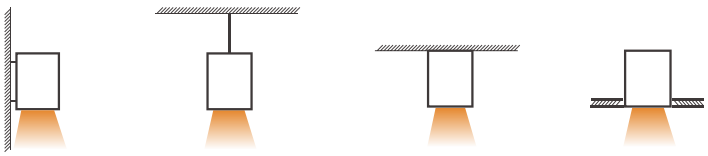


Wall Mount · Pendant Stem Mount · Surface Mount · Recessed Mount

Features

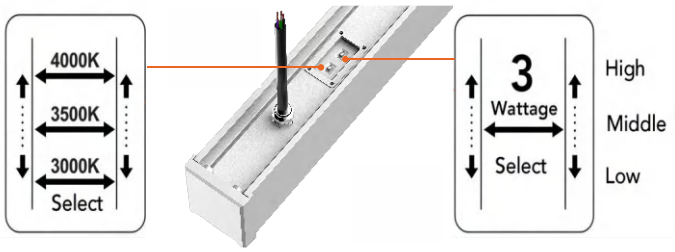


Dense 276	Length	Wattage	Output Lumen Up 0% Down 100%	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-22LSD2FT20WB3D1HV	2'	10W/15W/20W Select	1050lm/1575lm/2100lm	105lm/W	3000K/3500K/4000K Select or 3000K/4000K/5000K Select	AC120-347V	0-10V (1%-100% dim to off)	>80
WL-22LSD4FT40WB3D1HV	4'	20W/30W/40W Select	2100lm/3150lm/4200lm					
WL-22LSD8FT80WB3D1HV	8'	40W/60W/80W Select	4200lm/6300lm/8400lm					
WL-22LSD4FT70WADHV	4'	70W	3750lm		3000K-5000K Single CCT		0-10V (10%-100%)	
WL-22LSD8FT140WADHV	8'	140W	14700lm					

DENSE | SENSE 375

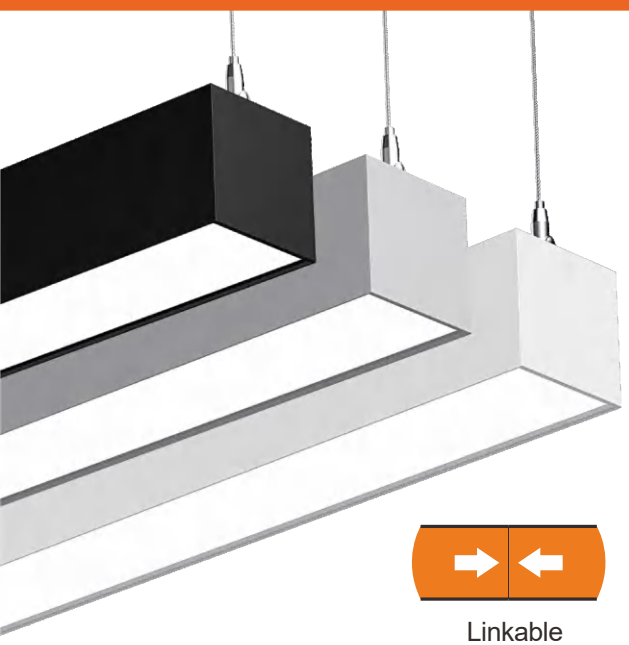

Linkable



DENSE | SENSE 375

3.75" GEN8 Linear Light

Specifications

Switch Select

2,600 - 12,000 Lumens

CCT Select

3000K/3500K/4000K CCT

Single Wattage


20 - 100 Watts

Linkable Pattern




L - Shape | T - Shape | X - Shape | Y - Shape | 120° Shape

Mounting

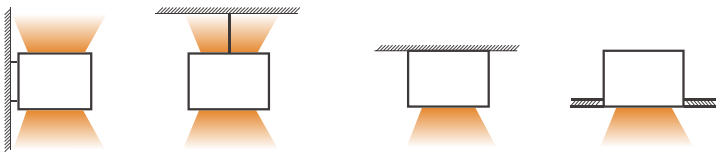



Wall Mount | Pendant Mount | Surface Mount | Recessed Mount



Wall Mount | Pendant Mount

Features



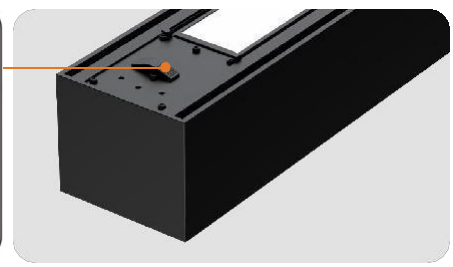


Sense 375	Length	Wattage	Max Output Lumen Up 30% Down 70%	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-8LSUD2FT25WBD1HV	2'	25W	3000lm	120lm/W	3000K 3500K 4000K	AC120-347V	(1%-100%) 0-10V	>80
WL-8LSUD4FT50WBD1HV	4'	50W	6000lm					
WL-8LSUD8FT100WBD1HV	8'	100W	12000lm					

Dense 375	Length	Wattage	Max Output Lumen Up 0% Down 100%	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-8LSD2FT20WBD1HV	2'	20W	2600lm	130lm/W	3000K 3500K 4000K	AC120-347V	(1%-100%) 0-10V	>80
WL-8LSD4FT40WBD1HV	4'	40W	5200lm					
WL-8LSD8FT80WBD1HV	8'	80W	10400lm					

DENSE | SENSE 178



Linkable



DENSE | SENSE 178

Low Glare GEN13 Linear Light

Specifications

Switch Select

8,500 - 20,667 Lumens


CCT Select

3000K/3500K/4000K CCT


Wattage Select

30 - 120 Watts

Selectable Distribution




Mounting




Pendant **Mount**

Beam Angles

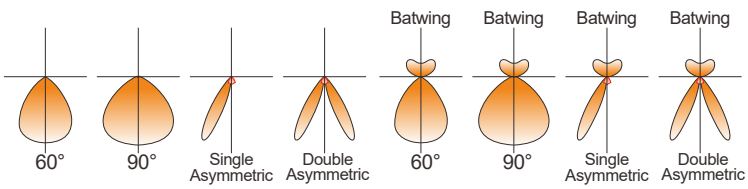


Features

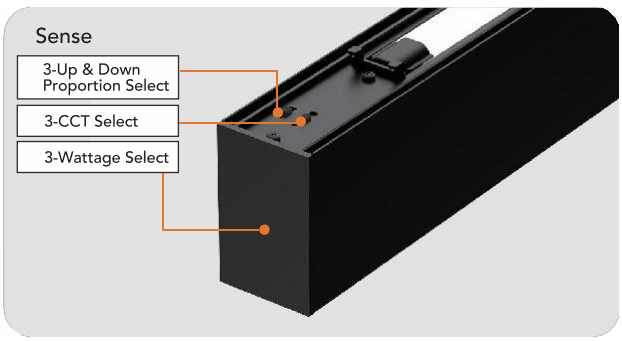

Sense 178	Length	WattageSelect	Max Output Lumen			Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
			Up 10% Down 90%	Up 20% Down 80%	Up 30% Down 70%					
WL-13LSUD4FT50WE1D1UV	4'	36W/48W/60W	10200lm	10284lm	10334lm	170lm/W	3000K 3500K 4000K	AC120-347V	0-10V (1%-100%)	>80
WL-13LSUD8FT120WE1D1UV	8'	72W/96W/120W	20400lm	20567lm	20667lm					


Dense 178	Length	WattageSelect	Max Output Lumen	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
			Up 0%Down 100%					
WL-13LSD4FT50WB1D1UV	4'	30W/40W/50W	8500lm	170lm/W	3000K 3500K 4000K	AC120-347V	0-10V (1%-100%)	>80
WL-13LSD8FT100WB1D1UV	8'	60W/80W/100W	17000lm					

CLEAVER G1

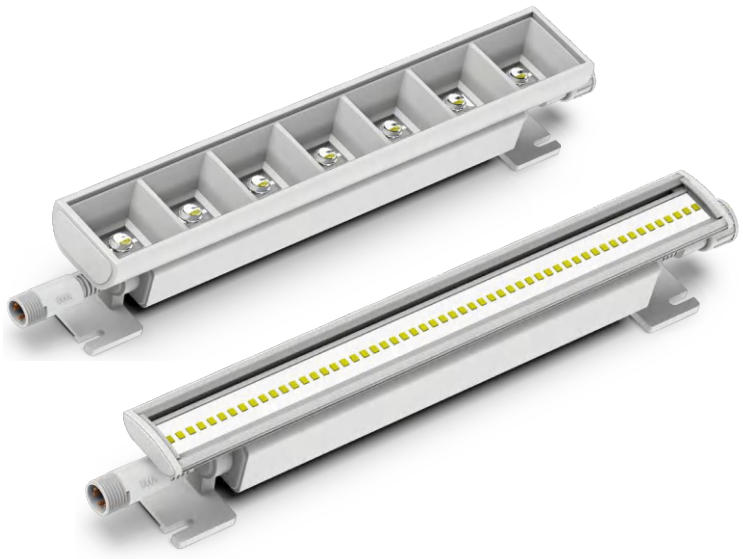



CLEAVER G1

Interior G1 Cove Light



Linkable





Specifications

Switch Select

180 - 4,800 Lumens


CCT Select


3000K/3500K/4000K CCT

Wattage Select

5 - 40 Watts

Beam Angles

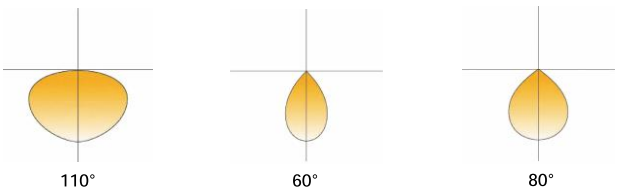

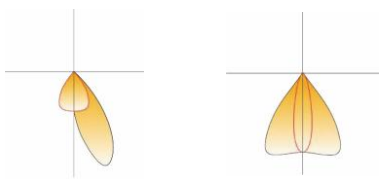

Mounting



Surface Mount

Cleaver G1	Length	Wattage	Output Lumen	Beam angle	Nominal Efficacy	CCT	Input Voltage	Dimmable	CRI
WL-1COV1FT10WB2D1UV	1'	5W/7.5W/10W	600lm/900lm/1200lm	110°	120lm/W	3000K 3500K 4000K Select	AC120-277V	0-10V (1-100%)	>90
WL-1COV4FT40WB2D1UV	4'	20W/30W/40W	2400lm/3600lm/4800lm						
WL-1COV1FT10WB2D1UV	1'	5W/7.5W/10W	550lm/825lm/1100lm	60° 80° 30x60° Asymmetric20° 40x70°	110lm/W	3000K 3500K 4000K Select			
WL-1COV4FT40WB2D1UV	4'	20W/30W/40W	2200lm/3300lm/4400lm						
WL1-COV1FT10WA1D1UV	1'	5W/7.5W/10W	450lm/675lm/900lm		90lm/W	3000K 3500K 4000K Single			
WL1-COV4FT40WA1D1UV	4'	20W/30W/40W	180lm/2700lm/3600lm						



CLEAVER G3

Exterior IP65 G3 Cove Light

Specifications

Lumen Output

1,100 - 4,400 Lumens

Single CCT


2700K/3000K/3500K/4000K CCT

Single Wattage


10 - 40 Watts

IP65


FASTSHIP




Linkable




Beam Angles

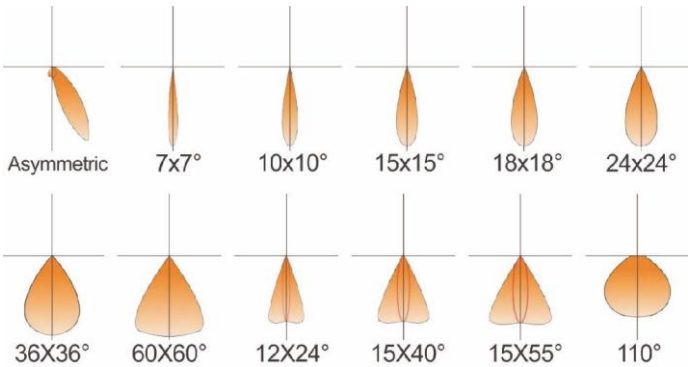

Mounting




Surface Mount



+/- 60 degrees adjustable angle. Adjust to 30 degrees for the highest point


RGBW Lighting Control Solution


▲ Supports RGBW lighting control: Bluetooth for easy scene switching, or DMX for professional control

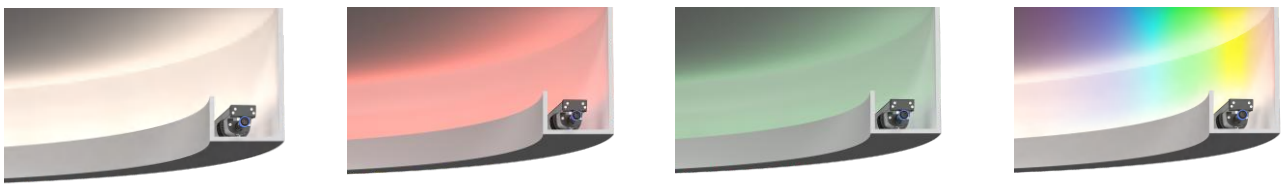

Model	Dimension	Wattage	LED	Beam angle	Single CCT	Efficacy	Lumens	Voltage	Dimming	CRI	UGR	SCDM
WL-3COV1FT10WAD1UV-90-110(XXK)-A	1FT L305xH54xW82.5mm	10W	RUNLUX	110° PC Clear Diffuser	2700K/ 3000K/ 3500K/ 4000K/ 5000K Single CCT	80 – 90Lm/W	800-900Lm	AC120-277V	0-10V (1-100%)	>90	⩽28	⩽3
WL-3COV4FT40WAD1UV-90-110(XXK)-A	4FT L1220xH54xW82.5mm	40W	RUNLUX			80 – 90Lm/W	3200-3600Lm					
WL-3COV1FT10WAD1UV-90-110(XXK)-B	1FT L305xH54xW82.5mm	10W	LUMILEDS			80 – 90Lm/W	800-900Lm					
WL-3COV4FT40WAD1UV-90-110(XXK)-B	4FT L1220xH54xW82.5mm	40W	LUMILEDS			80 – 90Lm/W	3200-3600Lm					
WL-3COV1FT10WAD1UV-90-XXXX(XXK)-C	1FT L305xH54xW82.5mm	10W	CREE	7×7°,10×10° 15×15°,18×18°, 24×24°,36×36° 60×60°,12×24°, 15×40°,15×55°, Asymmetric 25° Optic		65 – 80Lm/W	650 – 800Lm			>90		⩽5
WL-3COV4FT40WAD1UV-90-XXXX(XXK)-C	4FT L1220xH54xW82.5mm	40W	CREE				2600 – 3200Lm			>90		
WL-3COV1FT10WAD1UV-80-XXXX(XXK)-C	1FT L305xH54xW82.5mm	10W	CREE			80 – 100Lm/W	800-1000Lm			>80		
WL-3COV4FT40WAD1UV-80-XXXX(XXK)-C	4FT L1220xH54xW82.5mm	40W	CREE				3200-4000Lm			>80		
WL-3COV1FT10WAD1UV-90-XXXX(XXK)-L	1FT L305xH54xW82.5mm	10W	LUMISEE			65 – 80Lm/W	650 – 800Lm			>90	⩽16	⩽3
WL-3COV4FT40WAD1UV-90-XXXX(XXK)-L	4FT L1220xH54xW82.5mm	40W	LUMISEE				2600 – 3200Lm			>90		
WL-3COV1FT10WAD1UV-80-XXXX(XXK)-L	1FT L305xH54xW82.5mm	10W	LUMISEE			80 – 100Lm/W	800-1000Lm			>80		
WL-3COV4FT40WAD1UV-80-XXXX(XXK)-L	4FT L1220xH54xW82.5mm	40W	LUMISEE				3200-4000Lm			>80		
WL-3COV1FT10WMUV-90-XXXX(RGBW) -R	1FT L305xH54xW82.5mm	10W	CERAMI C3535	15°x15°,24°x24° 36°x36°,60°x60 ° 15×40°,15×55° etc Optic	RGBW	60Lm/W	600Lm	DC24V	DMX512	Red:620-630nm Green:520-535nm Blue:450-475nm White:380-780nm	/	/
WL-3COV4FT40WMUV-90-XXXX(RGBW) -R	4FT L1220xH54xW82.5mm	40W	CERAMI C3535		RGBW	60Lm/W	2400Lm		DMX512			



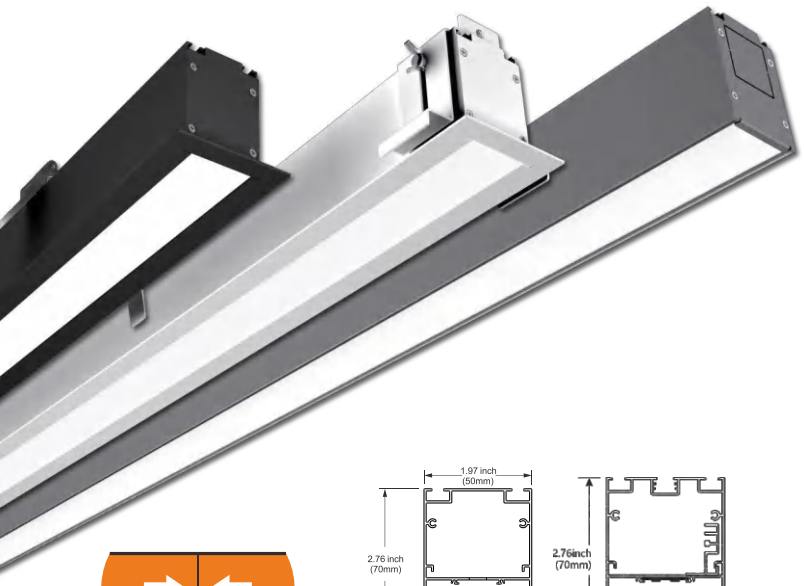



Linkable

DENSE | SENSE 197E

Economy GEN3 Linear Light

Specifications

Lumen Output

4,800 - 11,500 Lumens


CCT Select

3000K/4000K/5000K CCT


Single Wattage

40 - 100 Watts

Features




Mounting

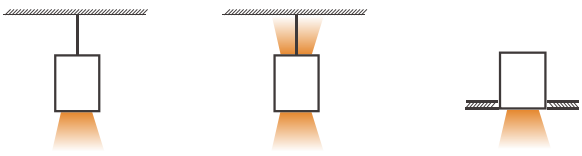

Pendant **Mount** Pendant **Mount** **Recessed Mount**

Features

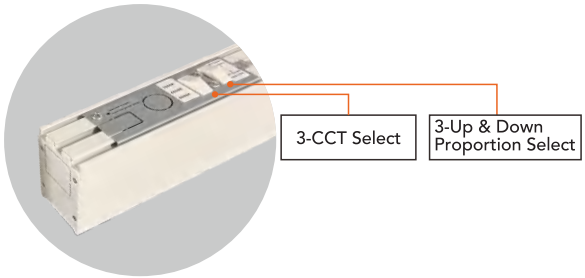

Sense E 197	Length	Wattage	Max Output Lumen Up 30% Down 70%	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-3LSUD4FT50W	4'	50W	5750lm	115lm/W	3000K 4000K 5000K	AC120-277V	Non-Dimming 0-10V DALI	>80
WL-3LSUD8FT100W	8'	100W	11500lm					

Dense E 197	Length	Wattage	Max Output Lumen Up 0% Down 100%	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-3LSD4FT40W	4'	40W	4800lm	120lm/W	3000K 4000K 5000K	AC120-277V	Non-Dimming 0-10V DALI	>80
WL-3LSD8FT80W	8'	80W	9600lm					


LED DOWNLIGHT



100 Lm/W

CRI 90

Flicker-free

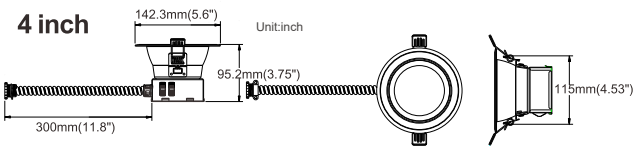

Item	Maximum Diameter (inch)	Height (inch)
4 inch	Ø5.6"(142.3mm)	H 3.75"(95.2mm)
6 inch	Ø7.9"(200.8mm)	H 4.56"(116mm)
8 inch	Ø9.92"(252mm)	H 5.16"(131mm)
10 inch	Ø12.2"(310mm)	H 5.16"(131mm)

LED DOWNLIGHT

Commercial Downlight

Specifications

Switch Select

800 - 4,000 Lumens

CCT Select

3000K/3500K/4000K CCT

Wattage Select

8 - 40 Watts

Options



Decorative Trim (Optional)



DC 8W Emergency Backup



Install as Retrofit kits (Plate)

Commercial Downlight		Size	Wattage Select	Max Output Lumen	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
Non-IC related	WL-DL04IN09WDUV	4"	9W	900lm	100lm/W	3000K 3500K 4000K	AC120-277V	0-10V (5%-100%)	>90
	WL-DL04IN12WDUV		12W	1200lm					
	WL-DL04IN15WDUV		15W	1500lm					
	WL-DL06IN12WDUV	6"	12W	1200lm					
	WL-DL06IN18WDUV		18W	1800lm					
	WL-DL06IN24WDUV		24W	2400lm					
	WL-DL08IN20WDUV	8"	20W	2000lm					
	WL-DL08IN25WDUV		25W	2500lm					
	WL-DL08IN30WDUV		30W	3000lm					
	WL-DL10IN20WDUV	10"	20W	2000lm					
	WL-DL10IN30WDUV		30W	3000lm					
	WL-DL10IN40WDUV		40W	4000lm					
IC related	WL-DL04IN8WDUV	4"	8W	800lm					
	WL-DL06IN12WDUV	6"	12W	1200lm					
	WL-DL08IN20WDUV	8"	20W	2000lm					

CYLINDER G1



CYLINDER G1

Architectural Modular Cylinder

Specifications

Switch Select

900 - 9,000 Lumens


CCT Select

2700K/3000K/3500K/ 4000K/5000K CCT

Wattage Select

9 - 90 Watts

Interchangeable parts, different heights

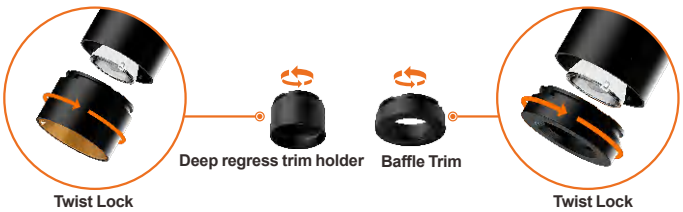

InterchaCone (Twist Lock)



Silver Gold White Black

Twist Lock Optic Lens (Easy change)




20° 30° 40° 50°

Aluminum reflector



25° 36° 60°

Mounting

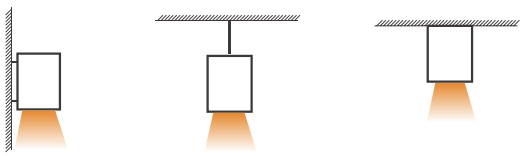

Wall Mount Pendant **Mount** **Surface Mount**

Model	Dimension	Watt select	Lumens	Optical	Distribution	Efficacy	Kelvintemp	Voltage	Dimmable	CRI
WL-1CLD3IN15WB5D 1UV5A -90-VV-MM-YY-SS-ZZ	3" (Ø2.87 x 7.09")	9W/12W/15W	900Lm 1200Lm 1500Lm	Lens	20° 30° 40° 50	100Lm/W	2700K 3000K 3500K 4000K 5000K Select	AC120-277V	0-10V (5%-100%, cannot turn off)	>90
WL-1CLD3IN15WB5 TRSV5A -90-VV-MM-YY-SS-ZZ	3" (Ø2.87 x 7.09")	9W/12W/15W	900Lm 1200Lm 1500Lm					AC120V	Triac /ELV	
WL-1CLD4IN30WB5D3UV5A -90-VV-MM-YY-SS-ZZ	4"(Type A) (Ø4.72 x 8.78")	18W/24W/30W	1800Lm 2400Lm 3000Lm					AC120-277V	0-10V (5%-100%, cannot turn off) & Triac (10 %-100%)	
WL-1CLD4IN40WB5D3UV5A -90-VV-MM-YY-SS-ZZ	4"(Type B) (Ø4.72 x 11.81")	20W/30W/40W	2000Lm 3000Lm 4000Lm							
WL-1CLD6IN20WB5D3UV5A -90-VV-MM-YY-SS-ZZ	6"(Type A) (Ø5.55 x 6.47")	10W/15W/20W	900Lm 1350Lm 1800Lm	Reflector	15° 25° 60°	90Lm/W				>90
WL-1CLD6IN 40WB5D3UV5A -90-VV-MM-YY-SS-ZZ	6"(Type B) (Ø5.55 x 10.63 ")	20W/30W/40W	1800 Lm 2700Lm 3600Lm	Reflector		90Lm/W				>90
WL-1CLD6IN55WB5D3UV5A -80-VV-MM-YY-SS-ZZ	6"(Type C) (Ø5.55 x 13.79 ")	45W/50W/55W	4950Lm 5500Lm 6050Lm	Reflector		110Lm/W				>80
WL-1CLD6IN 55WB5D3UV5A -90-VV-MM-YY-SS-ZZ	6"(Type C) (Ø5.55 x 13.79 ")	45W/50W/55W	4050Lm 4500Lm 4950Lm	Reflector		90Lm/W				>90
WL-1CLD8IN90WB3D3UVXX -80-VV-MM-SS-YY	8" (Ø7.87 x 17.22 ")	70W/80W/90W	7000Lm 8000Lm 9000Lm	Reflector		100Lm/W	2700K/ 3000K/ 3500K/ 4000K/ 5000K/ Single			>80
WL-1CLD8IN90WB3D3UVXX -90-VV-MM-SS-YY	8" (Ø7.87 x 17.22 ")	70W/80W/90W	6300Lm 7200Lm 8100Lm	Reflector		90Lm/W				>90

STACK TROFFER



STACK TROFFER

2X2FT, 2X4FT

Specifications

Switch Select

1,950 - 5,850 Lumens


CCT Select


3000K/4000K/5000K CCT

Wattage Select

15 - 50 Watts

Features

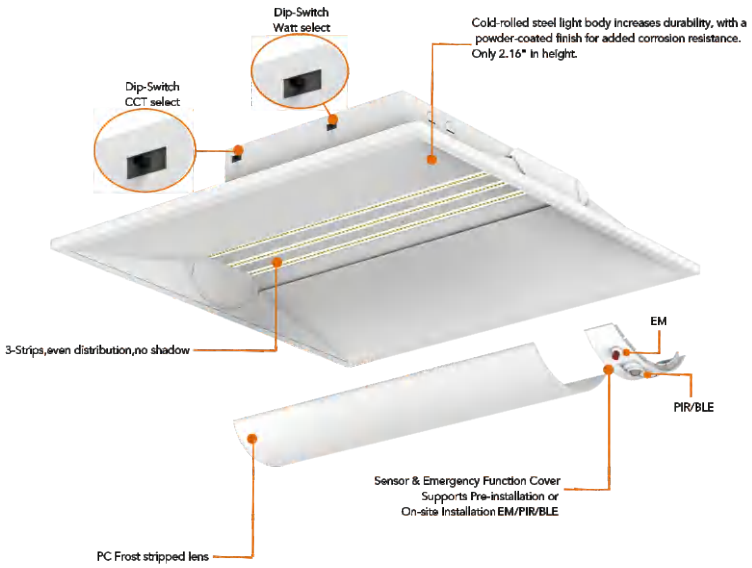





2x2FT Stack Pack 40#HQ Qty: 5430PCS
2x4FT Stack Pack 40#HQ Qty: 2664PCS

Standard Size

Troffer	Length	Wattage Select	Output Lumen	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI	Flicker Index
WL-4TRS2215/20/25DHV	2'X2'	15W/20W/25W	1950lm/2600lm/3250lm	130lm/W	3000K 3500K 4000K	AC120-347V	0-10V (10%-100%)	>80	<30%
WL-4TRS2224DHV	2'X2'	24W/30W/36W	3120lm						
WL-4TRS2230DHV			3900lm						
WL-4TRS2236DHV			4680lm						
WL-4TRS2416DHV	2'X4'	16W/24W/36W	2080lm						
WL-4TRS2424DHV			3120lm						
WL-4TRS2436DHV			4680lm						
WL-4TRS2424DHV	2'X4'	24W/36W/45W	3120lm						
WL-4TRS2436DHV			4680lm						
WL-4TRS2445DHV			5850lm						

Centimeter Size

Troffer	Length	Wattage Select	Output Lumen	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI	Flicker Index
WL-4TRS50050024DHV	500X500mm	24W/30W/36W	3120lm	130lm/W	3000K 3500K 4000K	AC120-347V	(0-10V 10%-100%)	>80	<30%
WL-4TRS50050030DHV			3900lm						
WL-4TRS50050036DHV			4680lm						
WL-4TRS50850824DHV	508X508mm	24W/30W/36W	3120lm						
WL-4TRS50850830DHV			3900lm						
WL-4TRS50850836DHV			4680lm						
WL-4TRS1500150030DHV	1500X500mm	30W/40W/50W	3120lm						
WL-4TRS1500150040DHV			3900lm						
WL-4TRS1500150050DHV			4680lm						
WL-4TRS148549530DHV	1485X495mm	30W/40W/50W	3120lm						
WL-4TRS148549540DHV			3900lm						
WL-4TRS148549550DHV			4680lm						
WL-4TRS74374324DHV	743X743mm	24W/30W/36W	3120lm						
WL-4TRS74374330DHV			3900lm						
WL-4TRS74374336DHV			4680lm						
WL-4TRS75075024DHV	750X750mm	24W/30W/36W	3120lm						
WL-4TRS75075030DHV			3900lm						
WL-4TRS75075036DHV			4680lm						



IP65 CLEAN ROOM





IP65 CLEAN ROOM

1X4FT, 2X2FT, 2X4FT

Specifications

Switch Select (Internel)

2,640 - 9,900 Lumens

CCT Select

3000K/3500K/4000K CCT

Wattage Select

24 - 90 Watts

Intertek (In Pending)


5 YEAR WARRANTY

IK10


IP65

UGR<22

Dimension

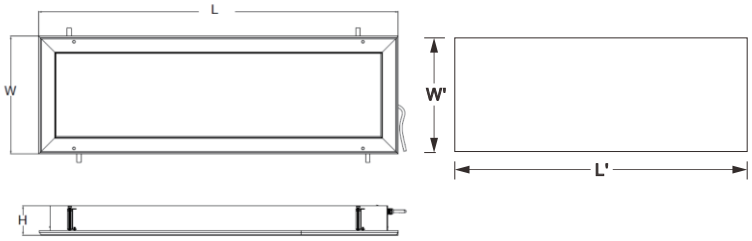


Mounting




Recessed

SIZE	L	W	H	L'	W'
1x4 FT	47.75"(1213mm)	11.93"(303mm)	3.15"(80mm)	46.85(1190mm)	11.22(285mm)
2X2 FT	23.74'(603mm)	23.74'(603mm)	3.15"(80mm)	23.03(585mm)	23.03(585mm)
2X4 FT	47.75"(1213mm)	23.74''(603mm)	3.15"(80mm)	46.85(1190mm)	23.03(585mm)

Clear	Length	Watt Select	Output Lumen	Nominal Efficacy	CCT Select	Input Voltage	Dimming	CRI	UGR
WL-2CR14B224/30/36W (30K-35K-40K)-X	1'X4'	24W/30W/36W	3240-5220 lm	135-145Lm/W	3000K-3500K-4000K-3-CCT Select (Standard)	AC120-347V	0-10V (1%-100%)	>80	<22
WL-2CR14B230/45/60W (30K-35K-40K)-X	1'X4'	30W/45W/60W	4050-8700 lm						
WL-2CR22B224/30/36W (30K-35K-40K)-X	2'X2'	24W/30W/36W	3240-5220 lm						
WL-2CR22B230/45/60W (30K-35K-40K)-X	2'X2'	30W/45W/60W	4050-8700 lm						
WL-2CR24B230/45/60W (30K-35K-40K)-X	2'X4'	30W/45W/60W	4050-8700 lm						
WL-2CR24B245/67/90W (30K-35K-40K)-X	2'X4'	45W/67W/90W	6075-13050 lm		Available on request : 3500K-4000K-5000K-3-CCT Select				
WL-2CR14B224/30/36W (30K-35K-40K) -X	1'X4'	24W/30W/36W	3240-5220 lm						
WL-2CR22B224/30/36W (30K-35K-40K) -X	2'X2'	24W/30W/36W	3240-5220 lm						
WL-2CR24B230/45/60W (30K-35K-40K) -X	2'X4'	30W/45W/60W	4050-8700 lm						

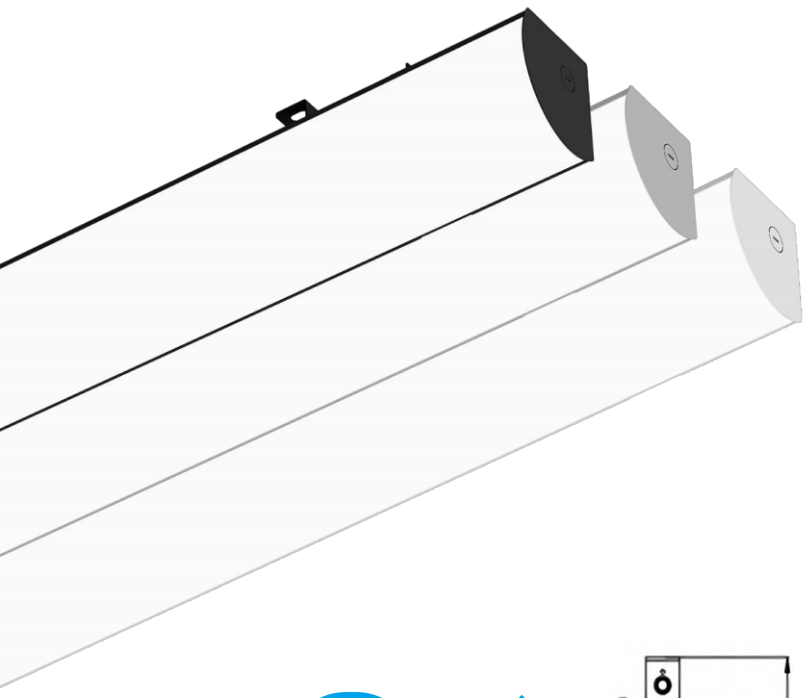

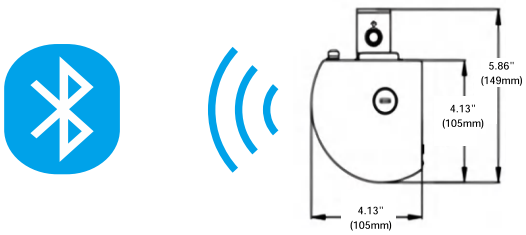

RIGHT-ANGLE STRIP

L-shaped ceiling to wall strip light

Specifications

Switch

19,200 Lumens

Single CCT


4000K CCT

Wattage Select

40 -120 Watts

Intertek (In Pending)

Features

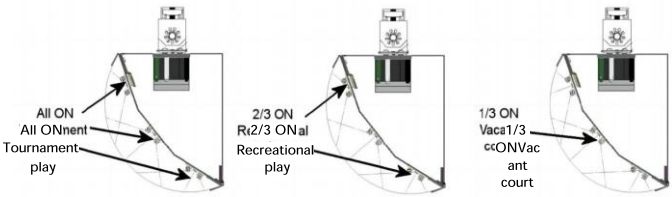


Line Voltage Stepped Dimming(wireless 0-10V Dimming also available)



Loose-leaf flipping

Mounting



Ceiling to wall

Pickleball Light	Length	Wattage	Output Lumen	Nominal Efficacy	CCT	Input Voltage	Dimmable	CRI
WL-3ST4FT120WADHV40K	4FT	120W	19200lm	160lm/w	4000K	AC120-347V	0-10V	80
WL-3ST4FT40WADHV40K	4FT	40W	6400lm Linkbbe	160lm/w	4000K	AC120-347V	0-10V	80

G5 LINEAR HIGHBAY



G5 LINEAR HIGHBAY

Alumnium heatsink

Specifications

lumens select
15,400 - 60,000 Lumens

Select
4000K - 5000K CCT

Wattage Select
60 - 400 Watts

Mounting Options




Chain Suspension (Standard)



NPT Suspension

G5 Linear Highbay	Length	Wattage	Max Output Lumen	Beam angle	Nominal Efficacy	CCT	Input Voltage	Dimmable	CRI
WL-5LH11.3FT110/135/165DUV(XXK)-L8-A	1.3'	110W/135W/165W Select	23100lm	100° Matt diffuser	140-155lm/W	4000K 5000K Single CCT	AC120-277V	0-10V	>80
WL-5LH11.6FT155/185/210DUV (XXK)-L8-A	1.6'	155W/185W/210W Select	29400lm						
WL-5LH11.9FT155/185/210DUV (XXK)-L8-A	1.9'	155W/185W/210W Select	29400lm						
WL-5LH12.3FT200/250/305DUV (XXK)-L8-A	2.3'	200W/250W/305W Select	42700lm						
WL-5LH13.0FT400DUV(XXK)-L8-A	3.0'	400W	56000lm						
WL-5LH11.3FT60/85/110DUV (40K-50K)-L8-A	1.3'	60W/85W/110W Select	15400lm	100° Matt diffuser	140-155lm/W	4000K 5000K Select CCT			
WL-5LH11.6FT110/135/165DUV (40K-50K)-L8-A	1.6'	110W/135W/165W Select	23000lm						
WL-5LH11.9FT155/185/210DUV (40K-50K)-L8-A	1.9'	155W/185W/210W Select	29400lm						
WL-5LH13.0FT200/250/305DUV (40K-50K)-L8-A	3.0'	200W/250W/305W Select	42000lm						
WL-5LH11.6FT100DUV(XXK)-H7-A	1.6'	100W	19000lm	100° Prismatic PC	170-190lm/W	4000K 5000K Single CCT			>70
WL-5LH11.3FT100/125/150DUV (XXK)-H7-A	1.3'	100W/125W/150W Select	25500lm						
WL-5LH11.6FT125/165/210DUV (XXK)-H7-A	1.6'	125W/165W/210W Select	35700lm						
WL-5LH12.3FT200/250/305DUV (XXK)-H7-A	2.3'	200W/250W/305W Select	51000lm						
WL-5LH12.0FT100/125/150DUV (XXK)-H7-B	2.0'	100W/125W/150W Select	25500lm	100 x40°	170-190lm/W	4000K 5000K Single CCT			
WL-5LH14.0FT200/250/305DUV (XXK)-H7-B	4.0'	200W/250W/305W Select	51000lm						
WL-5LH14.0FT400DUV (XXK)-H7-B	4.0'	400W	60000lm		150lm/W				

TROFFER RETROFIT

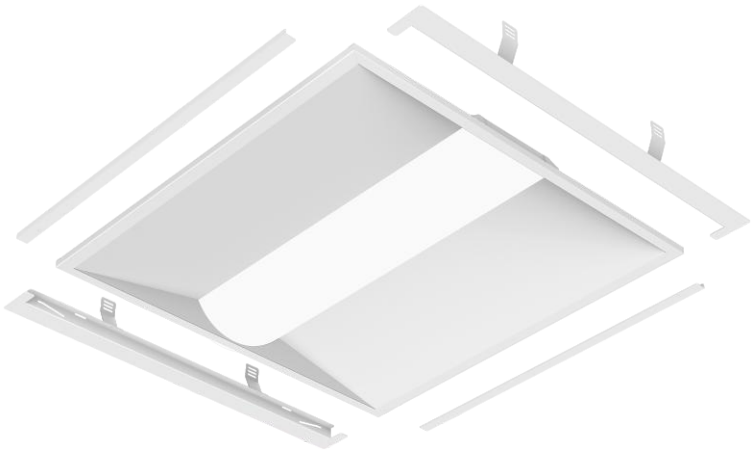

TROFFER RETROFIT

2X2FT, 2X4FT

Specifications

Switch Select

3,120 - 5,850 Lumens

CCT Select

3000K/4000K/5000K CCT

Wattage Select

24 - 45 Watts

Features





2x2FT 5112PCS 2x4FT 2606PCS

Retrofit Troffer	Length	Wattage Select	Output Lumen	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-3TRRS2224/30/36DUV	2'X2'	24W/30W/36W	3120lm/3900lm/4680lm	130lm/w	3500K 4000K 5000K	AC120-277V	0-10V	>80
WL-3TRRS24/24/36/45DUV	2'X4'	24W/36W/45W	3120lm/4680lm/5850lm					

T5 & T7 STRIP RETROFIT



T5 STRIP RETROFIT

LED Magnetic Strip Kits

Specifications

Switch Select
2,600 - 10,400 Lumens

CCT Select
3000K/4000K/5000K CCT

Wattage Select
20 - 80 Watts

UGR<22

T7 STRIP RETROFIT

LED Magnetic Strip Kits

Specifications

Switch Select
2,600 - 10,400 Lumens

CCT Select
3500K - 5000K CCT

Wattage Select
10 - 40 Watts

UGR<22



T5 Retrofit Magnetic Strips	Length	Wattage /1 Strip	Strips Q'ty	Total Power	Nominal Efficacy	Lumen	CCT Single	Input Voltage	Dimmable	CRI	Flicker Rate
WL-RTST2220D(xxxxK)	2'	10W	2	20W	130 lm/w	2600lm	3500K 4000K 5000K	AC120-277V	0-10V (10-100%) Dim to down	>80	<30%
WL-RTST2330D(xxxxK)	2'	10W	3	30W		3900lm					
WL-RTST124D(xxxxK)	4'	24W	1	24W		3120lm					
WL-RTST224D(xxxxK)	4'	12W	2	24W		3120lm					
WL-RTST230D(xxxxK)	4'	15W	2	30W		3900lm					
WL-RTST240D(xxxxK)	4'	20W	2	40W		5200lm					
WL-RTST345D(xxxxK)	4'	15W	3	45W		5850lm					
WL-RTST460D(xxxxK)	4'	15W	4	60W		7800lm					
WL-RTST480D(xxxxK)	4'	20W	4	80W		10400lm					
WL-RTST224D-HV(xxxxK)	4'	12W	2	24W		3120lm		AC120-347V			
WL-RTST230D-HV(xxxxK)	4'	15W	2	30W		3900lm					
WL-RTST240D-HV(xxxxK)	4'	20W	2	40W		5200lm					


T5 Size OPTIC LENS UGR<22150-160lm/W	Length	Wattage /1 Strip	Strips Q'ty	TotalPower	Nominal Efficacy	Lumen	CCT Single	Input Voltage	Dimmable	UGR	CRI
WL-2RTST2215D(xxxxK)	2'	7.5W	2	15W	155lm/w	2325lm	3500K 4000K 5000K	AC120-277V	0-10V (10-100%) Dim todown	<22	>80
WL-2RTST2330D(xxxxK)	2'	10W	3	30W	150lm/w	4500lm					
WL-2RTST115D(xxxxK)	4'	15W	1	15W	155lm/w	2325lm					
WL-2RTST124D(xxxxK)	4'	24W	1	24W	145lm/w	3480lm					
WL-2RTST224/30/40D(XXXXK)	4'	12W/15W/ 20W Select	2	24W/30W/ 40W Select	150lm/w-160lm/w	3840/4650/ 6000lm					
WL-2RTST248D(xxxxK)	4'	24W	2	48W	145lm/w	6960lm					
WL-2RTST345D(xxxxK)	4'	15W	3	45W	155lm/w	6975lm					
WL-2RTST460D(xxxxK)	4'	15W	4	60W	155lm/w	9300lm					
WL-2RTST480D(xxxxK)	4'	20W	4	80W	150lm/w	12000lm					

T5 Size OPTIC LENS UGR<22 3CCT 130lm/W	Length	Wattage /1 Strip	Strips Q'ty	Total Power	Nominal Efficacy	Lumen	CCT Select	Input Voltage	Dimmable	UGR	CRI
WL-2RTST2220D(35K/40K/50K)	2'	10W	2	20W	130lm/w	2600lm	3500K 4000K 5000K	AC120-277V	0-10V (10-100%) Dim to down	<22	>80
WL-2RTST224/30/40D(35K/40K/50K)	4'	12W/15W/ 20W Select	2	24W/30W/ 40W Select		3840/4650/ 6000lm					
WL-2RTST460D(35K/40K/50K)	4'	15W	4	60W		7800lm					

T7 Retrofit Magnetic Strips	Length	Wattage /1 Strip	Strips Q'ty	Total Power	Nominal Efficacy	Lumen	CCT Single	Input Voltage	Dimmable	UGR	CRI	Flicker Rate
WL-2WRTST220D	4'	10W	2	20W	130lm/w	2600lm	3500K 4000K 5000K	AC120-277V	0-10V	<22	>80	<30%
WL-2WRTST230D	4'	15W	2	30W		3900lm						
WL-2WRTST240D	4'	20W	2	40W		5200lm						
WL-2WRTST260D	4'	30W	2	60W		7800lm						
WL-2WRTST280D	4'	40W	2	80W		10400lm						



Track dimensions: Max. length 3 m, width/height 40 mm

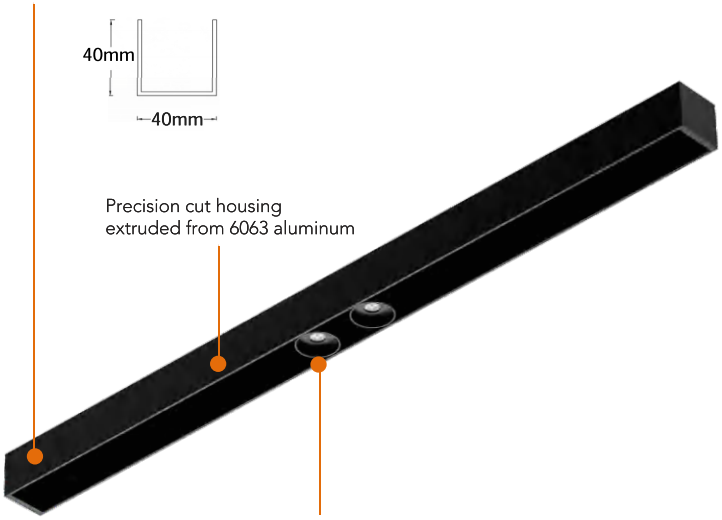



YACHT & BOAT LIGHT

Pendant / Recessed / Surface Track Spotlight

Specifications

Switch

147 Lumens

Single CCT

2700K/3000K/4000K/5000K CCT

Wattage


3 Watts

5 YEAR WARRANTY


LV 10-30V

PWM DIMMING


Dimension

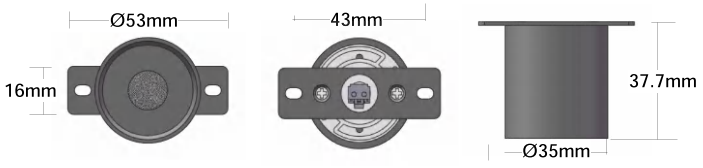

Mounting



Model	Dimension	Wattage	Lumens	Efficacy	Single CCT	Input Voltage	Dimmable	CRI
WL-YLSPO015IN3WAPLVXXK	Ø35*31.1mm	3W	147lm	49lm/W	27K/30K/40K/50K	DC10-30V	PWM	90

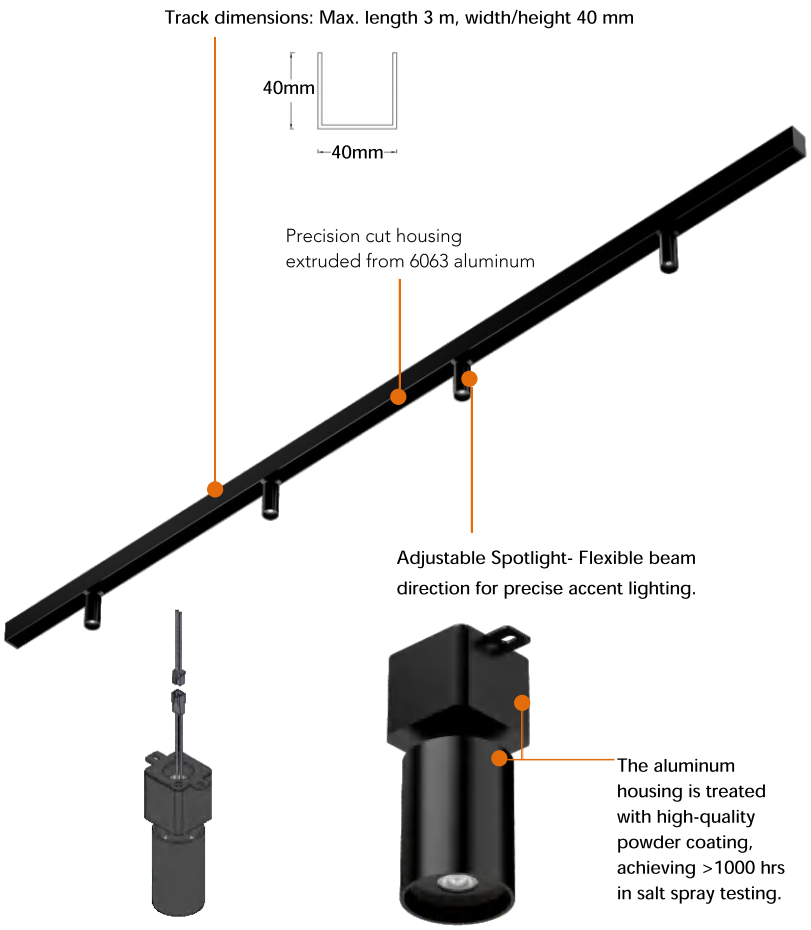

YACHT & BOAT LIGHT

Pendant / Recessed / Surface Track Rototable Spotlight

Specifications

Switch
147 Lumens

Single CCT
2700K/3000K/4000K/5000K CCT


Wattage
3 Watts

5 YEAR WARRANTY

LV 10-30V

PWM DIMMING

Dimension

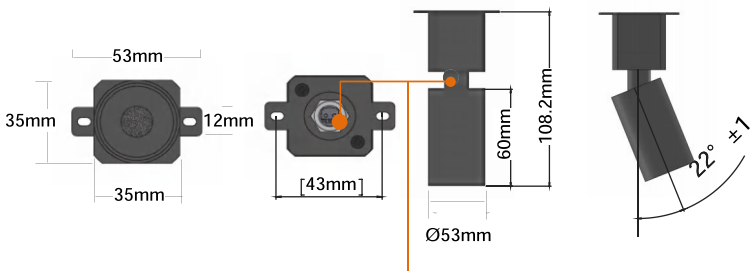

Brass construction for the swivel head, threaded pipe, and nut ensures durability and corrosion resistance.


Mounting



Surface Mount

Recessed Mount

Model	Dimension	Wattage	Lumens	Efficacy	Single CCT	Input Voltage	Dimmable	CRI
WL-YLADJ015IN3WAPLVXXK	Ø53*108.2mm	3W	147lm	49lm/W	27K/30K/40K/50K	DC10-30V	PWM	90

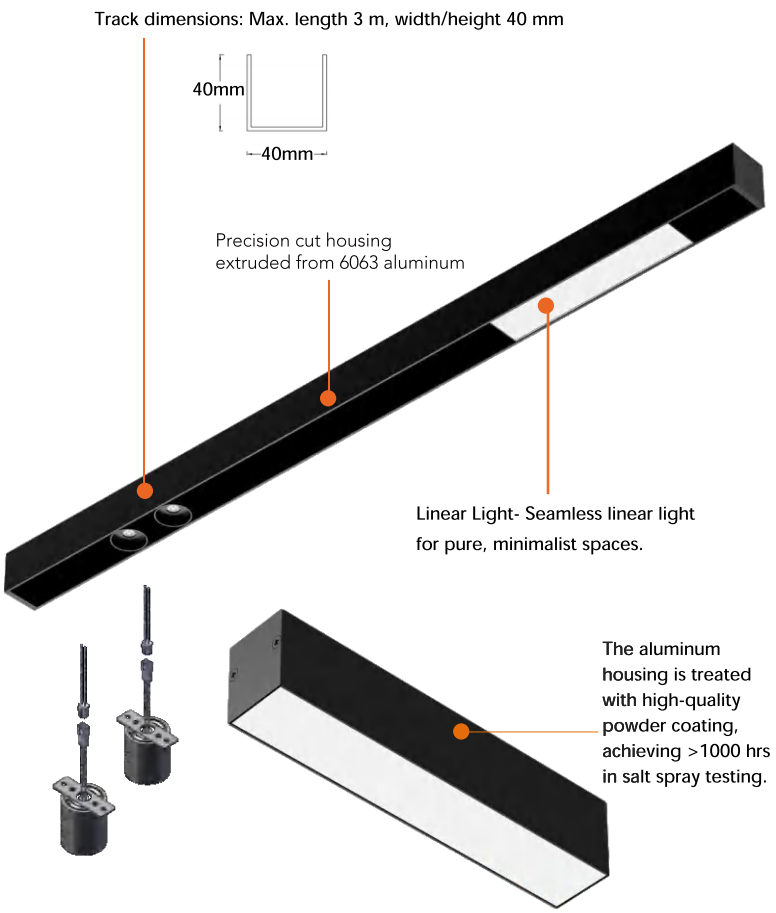

YACHT & BOAT LIGHT

Pendant / Recessed / Surface Linear Light

Specifications

Switch

147 Lumens

Single CCT

2700K/3000K/4000K/5000K CCT

Wattage


3 - 12 Watts


5 YEAR WARRANTY

LV 10-30V


PWM DIMMING

Dimension



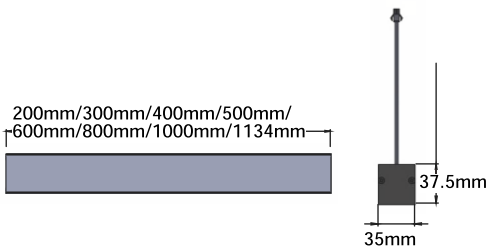


Mounting



Luminaire ID	Mode	Length	Wattage	Series	Dimming	Power Voltage	CCT
Yacht Light	WL-YLLIN= Wisdom Light Yacht Linear Light	0.7FT =200mm 1.0FT =300mm 1.3FT =400 mm 1.6FT =500 mm 2.0FT =600 mm 2.6FT =800 mm 3.3FT =1000mm 3.7FT =1134mm	3W 12W	A=Single CCT	P=PWM dimming	LV=10-30V	XXK= 27K=2700K 30K=3000K 40K=4000K 50K=5000K

Acoustic cover
(Pet/Polyester Fiber)

WISDOM LIGHT


FS03


FG2125


FG2032


FB2127


FA17



FB2108


FB2109



FB2021



FB2107



FB2123



FP2106



FP2105



FP2104


FP2124


FP2112



FG2128


FG2129


FG2110


FGE2130


FB2111


FPE2121


FPE2120


FPE2113


FG2301

FG2302

Color card

WISDOM LIGHT

Linear Light

Powder Coating 喷粉



RAL9016
Sand Texture White
砂纹白
(SW20144)


RAL9016
Matte White
哑白
(BG20145)


RAL9004
Sand Texture Black
砂纹黑
(10075)


RAL9004
Matte Black
哑黑
(9F2817G20)


RAL7040
Window Gray
窗灰色
(S79829)


RAL9006
Metallic Silver
金属灰
(90318)


RAL7011
Iron Gray
铁灰
(JZ721-S78619)

Anodizing 阳极氧化


RAL9006
Clear Anodized Aluminum
阳极氧化本色


RAL9006
Anodized Brushed Silver
拉丝氧化银

Cleaver GNE3

Anodizing 阳极氧化


RAL7024
Anodized Gray
浅铁灰氧化

Spray Painting 喷油


RAL9006
Silver Spray Painting
喷油银

Water Transfer Printing 水转印


Maple
枫木纹


Wallnut
核桃木纹


French oak
法国橡木纹



Ebony
乌木纹


20665


8012-14


8054-13


8009


B12683FTW


YX-21404FTW


YX-20432FTWB-2


A210-3


8079-11A


E20


S3052-1A


9186T


A244-7

Troffer


Powder Coating 喷粉


RAL9016
Matte White
哑白

Highbay

Powder Coating 喷粉


RAL9016
Gloss White
亮白

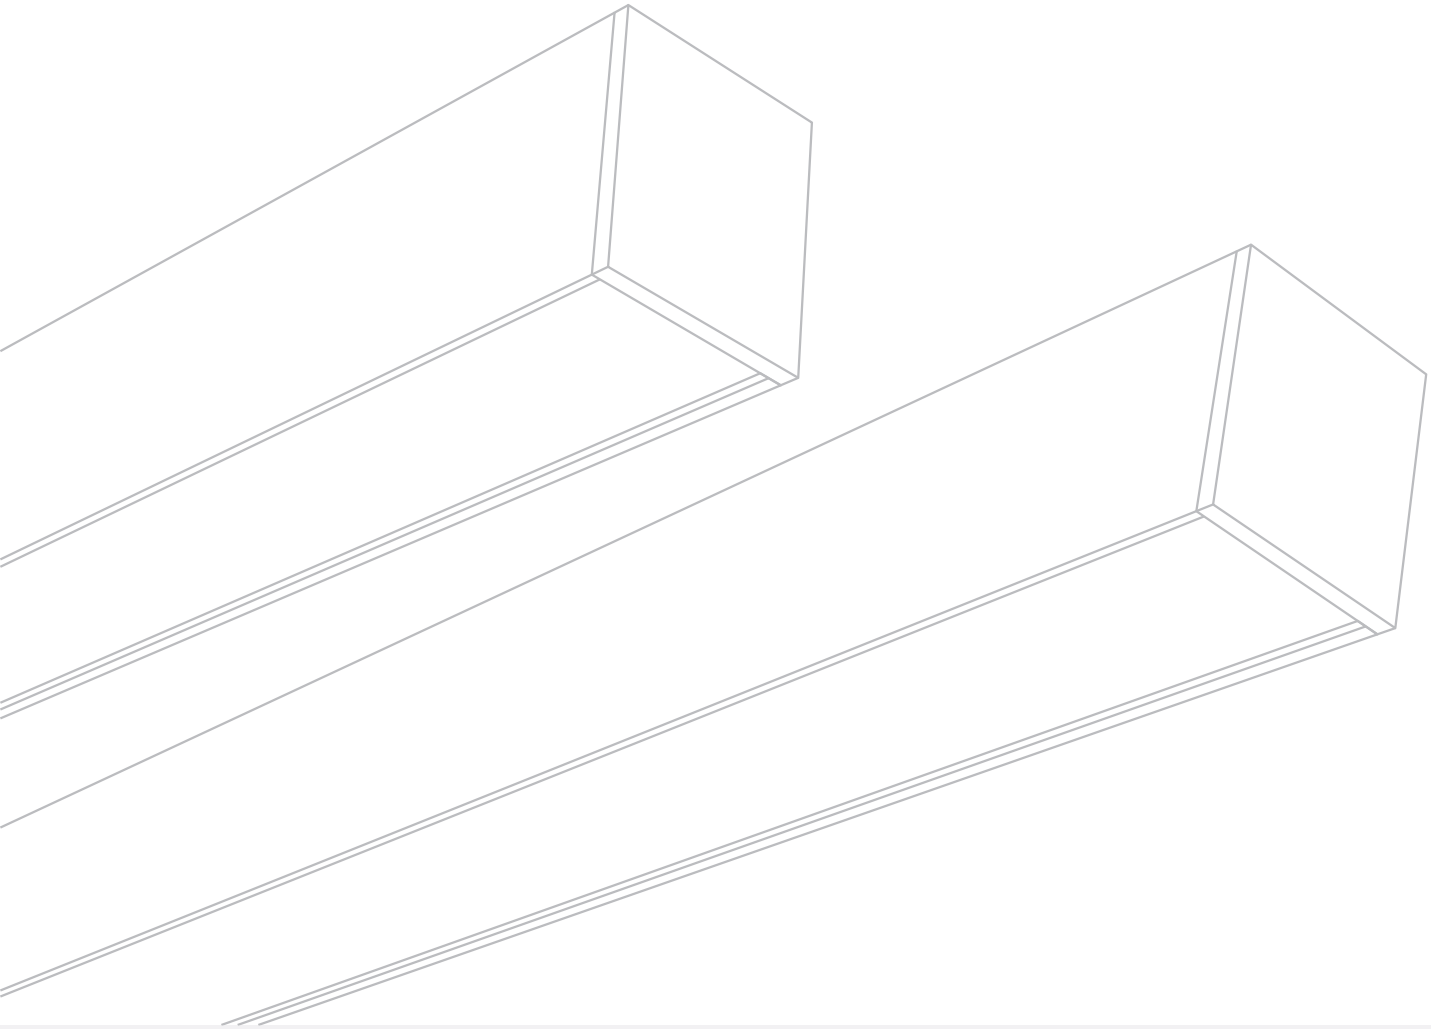

WISDOM LIGHT

Shenzhen Wisdom Light Co.,Ltd.

Tel: +86-755-22216523
Email: sales@wisdomled.net
Add: Block 2, No. 10, Gaohai Avenue, Gaohai Industrial Zone, Danzao Town, Nanhai District, Foshan City, 528234, Guangdong province , China

PT Wisetronics Manufacturing Indonesia

Add: Kawasan Hijrah Karya Mandiri Block E No.5,Batam,Indonesia 29431