


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:982.82x1 lm		
NAME: V10	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 109.20 lm/W			
MODEL		I _{max} (cd)	11653	S/MH(C0/180)	0.22
NOMINAL POWER(W)	10W	LOR(%)	100.0	S/MH(C90/270)	0.21
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	982.82	η UP,DN(C0-180)	0.2,46.3
NOMINAL FLUX(lm)	982.82	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.2,53.4
LAMPS INSIDE	1	η up(%)	0.4	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	120.0	η down(%)	99.6	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

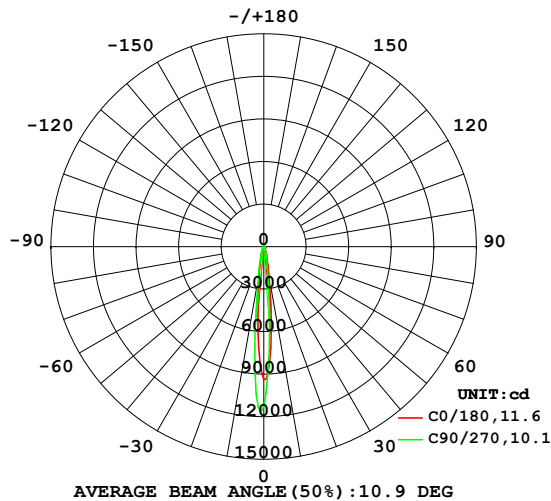

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

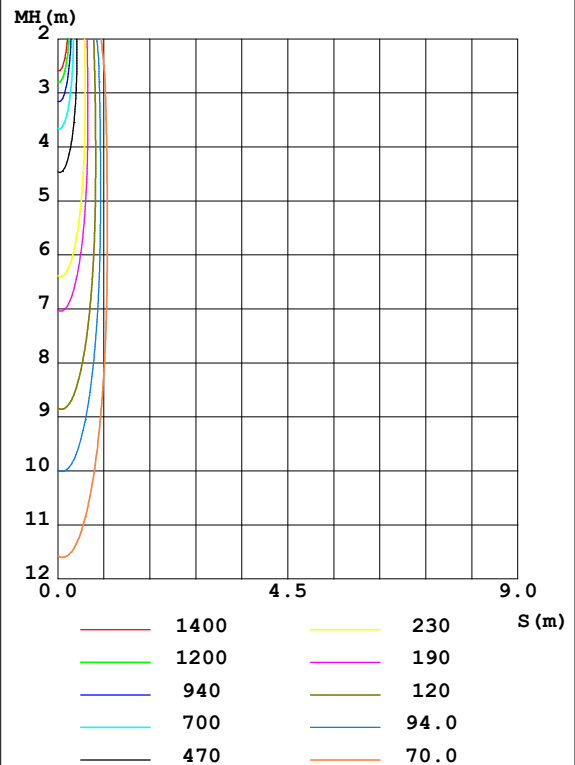

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	220.9	164.6	141.6	192.5	184.2	219.9	225.0	192.8	0- 10	425.9	425.9	43.3,43.3
20	51.00	38.93	35.09	44.18	48.73	53.17	55.37	47.75	10- 20	254.4	680.3	69.2,69.2
30	16.83	13.02	12.84	15.04	16.68	18.30	19.00	16.20	20- 30	125.1	805.4	81.9,81.9
40	8.033	6.601	6.534	7.211	8.161	8.178	8.567	7.361	30- 40	68.16	873.6	88.9,88.9
50	4.595	4.039	3.997	4.236	4.537	4.592	4.586	4.139	40- 50	44.18	917.7	93.4,93.4
60	2.604	2.465	2.547	2.651	2.654	2.754	2.749	2.393	50- 60	30.39	948.1	96.5,96.5
70	1.409	1.234	1.375	1.372	1.319	1.426	1.536	1.179	60- 70	19.31	967.4	98.4,98.4
80	0.6434	0.4281	0.3409	0.4685	0.5347	0.5026	0.4117	0.4132	70- 80	9.248	976.7	99.4,99.4
90	0.1881	0.1012	0	0.0706	0.1871	0.0631	0	0.1119	80- 90	2.412	979.1	99.6,99.6
100	0.1644	0.0877	0	0.0523	0.1242	0.0504	0	0.0940	90-100	0.8579	979.9	99.7,99.7
110	0.1490	0.0566	0	0.0489	0.0978	0.0441	0	0.0669	100-110	0.6876	980.6	99.8,99.8
120	0.1255	0.0361	0.0017	0.0334	0.0726	0.0380	0	0.0438	110-120	0.4981	981.1	99.8,99.8
130	0.0826	0.0312	0.0058	0.0388	0.0504	0.0383	0.0022	0.0361	120-130	0.3448	981.5	99.9,99.9
140	0.0625	0.0337	0.0143	0.0351	0.0518	0.0361	0.0085	0.0339	130-140	0.2630	981.7	99.9,99.9
150	0.0615	0.0511	0.0443	0.0533	0.0618	0.0501	0.0308	0.0484	140-150	0.2453	982.0	99.9,99.9
160	0.1068	0.1117	0.1126	0.1262	0.1269	0.1177	0.1032	0.1186	150-160	0.3722	982.4	100,100
170	0.1175	0.1182	0.1209	0.1387	0.1182	0.1228	0.1208	0.1286	160-170	0.3521	982.7	100,100
180	0.0993	0.0998	0.1095	0.1170	0.0983	0.1000	0.1099	0.1150	170-180	0.1114	982.8	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:982.82x1 lm		
NAME: V10	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

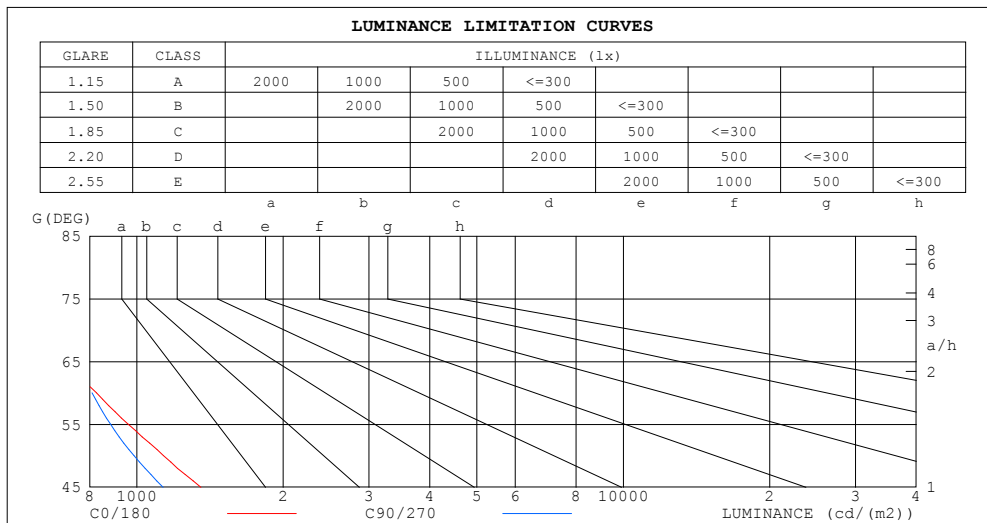

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	607	116
80	588	312
75	637	504
70	654	638
65	721	734
60	827	809
55	960	883
50	1135	987
45	1355	1132


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:982.82x1 lm		
NAME: V10	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.05	1.04	1.03	1.02	1.01	.99	.98	.97	.97	.95
2.0	1.06	1.02	.99	1.04	1.01	.98	1.01	.98	.96	.98	.96	.94	.95	.93	.92	.90
3.0	1.00	.96	.93	.99	.95	.92	.96	.93	.91	.94	.91	.89	.92	.90	.88	.86
4.0	.96	.91	.88	.95	.90	.87	.92	.89	.86	.91	.88	.85	.89	.86	.84	.83
5.0	.92	.87	.84	.91	.87	.83	.89	.85	.83	.88	.84	.82	.86	.83	.81	.80
6.0	.88	.84	.80	.88	.83	.80	.86	.82	.79	.85	.81	.79	.84	.81	.78	.77
7.0	.85	.81	.77	.85	.80	.77	.83	.80	.77	.82	.79	.76	.81	.78	.76	.75
8.0	.83	.78	.75	.82	.78	.75	.81	.77	.74	.80	.77	.74	.79	.76	.74	.73
9.0	.80	.76	.73	.80	.76	.73	.79	.75	.72	.78	.75	.72	.77	.74	.72	.71
10.0	.78	.74	.71	.78	.74	.71	.77	.73	.71	.76	.73	.70	.76	.72	.70	.69

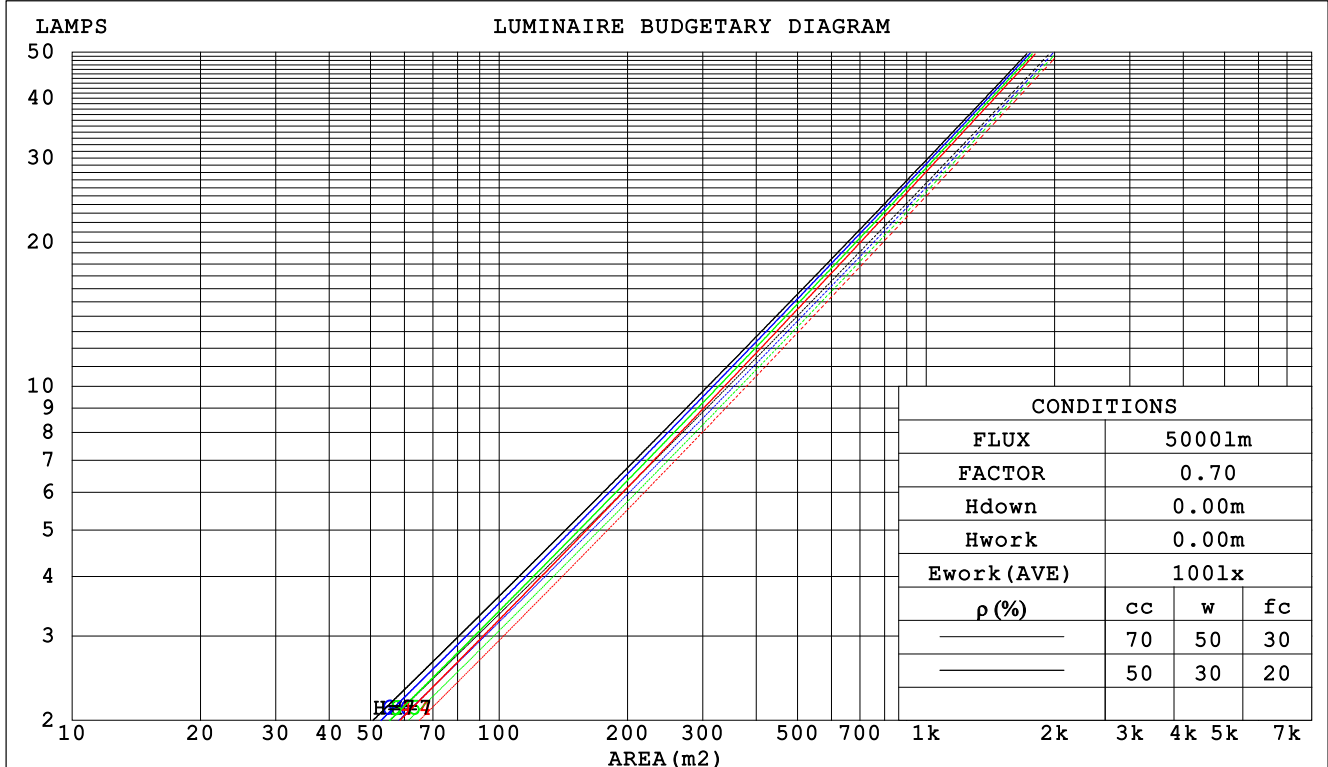

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:982.82x1 lm					
NAME: V10			TYPE:4000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.157	.089	.028	.150	.086	.027	.137	.079	.025	.126	.073	.023	.115	.067	.021		
2.0	.146	.080	.025	.141	.077	.024	.130	.072	.022	.120	.067	.021	.111	.063	.020		
3.0	.136	.072	.022	.131	.070	.021	.122	.066	.020	.114	.062	.019	.106	.059	.018		
4.0	.127	.066	.019	.122	.064	.019	.115	.061	.018	.108	.058	.017	.101	.055	.017		
5.0	.118	.060	.017	.115	.059	.017	.108	.056	.017	.102	.054	.016	.097	.052	.015		
6.0	.111	.056	.016	.108	.054	.016	.102	.052	.015	.097	.050	.015	.092	.048	.014		
7.0	.104	.052	.015	.102	.051	.014	.097	.049	.014	.092	.047	.014	.088	.046	.013		
8.0	.099	.048	.014	.096	.047	.013	.092	.046	.013	.088	.045	.013	.084	.043	.013		
9.0	.093	.045	.013	.091	.045	.012	.087	.043	.012	.084	.042	.012	.081	.041	.012		
10.0	.089	.043	.012	.087	.042	.012	.083	.041	.012	.080	.040	.011	.077	.039	.011		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.173	.160	.149	.148	.138	.129	.101	.095	.089	.058	.055	.052	.019	.018	.017	
2.0	.156	.136	.119	.133	.117	.102	.091	.081	.071	.053	.047	.042	.017	.015	.014	
3.0	.142	.116	.096	.121	.100	.083	.083	.070	.059	.048	.041	.034	.015	.013	.011	
4.0	.130	.101	.080	.111	.087	.069	.076	.061	.049	.044	.036	.029	.014	.012	.009	
5.0	.119	.089	.067	.102	.077	.058	.071	.054	.041	.041	.032	.024	.013	.010	.008	
6.0	.110	.079	.057	.095	.069	.050	.065	.048	.035	.038	.028	.021	.012	.009	.007	
7.0	.103	.071	.049	.088	.062	.043	.061	.043	.030	.035	.025	.018	.011	.008	.006	
8.0	.096	.064	.043	.083	.056	.037	.057	.039	.026	.033	.023	.016	.011	.008	.005	
9.0	.090	.059	.038	.078	.051	.033	.054	.036	.023	.031	.021	.014	.010	.007	.005	
10.0	.085	.054	.034	.073	.047	.029	.051	.033	.021	.030	.020	.012	.010	.006	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:982.82x1 lm										
NAME: V10					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	7.5	8.2	7.7	8.4	8.6	7.1	7.8	7.3	8.0	8.1
3H	8.4	9.1	8.6	9.3	9.5	8.1	8.7	8.3	8.9	9.1
4H	8.8	9.4	9.1	9.7	9.9	8.4	9.0	8.6	9.2	9.5
6H	9.1	9.7	9.4	10.0	10.2	8.5	9.1	8.8	9.3	9.6
8H	9.2	9.8	9.5	10.1	10.3	8.5	9.1	8.8	9.3	9.6
12H	9.3	9.9	9.6	10.1	10.4	8.4	9.0	8.8	9.3	9.6
4H 2H	7.8	8.5	8.1	8.7	8.9	7.5	8.1	7.8	8.4	8.6
3H	8.9	9.4	9.2	9.7	10.0	8.6	9.2	8.9	9.4	9.7
4H	9.4	9.9	9.7	10.2	10.5	9.0	9.5	9.3	9.8	10.1
6H	9.8	10.3	10.2	10.6	10.9	9.2	9.6	9.5	10.0	10.3
8H	9.9	10.4	10.3	10.7	11.1	9.2	9.6	9.5	10.0	10.3
12H	10.0	10.4	10.5	10.8	11.2	9.1	9.5	9.5	9.9	10.3
8H 4H	9.4	9.9	9.8	10.2	10.6	9.1	9.5	9.5	9.9	10.2
6H	9.9	10.3	10.4	10.7	11.1	9.3	9.7	9.7	10.1	10.5
8H	10.1	10.5	10.6	10.9	11.3	9.3	9.7	9.8	10.1	10.5
12H	10.3	10.6	10.8	11.0	11.5	9.3	9.6	9.8	10.0	10.5
12H 4H	9.4	9.8	9.8	10.2	10.6	9.0	9.4	9.5	9.8	10.2
6H	9.9	10.2	10.4	10.7	11.1	9.3	9.6	9.8	10.1	10.5
8H	10.1	10.4	10.6	10.9	11.3	9.3	9.6	9.8	10.1	10.6
Variations with the observer position at spacings:										
S = 1.0H	+ 0.4 / - 0.5					+ 0.4 / - 0.5				
1.5H	+ 0.6 / - 0.4					+ 0.3 / - 0.3				
2.0H	+ 0.8 / - 0.6					+ 0.6 / - 0.5				

CIE Pub.117 Corrected 982.8 lm Total Lamp Luminous Flux.(8log(F/F0) = -0.1)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:982.82x1 lm		
NAME: V10	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	85	78	74	84	78	74	83	77	74	70
0.80	92	86	82	92	86	82	90	85	81	77
1.00	97	91	87	96	90	87	94	90	86	82
1.25	101	96	92	100	95	91	98	94	90	86
1.50	104	99	95	103	98	95	100	97	94	89
2.00	107	103	99	106	101	98	103	99	97	91
2.50	109	105	102	107	104	101	104	101	99	93
3.00	111	107	104	109	106	103	105	103	101	94
4.00	113	110	108	111	108	106	107	105	103	96
5.00	114	112	110	112	110	108	108	107	105	97
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:982.82x1 lm		
NAME: V10	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

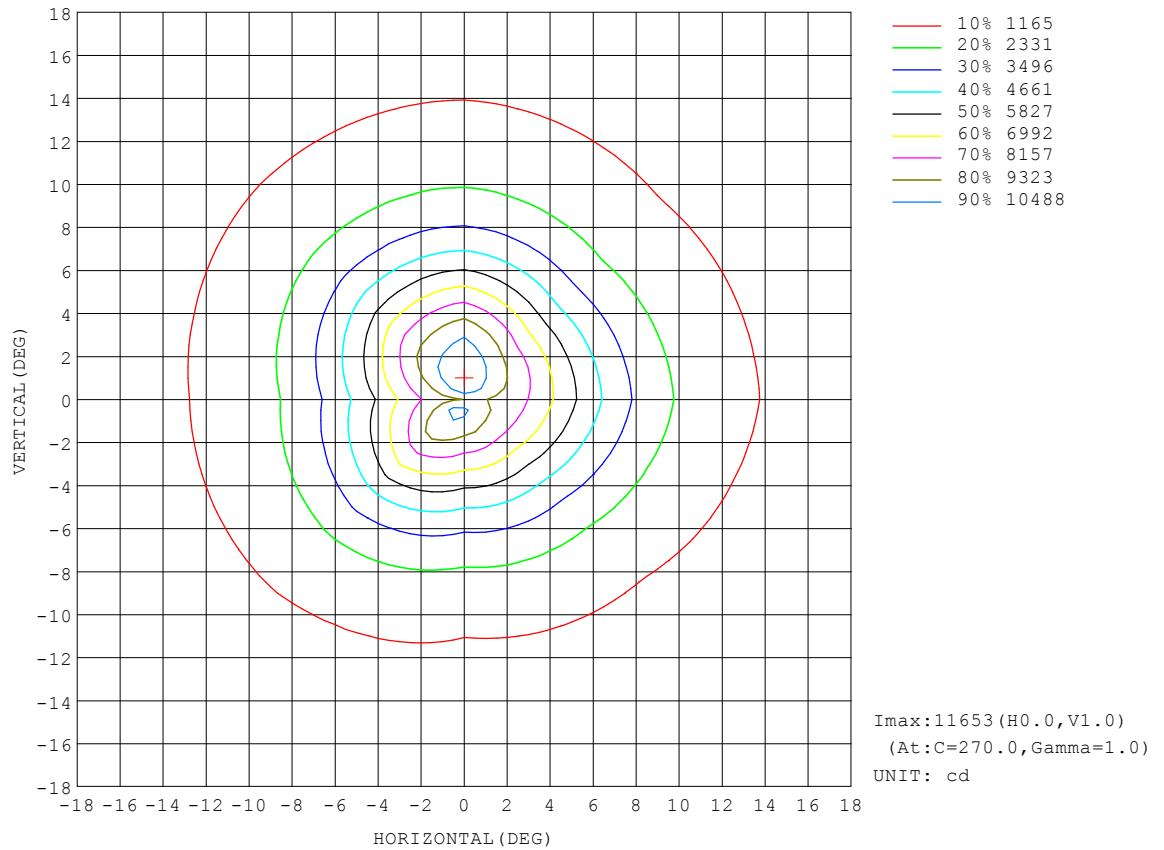


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:982.82x1 lm		
NAME: V10	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

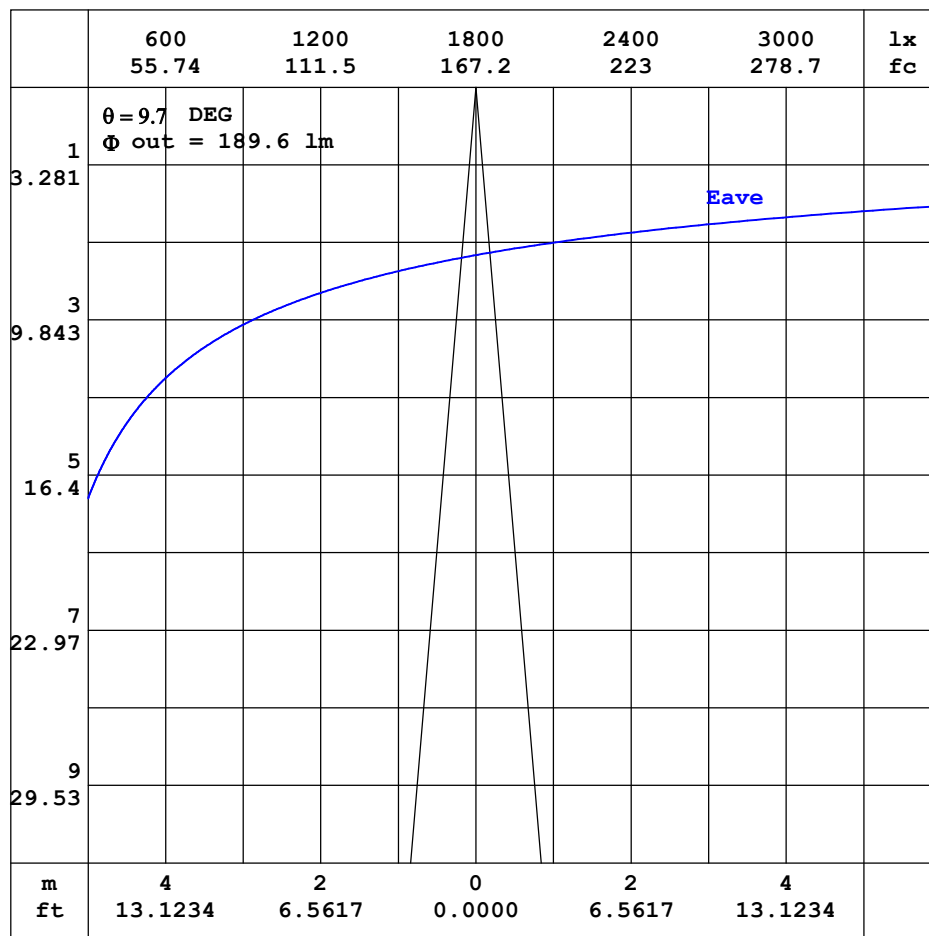


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:982.82x1 lm		
NAME: V10	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

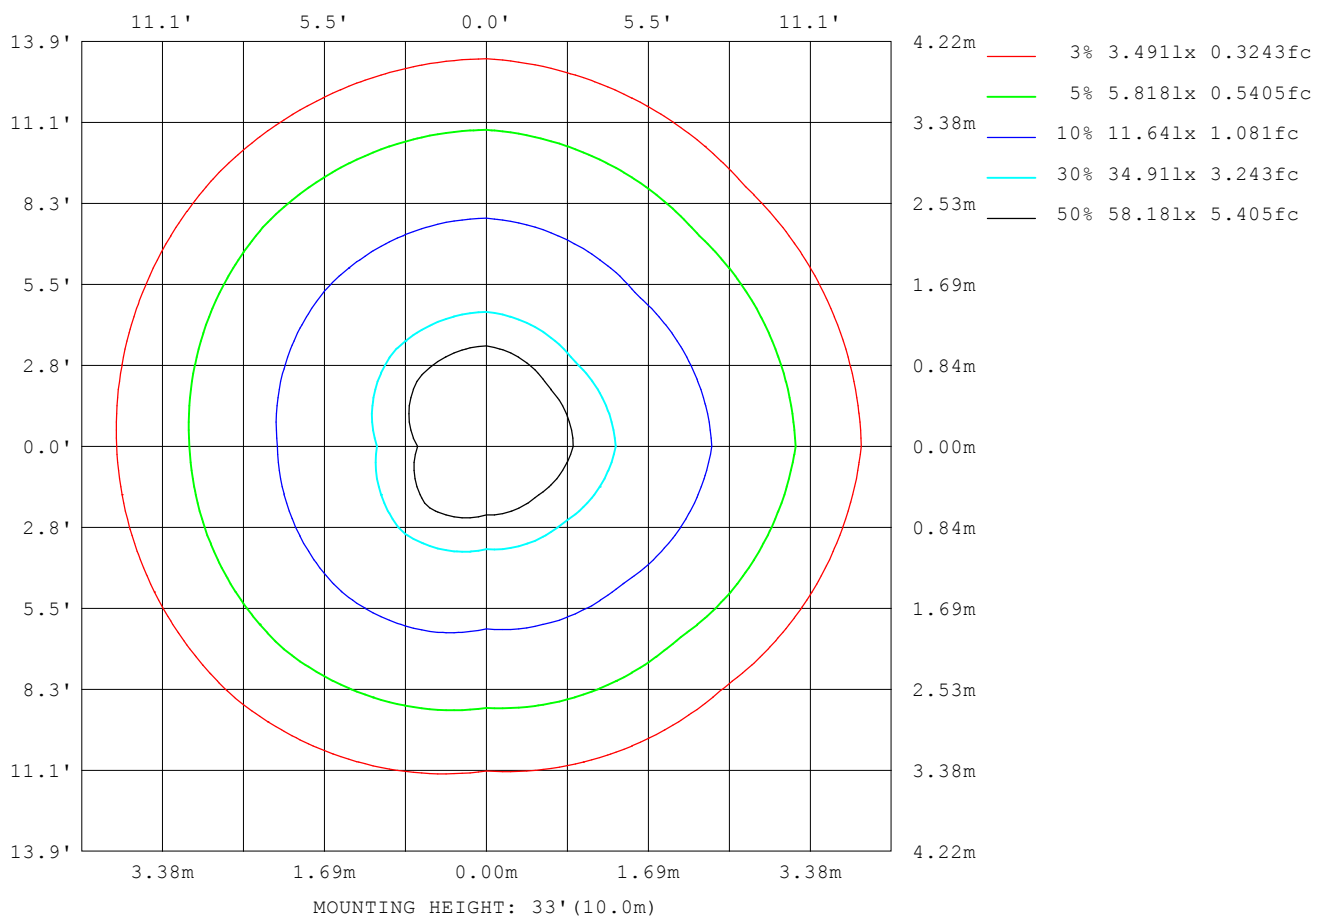

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:982.82x1 lm		
NAME: V10	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	725
L_0~180 (75) av	585
L_0~180 (85) av	579
L_90~270 (65) av	764
L_90~270 (75) av	537
L_90~270 (85) av	130
L_45 (65) av	714
L_45 (75) av	496
L_45 (85) av	342

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

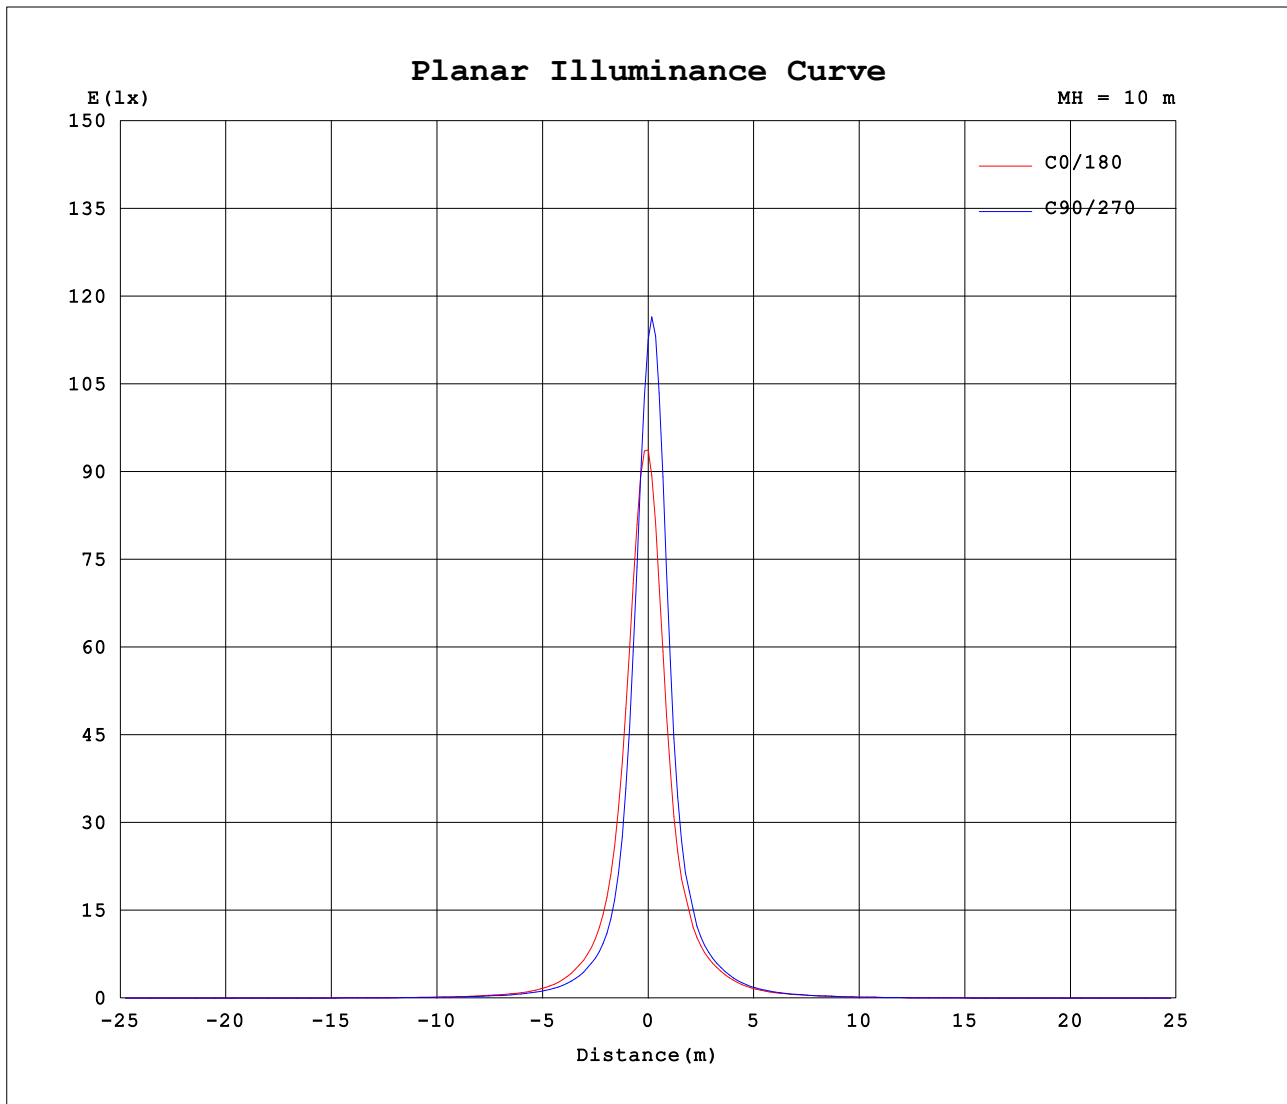

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:982.82x1 lm		
NAME: V10	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	937	1052	1127	1113	937	1052	1127	1113										
5	607	495	471	596	490	685	739	604										
10	221	165	142	193	184	220	225	193										
15	96.8	72.5	67.0	81.4	86.3	97.5	101	88.3										
20	51.0	38.9	35.1	44.2	48.7	53.2	55.4	47.7										
25	28.2	21.2	20.2	24.5	27.5	30.0	31.1	26.4										
30	16.8	13.0	12.8	15.0	16.7	18.3	19.0	16.2										
35	11.2	8.87	8.93	9.99	11.4	11.8	12.3	10.5										
40	8.03	6.60	6.53	7.21	8.16	8.18	8.57	7.36										
45	6.04	5.11	5.04	5.43	6.02	6.01	6.02	5.43										
50	4.60	4.04	4.00	4.24	4.54	4.59	4.59	4.14										
55	3.47	3.19	3.19	3.37	3.48	3.57	3.51	3.15										
60	2.60	2.46	2.55	2.65	2.65	2.75	2.75	2.39										
65	1.92	1.81	1.96	1.98	1.94	2.05	2.11	1.75										
70	1.41	1.23	1.37	1.37	1.32	1.43	1.54	1.18										
75	1.04	0.77	0.82	0.83	0.87	0.88	0.93	0.75										
80	0.64	0.43	0.34	0.47	0.53	0.50	0.41	0.41										
85	0.33	0.17	0.06	0.20	0.30	0.20	0.08	0.18										
90	0.19	0.10	0.00	0.07	0.19	0.06	0.00	0.11										
95	0.16	0.09	0.00	0.05	0.16	0.05	0.00	0.10										
100	0.16	0.09	0.00	0.05	0.12	0.05	0.00	0.09										
105	0.16	0.07	0.00	0.05	0.11	0.05	0.00	0.08										
110	0.15	0.06	0.00	0.05	0.10	0.04	0.00	0.07										
115	0.14	0.04	0.00	0.04	0.09	0.04	0.00	0.05										
120	0.13	0.04	0.00	0.03	0.07	0.04	0.00	0.04										
125	0.10	0.03	0.00	0.04	0.06	0.03	0.00	0.04										
130	0.08	0.03	0.01	0.04	0.05	0.04	0.00	0.04										
135	0.07	0.03	0.01	0.04	0.04	0.04	0.00	0.03										
140	0.06	0.03	0.01	0.04	0.05	0.04	0.01	0.03										
145	0.06	0.04	0.02	0.04	0.06	0.04	0.02	0.04										
150	0.06	0.05	0.04	0.05	0.06	0.05	0.03	0.05										
155	0.08	0.08	0.08	0.09	0.10	0.08	0.06	0.08										
160	0.11	0.11	0.11	0.13	0.13	0.12	0.10	0.12										
165	0.12	0.12	0.13	0.15	0.13	0.13	0.12	0.13										
170	0.12	0.12	0.12	0.14	0.12	0.12	0.12	0.13										
175	0.11	0.11	0.11	0.12	0.10	0.11	0.12	0.12										
180	0.10	0.10	0.11	0.12	0.10	0.10	0.11	0.12										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: