


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.0750A P:8.990W PF:0.9970 Freq:60.00Hz Lamp Flux:986.845x1 lm		
NAME: V1022	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 109.77 lm/W			
MODEL		I _{max} (cd)	5595	S/MH (C0/180)	0.40
NOMINAL POWER(W)	10W	LOR(%)	100.0	S/MH (C90/270)	0.37
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	986.84	η UP,DN (C0-180)	0.2,56.8
NOMINAL FLUX(lm)	986.845	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.2,42.8
LAMPS INSIDE	1	η up (%)	0.4	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	120.0	η down (%)	99.6	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

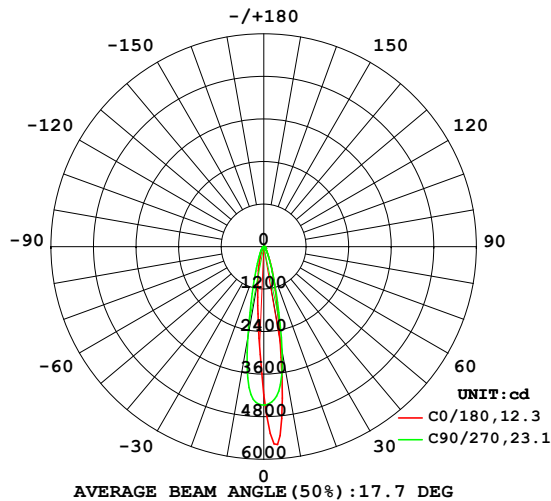

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

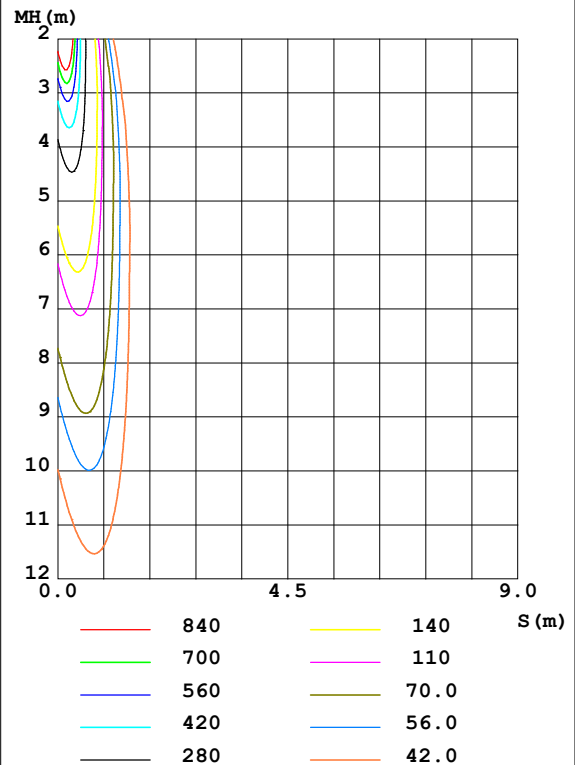

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2685	3871	2992	1549	990.0	1234	2637	2718	0- 10	320.9	320.9	32.5,32.5
20	671.8	785.7	664.0	438.4	314.5	379.7	569.5	611.1	10- 20	317.4	638.4	64.7,64.7
30	215.3	237.3	213.6	163.2	128.0	149.4	209.3	198.2	20- 30	147.3	785.6	79.6,79.6
40	95.82	100.4	96.12	78.82	67.16	75.79	96.38	89.15	30- 40	80.07	865.7	87.7,87.7
50	54.40	53.44	49.42	43.92	39.70	43.27	48.44	48.79	40- 50	49.84	915.6	92.8,92.8
60	31.96	31.25	30.24	26.60	23.25	26.57	29.92	28.31	50- 60	33.14	948.7	96.1,96.1
70	17.57	17.58	17.75	13.78	10.66	12.80	16.39	15.17	60- 70	21.52	970.2	98.3,98.3
80	9.137	6.736	4.462	4.271	3.990	3.399	3.473	5.627	70- 80	10.23	980.4	99.4,99.4
90	2.520	1.329	0	0.6122	1.852	0.5351	0	1.313	80- 90	2.663	983.1	99.6,99.6
100	1.523	1.061	0	0.5498	1.143	0.4844	0	1.102	90-100	0.9130	984.0	99.7,99.7
110	1.453	0.7409	0	0.4867	0.9346	0.4069	0	0.7800	100-110	0.7206	984.7	99.8,99.8
120	1.243	0.4697	0.0073	0.4165	0.6942	0.3536	0.0024	0.4702	110-120	0.5243	985.3	99.8,99.8
130	0.8265	0.3899	0.0387	0.4407	0.4764	0.3536	0.0388	0.3150	120-130	0.3546	985.6	99.9,99.9
140	0.6081	0.3778	0.1209	0.3463	0.4918	0.2473	0.1455	0.2714	130-140	0.2557	985.9	99.9,99.9
150	0.5546	0.4458	0.3774	0.5550	0.7178	0.6316	0.4631	0.4623	140-150	0.2482	986.1	99.9,99.9
160	0.8326	0.7728	0.7625	1.005	1.245	1.075	0.8578	0.9296	150-160	0.3342	986.5	100,100
170	1.160	1.008	0.9687	1.085	1.174	1.056	1.000	1.129	160-170	0.2919	986.7	100,100
180	1.104	0.9881	0.9784	0.9881	1.112	0.9687	0.9736	0.9857	170-180	0.0997	986.8	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.5V I:0.0750A P:8.990W PF:0.9970 Freq:60.00Hz Lamp Flux:986.845x1 lm		
NAME: V1022	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

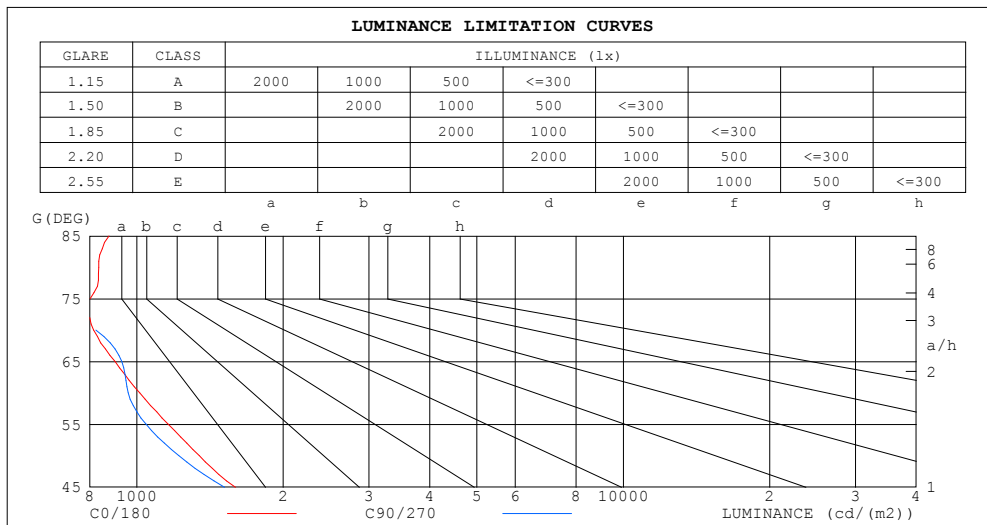

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	876	153
80	835	408
75	802	639
70	816	824
65	903	931
60	1015	960
55	1161	1045
50	1343	1220
45	1596	1514


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.5V I:0.0750A P:8.990W PF:0.9970 Freq:60.00Hz Lamp Flux:986.845x1 lm		
NAME: V1022	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.98	.97	.96	.94
2.0	1.04	1.01	.98	1.03	.99	.97	.99	.97	.94	.96	.94	.92	.94	.92	.90	.89
3.0	.99	.94	.91	.97	.93	.90	.95	.91	.88	.92	.89	.87	.90	.88	.86	.84
4.0	.94	.89	.85	.92	.88	.85	.90	.87	.84	.88	.85	.83	.87	.84	.82	.80
5.0	.89	.84	.80	.88	.84	.80	.87	.82	.79	.85	.81	.79	.83	.80	.78	.77
6.0	.85	.80	.77	.85	.80	.76	.83	.79	.76	.82	.78	.75	.81	.77	.75	.74
7.0	.82	.77	.73	.81	.77	.73	.80	.76	.73	.79	.75	.72	.78	.75	.72	.71
8.0	.79	.74	.71	.78	.74	.70	.77	.73	.70	.76	.73	.70	.75	.72	.69	.68
9.0	.76	.71	.68	.76	.71	.68	.75	.71	.68	.74	.70	.67	.73	.70	.67	.66
10.0	.74	.69	.66	.73	.69	.66	.72	.68	.65	.72	.68	.65	.71	.68	.65	.64

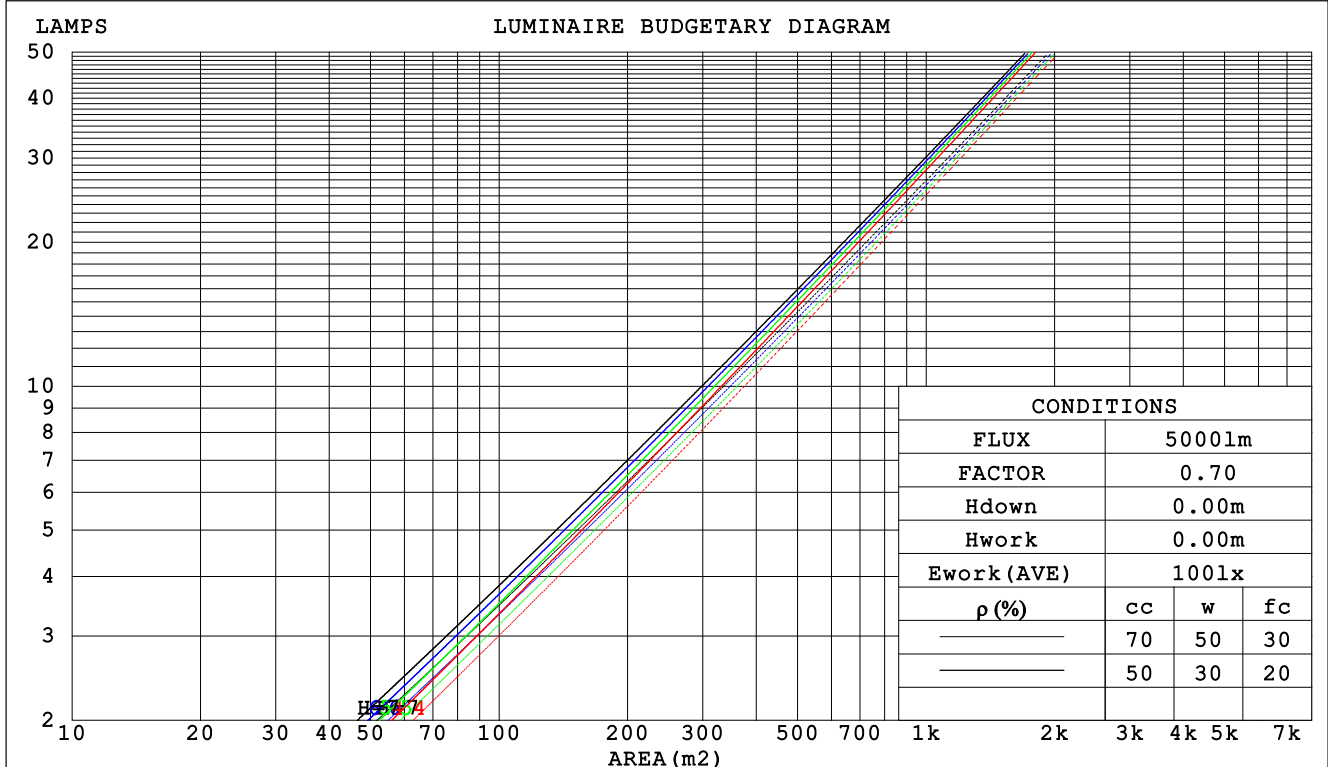

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.5V I:0.0750A P:8.990W PF:0.9970 Freq:60.00Hz Lamp Flux:986.845x1 lm					
NAME: V1022			TYPE:4000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.167	.095	.030	.160	.091	.029	.147	.085	.027	.136	.078	.025	.125	.072	.023		
2.0	.156	.086	.026	.151	.083	.026	.140	.078	.024	.130	.073	.023	.121	.069	.022		
3.0	.146	.078	.023	.141	.076	.023	.132	.072	.022	.124	.068	.021	.116	.064	.020		
4.0	.136	.071	.021	.132	.069	.020	.125	.066	.020	.117	.063	.019	.111	.060	.018		
5.0	.128	.065	.019	.124	.064	.019	.118	.061	.018	.112	.059	.018	.106	.056	.017		
6.0	.120	.060	.017	.117	.059	.017	.111	.057	.017	.106	.055	.016	.101	.053	.016		
7.0	.114	.056	.016	.111	.055	.016	.106	.053	.015	.101	.052	.015	.097	.050	.015		
8.0	.108	.053	.015	.105	.052	.015	.101	.050	.014	.096	.049	.014	.093	.047	.014		
9.0	.102	.049	.014	.100	.049	.014	.096	.047	.013	.092	.046	.013	.089	.045	.013		
10.0	.097	.047	.013	.095	.046	.013	.092	.045	.013	.088	.044	.012	.085	.043	.012		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.173	.160	.149	.148	.138	.128	.101	.095	.088	.058	.055	.051	.019	.018	.017	
2.0	.157	.135	.117	.135	.117	.101	.092	.081	.071	.053	.047	.041	.017	.015	.014	
3.0	.144	.116	.095	.123	.100	.082	.084	.070	.058	.049	.041	.034	.016	.013	.011	
4.0	.132	.101	.078	.113	.088	.068	.078	.061	.048	.045	.036	.028	.015	.012	.009	
5.0	.122	.089	.065	.105	.077	.057	.072	.054	.040	.042	.032	.024	.013	.010	.008	
6.0	.114	.080	.056	.098	.069	.048	.067	.048	.034	.039	.028	.020	.013	.009	.007	
7.0	.106	.072	.048	.091	.062	.042	.063	.044	.030	.037	.026	.018	.012	.008	.006	
8.0	.100	.065	.042	.086	.057	.036	.059	.040	.026	.035	.023	.015	.011	.008	.005	
9.0	.094	.060	.037	.081	.052	.032	.056	.036	.023	.033	.022	.014	.011	.007	.004	
10.0	.089	.055	.033	.077	.048	.028	.053	.034	.020	.031	.020	.012	.010	.007	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.5V I:0.0750A P:8.990W PF:0.9970 Freq:60.00Hz Lamp Flux:986.845x1 lm										
NAME: V1022					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.2	10.0	9.4	10.1	10.3	9.0	9.8	9.2	10.0	10.1
3H	10.0	10.8	10.3	11.0	11.2	10.0	10.7	10.2	10.9	11.1
4H	10.4	11.2	10.7	11.4	11.6	10.3	11.0	10.5	11.2	11.4
6H	10.8	11.5	11.1	11.7	12.0	10.4	11.1	10.7	11.3	11.5
8H	11.0	11.6	11.3	11.9	12.2	10.4	11.0	10.7	11.3	11.6
12H	11.1	11.7	11.4	12.0	12.3	10.3	11.0	10.7	11.2	11.5
4H 2H	9.5	10.2	9.8	10.4	10.7	9.4	10.1	9.7	10.3	10.5
3H	10.6	11.2	10.9	11.5	11.7	10.5	11.1	10.8	11.4	11.7
4H	11.1	11.7	11.4	12.0	12.3	10.9	11.5	11.3	11.8	12.1
6H	11.6	12.1	12.0	12.4	12.8	11.1	11.6	11.5	11.9	12.3
8H	11.8	12.3	12.2	12.6	13.0	11.1	11.6	11.5	11.9	12.3
12H	12.0	12.4	12.4	12.8	13.2	11.1	11.5	11.5	11.9	12.3
8H 4H	11.2	11.7	11.6	12.0	12.4	11.0	11.5	11.4	11.9	12.2
6H	11.8	12.2	12.3	12.6	13.0	11.3	11.7	11.7	12.1	12.5
8H	12.1	12.5	12.6	12.9	13.3	11.4	11.7	11.8	12.1	12.6
12H	12.4	12.7	12.9	13.1	13.6	11.4	11.7	11.8	12.1	12.6
12H 4H	11.2	11.6	11.6	12.0	12.4	11.0	11.5	11.4	11.8	12.2
6H	11.8	12.2	12.3	12.6	13.1	11.3	11.7	11.8	12.1	12.6
8H	12.2	12.5	12.6	12.9	13.4	11.4	11.7	11.9	12.2	12.6
Variations with the observer position at spacings:										
S = 1.0H	+ 0.4 / - 0.5					+ 0.5 / - 0.7				
1.5H	+ 0.4 / - 0.3					+ 0.6 / - 0.6				
2.0H	+ 0.6 / - 0.4					+ 0.8 / - 0.6				

CIE Pub.117 Corrected 986.8 lm Total Lamp Luminous Flux.(8log(F/F0) = -0.0)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.0750A P:8.990W PF:0.9970 Freq:60.00Hz Lamp Flux:986.845x1 lm		
NAME: V1022	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	84	77	73	83	77	73	83	76	73	69
0.80	92	85	81	91	85	81	90	84	80	76
1.00	96	90	86	96	90	86	94	90	85	81
1.25	101	95	91	100	94	91	98	93	90	85
1.50	104	98	95	102	98	94	100	96	93	88
2.00	107	102	99	105	101	98	103	99	96	91
2.50	109	105	101	107	103	100	104	101	98	92
3.00	111	107	104	109	105	103	105	103	100	94
4.00	113	110	107	111	108	106	107	105	103	96
5.00	114	112	110	112	110	108	108	106	105	97
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.0750A P:8.990W PF:0.9970 Freq:60.00Hz Lamp Flux:986.845x1 lm		
NAME: V1022	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

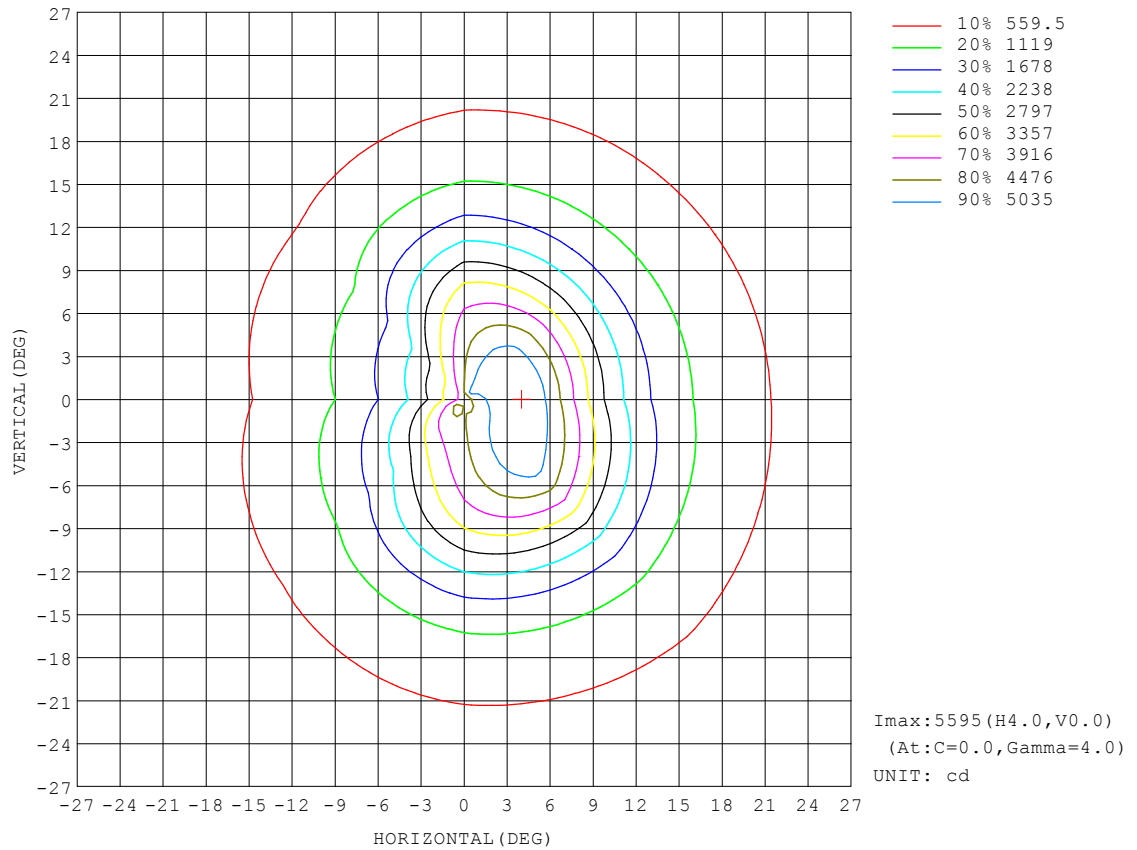


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:119.5V I:0.0750A P:8.990W PF:0.9970 Freq:60.00Hz Lamp Flux:986.845x1 lm		
NAME: V1022	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

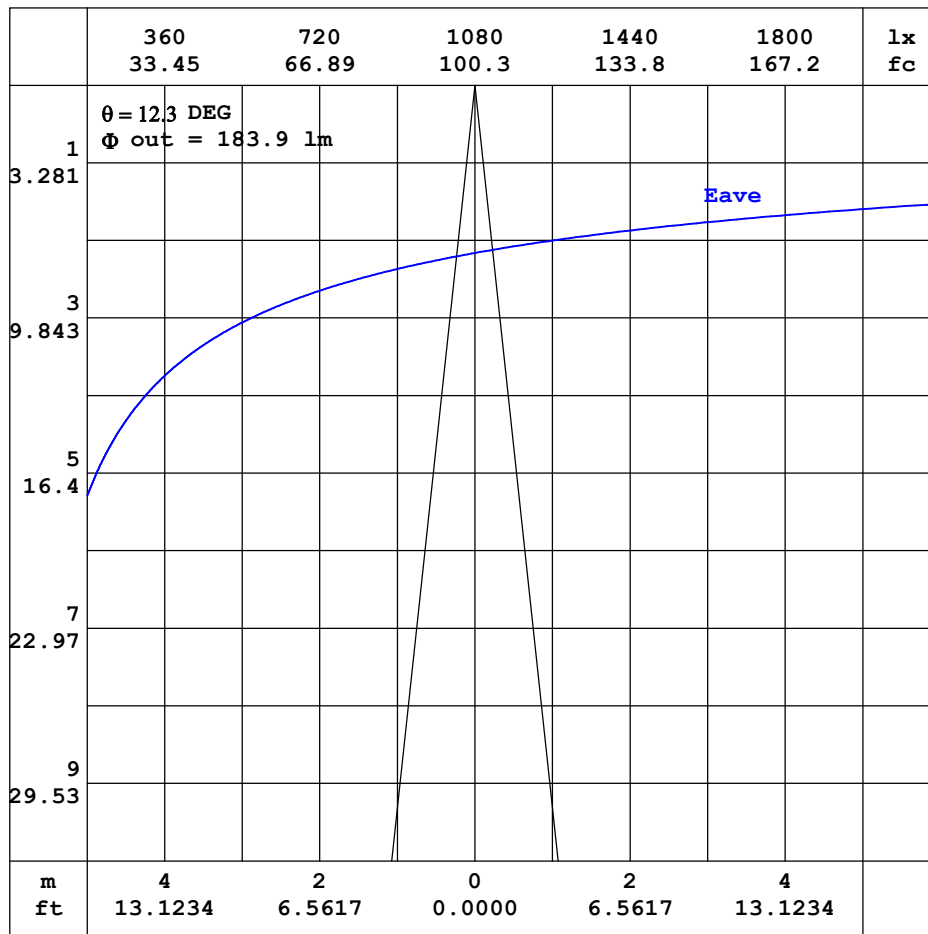


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.5V I:0.0750A P:8.990W PF:0.9970 Freq:60.00Hz Lamp Flux:986.845x1 lm		
NAME: V1022	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

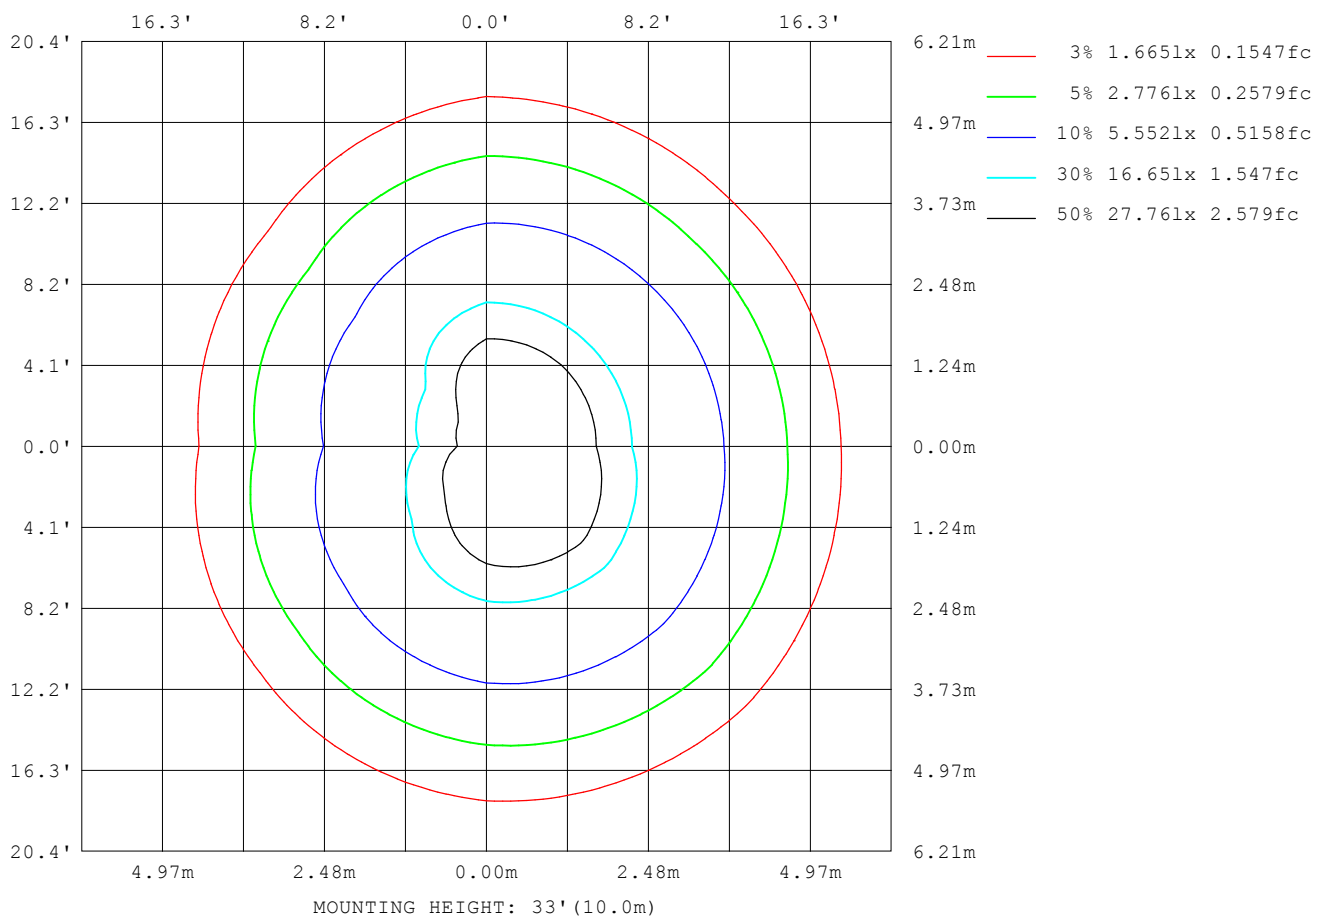

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.5V I:0.0750A P:8.990W PF:0.9970 Freq:60.00Hz Lamp Flux:986.845x1 lm		
NAME: V1022	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	758
L_0~180 (75) av	600
L_0~180 (85) av	648
L_90~270 (65) av	909
L_90~270 (75) av	595
L_90~270 (85) av	115
L_45 (65) av	797
L_45 (75) av	553
L_45 (85) av	382

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

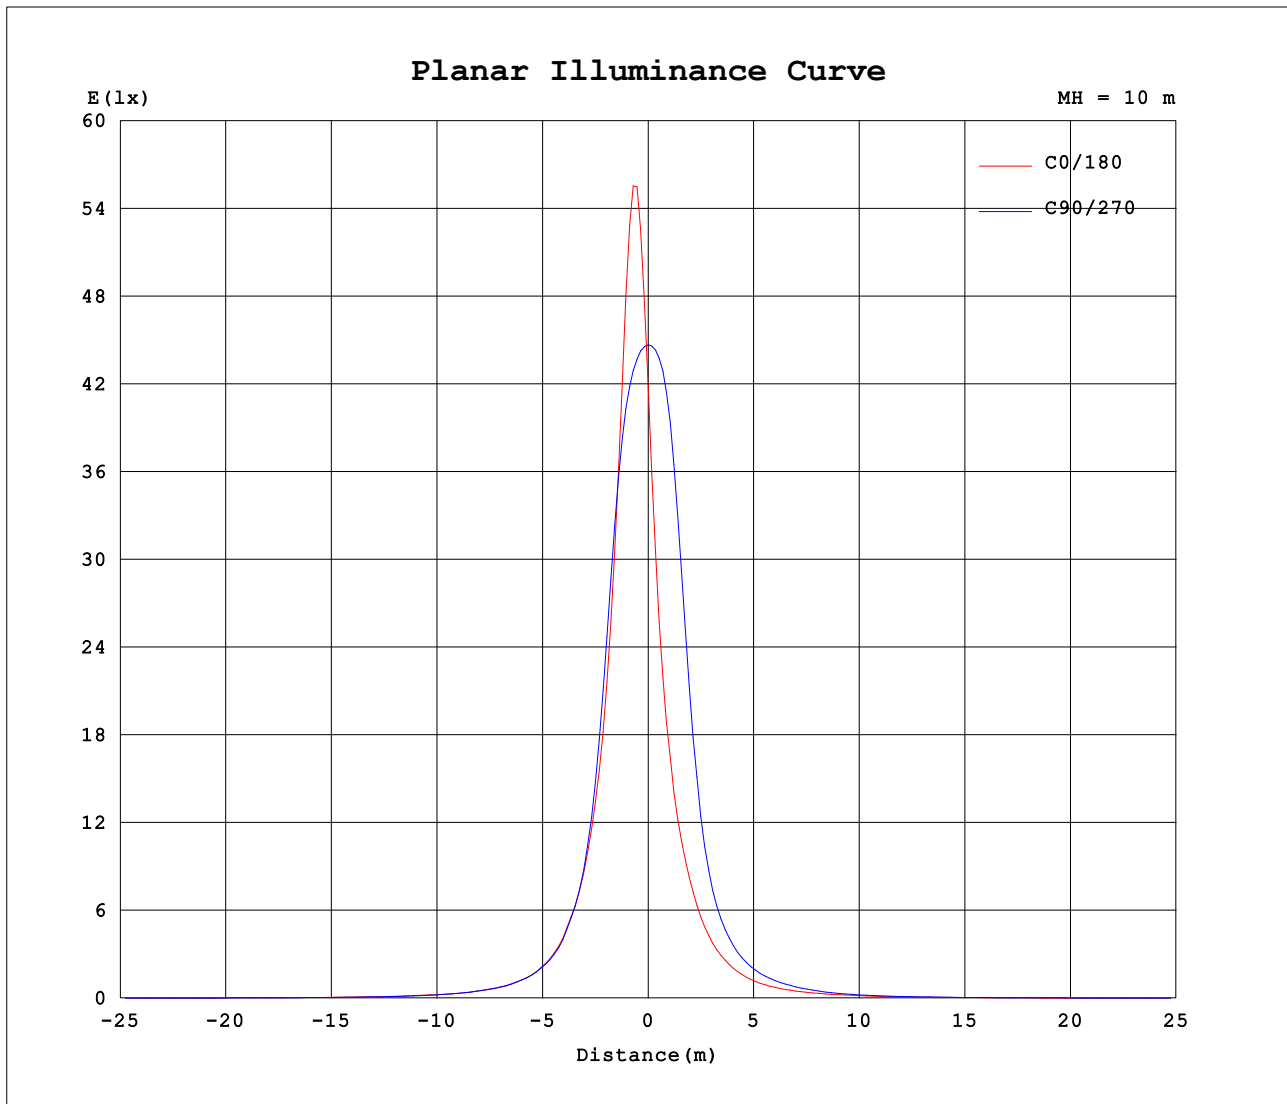

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.0750A P:8.990W PF:0.9970 Freq:60.00Hz Lamp Flux:986.845x1 lm								
NAME: V1022					TYPE:4000K			WEIGHT:
SPEC.:					DIM.:			SERIAL No.:
MFR.: EVERFINE					SUR.:			Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	4180	4085	4468	5010	4180	4085	4468	5010										
5	5348	5489	4233	2903	1904	2260	4189	5099										
10	2685	3871	2992	1549	990	1234	2637	2718										
15	1283	1719	1371	811	543	684	1155	1195										
20	672	786	664	438	315	380	569	611										
25	361	412	353	257	193	229	328	329										
30	215	237	214	163	128	149	209	198										
35	136	149	141	109	90.8	104	143	128										
40	95.8	100	96.1	78.8	67.2	75.8	96.4	89.1										
45	71.1	72.2	67.5	58.1	51.0	56.3	67.2	65.4										
50	54.4	53.4	49.4	43.9	39.7	43.3	48.4	48.8										
55	42.0	40.5	37.7	34.1	30.8	33.9	36.9	36.9										
60	32.0	31.2	30.2	26.6	23.2	26.6	29.9	28.3										
65	24.0	24.0	24.8	20.0	16.4	19.5	23.6	21.3										
70	17.6	17.6	17.8	13.8	10.7	12.8	16.4	15.2										
75	13.1	11.5	10.4	8.02	6.48	7.00	8.97	9.53										
80	9.14	6.74	4.46	4.27	3.99	3.40	3.47	5.63										
85	4.81	3.23	0.84	1.64	2.30	1.10	0.42	2.44										
90	2.52	1.33	0.00	0.61	1.85	0.54	0.00	1.31										
95	1.62	1.13	0.00	0.57	1.48	0.52	0.00	1.24										
100	1.52	1.06	0.00	0.55	1.14	0.48	0.00	1.10										
105	1.57	0.94	0.00	0.54	1.03	0.47	0.00	0.97										
110	1.45	0.74	0.00	0.49	0.93	0.41	0.00	0.78										
115	1.36	0.62	0.00	0.44	0.78	0.39	0.00	0.63										
120	1.24	0.47	0.01	0.42	0.69	0.35	0.00	0.47										
125	1.04	0.41	0.03	0.43	0.50	0.31	0.01	0.37										
130	0.83	0.39	0.04	0.44	0.48	0.35	0.04	0.32										
135	0.68	0.38	0.07	0.39	0.39	0.28	0.07	0.31										
140	0.61	0.38	0.12	0.35	0.49	0.25	0.15	0.27										
145	0.57	0.39	0.22	0.39	0.52	0.39	0.26	0.33										
150	0.55	0.45	0.38	0.55	0.72	0.63	0.46	0.46										
155	0.63	0.59	0.57	0.78	1.07	0.90	0.67	0.68										
160	0.83	0.77	0.76	1.01	1.24	1.08	0.86	0.93										
165	1.04	0.92	0.91	1.12	1.25	1.13	0.98	1.09										
170	1.16	1.01	0.97	1.08	1.17	1.06	1.00	1.13										
175	1.16	1.01	0.96	1.00	1.05	0.98	0.99	1.06										
180	1.10	0.99	0.98	0.99	1.11	0.97	0.97	0.99										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: