


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:916.701x1 lm		
NAME: V12	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 102.08 lm/W			
MODEL		I _{max} (cd)	4948	S/MH (C0/180)	0.33
NOMINAL POWER (W)	10W	LOR (%)	100.0	S/MH (C90/270)	0.29
RATED VOLTAGE (V)	120.0	TOTAL FLUX (lm)	916.70	η UP, DN (C0-180)	0.3, 48.7
NOMINAL FLUX (lm)	916.701	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.3, 50.7
LAMPS INSIDE	1	η up (%)	0.6	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	120.0	η down (%)	99.4	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

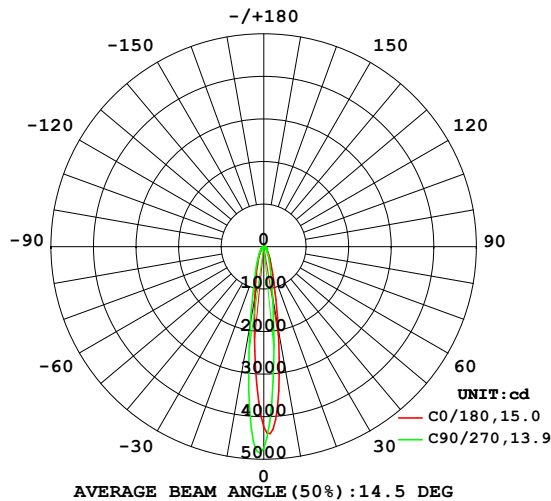

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

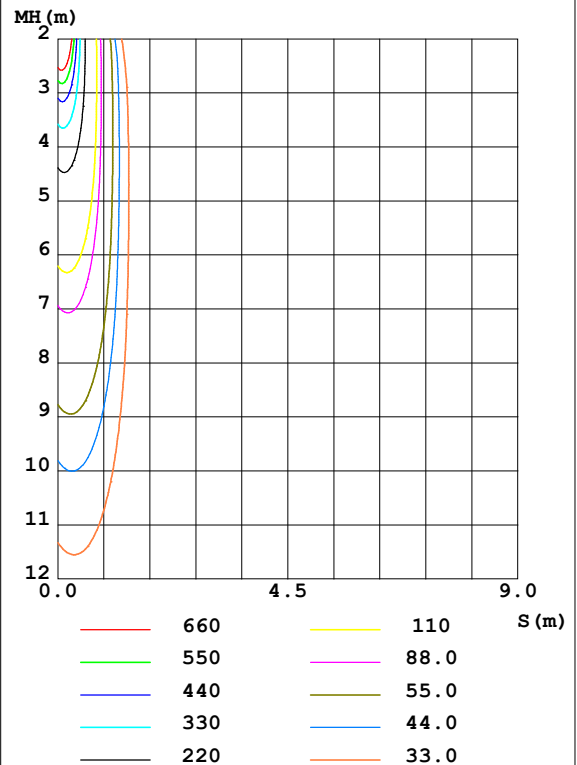

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1970	1439	1214	1331	1226	1484	1858	1820	0- 10	250.8	250.8	27.4,27.4
20	570.0	459.5	409.1	438.3	439.1	479.1	536.2	523.7	10- 20	230.8	481.7	52.5,52.5
30	251.3	208.1	189.0	200.4	202.7	216.2	234.6	228.7	20- 30	147.5	629.2	68.6,68.6
40	130.8	114.6	109.4	110.7	113.3	118.0	124.8	121.2	30- 40	99.05	728.2	79.4,79.4
50	81.38	74.63	71.02	72.19	71.71	75.73	76.41	75.10	40- 50	72.30	800.5	87.3,87.3
60	49.78	48.38	46.51	47.26	44.34	49.03	49.74	47.19	50- 60	54.27	854.8	93.2,93.2
70	27.34	24.82	24.47	23.52	20.98	24.74	27.87	24.08	60- 70	35.55	890.3	97.1,97.1
80	13.46	8.735	5.818	7.288	8.134	7.789	7.523	8.809	70- 80	16.66	907.0	98.9,98.9
90	3.662	1.794	0	1.055	3.002	0.9874	0	2.040	80- 90	4.295	911.3	99.4,99.4
100	2.647	1.598	0	0.9809	2.017	0.8428	0	1.747	90-100	1.486	912.8	99.6,99.6
110	2.480	1.063	0	0.8645	1.189	0.4868	0.0001	1.180	100-110	1.157	913.9	99.7,99.7
120	2.037	0.7095	0.0484	0.6152	0.8861	0.2489	0.0242	0.7679	110-120	0.7869	914.7	99.8,99.8
130	1.321	0.6151	0.0993	0.6949	0.6270	0.4238	0.0655	0.6225	120-130	0.5499	915.3	99.8,99.8
140	1.005	0.5788	0.1887	0.5546	0.5356	0.3512	0.1357	0.5425	130-140	0.4015	915.7	99.9,99.9
150	0.8501	0.5813	0.4017	0.6858	0.7103	0.5713	0.3275	0.5545	140-150	0.3223	916.0	99.9,99.9
160	0.9274	0.8211	0.7820	1.129	1.126	0.9394	0.7489	0.8571	150-160	0.3423	916.3	100,100
170	0.9640	0.8839	0.8912	1.174	1.022	0.9471	0.9178	0.9759	160-170	0.2747	916.6	100,100
180	0.8718	0.8186	0.9009	0.9711	0.8573	0.8016	0.8840	0.8985	170-180	0.0889	916.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:916.701x1 lm		
NAME: V12	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

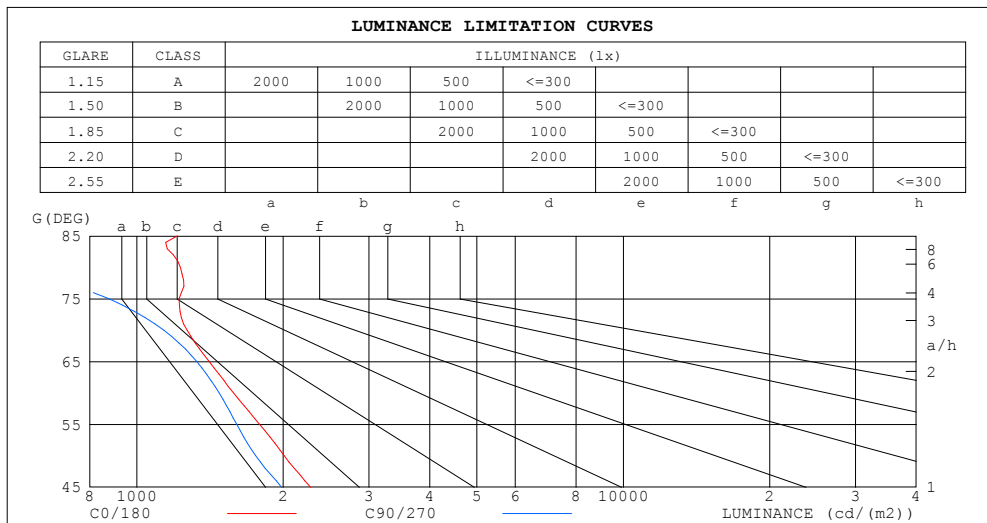

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1211	181
80	1230	532
75	1222	876
70	1269	1136
65	1408	1328
60	1580	1477
55	1788	1606
50	2010	1754
45	2277	1985


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:916.701x1 lm		
NAME: V12	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.10	1.07	1.05	1.08	1.05	1.03	1.03	1.02	.00	.00	.98	.97	.96	.95	.94	.92
2.0	1.02	.98	.94	1.00	.96	.93	.97	.93	.91	.94	.91	.89	.91	.89	.87	.85
3.0	.95	.90	.86	.94	.89	.85	.91	.87	.84	.88	.85	.82	.86	.83	.81	.79
4.0	.89	.83	.79	.88	.83	.79	.86	.81	.78	.84	.80	.77	.82	.78	.76	.74
5.0	.84	.78	.74	.83	.78	.74	.81	.76	.73	.79	.75	.72	.78	.74	.71	.70
6.0	.80	.74	.70	.79	.73	.69	.77	.72	.69	.76	.72	.68	.74	.71	.68	.66
7.0	.76	.70	.66	.75	.70	.66	.74	.69	.65	.73	.68	.65	.71	.68	.65	.63
8.0	.72	.67	.63	.72	.66	.63	.71	.66	.62	.70	.65	.62	.69	.65	.62	.61
9.0	.69	.64	.60	.69	.64	.60	.68	.63	.60	.67	.63	.60	.66	.62	.59	.58
10.0	.67	.61	.58	.66	.61	.58	.65	.61	.57	.65	.60	.57	.64	.60	.57	.56

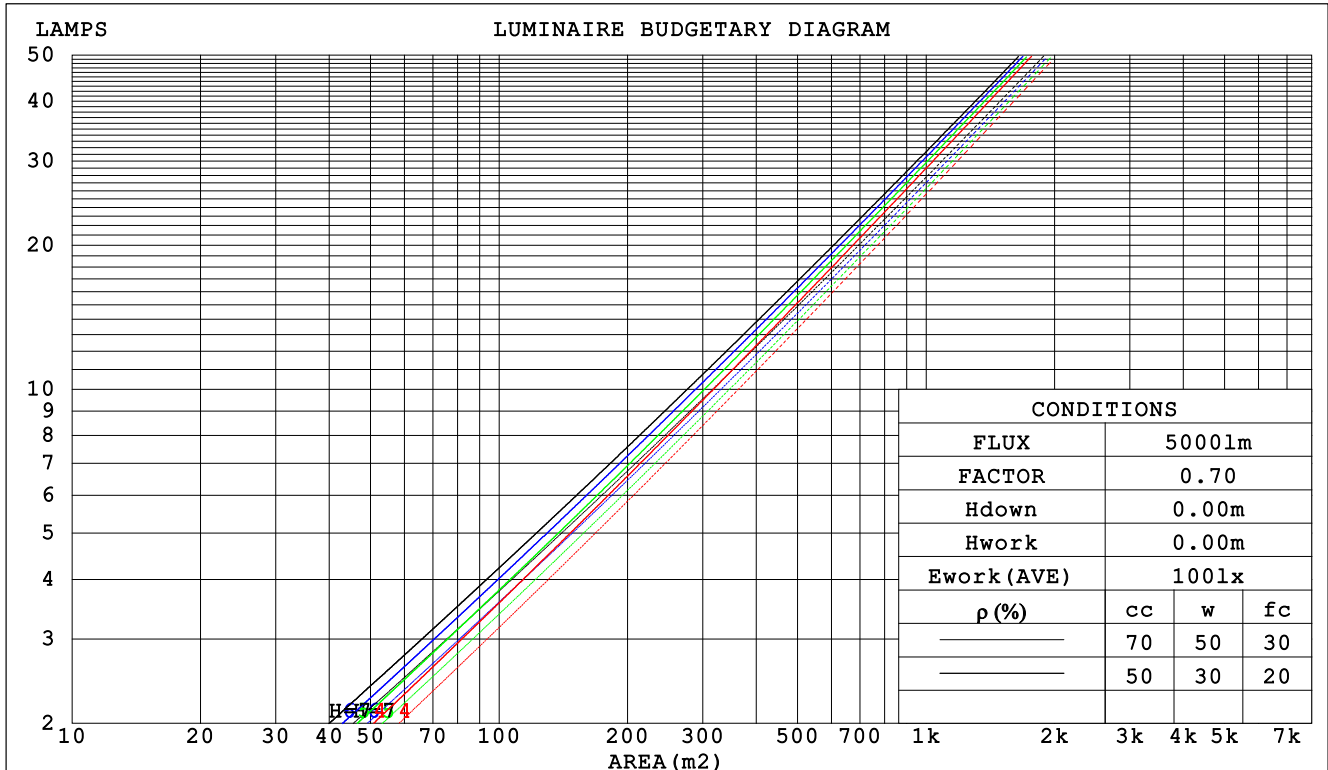

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:916.701x1 lm					
NAME: V12			TYPE:4000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.192	.109	.035	.185	.106	.034	.172	.099	.032	.160	.092	.030	.149	.086	.028		
2.0	.181	.099	.030	.175	.097	.030	.164	.091	.028	.154	.086	.027	.145	.082	.026		
3.0	.169	.090	.027	.164	.088	.026	.155	.084	.025	.146	.080	.025	.138	.076	.024		
4.0	.158	.082	.024	.154	.080	.024	.145	.077	.023	.138	.074	.022	.131	.071	.022		
5.0	.148	.075	.022	.144	.074	.022	.137	.071	.021	.130	.069	.020	.124	.066	.020		
6.0	.139	.069	.020	.135	.068	.020	.129	.066	.019	.123	.064	.019	.118	.062	.018		
7.0	.130	.064	.018	.128	.064	.018	.122	.062	.018	.117	.060	.017	.112	.058	.017		
8.0	.123	.060	.017	.121	.059	.017	.116	.058	.017	.111	.056	.016	.107	.055	.016		
9.0	.116	.056	.016	.114	.056	.016	.110	.054	.015	.106	.053	.015	.102	.052	.015		
10.0	.111	.053	.015	.108	.052	.015	.105	.051	.014	.101	.050	.014	.097	.049	.014		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.195	.195	.195	.167	.167	.167	.114	.114	.114	.065	.065	.065	.021	.021	.021	
1.0	.177	.162	.148	.151	.139	.128	.103	.095	.088	.060	.055	.051	.019	.018	.017	
2.0	.162	.137	.116	.139	.118	.100	.095	.082	.070	.055	.047	.041	.018	.015	.013	
3.0	.150	.118	.093	.128	.102	.081	.088	.071	.057	.051	.041	.033	.016	.013	.011	
4.0	.139	.104	.077	.119	.089	.066	.082	.062	.047	.047	.037	.028	.015	.012	.009	
5.0	.130	.092	.064	.111	.080	.056	.077	.056	.039	.044	.033	.023	.014	.011	.008	
6.0	.121	.083	.055	.104	.071	.048	.072	.050	.034	.042	.029	.020	.013	.010	.007	
7.0	.114	.075	.047	.098	.065	.041	.068	.045	.029	.039	.027	.017	.013	.009	.006	
8.0	.108	.068	.041	.093	.059	.036	.064	.042	.026	.037	.025	.015	.012	.008	.005	
9.0	.102	.063	.037	.088	.055	.032	.061	.038	.023	.035	.023	.014	.011	.007	.004	
10.0	.097	.058	.033	.083	.051	.029	.058	.036	.020	.034	.021	.012	.011	.007	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:916.701x1 lm										
NAME: V12					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	11.9	12.8	12.1	13.0	13.1	11.4	12.3	11.6	12.5	12.7
3H	12.9	13.7	13.1	13.9	14.1	12.4	13.3	12.7	13.5	13.7
4H	13.3	14.1	13.6	14.3	14.6	12.7	13.5	13.0	13.7	14.0
6H	13.7	14.5	14.0	14.7	15.0	12.8	13.6	13.1	13.8	14.1
8H	13.8	14.6	14.1	14.8	15.1	12.8	13.5	13.1	13.8	14.1
12H	13.9	14.6	14.2	14.9	15.2	12.7	13.5	13.1	13.7	14.0
4H 2H	12.3	13.1	12.5	13.3	13.5	11.9	12.7	12.2	12.9	13.2
3H	13.4	14.1	13.7	14.4	14.7	13.0	13.7	13.3	14.0	14.3
4H	13.9	14.6	14.3	14.9	15.2	13.4	14.0	13.7	14.4	14.7
6H	14.4	15.0	14.8	15.4	15.7	13.5	14.1	13.9	14.5	14.8
8H	14.6	15.2	15.0	15.5	15.9	13.6	14.1	14.0	14.5	14.8
12H	14.8	15.3	15.2	15.7	16.1	13.5	14.0	13.9	14.4	14.8
8H 4H	14.0	14.6	14.4	14.9	15.3	13.5	14.1	13.9	14.4	14.8
6H	14.6	15.1	15.1	15.5	15.9	13.8	14.2	14.2	14.6	15.0
8H	14.9	15.3	15.3	15.7	16.2	13.8	14.2	14.2	14.6	15.1
12H	15.1	15.4	15.6	15.9	16.4	13.8	14.1	14.2	14.6	15.1
12H 4H	14.0	14.5	14.4	14.9	15.3	13.5	14.0	13.9	14.4	14.8
6H	14.6	15.0	15.1	15.5	15.9	13.8	14.2	14.2	14.6	15.1
8H	14.9	15.2	15.4	15.7	16.2	13.8	14.2	14.3	14.6	15.1
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.5				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.5 / - 0.4					+ 0.4 / - 0.5				

CIE Pub.117 Corrected 916.7 lm Total Lamp Luminous Flux.(8log(F/F0) = -0.3)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:916.701x1 lm		
NAME: V12	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	71	66	78	71	66	77	70	66	62
0.80	87	79	75	86	79	75	85	78	74	70
1.00	93	85	81	92	85	80	90	85	80	75
1.25	97	91	86	96	90	86	94	89	85	80
1.50	101	95	90	99	94	90	97	92	89	83
2.00	105	99	95	103	98	94	100	96	93	87
2.50	107	102	98	105	101	97	102	98	95	89
3.00	109	105	101	107	103	100	103	100	98	91
4.00	112	108	105	109	106	104	106	103	101	93
5.00	113	110	108	111	108	106	107	105	103	95
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:916.701x1 lm		
NAME: V12	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

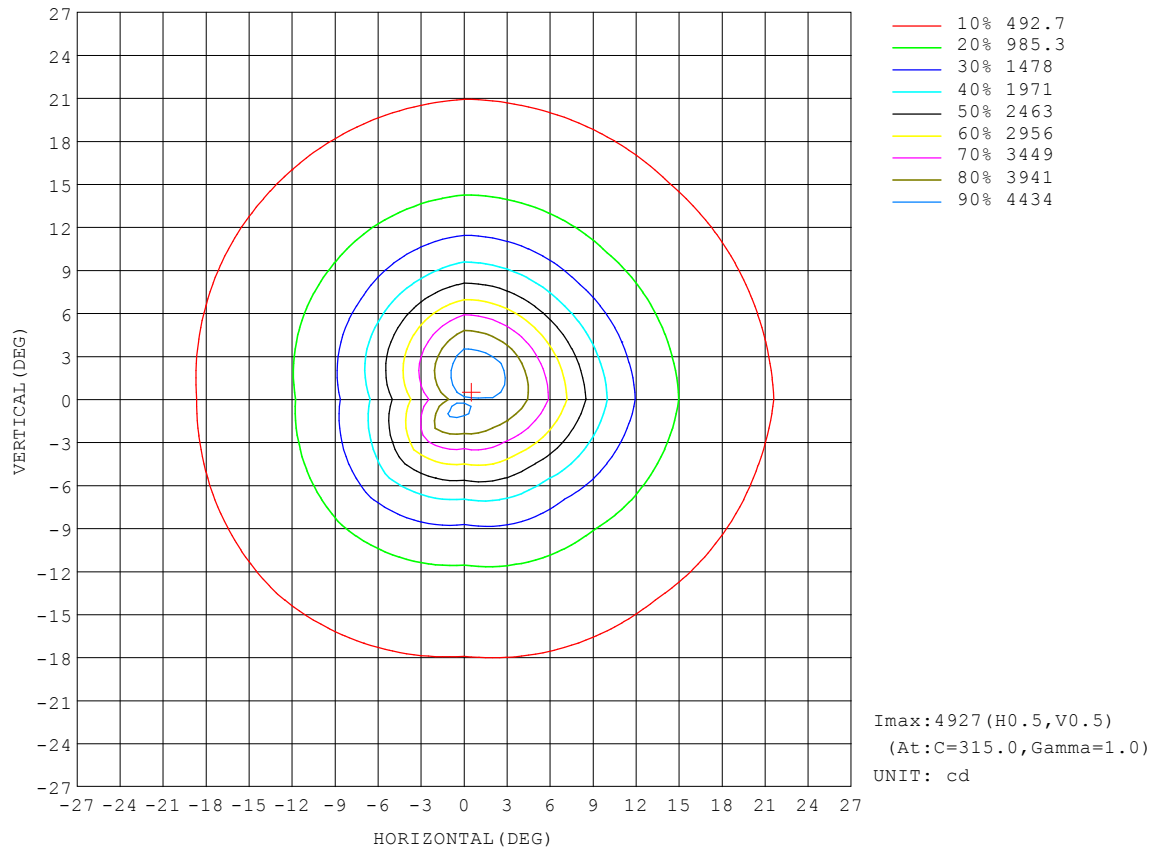


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:916.701x1 lm		
NAME: V12	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

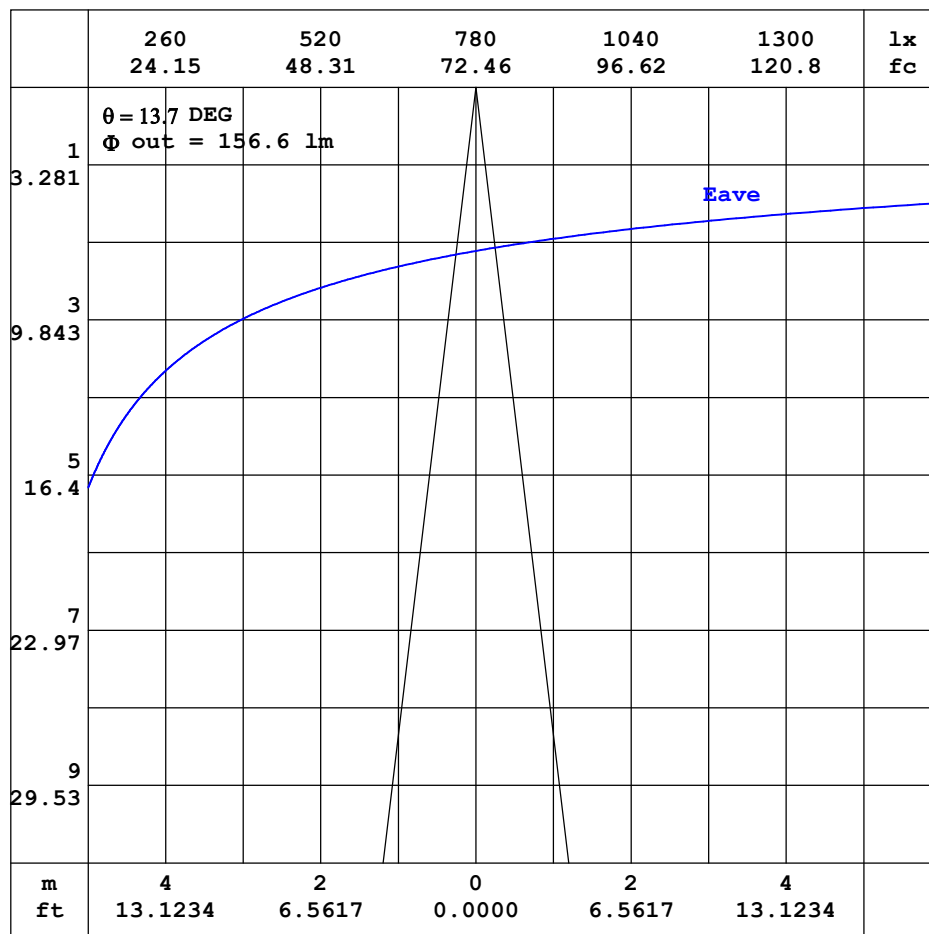


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:916.701x1 lm		
NAME: V12	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

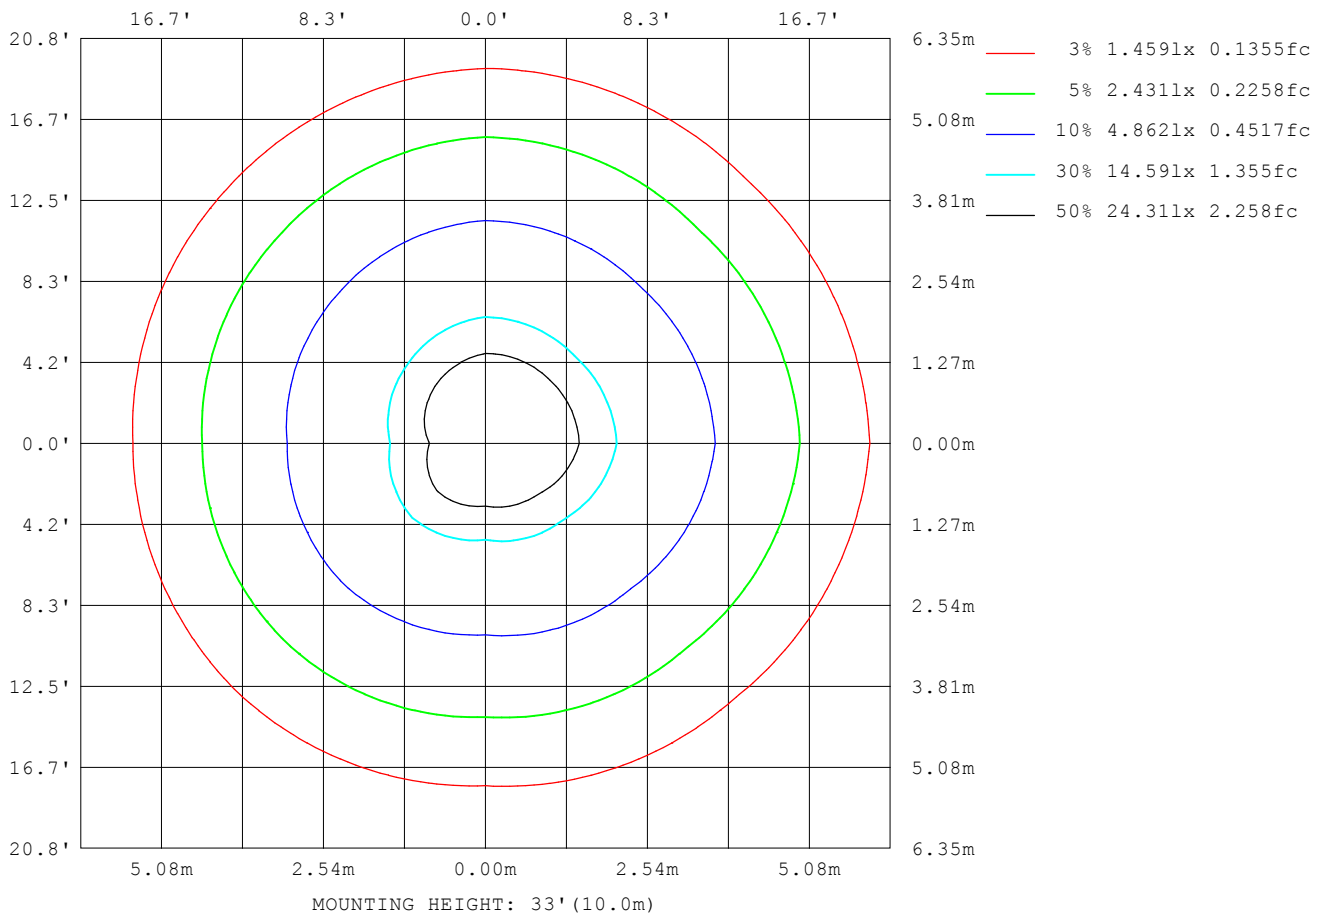

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:916.701x1 lm		
NAME: V12	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1302
L_0~180 (75) av	1014
L_0~180 (85) av	1003
L_90~270 (65) av	1388
L_90~270 (75) av	954
L_90~270 (85) av	225
L_45 (65) av	1345
L_45 (75) av	902
L_45 (85) av	602

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

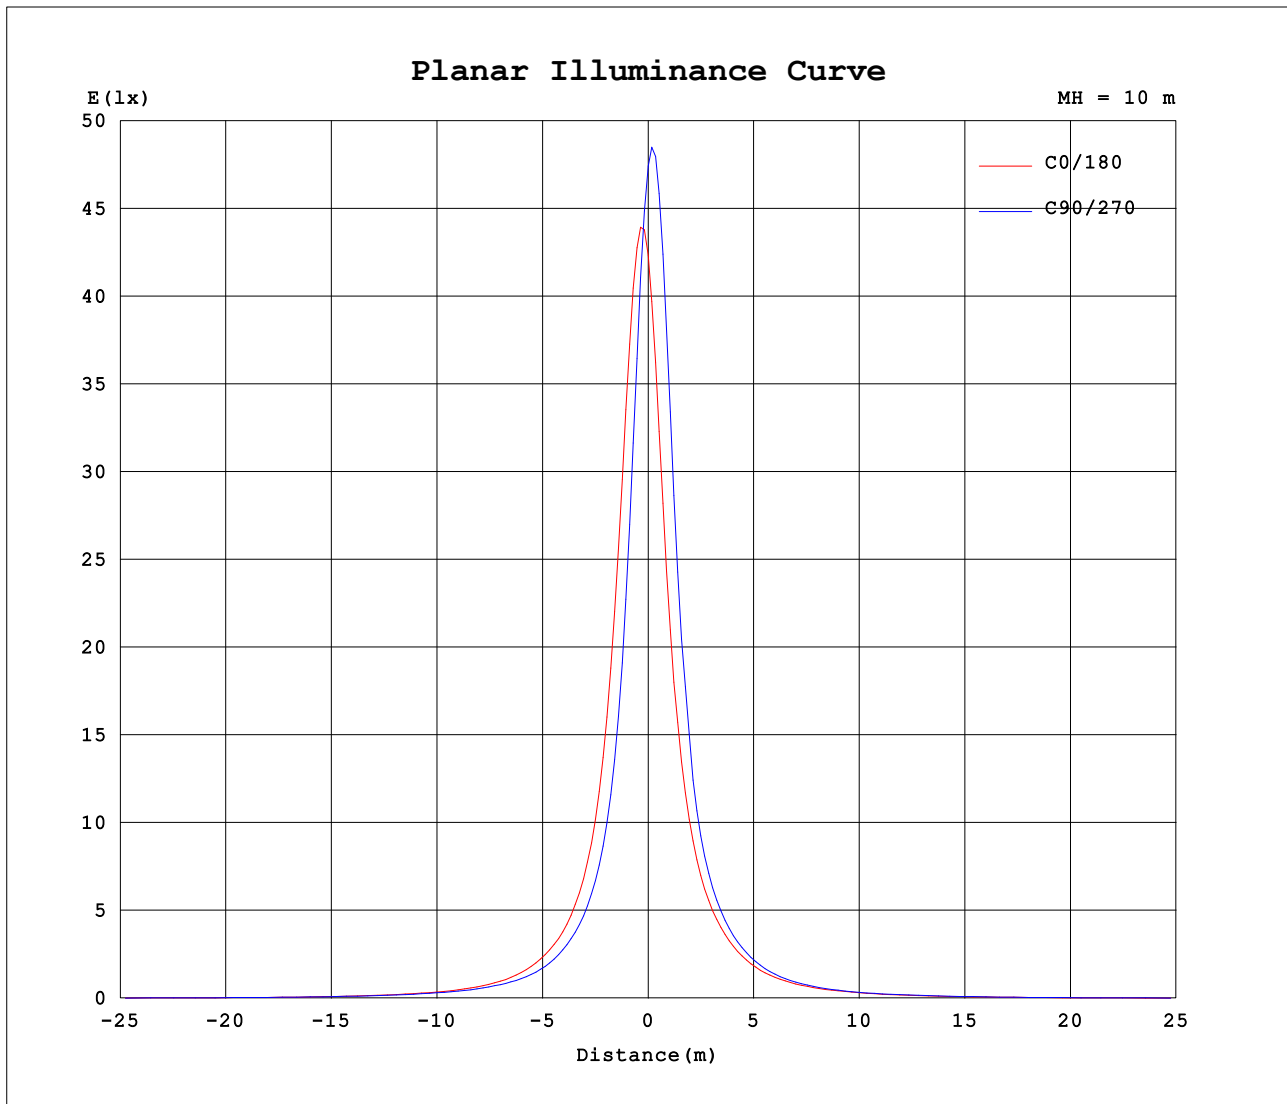

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:916.701x1 lm								
NAME: V12				TYPE:4000K				WEIGHT:
SPEC.:				DIM.:				SERIAL No.:
MFR.: EVERFINE				SUR.:				Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	4234	4477	4742	4875	4234	4477	4742	4875										
5	3770	3090	2730	2941	2466	3130	3857	3866										
10	1970	1439	1214	1331	1226	1484	1858	1820										
15	983	756	663	712	691	786	899	896										
20	570	460	409	438	439	479	536	524										
25	371	301	271	289	293	314	349	337										
30	251	208	189	200	203	216	235	229										
35	176	152	142	146	149	156	166	163										
40	131	115	109	111	113	118	125	121										
45	101	91.5	88.4	88.2	89.3	93.2	96.3	94.3										
50	81.4	74.6	71.0	72.2	71.7	75.7	76.4	75.1										
55	64.6	61.0	58.0	59.3	57.5	61.6	61.7	60.0										
60	49.8	48.4	46.5	47.3	44.3	49.0	49.7	47.2										
65	37.5	36.4	35.4	35.1	31.9	36.6	38.6	35.2										
70	27.3	24.8	24.5	23.5	21.0	24.7	27.9	24.1										
75	19.9	15.3	14.3	13.7	13.1	14.7	16.8	15.1										
80	13.5	8.74	5.82	7.29	8.13	7.79	7.52	8.81										
85	6.65	3.52	1.00	2.77	4.37	3.08	1.47	3.86										
90	3.66	1.79	0.00	1.06	3.00	0.99	0.00	2.04										
95	2.65	1.73	0.00	1.00	2.66	0.88	0.00	1.91										
100	2.65	1.60	0.00	0.98	2.02	0.84	0.00	1.75										
105	2.66	1.33	0.00	0.98	1.79	0.59	0.00	1.50										
110	2.48	1.06	0.00	0.86	1.19	0.49	0.00	1.18										
115	2.26	0.84	0.03	0.71	1.01	0.45	0.01	0.95										
120	2.04	0.71	0.05	0.62	0.89	0.25	0.02	0.77										
125	1.68	0.65	0.07	0.68	0.68	0.38	0.04	0.68										
130	1.32	0.62	0.10	0.69	0.63	0.42	0.07	0.62										
135	1.13	0.60	0.14	0.65	0.56	0.41	0.09	0.57										
140	1.01	0.58	0.19	0.55	0.54	0.35	0.14	0.54										
145	0.91	0.56	0.26	0.56	0.62	0.39	0.21	0.52										
150	0.85	0.58	0.40	0.69	0.71	0.57	0.33	0.55										
155	0.87	0.68	0.60	0.89	0.95	0.76	0.54	0.69										
160	0.93	0.82	0.78	1.13	1.13	0.94	0.75	0.86										
165	0.98	0.86	0.88	1.26	1.09	1.01	0.88	0.93										
170	0.96	0.88	0.89	1.17	1.02	0.95	0.92	0.98										
175	0.93	0.84	0.89	1.04	0.86	0.86	0.90	0.94										
180	0.87	0.82	0.90	0.97	0.86	0.80	0.88	0.90										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: