


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.0750A P:8.970W PF:0.9960 Freq:60.00Hz Lamp Flux:949.131x1 lm		
NAME: V1245	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 105.81 lm/W			
MODEL		I _{max} (cd)	2494	S/MH (C0/180)	0.30
NOMINAL POWER(W)	10W	LOR(%)	100.0	S/MH (C90/270)	0.66
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	949.13	η UP,DN (C0-180)	0.3,51.7
NOMINAL FLUX(lm)	949.131	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.2,47.8
LAMPS INSIDE	1	η up (%)	0.5	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	120.0	η down (%)	99.5	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

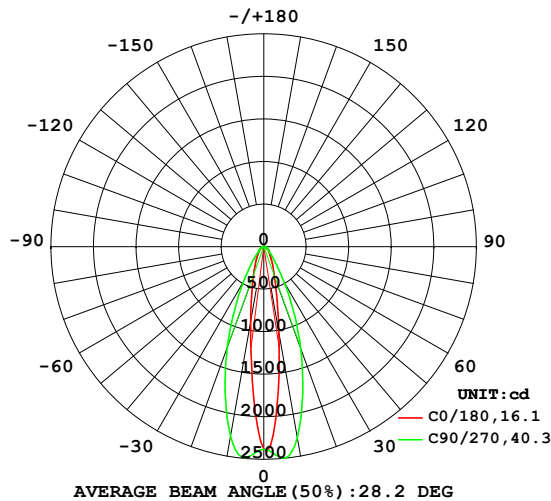

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

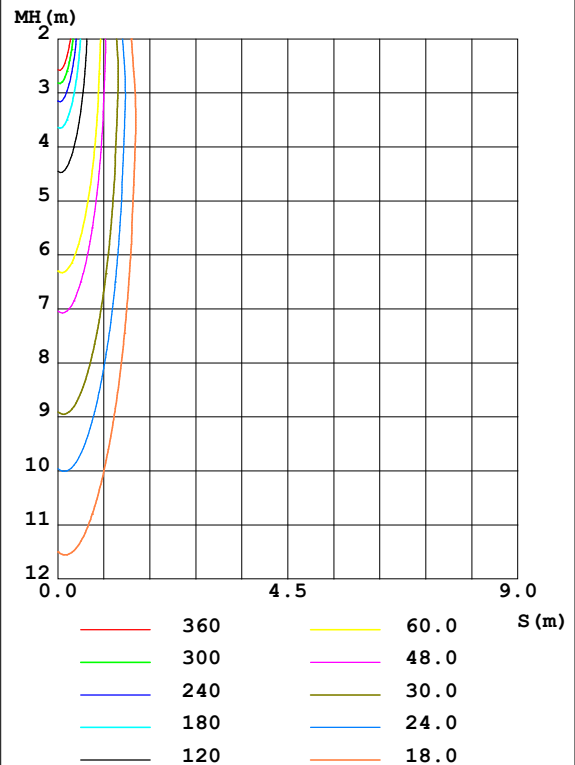

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1038	1518	2276	1416	896.2	1181	2258	1173	0- 10	176.7	176.7	18.6,18.6
20	372.1	537.3	1271	531.2	355.9	461.9	1253	423.1	10- 20	273.7	450.4	47.5,47.5
30	182.5	223.7	474.6	227.3	178.8	207.9	484.1	191.0	20- 30	196.7	647.1	68.2,68.2
40	112.5	119.3	161.4	120.0	107.0	115.7	167.4	109.3	30- 40	115.0	762.1	80.3,80.3
50	75.56	75.89	76.37	74.43	69.63	73.96	75.38	71.45	40- 50	74.35	836.4	88.1,88.1
60	49.04	49.50	47.49	46.10	41.12	46.02	47.68	46.00	50- 60	53.16	889.6	93.7,93.7
70	25.69	25.61	25.93	22.86	21.61	22.31	26.12	22.84	60- 70	34.68	924.3	97.4,97.4
80	9.744	7.893	6.563	8.561	8.220	7.577	6.434	6.902	70- 80	16.04	940.3	99.1,99.1
90	3.180	0.9408	0	2.027	2.476	1.836	0	0.9677	80- 90	3.892	944.2	99.5,99.5
100	2.067	0.7435	0	1.712	2.363	1.500	0	0.8573	90-100	1.357	945.6	99.6,99.6
110	1.502	0.6537	0	1.157	1.901	0.7342	0.0024	0.6033	100-110	1.048	946.6	99.7,99.7
120	1.245	0.5788	0.0338	0.7336	1.082	0.3535	0.0316	0.4311	110-120	0.6749	947.3	99.8,99.8
130	0.9158	0.6442	0.1113	0.5835	0.5883	0.3342	0.1020	0.4819	120-130	0.4557	947.8	99.9,99.9
140	0.8451	0.6224	0.2637	0.5255	0.4769	0.3535	0.2569	0.4309	130-140	0.3546	948.1	99.9,99.9
150	0.8719	0.7146	0.4817	0.6469	0.5621	0.5568	0.4653	0.6441	140-150	0.3329	948.4	99.9,99.9
160	1.118	0.8842	0.6997	0.9204	0.8770	0.8281	0.6662	0.8402	150-160	0.3373	948.8	100,100
170	1.156	0.9978	0.8572	0.9905	0.9710	0.9252	0.8357	0.8476	160-170	0.2582	949.0	100,100
180	0.9106	0.9397	0.9179	0.9203	0.9130	0.9275	0.9203	0.9154	170-180	0.0895	949.1	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.5V I:0.0750A P:8.970W PF:0.9960 Freq:60.00Hz Lamp Flux:949.131x1 lm		
NAME: V1245	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

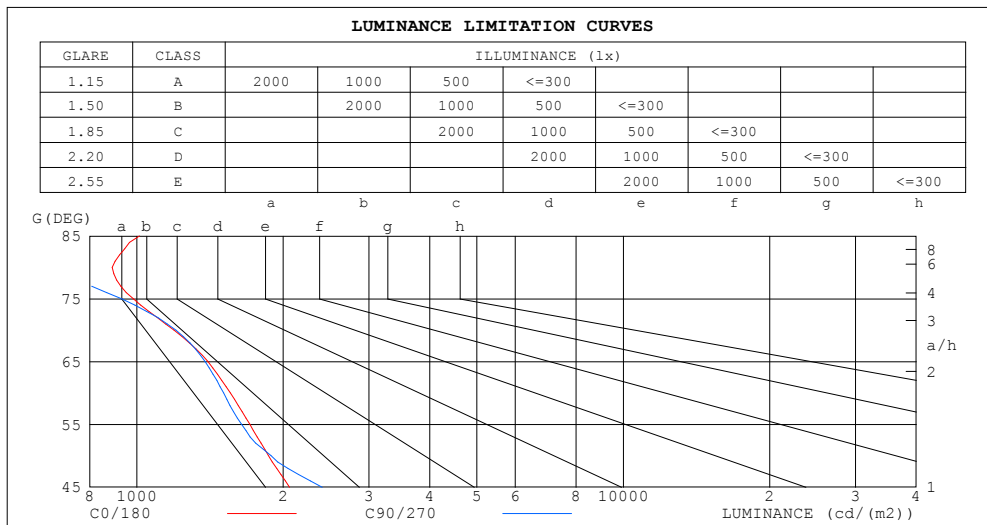


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.5V I:0.0750A P:8.970W PF:0.9960 Freq:60.00Hz Lamp Flux:949.13lx1 lm		
NAME: V1245	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.99
1.0	1.10	1.07	1.04	1.07	1.05	1.03	1.03	1.01	.99	.99	.98	.96	.96	.95	.94	.92
2.0	1.01	.97	.93	.90	.96	.92	.96	.93	.90	.93	.90	.88	.90	.88	.86	.84
3.0	.94	.89	.85	.93	.88	.84	.90	.86	.82	.87	.84	.81	.85	.82	.80	.78
4.0	.88	.82	.78	.87	.81	.77	.84	.80	.76	.82	.78	.75	.80	.77	.74	.73
5.0	.82	.76	.72	.81	.76	.72	.80	.75	.71	.78	.74	.70	.76	.73	.70	.68
6.0	.78	.72	.67	.77	.71	.67	.75	.70	.66	.74	.69	.66	.72	.69	.65	.64
7.0	.74	.67	.63	.73	.67	.63	.71	.66	.63	.70	.66	.62	.69	.65	.62	.60
8.0	.70	.64	.60	.69	.64	.60	.68	.63	.59	.67	.62	.59	.66	.62	.59	.57
9.0	.66	.61	.57	.66	.60	.57	.65	.60	.56	.64	.59	.56	.63	.59	.56	.55
10.0	.63	.58	.54	.63	.58	.54	.62	.57	.54	.61	.57	.54	.61	.56	.53	.52

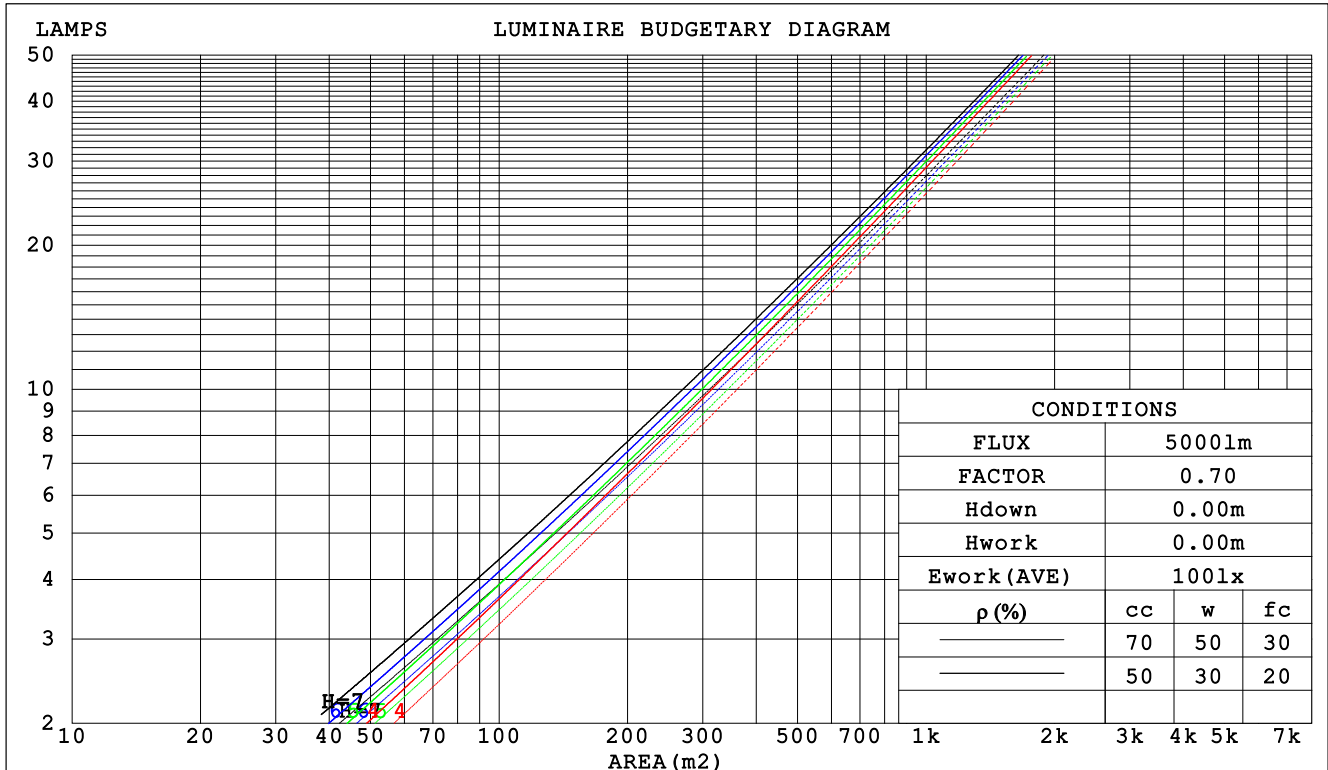

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.5V I:0.0750A P:8.970W PF:0.9960 Freq:60.00Hz Lamp Flux:949.131x1 lm					
NAME: V1245			TYPE:4000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.197	.112	.035	.190	.108	.034	.177	.101	.032	.165	.095	.031	.154	.089	.029		
2.0	.186	.102	.031	.180	.099	.031	.169	.094	.029	.159	.089	.028	.150	.085	.027		
3.0	.175	.093	.028	.170	.091	.027	.160	.087	.026	.152	.083	.025	.143	.079	.025		
4.0	.164	.085	.025	.159	.083	.025	.151	.080	.024	.144	.077	.023	.137	.074	.023		
5.0	.154	.078	.023	.150	.077	.022	.143	.074	.022	.136	.072	.021	.130	.070	.021		
6.0	.145	.073	.021	.142	.072	.021	.135	.069	.020	.129	.067	.020	.124	.065	.019		
7.0	.137	.068	.019	.134	.067	.019	.128	.065	.019	.123	.063	.018	.118	.061	.018		
8.0	.129	.063	.018	.127	.062	.018	.122	.061	.017	.117	.059	.017	.113	.058	.017		
9.0	.123	.059	.017	.121	.059	.016	.116	.057	.016	.112	.056	.016	.108	.055	.016		
10.0	.117	.056	.016	.115	.055	.015	.111	.054	.015	.107	.053	.015	.104	.052	.015		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.176	.161	.147	.151	.138	.127	.103	.095	.088	.059	.055	.051	.019	.018	.016	
2.0	.162	.136	.115	.139	.117	.099	.095	.081	.069	.055	.047	.041	.018	.015	.013	
3.0	.150	.118	.092	.129	.102	.080	.088	.071	.056	.051	.041	.033	.016	.013	.011	
4.0	.140	.103	.075	.120	.089	.065	.083	.062	.046	.048	.036	.027	.015	.012	.009	
5.0	.131	.092	.063	.112	.079	.054	.077	.055	.038	.045	.033	.023	.014	.011	.008	
6.0	.123	.082	.053	.106	.071	.046	.073	.050	.033	.042	.029	.019	.014	.010	.006	
7.0	.116	.075	.046	.100	.065	.040	.069	.045	.028	.040	.027	.017	.013	.009	.006	
8.0	.110	.068	.040	.095	.059	.035	.065	.042	.025	.038	.025	.015	.012	.008	.005	
9.0	.104	.063	.035	.090	.055	.031	.062	.039	.022	.036	.023	.013	.012	.007	.004	
10.0	.099	.059	.032	.086	.051	.028	.059	.036	.020	.035	.021	.012	.011	.007	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.5V I:0.0750A P:8.970W PF:0.9960 Freq:60.00Hz Lamp Flux:949.131x1 lm										
NAME: V1245					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	11.5	12.5	11.8	12.7	12.9	12.1	13.1	12.3	13.2	13.4
3H	12.5	13.4	12.8	13.7	13.9	12.9	13.8	13.2	14.1	14.3
4H	12.9	13.7	13.1	13.9	14.2	13.2	14.1	13.5	14.3	14.5
6H	13.1	13.9	13.4	14.1	14.4	13.3	14.1	13.6	14.4	14.6
8H	13.2	13.9	13.5	14.2	14.5	13.3	14.1	13.6	14.3	14.6
12H	13.2	14.0	13.6	14.3	14.6	13.2	14.0	13.6	14.3	14.6
4H 2H	12.0	12.8	12.3	13.1	13.3	12.4	13.3	12.7	13.5	13.8
3H	13.1	13.9	13.5	14.2	14.5	13.5	14.2	13.8	14.5	14.8
4H	13.5	14.2	13.9	14.5	14.9	13.8	14.5	14.2	14.8	15.1
6H	13.8	14.4	14.2	14.8	15.1	14.0	14.6	14.3	14.9	15.3
8H	14.0	14.5	14.4	14.9	15.3	14.0	14.5	14.4	14.9	15.3
12H	14.1	14.6	14.5	15.0	15.4	13.9	14.4	14.3	14.8	15.2
8H 4H	13.6	14.2	14.1	14.6	15.0	13.9	14.5	14.3	14.8	15.2
6H	14.0	14.5	14.5	14.9	15.3	14.1	14.6	14.5	15.0	15.4
8H	14.2	14.6	14.7	15.0	15.5	14.1	14.5	14.6	15.0	15.4
12H	14.4	14.7	14.9	15.2	15.7	14.1	14.5	14.6	14.9	15.4
12H 4H	13.6	14.1	14.0	14.5	14.9	13.9	14.4	14.3	14.8	15.2
6H	14.0	14.4	14.5	14.9	15.3	14.1	14.5	14.6	14.9	15.4
8H	14.2	14.6	14.7	15.0	15.5	14.1	14.5	14.6	15.0	15.4
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.4					+ 0.8 / - 0.7				
1.5H	+ 0.1 / - 0.2					+ 1.3 / - 0.6				
2.0H	+ 0.4 / - 0.4					+ 0.8 / - 0.6				

CIE Pub.117 Corrected 949.1 lm Total Lamp Luminous Flux.(8log(F/F0) = -0.2)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.0750A P:8.970W PF:0.9960 Freq:60.00Hz Lamp Flux:949.131x1 lm		
NAME: V1245	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	72	67	79	71	67	78	71	67	62
0.80	87	80	75	87	80	75	85	79	75	70
1.00	93	86	81	92	85	81	90	86	81	76
1.25	98	91	87	97	91	86	94	89	86	81
1.50	101	95	91	100	94	90	97	93	89	84
2.00	105	100	96	103	99	95	100	96	93	87
2.50	107	102	99	105	101	98	102	99	96	89
3.00	109	105	102	107	103	100	104	101	98	91
4.00	112	108	105	110	107	104	106	103	101	94
5.00	113	110	108	111	109	106	107	105	103	95
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.0750A P:8.970W PF:0.9960 Freq:60.00Hz Lamp Flux:949.13lx1 lm		
NAME: V1245	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

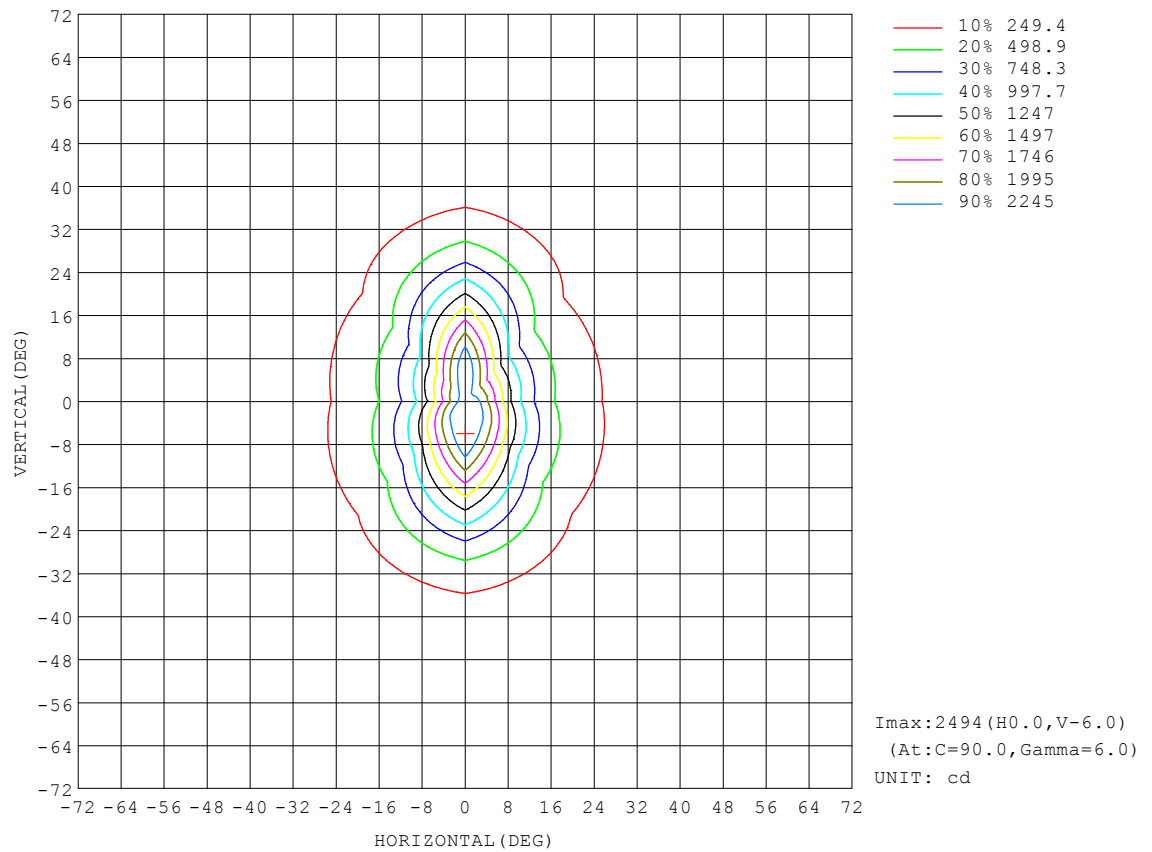


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:119.5V I:0.0750A P:8.970W PF:0.9960 Freq:60.00Hz Lamp Flux:949.13lx1 lm		
NAME: V1245	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

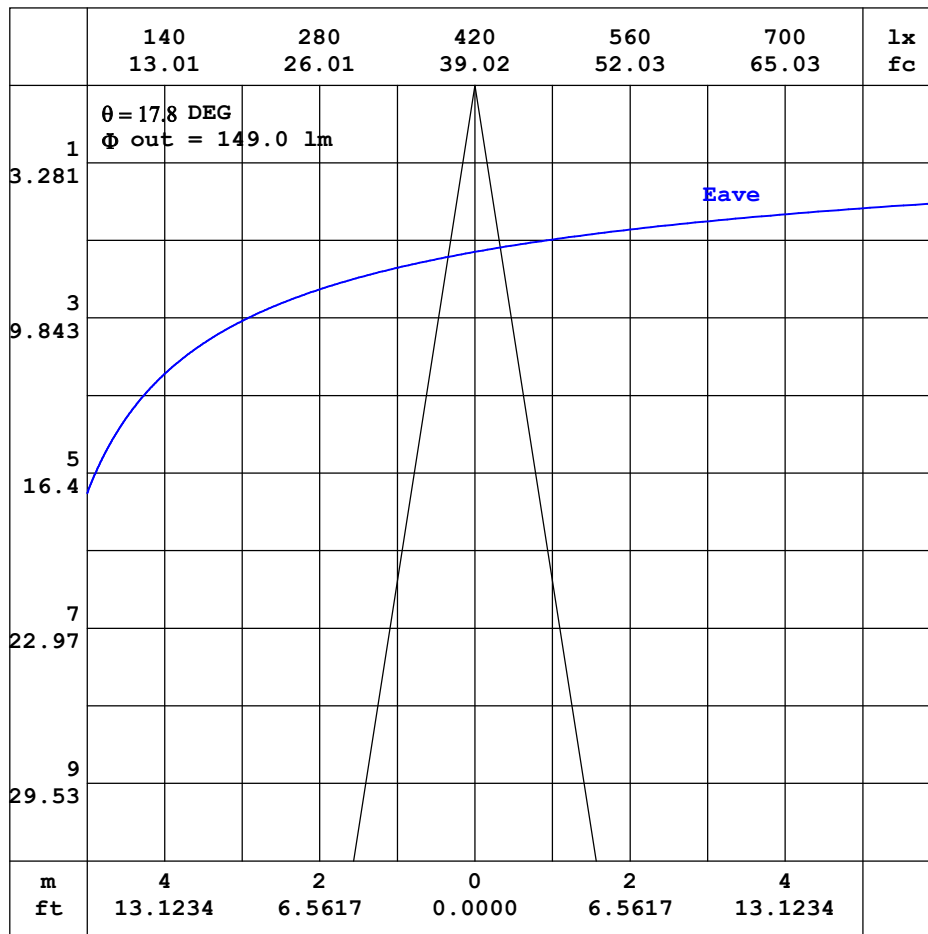


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.5V I:0.0750A P:8.970W PF:0.9960 Freq:60.00Hz Lamp Flux:949.13lx1 lm		
NAME: V1245	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

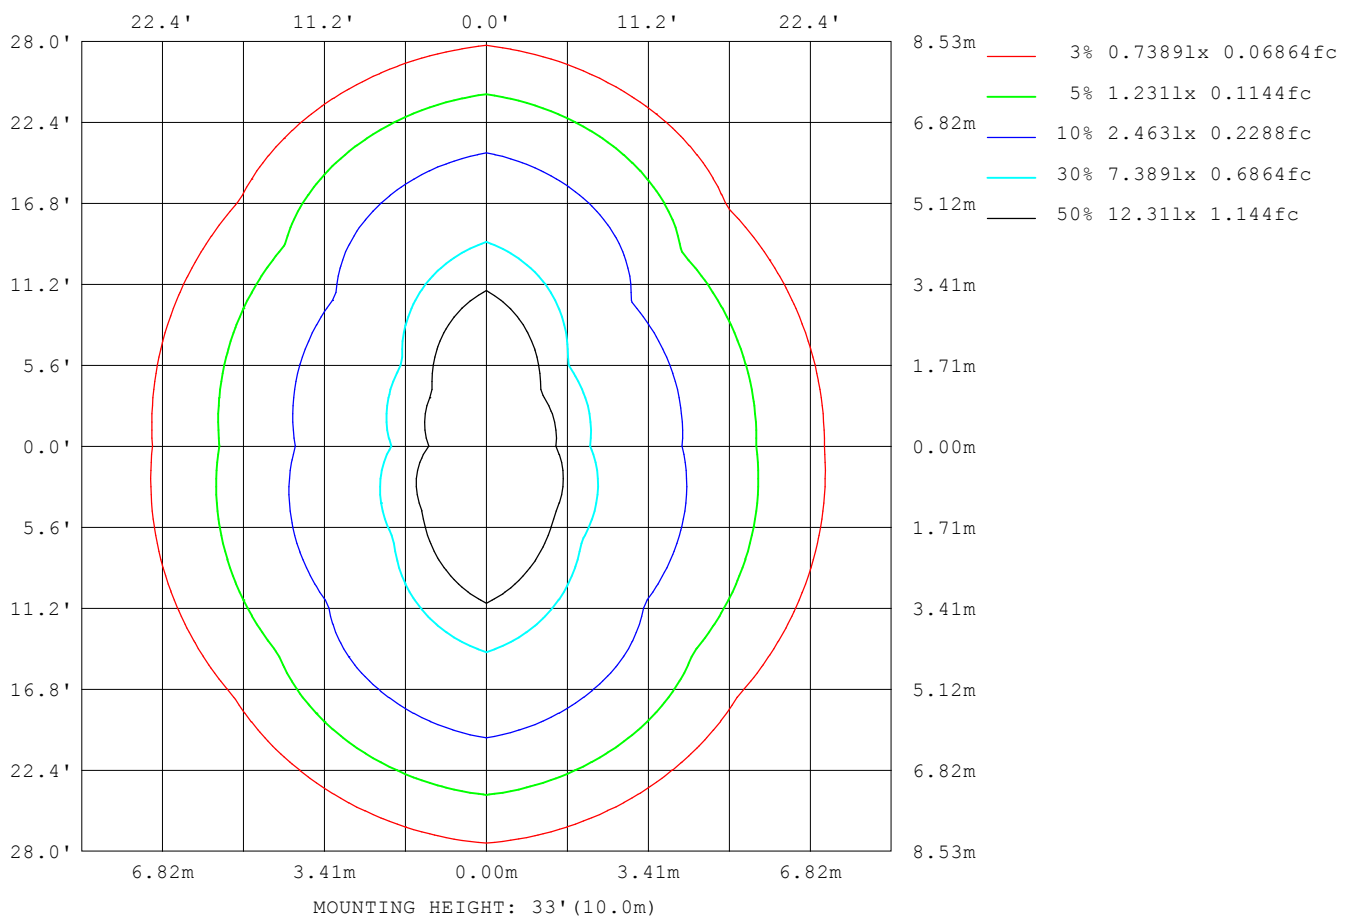

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.5V I:0.0750A P:8.970W PF:0.9960 Freq:60.00Hz Lamp Flux:949.131x1 lm		
NAME: V1245	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1259
L_0~180 (75) av	962
L_0~180 (85) av	894
L_90~270 (65) av	1379
L_90~270 (75) av	933
L_90~270 (85) av	174
L_45 (65) av	1303
L_45 (75) av	873
L_45 (85) av	562

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

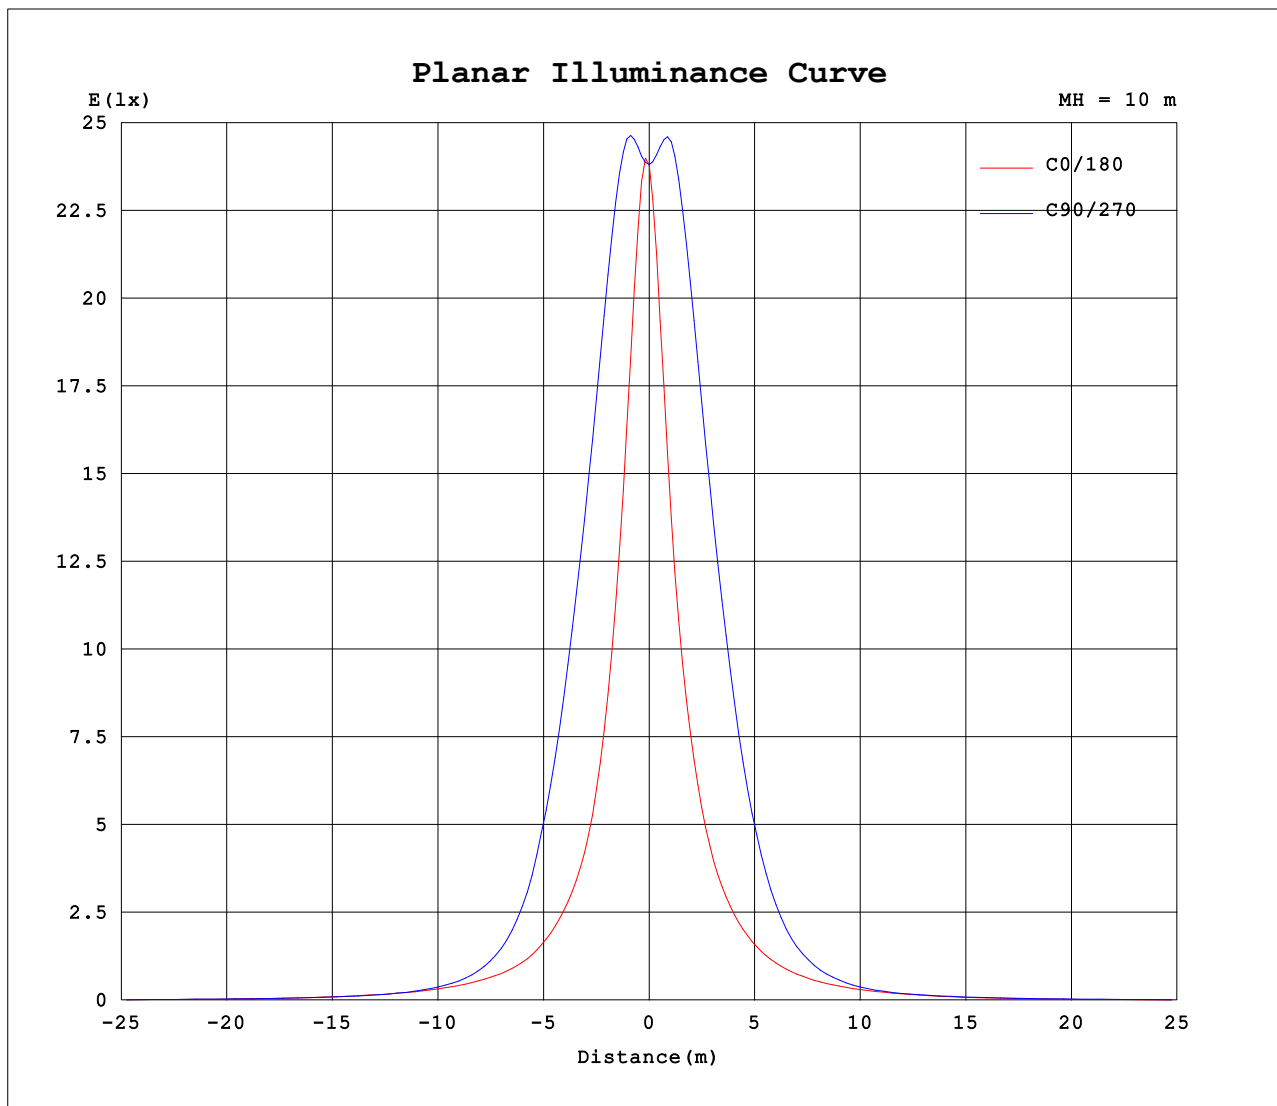

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.0750A P:8.970W PF:0.9960 Freq:60.00Hz Lamp Flux:949.131x1 lm								
NAME: V1245				TYPE:4000K				WEIGHT:
SPEC.:				DIM.:				SERIAL No.:
MFR.: EVERFINE				SUR.:				Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	2380	2357	2381	2351	2380	2357	2381	2351										
5	1851	2218	2493	2143	1578	1826	2489	1846										
10	1038	1518	2276	1416	896	1181	2258	1173										
15	586	903	1773	860	546	736	1760	692										
20	372	537	1271	531	356	462	1253	423										
25	257	336	825	338	248	301	809	276										
30	183	224	475	227	179	208	484	191										
35	139	159	270	162	136	152	279	141										
40	112	119	161	120	107	116	167	109										
45	91.7	94.0	107	93.6	86.0	92.0	106	87.8										
50	75.6	75.9	76.4	74.4	69.6	74.0	75.4	71.4										
55	61.7	61.9	59.4	59.1	54.3	59.0	59.5	58.0										
60	49.0	49.5	47.5	46.1	41.1	46.0	47.7	46.0										
65	37.3	37.3	36.8	33.9	29.8	33.5	36.7	34.0										
70	25.7	25.6	25.9	22.9	21.6	22.3	26.1	22.8										
75	16.0	15.6	15.2	14.4	15.4	13.7	15.2	13.2										
80	9.74	7.89	6.56	8.56	8.22	7.58	6.43	6.90										
85	5.56	3.18	1.04	3.56	4.26	2.95	0.87	2.66										
90	3.18	0.94	0.00	2.03	2.48	1.84	0.00	0.97										
95	2.59	0.75	0.00	1.83	2.11	1.58	0.00	0.89										
100	2.07	0.74	0.00	1.71	2.36	1.50	0.00	0.86										
105	1.64	0.72	0.00	1.47	2.20	1.04	0.00	0.83										
110	1.50	0.65	0.00	1.16	1.90	0.73	0.00	0.60										
115	1.36	0.58	0.01	0.94	1.47	0.53	0.01	0.48										
120	1.24	0.58	0.03	0.73	1.08	0.35	0.03	0.43										
125	1.15	0.61	0.07	0.64	0.74	0.27	0.06	0.47										
130	0.92	0.64	0.11	0.58	0.59	0.33	0.10	0.48										
135	0.84	0.65	0.17	0.54	0.44	0.32	0.17	0.47										
140	0.85	0.62	0.26	0.53	0.48	0.35	0.26	0.43										
145	0.88	0.64	0.37	0.55	0.48	0.42	0.35	0.54										
150	0.87	0.71	0.48	0.65	0.56	0.56	0.47	0.64										
155	0.94	0.80	0.60	0.80	0.72	0.71	0.57	0.74										
160	1.12	0.88	0.70	0.92	0.88	0.83	0.67	0.84										
165	1.19	0.95	0.79	0.97	0.96	0.90	0.76	0.83										
170	1.16	1.00	0.86	0.99	0.97	0.93	0.84	0.85										
175	1.02	0.96	0.90	0.97	0.92	0.93	0.89	0.86										
180	0.91	0.94	0.92	0.92	0.91	0.93	0.92	0.92										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: