


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:955.481x1 lm		
NAME: V1555	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 106.40 lm/W			
MODEL		I _{max} (cd)	2095	S/MH(C0/180)	0.32
NOMINAL POWER(W)	10W	LOR(%)	100.0	S/MH(C90/270)	0.83
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	955.48	η UP,DN(C0-180)	0.3,50.2
NOMINAL FLUX(lm)	955.481	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.2,49.3
LAMPS INSIDE	1	η up(%)	0.5	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	120.0	η down(%)	99.5	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

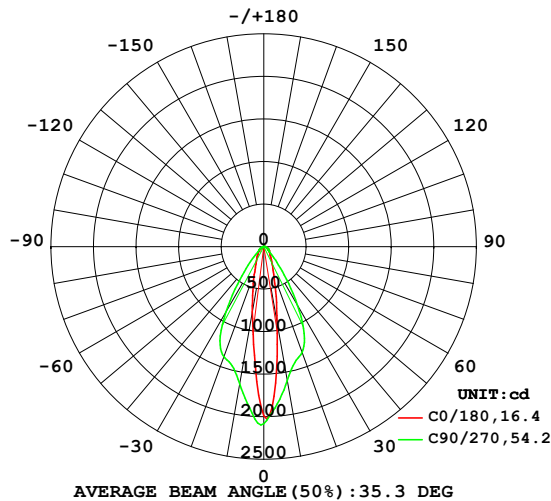

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

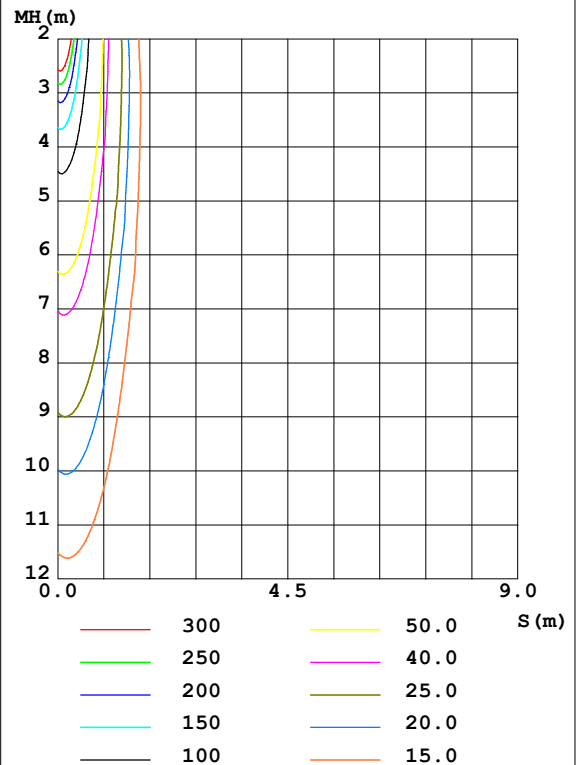

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	921.8	1174	1600	1087	780.6	949.3	1640	999.7	0- 10	140.4	140.4	14.7,14.7
20	346.6	458.2	1320	444.3	318.2	408.3	1375	408.8	10- 20	231.6	372.0	38.9,38.9
30	181.1	217.4	794.9	215.0	168.1	205.7	896.8	204.3	20- 30	226.3	598.3	62.6,62.6
40	117.0	122.7	245.2	122.5	108.2	122.5	288.8	119.3	30- 40	152.0	750.2	78.5,78.5
50	81.85	78.29	76.07	75.98	72.20	77.08	79.76	76.25	40- 50	83.28	833.5	87.2,87.2
60	53.69	53.37	52.95	48.66	42.46	49.68	55.40	51.37	50- 60	56.42	889.9	93.1,93.1
70	28.32	27.64	28.67	24.05	22.49	24.60	30.46	26.75	60- 70	38.27	928.2	97.1,97.1
80	10.68	8.261	8.002	8.524	8.269	8.459	8.909	8.296	70- 80	17.80	946.0	99,99
90	3.483	0.9966	0	2.230	2.597	1.984	0	1.181	80- 90	4.318	950.3	99.5,99.5
100	2.256	0.8427	0	1.903	2.447	1.439	0	0.8914	90-100	1.485	951.8	99.6,99.6
110	1.647	0.7409	0.0072	1.281	1.676	0.7243	0.0001	0.4942	100-110	1.051	952.9	99.7,99.7
120	1.354	0.6660	0.0557	0.8135	1.123	0.3874	0.0509	0.4867	110-120	0.7082	953.6	99.8,99.8
130	1.018	0.7265	0.1718	0.6611	0.6342	0.4070	0.1503	0.5449	120-130	0.5122	954.1	99.9,99.9
140	0.8936	0.6756	0.3315	0.5788	0.5448	0.4745	0.2811	0.5183	130-140	0.4082	954.5	99.9,99.9
150	0.8817	0.7096	0.4866	0.6977	0.6129	0.5666	0.4336	0.6586	140-150	0.3597	954.8	99.9,99.9
160	1.0000	0.8113	0.6610	0.8913	0.8090	0.7604	0.6032	0.7822	150-160	0.3264	955.2	100,100
170	1.034	0.8355	0.8015	0.9397	0.8598	0.8331	0.7509	0.7459	160-170	0.2339	955.4	100,100
180	0.7968	0.8258	0.8258	0.8452	0.8137	0.8113	0.8113	0.7992	170-180	0.0799	955.5	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:955.481x1 lm		
NAME: V1555	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

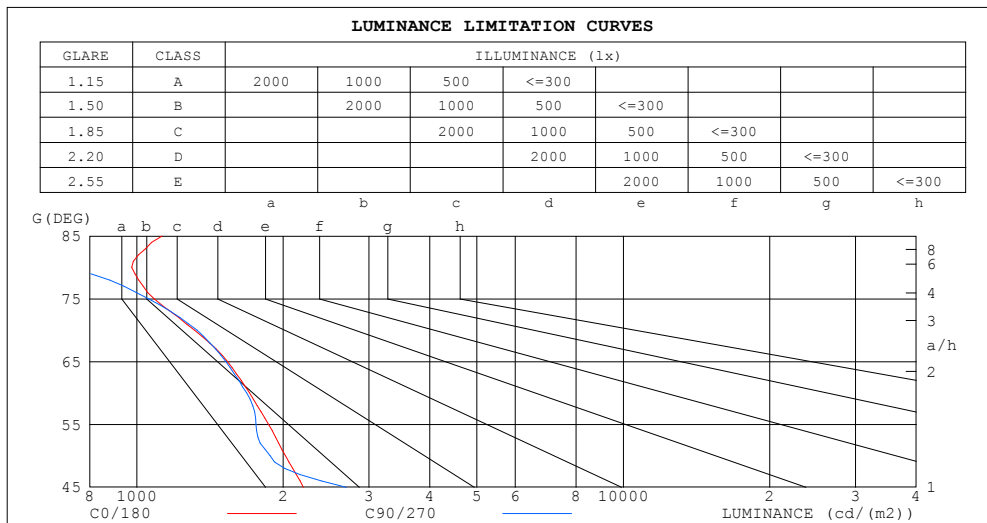

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1128	172
80	976	731
75	1086	1057
70	1314	1331
65	1535	1524
60	1705	1681
55	1865	1759
50	2021	1878
45	2201	2696


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:955.481x1 lm		
NAME: V1555	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.99
1.0	1.09	1.06	1.04	1.07	1.04	1.02	1.03	1.01	.99	.99	.97	.96	.95	.94	.93	.91
2.0	1.00	.96	.92	.98	.94	.91	.95	.92	.89	.92	.89	.87	.89	.87	.85	.83
3.0	.93	.87	.82	.91	.86	.82	.88	.84	.80	.86	.82	.79	.83	.80	.78	.76
4.0	.86	.80	.75	.85	.79	.74	.82	.77	.73	.80	.76	.73	.78	.75	.72	.70
5.0	.80	.74	.69	.79	.73	.68	.77	.72	.68	.75	.71	.67	.74	.70	.66	.65
6.0	.75	.68	.64	.74	.68	.63	.72	.67	.63	.71	.66	.63	.70	.65	.62	.60
7.0	.70	.64	.59	.70	.64	.59	.68	.63	.59	.67	.62	.58	.66	.61	.58	.57
8.0	.66	.60	.56	.66	.60	.56	.65	.59	.55	.63	.59	.55	.62	.58	.55	.53
9.0	.63	.57	.52	.62	.56	.52	.61	.56	.52	.60	.55	.52	.59	.55	.52	.50
10.0	.60	.54	.50	.59	.53	.49	.58	.53	.49	.57	.53	.49	.57	.52	.49	.48

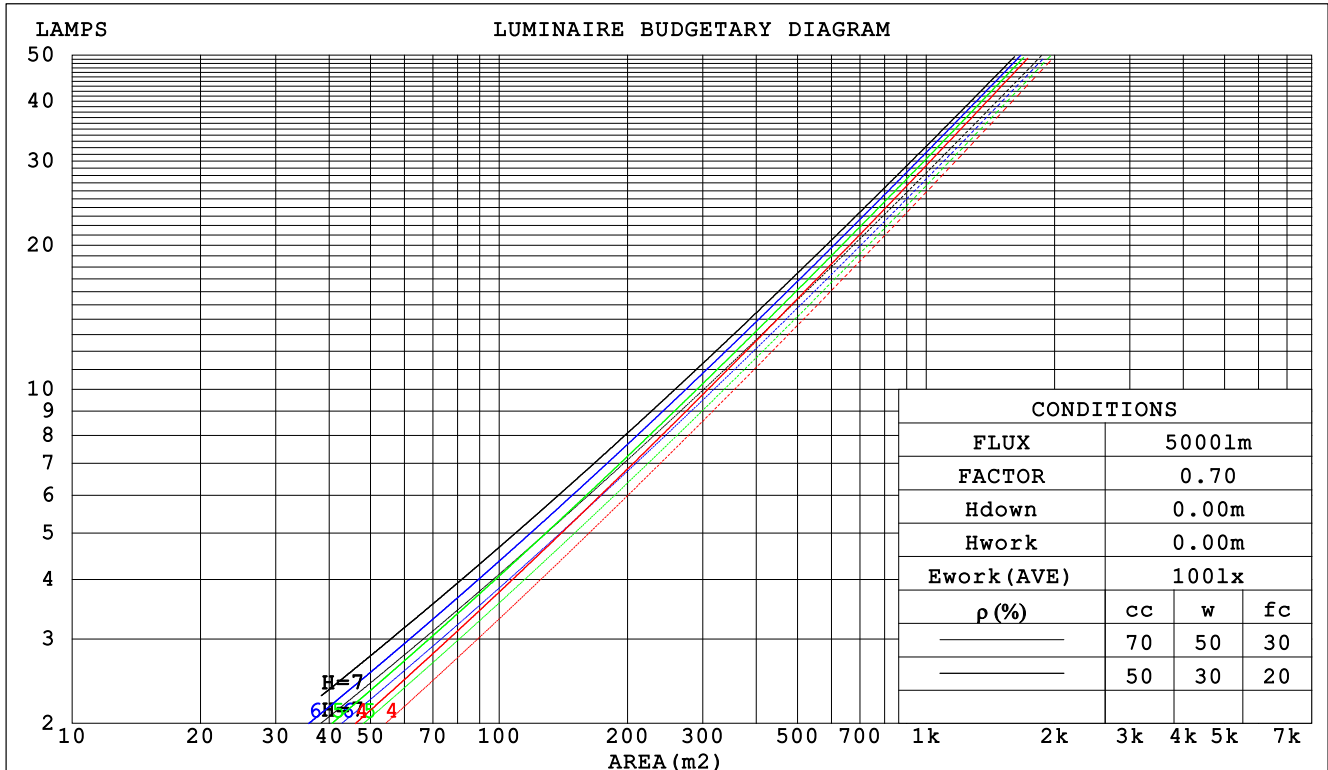

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:955.481x1 lm								
NAME: V1555			TYPE:4000K			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: EVERFINE			SUR.:			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.207	.118	.037	.200	.114	.036	.187	.107	.034	.175	.101	.032	.164	.095	.031		
2.0	.197	.108	.033	.191	.105	.032	.180	.100	.031	.169	.095	.030	.160	.090	.028		
3.0	.185	.098	.029	.180	.096	.029	.170	.092	.028	.161	.088	.027	.153	.085	.026		
4.0	.174	.090	.027	.169	.089	.026	.161	.085	.025	.153	.082	.025	.146	.079	.024		
5.0	.163	.083	.024	.159	.082	.024	.152	.079	.023	.145	.077	.023	.139	.074	.022		
6.0	.154	.077	.022	.151	.076	.022	.144	.074	.021	.138	.072	.021	.132	.070	.021		
7.0	.145	.072	.020	.142	.071	.020	.137	.069	.020	.131	.067	.020	.126	.066	.019		
8.0	.138	.067	.019	.135	.066	.019	.130	.065	.019	.125	.063	.018	.121	.062	.018		
9.0	.131	.063	.018	.128	.063	.018	.124	.061	.017	.119	.060	.017	.115	.059	.017		
10.0	.124	.060	.017	.122	.059	.016	.118	.058	.016	.114	.057	.016	.111	.056	.016		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.195	.195	.195	.166	.166	.166	.114	.114	.114	.065	.065	.065	.021	.021	.021	
1.0	.177	.161	.147	.152	.138	.126	.104	.095	.087	.060	.055	.051	.019	.018	.016	
2.0	.164	.137	.114	.140	.118	.098	.096	.081	.069	.055	.047	.040	.018	.015	.013	
3.0	.152	.118	.091	.131	.102	.078	.090	.071	.055	.052	.041	.032	.017	.013	.011	
4.0	.142	.104	.074	.122	.089	.064	.084	.062	.045	.049	.037	.027	.016	.012	.009	
5.0	.134	.092	.061	.115	.080	.053	.079	.056	.038	.046	.033	.022	.015	.011	.007	
6.0	.126	.083	.052	.109	.072	.045	.075	.050	.032	.043	.030	.019	.014	.010	.006	
7.0	.120	.076	.045	.103	.065	.039	.071	.046	.028	.041	.027	.016	.013	.009	.005	
8.0	.113	.069	.039	.098	.060	.034	.068	.042	.024	.039	.025	.014	.013	.008	.005	
9.0	.108	.064	.035	.093	.056	.030	.064	.039	.021	.038	.023	.013	.012	.008	.004	
10.0	.103	.060	.031	.089	.052	.027	.062	.037	.019	.036	.022	.011	.012	.007	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:955.481x1 lm										
NAME: V1555					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	11.9	13.0	12.2	13.2	13.3	13.3	14.4	13.6	14.6	14.8
3H	13.0	14.0	13.3	14.2	14.4	14.0	15.0	14.3	15.2	15.4
4H	13.3	14.2	13.6	14.5	14.7	14.3	15.2	14.6	15.4	15.7
6H	13.6	14.4	13.9	14.7	14.9	14.4	15.2	14.7	15.5	15.7
8H	13.6	14.5	14.0	14.7	15.0	14.3	15.2	14.7	15.4	15.7
12H	13.7	14.5	14.1	14.8	15.1	14.3	15.1	14.6	15.4	15.7
4H 2H	12.4	13.3	12.7	13.6	13.8	13.6	14.5	13.9	14.7	15.0
3H	13.6	14.4	13.9	14.7	15.0	14.4	15.2	14.8	15.5	15.8
4H	14.0	14.8	14.4	15.1	15.4	14.8	15.5	15.1	15.8	16.1
6H	14.3	15.0	14.7	15.3	15.7	14.9	15.5	15.3	15.9	16.3
8H	14.5	15.1	14.9	15.4	15.8	14.9	15.5	15.3	15.9	16.3
12H	14.6	15.1	15.0	15.5	15.9	14.9	15.4	15.3	15.8	16.2
8H 4H	14.1	14.7	14.5	15.1	15.5	14.8	15.4	15.2	15.8	16.1
6H	14.5	15.0	15.0	15.4	15.8	15.0	15.5	15.5	15.9	16.3
8H	14.7	15.1	15.2	15.6	16.0	15.1	15.5	15.5	15.9	16.4
12H	14.9	15.3	15.4	15.7	16.2	15.0	15.4	15.5	15.9	16.3
12H 4H	14.1	14.6	14.5	15.0	15.4	14.8	15.3	15.2	15.7	16.1
6H	14.5	14.9	15.0	15.4	15.8	15.0	15.4	15.5	15.9	16.3
8H	14.7	15.1	15.2	15.5	16.0	15.1	15.4	15.5	15.9	16.4
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.4					+ 1.7 / - 1.1				
1.5H	+ 0.1 / - 0.2					+ 3.1 / - 1.0				
2.0H	+ 0.4 / - 0.5					+ 1.0 / - 0.5				

CIE Pub.117 Corrected 955.5 lm Total Lamp Luminous Flux.(8log(F/F0) = -0.2)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:955.481x1 lm		
NAME: V1555	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	78	70	66	78	70	65	77	70	65	61
0.80	86	79	74	86	79	74	84	78	74	69
1.00	92	85	80	91	84	80	89	85	79	75
1.25	97	90	86	96	90	85	94	88	85	80
1.50	101	94	90	99	94	89	97	92	88	83
2.00	104	99	95	103	98	94	100	96	93	87
2.50	107	102	98	105	101	97	102	98	95	88
3.00	109	105	101	107	103	100	103	100	98	91
4.00	112	108	105	109	106	104	105	103	101	93
5.00	113	110	108	111	108	106	107	105	103	95
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:955.481x1 lm		
NAME: V1555	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

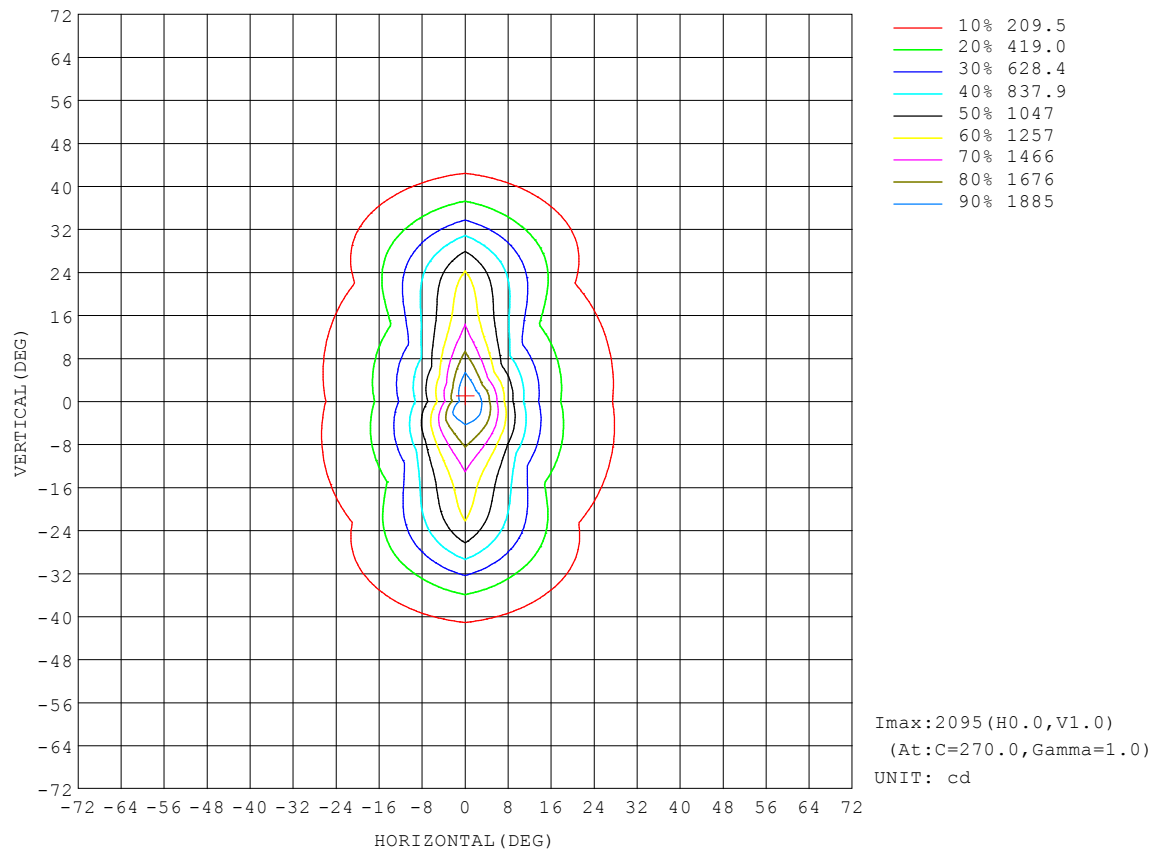


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:955.481x1 lm		
NAME: V1555	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

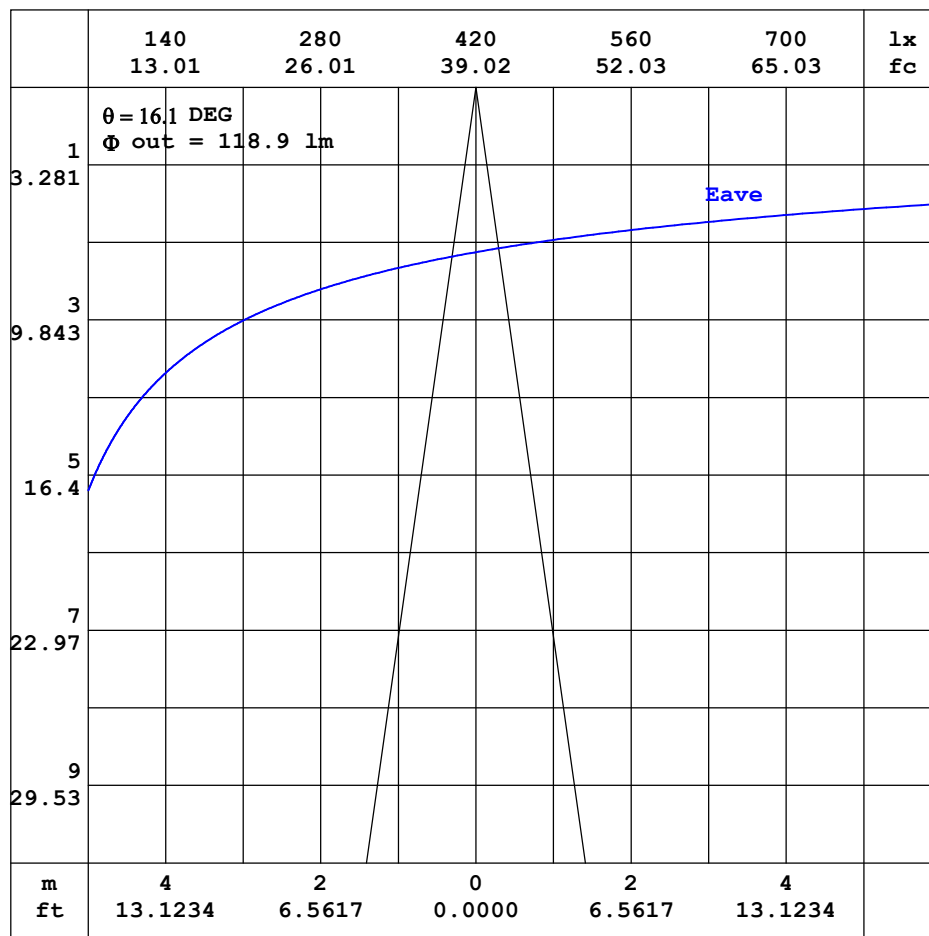


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:955.481x1 lm		
NAME: V1555	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

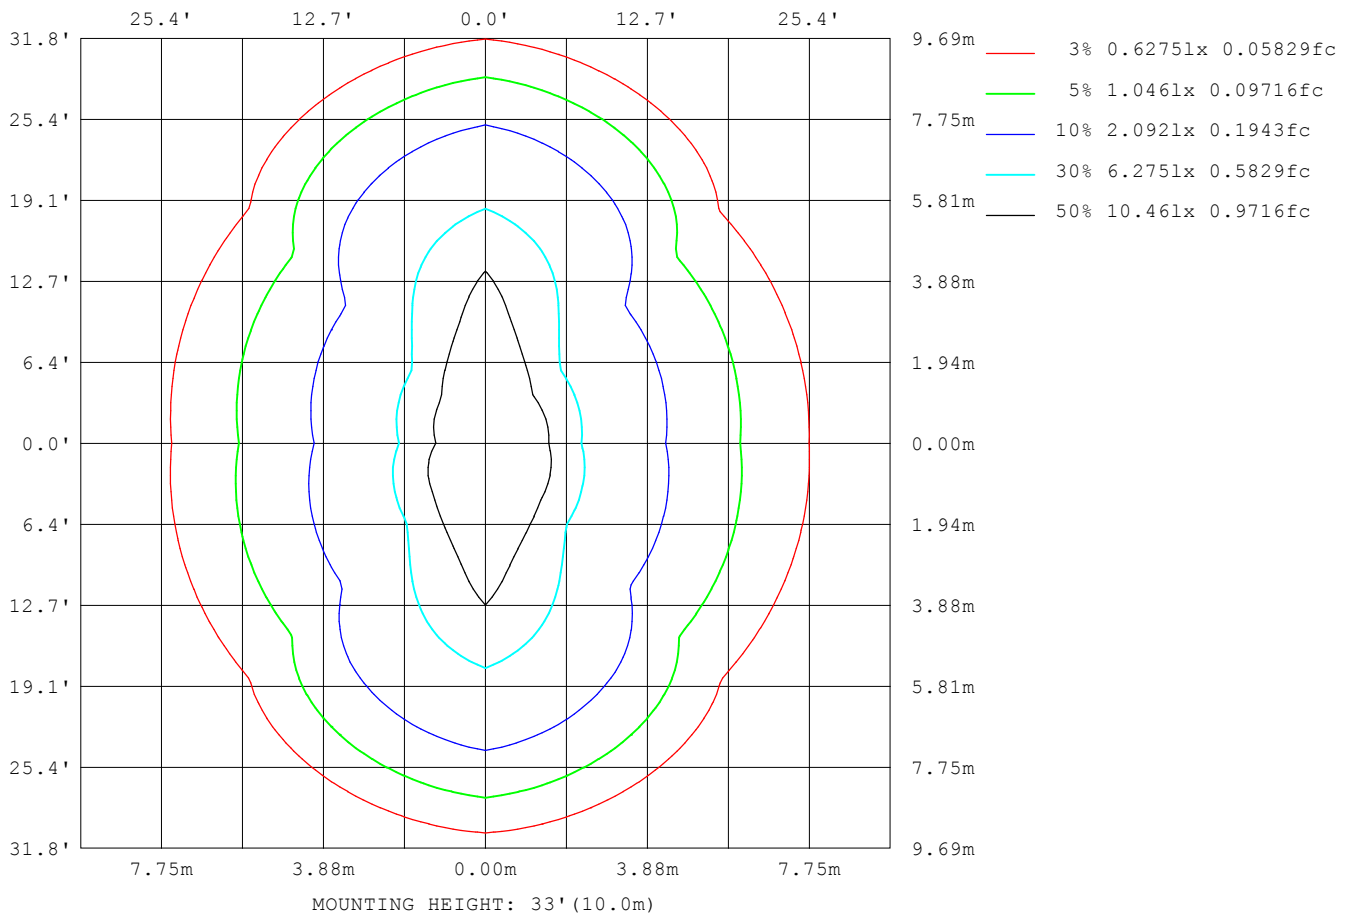

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:955.481x1 lm		
NAME: V1555	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1345
L_0~180 (75) av	1028
L_0~180 (85) av	961
L_90~270 (65) av	1577
L_90~270 (75) av	1108
L_90~270 (85) av	202
L_45 (65) av	1445
L_45 (75) av	954
L_45 (85) av	616

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

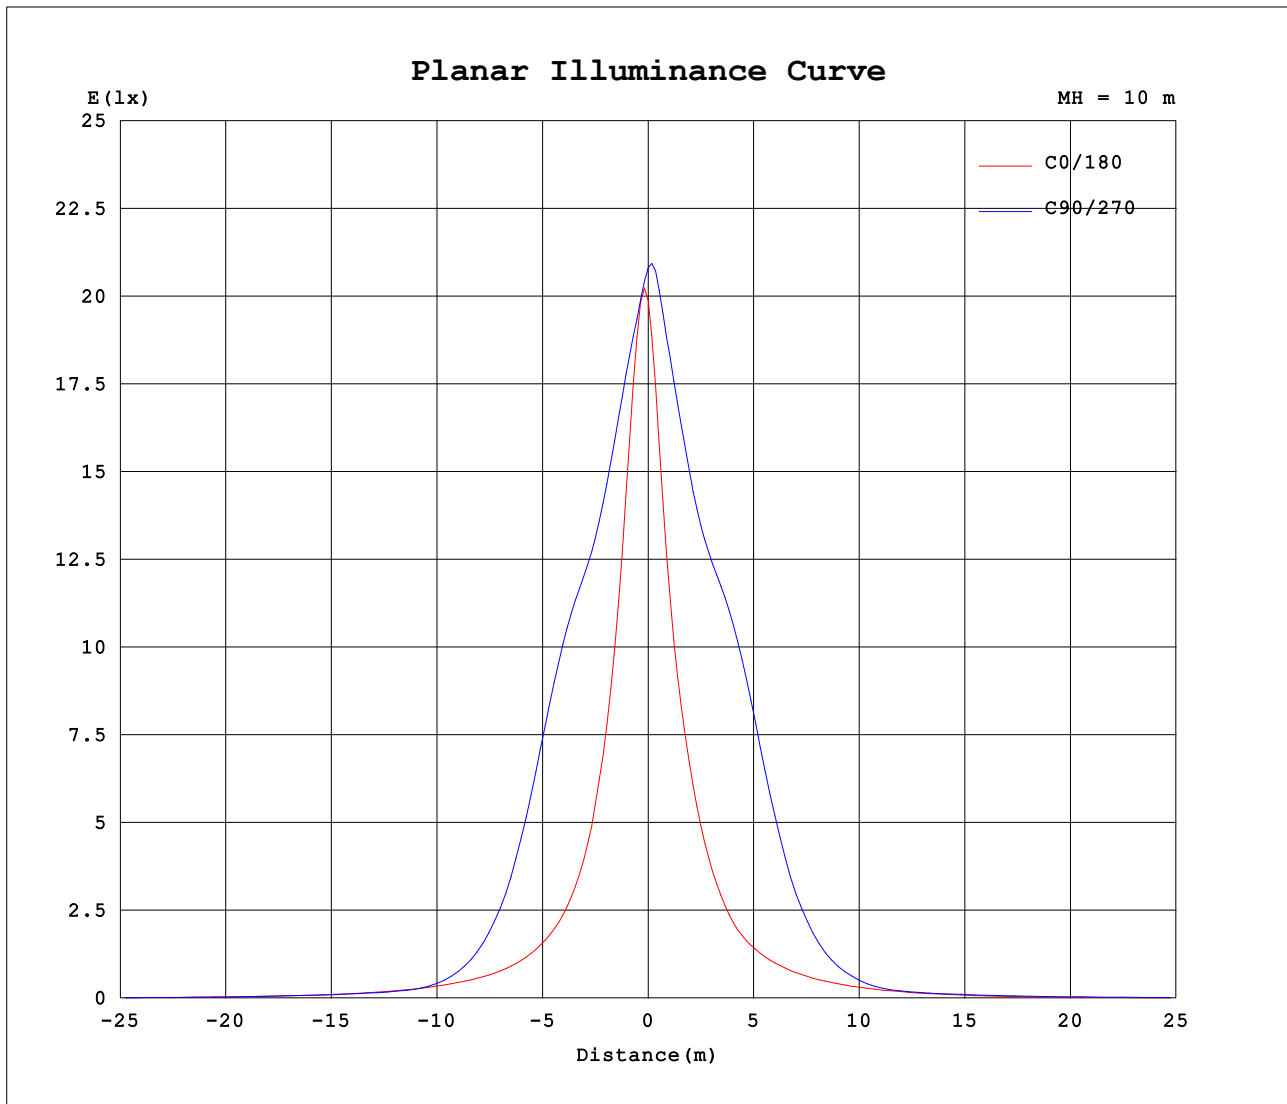

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:955.481x1 lm		
NAME: V1555	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1988	2018	2082	2090	1988	2018	2082	2090										
5	1611	1763	1854	1679	1281	1447	1905	1593										
10	922	1174	1600	1087	781	949	1640	1000										
15	542	723	1411	688	494	623	1450	631										
20	347	458	1320	444	318	408	1375	409										
25	242	307	1127	300	221	282	1220	282										
30	181	217	795	215	168	206	897	204										
35	141	161	469	160	133	157	544	153										
40	117	123	245	123	108	123	289	119										
45	98.0	97.1	120	96.3	88.9	97.0	147	94.9										
50	81.8	78.3	76.1	76.0	72.2	77.1	79.8	76.3										
55	67.4	64.2	63.5	60.6	56.4	61.9	65.2	62.1										
60	53.7	53.4	53.0	48.7	42.5	49.7	55.4	51.4										
65	40.9	40.9	40.6	36.6	30.7	37.1	43.4	39.3										
70	28.3	27.6	28.7	24.0	22.5	24.6	30.5	26.8										
75	17.7	16.6	17.2	14.8	15.8	15.1	18.9	15.7										
80	10.7	8.26	8.00	8.52	8.27	8.46	8.91	8.30										
85	6.19	3.26	0.94	3.43	4.37	3.32	1.28	3.52										
90	3.48	1.00	0.00	2.23	2.60	1.98	0.00	1.18										
95	2.80	0.87	0.00	2.03	2.43	1.76	0.00	0.97										
100	2.26	0.84	0.00	1.90	2.45	1.44	0.00	0.89										
105	1.79	0.83	0.00	1.58	1.93	0.94	0.00	0.64										
110	1.65	0.74	0.01	1.28	1.68	0.72	0.00	0.49										
115	1.49	0.68	0.03	1.00	1.41	0.56	0.02	0.50										
120	1.35	0.67	0.06	0.81	1.12	0.39	0.05	0.49										
125	1.26	0.70	0.11	0.72	0.77	0.36	0.09	0.50										
130	1.02	0.73	0.17	0.66	0.63	0.41	0.15	0.54										
135	0.91	0.72	0.25	0.60	0.52	0.41	0.22	0.55										
140	0.89	0.68	0.33	0.58	0.54	0.47	0.28	0.52										
145	0.92	0.67	0.40	0.62	0.54	0.47	0.35	0.57										
150	0.88	0.71	0.49	0.70	0.61	0.57	0.43	0.66										
155	0.90	0.75	0.58	0.81	0.71	0.69	0.52	0.73										
160	1.00	0.81	0.66	0.89	0.81	0.76	0.60	0.78										
165	1.05	0.84	0.74	0.93	0.85	0.80	0.69	0.74										
170	1.03	0.84	0.80	0.94	0.86	0.83	0.75	0.75										
175	0.89	0.83	0.82	0.91	0.82	0.81	0.79	0.77										
180	0.80	0.83	0.83	0.85	0.81	0.81	0.81	0.80										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: