


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.0750A P:8.990W PF:0.9960 Freq:60.00Hz Lamp Flux:1005.4x1 lm		
NAME: V17	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 111.84 lm/W			
MODEL		I _{max} (cd)	5565	S/MH(C0/180)	0.23
NOMINAL POWER(W)	10W	LOR(%)	100.0	S/MH(C90/270)	0.29
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	1005.4	η UP,DN(C0-180)	0.2,48.1
NOMINAL FLUX(lm)	1005.4	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.2,51.6
LAMPS INSIDE	1	η up(%)	0.4	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	120.0	η down(%)	99.6	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

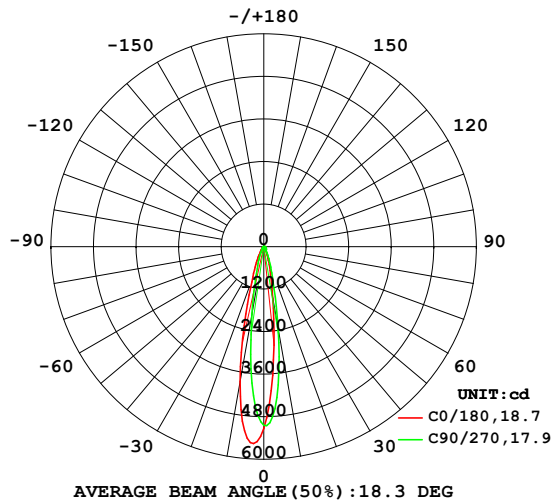

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

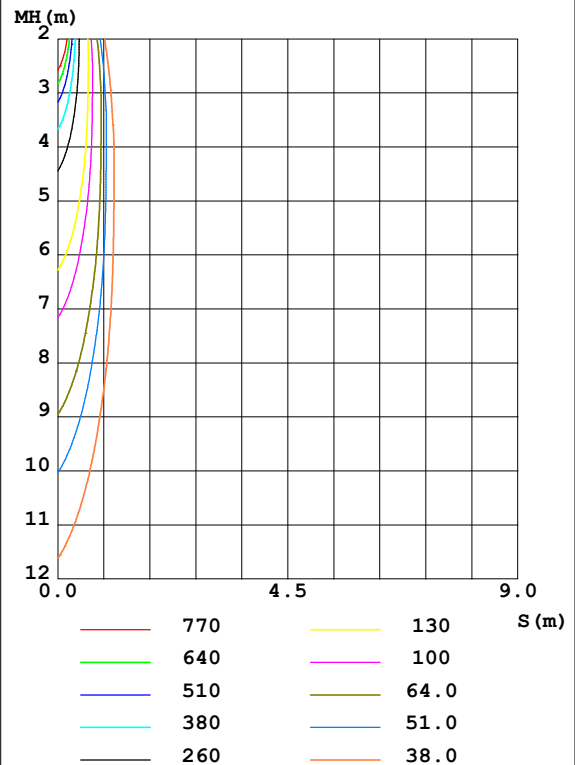

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1490	1747	2371	3836	3871	3198	1938	1235	0- 10	340.7	340.7	33.9,33.9
20	359.8	399.0	536.0	875.7	918.4	697.6	449.5	299.6	10- 20	337.0	677.7	67.4,67.4
30	119.9	122.6	161.9	258.4	273.5	202.4	140.0	102.4	20- 30	145.5	823.2	81.9,81.9
40	64.73	64.20	74.91	94.78	103.1	83.66	69.94	57.52	30- 40	70.15	893.3	88.9,88.9
50	38.72	38.55	42.92	52.22	56.45	49.00	41.16	34.84	40- 50	45.11	938.5	93.3,93.3
60	21.95	22.71	26.64	30.93	32.75	29.99	25.79	20.31	50- 60	30.79	969.2	96.4,96.4
70	12.45	10.94	15.06	17.51	17.74	16.53	14.17	9.360	60- 70	19.84	989.1	98.4,98.4
80	4.220	3.463	4.105	6.813	7.742	5.921	3.249	2.625	70- 80	9.754	998.8	99.3,99.3
90	1.679	1.107	0	1.429	2.712	0.9561	0	1.138	80- 90	2.657	1001	99.6,99.6
100	1.630	0.9055	0	0.5766	1.685	0.5449	0	0.8989	90-100	0.9749	1002	99.7,99.7
110	1.415	0.5689	0	0.5837	1.145	0.4965	0	0.5670	100-110	0.7189	1003	99.8,99.8
120	1.069	0.3875	0.0121	0.4406	0.7144	0.2073	0.0024	0.3973	110-120	0.5034	1004	99.8,99.8
130	0.7315	0.3463	0.0629	0.4213	0.5296	0.3850	0.0315	0.3488	120-130	0.3514	1004	99.9,99.9
140	0.6321	0.3634	0.1306	0.3536	0.4022	0.3101	0.1286	0.3631	130-140	0.2598	1004	99.9,99.9
150	0.8375	0.6204	0.3774	0.4435	0.5717	0.4503	0.4656	0.7189	140-150	0.2598	1005	99.9,99.9
160	1.203	1.158	0.9948	0.9354	0.9887	1.026	1.103	1.213	150-160	0.3704	1005	100,100
170	1.199	1.254	1.342	1.356	1.257	1.337	1.361	1.262	160-170	0.3457	1005	100,100
180	1.148	1.213	1.320	1.279	1.138	1.221	1.320	1.281	170-180	0.1215	1005	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.5V I:0.0750A P:8.990W PF:0.9960 Freq:60.00Hz Lamp Flux:1005.4x1 lm		
NAME: V17	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

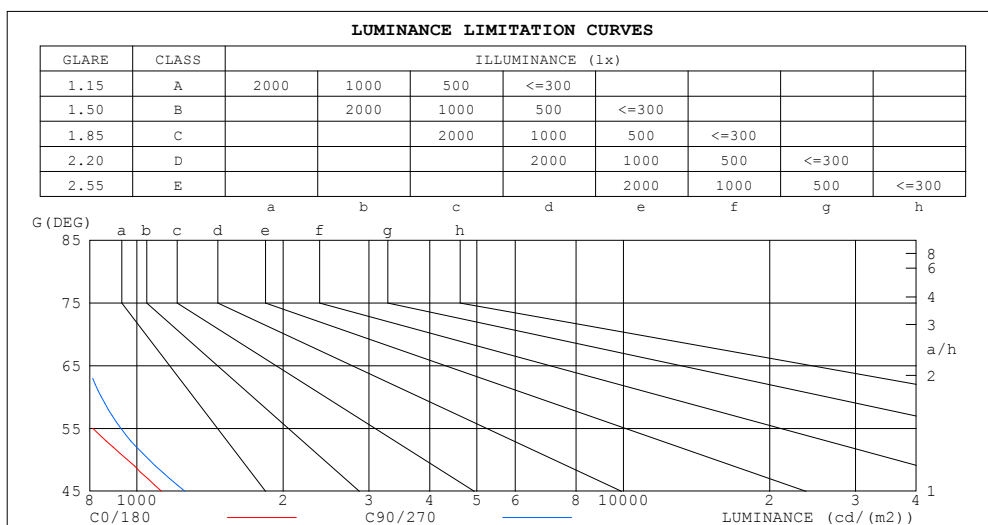

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	423	133
80	386	375
75	508	572
70	578	699
65	611	786
60	697	846
55	811	927
50	956	1060
45	1124	1256


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.5V I:0.0750A P:8.990W PF:0.9960 Freq:60.00Hz Lamp Flux:1005.4x1 lm		
NAME: V17	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.04	1.02	1.01	1.00	.99	.98	.97	.96	.94
2.0	1.05	1.01	.98	1.03	.90	.97	.90	.97	.95	.97	.95	.93	.94	.92	.91	.89
3.0	.99	.95	.91	.98	.94	.91	.95	.92	.89	.93	.90	.88	.91	.88	.86	.85
4.0	.94	.90	.86	.93	.89	.86	.91	.87	.85	.89	.86	.84	.87	.85	.83	.81
5.0	.90	.85	.82	.89	.85	.81	.88	.84	.81	.86	.83	.80	.84	.81	.79	.78
6.0	.86	.82	.78	.86	.81	.78	.84	.80	.77	.83	.79	.77	.82	.79	.76	.75
7.0	.83	.78	.75	.82	.78	.75	.81	.77	.74	.80	.77	.74	.79	.76	.73	.72
8.0	.80	.75	.72	.80	.75	.72	.79	.75	.72	.78	.74	.71	.77	.73	.71	.70
9.0	.77	.73	.70	.77	.73	.69	.76	.72	.69	.75	.72	.69	.75	.71	.69	.68
10.0	.75	.70	.67	.75	.70	.67	.74	.70	.67	.73	.70	.67	.73	.69	.67	.66

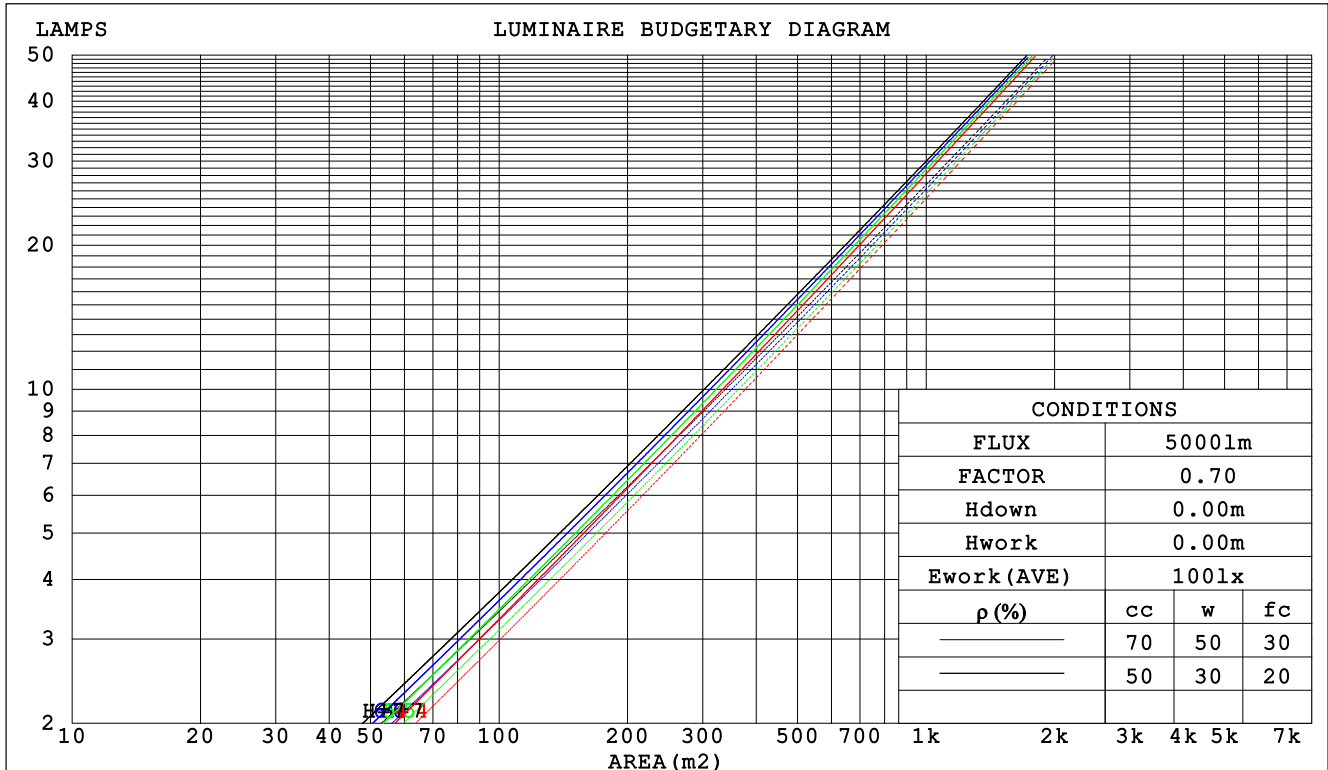

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.5V I:0.0750A P:8.990W PF:0.9960 Freq:60.00Hz Lamp Flux:1005.4x1 lm					
NAME: V17			TYPE:4000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.163	.093	.029	.156	.089	.028	.143	.082	.026	.132	.076	.024	.121	.070	.023		
2.0	.152	.083	.026	.147	.081	.025	.136	.076	.023	.126	.071	.022	.117	.066	.021		
3.0	.142	.076	.023	.137	.073	.022	.128	.069	.021	.120	.066	.020	.112	.062	.019		
4.0	.133	.069	.020	.128	.067	.020	.121	.064	.019	.114	.061	.018	.107	.058	.018		
5.0	.124	.063	.018	.121	.062	.018	.114	.059	.017	.108	.057	.017	.102	.055	.016		
6.0	.117	.059	.017	.114	.057	.017	.108	.055	.016	.103	.053	.016	.098	.051	.015		
7.0	.110	.055	.015	.108	.054	.015	.103	.052	.015	.098	.050	.015	.093	.049	.014		
8.0	.104	.051	.014	.102	.050	.014	.098	.049	.014	.093	.047	.014	.090	.046	.013		
9.0	.099	.048	.013	.097	.047	.013	.093	.046	.013	.089	.045	.013	.086	.044	.013		
10.0	.094	.045	.013	.093	.045	.012	.089	.044	.012	.086	.043	.012	.083	.042	.012		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.173	.160	.149	.148	.138	.128	.101	.095	.089	.058	.055	.052	.019	.018	.017	
2.0	.157	.136	.118	.134	.117	.102	.092	.081	.071	.053	.047	.042	.017	.015	.014	
3.0	.143	.116	.095	.122	.100	.083	.084	.070	.058	.049	.041	.034	.016	.013	.011	
4.0	.131	.101	.079	.113	.088	.068	.077	.061	.048	.045	.036	.028	.014	.012	.009	
5.0	.121	.089	.066	.104	.077	.057	.072	.054	.041	.042	.032	.024	.013	.010	.008	
6.0	.113	.080	.056	.097	.069	.049	.067	.048	.035	.039	.028	.021	.012	.009	.007	
7.0	.105	.072	.048	.090	.062	.042	.062	.044	.030	.036	.026	.018	.012	.008	.006	
8.0	.098	.065	.042	.085	.056	.037	.059	.040	.026	.034	.023	.016	.011	.008	.005	
9.0	.093	.060	.037	.080	.052	.032	.055	.036	.023	.032	.021	.014	.010	.007	.005	
10.0	.088	.055	.033	.076	.048	.029	.052	.034	.020	.031	.020	.012	.010	.007	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.5V I:0.0750A P:8.990W PF:0.9960 Freq:60.00Hz Lamp Flux:1005.4x1 lm										
NAME: V17					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.5	7.3	6.7	7.4	7.6	7.2	7.9	7.4	8.1	8.3
3H	7.3	8.1	7.6	8.3	8.5	8.2	8.9	8.4	9.1	9.3
4H	7.7	8.4	8.0	8.6	8.8	8.5	9.2	8.8	9.4	9.7
6H	7.9	8.6	8.2	8.8	9.0	8.7	9.3	9.0	9.6	9.8
8H	8.0	8.6	8.3	8.8	9.1	8.7	9.3	9.0	9.6	9.8
12H	8.0	8.6	8.3	8.9	9.2	8.6	9.3	9.0	9.5	9.8
4H 2H	6.9	7.6	7.1	7.8	8.0	7.4	8.1	7.7	8.4	8.6
3H	7.9	8.5	8.2	8.8	9.0	8.6	9.2	8.9	9.5	9.7
4H	8.3	8.9	8.7	9.2	9.5	9.0	9.6	9.4	9.9	10.2
6H	8.6	9.1	9.0	9.4	9.8	9.2	9.7	9.6	10.1	10.4
8H	8.7	9.1	9.1	9.5	9.8	9.2	9.7	9.6	10.1	10.4
12H	8.7	9.1	9.1	9.5	9.9	9.2	9.6	9.6	10.0	10.4
8H 4H	8.4	8.9	8.8	9.2	9.6	9.0	9.5	9.4	9.9	10.2
6H	8.7	9.1	9.2	9.5	9.9	9.3	9.7	9.8	10.1	10.5
8H	8.8	9.2	9.3	9.6	10.0	9.4	9.7	9.8	10.1	10.6
12H	9.0	9.2	9.4	9.7	10.2	9.3	9.6	9.8	10.1	10.6
12H 4H	8.4	8.8	8.8	9.2	9.6	9.0	9.4	9.4	9.8	10.2
6H	8.7	9.0	9.2	9.5	9.9	9.3	9.6	9.8	10.1	10.5
8H	8.8	9.1	9.3	9.6	10.1	9.3	9.6	9.8	10.1	10.6
Variations with the observer position at spacings:										
S = 1.0H	+ 0.4 / - 0.6					+ 0.4 / - 0.5				
1.5H	+ 0.3 / - 0.3					+ 0.7 / - 0.4				
2.0H	+ 0.8 / - 0.7					+ 0.9 / - 0.7				

CIE Pub.117 Corrected 1005 lm Total Lamp Luminous Flux.(8log(F/F0) = 0.0)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.0750A P:8.990W PF:0.9960 Freq:60.00Hz Lamp Flux:1005.4x1 lm		
NAME: V17	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	85	78	74	84	78	74	83	77	74	70
0.80	92	86	82	92	86	82	90	85	81	77
1.00	97	91	87	96	90	87	94	90	86	82
1.25	101	95	92	100	95	91	98	94	90	86
1.50	104	99	95	103	98	95	100	97	94	89
2.00	107	103	99	106	101	98	103	99	97	91
2.50	109	105	102	107	104	101	104	101	99	92
3.00	111	107	104	109	106	103	105	103	101	94
4.00	113	110	107	111	108	106	107	105	103	96
5.00	114	112	110	112	110	108	108	106	105	97
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.0750A P:8.990W PF:0.9960 Freq:60.00Hz Lamp Flux:1005.4x1 lm		
NAME: V17	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

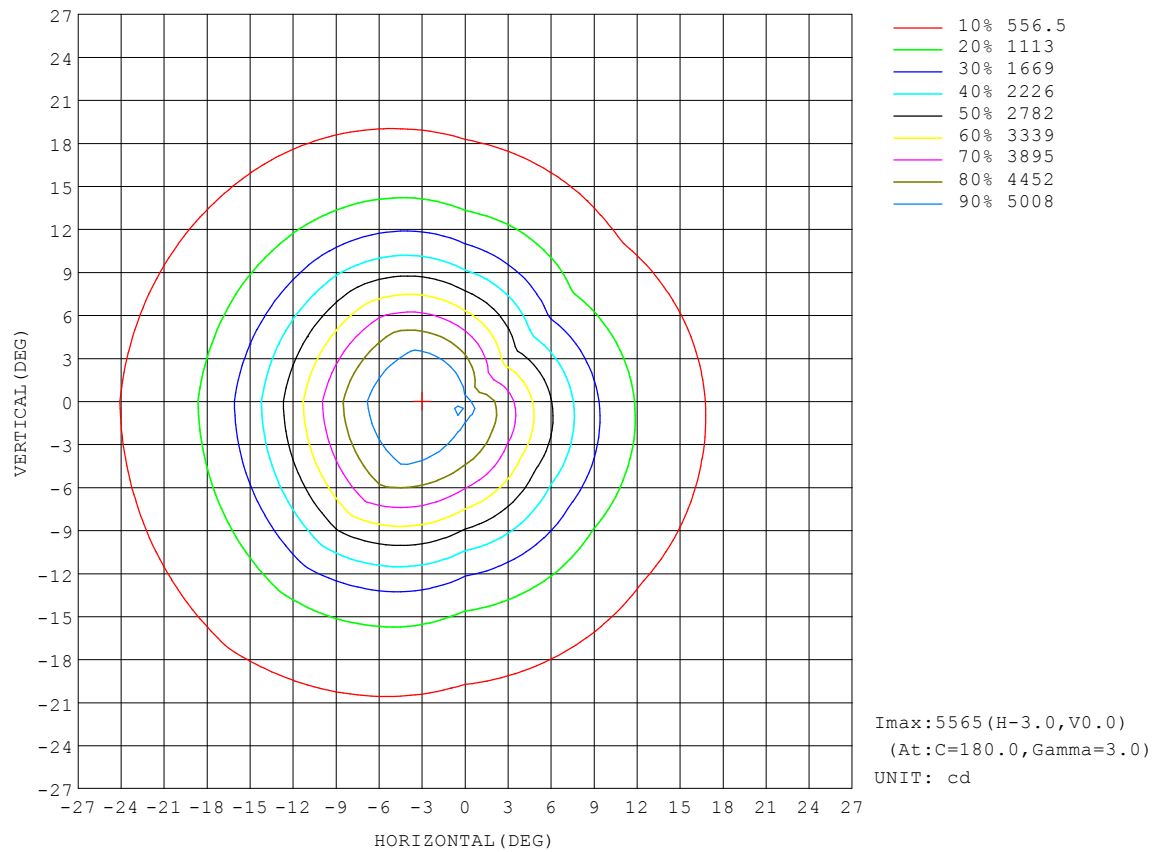

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:


```

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

```

ISOLUX DIAGRAM

Test:U:119.5V I:0.0750A P:8.990W PF:0.9960 Freq:60.00Hz Lamp Flux:1005.4x1 lm		
NAME: V17	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

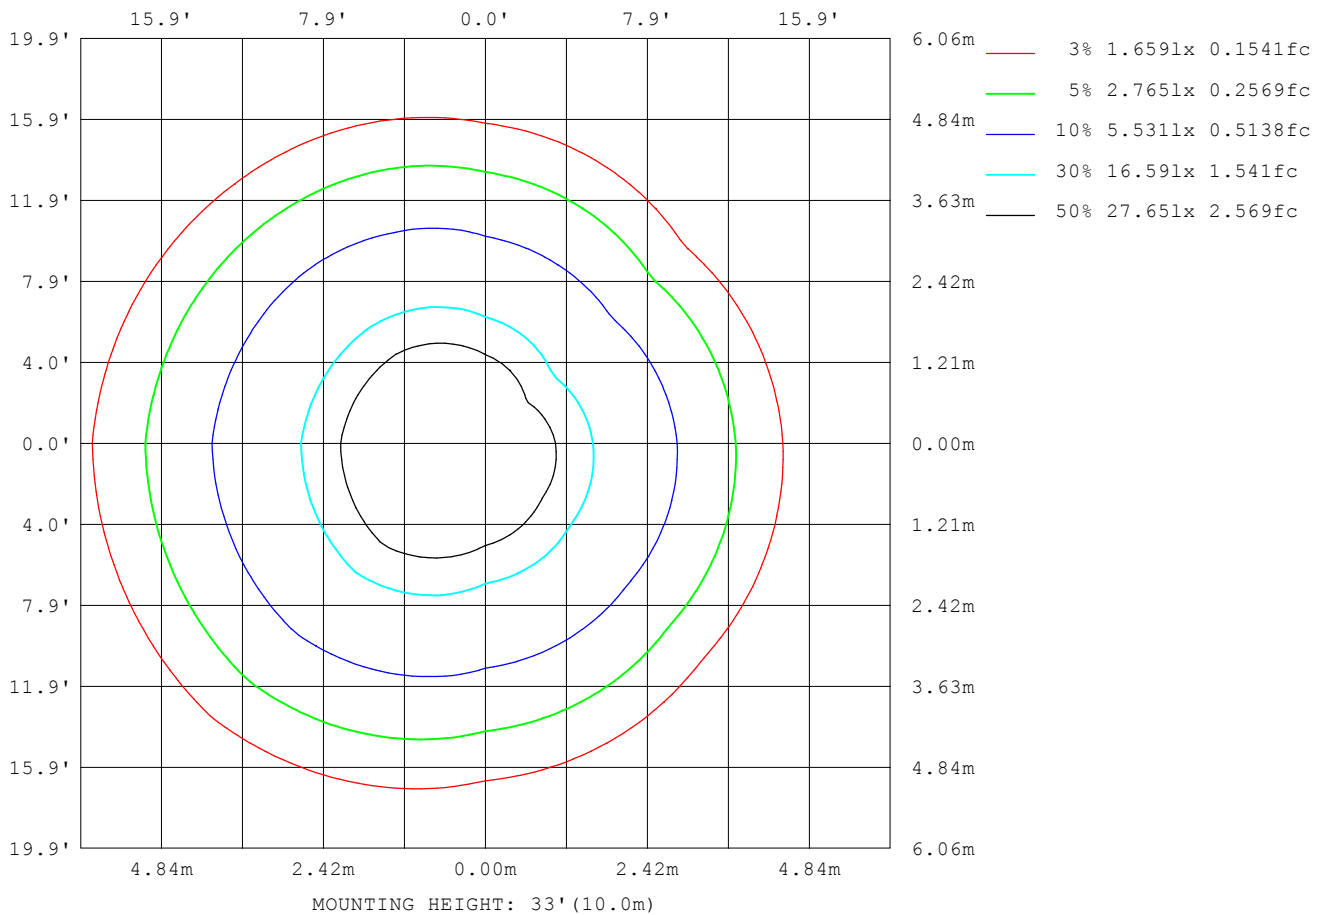

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.5V I:0.0750A P:8.990W PF:0.9960 Freq:60.00Hz Lamp Flux:1005.4x1 lm		
NAME: V17	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	773
L_0~180 (75) av	615
L_0~180 (85) av	656
L_90~270 (65) av	766
L_90~270 (75) av	541
L_90~270 (85) av	105
L_45 (65) av	729
L_45 (75) av	542
L_45 (85) av	414

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

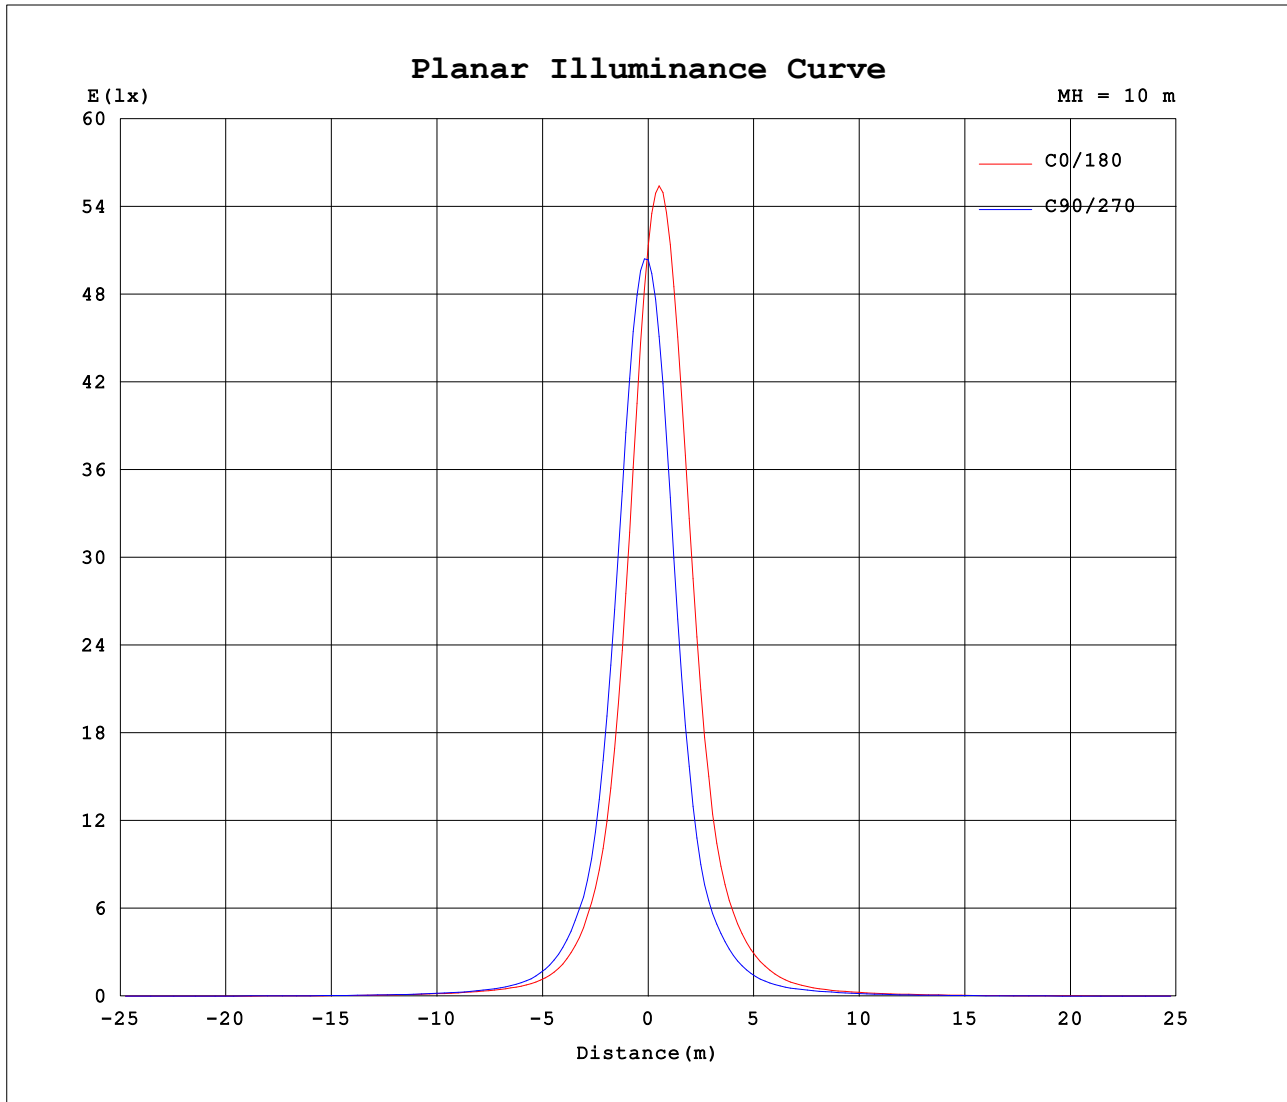

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.0750A P:8.990W PF:0.9960 Freq:60.00Hz Lamp Flux:1005.4x1 lm								
NAME: V17					TYPE:4000K			WEIGHT:
SPEC.:					DIM.:			SERIAL No.:
MFR.: EVERFINE					SUR.:			Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	5131	5221	5036	4708	5131	5221	5036	4708										
5	3209	3553	4275	5216	5420	5028	3862	2794										
10	1490	1747	2371	3836	3871	3198	1938	1235										
15	709	784	1042	1938	1963	1457	846	604										
20	360	399	536	876	918	698	450	300										
25	193	210	288	473	495	369	242	163										
30	120	123	162	258	274	202	140	102										
35	85.0	84.1	106	148	158	120	93.2	74.2										
40	64.7	64.2	74.9	94.8	103	83.7	69.9	57.5										
45	50.1	49.9	56.0	69.6	75.4	63.7	53.7	44.8										
50	38.7	38.6	42.9	52.2	56.4	49.0	41.2	34.8										
55	29.3	29.9	33.5	39.6	42.9	38.0	32.4	27.0										
60	21.9	22.7	26.6	30.9	32.7	30.0	25.8	20.3										
65	16.3	16.4	20.9	23.9	24.9	23.0	19.9	14.3										
70	12.5	10.9	15.1	17.5	17.7	16.5	14.2	9.36										
75	8.28	6.87	9.32	11.8	11.8	10.8	8.32	5.84										
80	4.22	3.46	4.11	6.81	7.74	5.92	3.25	2.62										
85	2.32	1.40	0.73	3.68	4.88	2.77	0.42	1.24										
90	1.68	1.11	0.00	1.43	2.71	0.96	0.00	1.14										
95	1.65	1.02	0.00	0.57	2.00	0.55	0.00	1.01										
100	1.63	0.91	0.00	0.58	1.68	0.54	0.00	0.90										
105	1.54	0.70	0.00	0.58	1.28	0.54	0.00	0.72										
110	1.41	0.57	0.00	0.58	1.15	0.50	0.00	0.57										
115	1.29	0.44	0.00	0.54	0.99	0.36	0.00	0.45										
120	1.07	0.39	0.01	0.44	0.71	0.21	0.00	0.40										
125	0.85	0.36	0.04	0.43	0.76	0.31	0.02	0.37										
130	0.73	0.35	0.06	0.42	0.53	0.38	0.03	0.35										
135	0.66	0.35	0.08	0.39	0.35	0.36	0.06	0.35										
140	0.63	0.36	0.13	0.35	0.40	0.31	0.13	0.36										
145	0.68	0.44	0.21	0.36	0.48	0.32	0.25	0.48										
150	0.84	0.62	0.38	0.44	0.57	0.45	0.47	0.72										
155	1.05	0.92	0.67	0.64	0.73	0.71	0.80	1.00										
160	1.20	1.16	0.99	0.94	0.99	1.03	1.10	1.21										
165	1.24	1.26	1.25	1.22	1.19	1.27	1.31	1.28										
170	1.20	1.25	1.34	1.36	1.26	1.34	1.36	1.26										
175	1.13	1.21	1.32	1.34	1.18	1.28	1.34	1.24										
180	1.15	1.21	1.32	1.28	1.14	1.22	1.32	1.28										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: