


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.6V I:0.0750A P:9.020W PF:0.9970 Freq:60.00Hz Lamp Flux:938.482x1 lm		
NAME: PG25	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 104.04 lm/W			
MODEL		I _{max} (cd)	2990	S/MH (C0/180)	0.93
NOMINAL POWER(W)	10W	LOR(%)	100.0	S/MH (C90/270)	0.53
RATED VOLTAGE(V)	120.0	TOTAL FLUX (lm)	938.48	η UP,DN (C0-180)	0.3,56.0
NOMINAL FLUX(lm)	938.482	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.3,43.4
LAMPS INSIDE	1	η up (%)	0.6	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	120.0	η down (%)	99.4	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

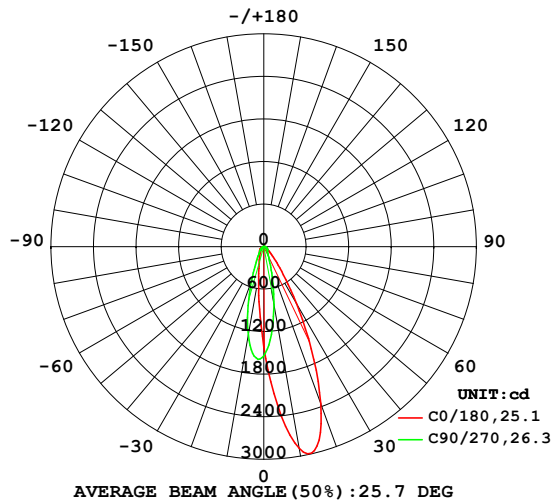

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

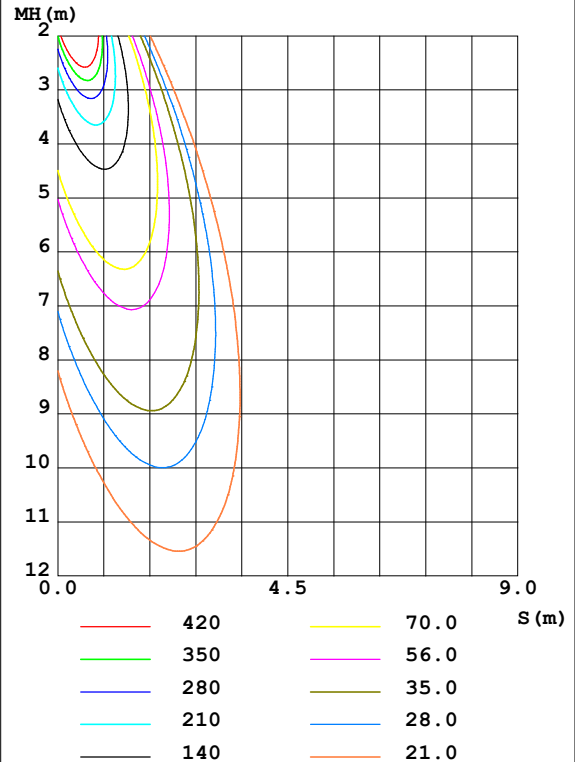

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2886	1669	833.5	561.9	435.1	620.6	1265	2608	0- 10	138.4	138.4	14.7,14.7
20	2350	800.7	278.8	195.7	182.0	240.2	508.1	1552	10- 20	297.0	435.4	46.4,46.4
30	923.2	251.7	119.0	109.7	117.8	127.0	171.9	468.2	20- 30	222.7	658.1	70.1,70.1
40	260.4	99.98	74.62	81.57	92.74	87.96	86.27	139.7	30- 40	112.8	770.9	82.1,82.1
50	93.91	53.97	54.27	64.47	73.53	68.37	58.61	63.48	40- 50	66.65	837.5	89.2,89.2
60	41.58	30.13	36.89	47.30	51.88	49.77	37.59	34.35	50- 60	47.46	885.0	94.3,94.3
70	17.97	12.74	16.98	26.48	29.29	28.25	18.94	14.67	60- 70	30.32	915.3	97.5,97.5
80	6.977	3.185	2.684	9.863	15.12	10.43	4.093	4.389	70- 80	13.74	929.0	99,99
90	2.928	0.7338	0	2.180	4.054	2.299	0	0.9056	80- 90	3.965	933.0	99.4,99.4
100	2.265	0.6757	0	1.724	2.318	1.552	0	0.8477	90-100	1.425	934.4	99.6,99.6
110	2.006	0.5715	0.0048	1.322	2.264	0.7331	0	0.5208	100-110	1.166	935.6	99.7,99.7
120	1.686	0.5764	0.0266	0.9321	1.608	0.6615	0.0145	0.6052	110-120	0.8373	936.4	99.8,99.8
130	1.143	0.5835	0.0629	0.7240	1.110	0.3729	0.0412	0.6149	120-130	0.5989	937.0	99.8,99.8
140	1.112	0.4868	0.1475	0.7533	1.054	0.4696	0.0922	0.4941	130-140	0.4330	937.5	99.9,99.9
150	0.8333	0.4602	0.3726	0.9398	1.204	0.7119	0.2716	0.4480	140-150	0.3803	937.8	99.9,99.9
160	0.6975	0.6346	0.6657	0.9686	1.102	0.8525	0.6010	0.6296	150-160	0.3293	938.2	100,100
170	0.8308	0.8041	0.7629	0.8742	0.9493	0.7799	0.8137	0.8304	160-170	0.2260	938.4	100,100
180	0.9760	0.8258	0.7871	0.9614	0.9324	0.8258	0.7895	0.9614	170-180	0.0811	938.5	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.6V I:0.0750A P:9.020W PF:0.9970 Freq:60.00Hz Lamp Flux:938.482x1 lm		
NAME: PG25	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

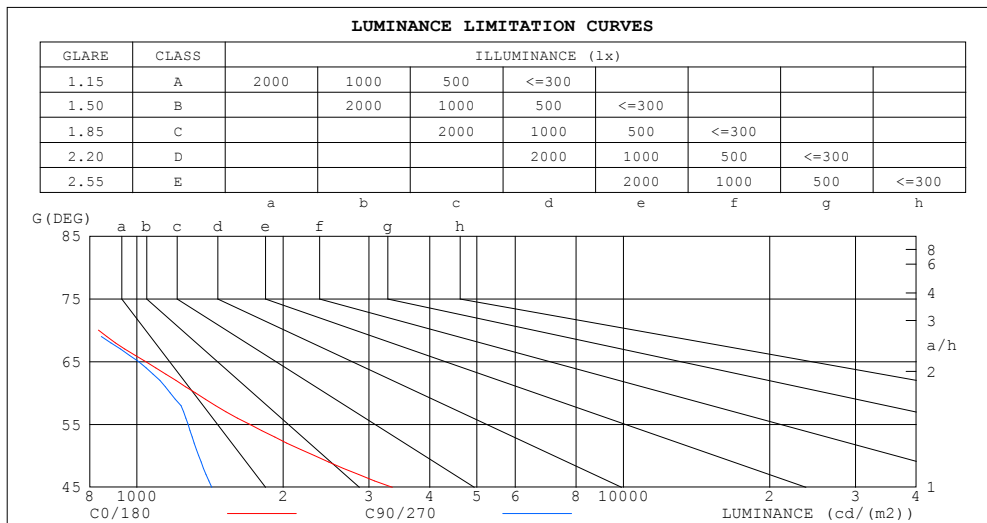

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	717	15
80	638	245
75	693	532
70	834	788
65	1042	1007
60	1320	1171
55	1705	1275
50	2319	1340
45	3349	1427


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.6V I:0.0750A P:9.020W PF:0.9970 Freq:60.00Hz Lamp Flux:938.482x1 lm		
NAME: PG25	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.99
1.0	1.10	1.07	1.05	1.07	1.05	1.03	1.03	1.01	.00	.99	.98	.96	.96	.95	.94	.92
2.0	1.01	.97	.93	.00	.96	.92	.96	.93	.90	.93	.90	.88	.90	.88	.86	.84
3.0	.94	.89	.85	.93	.88	.84	.90	.86	.83	.87	.84	.81	.85	.82	.80	.78
4.0	.88	.82	.78	.87	.81	.77	.84	.80	.76	.82	.78	.75	.80	.77	.74	.73
5.0	.82	.76	.72	.81	.76	.72	.80	.75	.71	.78	.74	.70	.76	.72	.70	.68
6.0	.78	.71	.67	.77	.71	.67	.75	.70	.66	.74	.69	.66	.72	.68	.65	.64
7.0	.73	.67	.63	.73	.67	.63	.71	.66	.62	.70	.65	.62	.69	.65	.62	.60
8.0	.69	.63	.59	.69	.63	.59	.68	.63	.59	.67	.62	.59	.66	.61	.58	.57
9.0	.66	.60	.56	.65	.60	.56	.64	.59	.56	.64	.59	.56	.63	.58	.55	.54
10.0	.63	.57	.53	.62	.57	.53	.61	.56	.53	.61	.56	.53	.60	.56	.53	.51

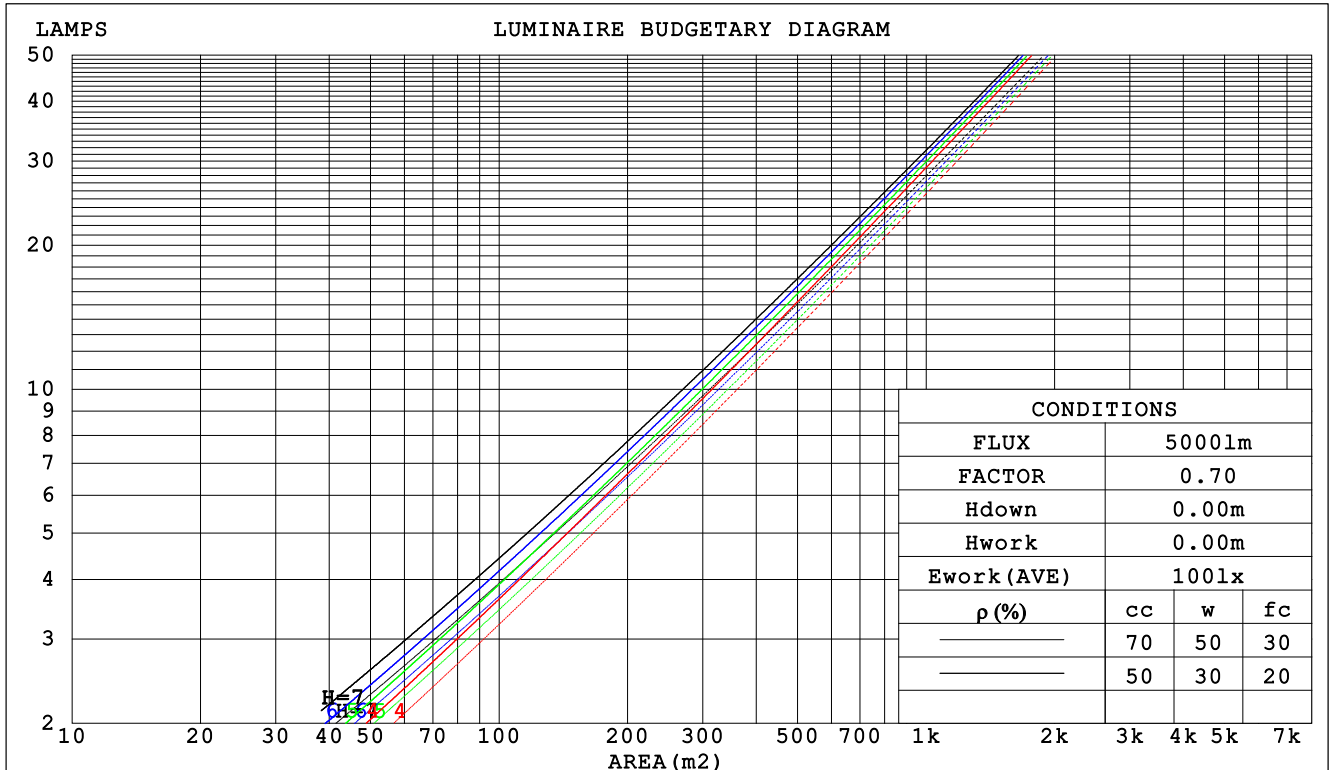

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.6V I:0.0750A P:9.020W PF:0.9970 Freq:60.00Hz Lamp Flux:938.482x1 lm					
NAME: PG25			TYPE:4000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.196	.111	.035	.189	.108	.034	.176	.101	.032	.164	.094	.030	.153	.088	.029		
2.0	.185	.101	.031	.179	.099	.030	.168	.094	.029	.158	.089	.028	.149	.084	.027		
3.0	.174	.093	.028	.169	.090	.027	.159	.086	.026	.151	.083	.025	.143	.079	.024		
4.0	.163	.085	.025	.159	.083	.025	.151	.080	.024	.143	.077	.023	.136	.074	.023		
5.0	.154	.078	.023	.150	.077	.022	.143	.074	.022	.136	.072	.021	.130	.069	.021		
6.0	.145	.073	.021	.142	.072	.021	.136	.069	.020	.130	.067	.020	.124	.065	.019		
7.0	.137	.068	.019	.134	.067	.019	.129	.065	.019	.124	.063	.018	.119	.062	.018		
8.0	.130	.064	.018	.128	.063	.018	.123	.061	.018	.118	.060	.017	.114	.058	.017		
9.0	.124	.060	.017	.122	.059	.017	.117	.058	.016	.113	.057	.016	.109	.055	.016		
10.0	.118	.057	.016	.116	.056	.016	.112	.055	.015	.108	.054	.015	.105	.053	.015		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.195	.195	.195	.167	.167	.167	.114	.114	.114	.065	.065	.065	.021	.021	.021	
1.0	.177	.162	.148	.151	.139	.127	.104	.095	.088	.060	.055	.051	.019	.018	.017	
2.0	.163	.137	.115	.139	.118	.100	.095	.082	.070	.055	.047	.041	.018	.015	.013	
3.0	.151	.118	.092	.129	.102	.080	.089	.071	.056	.051	.041	.033	.016	.013	.011	
4.0	.140	.104	.076	.120	.090	.066	.083	.062	.046	.048	.037	.027	.015	.012	.009	
5.0	.131	.092	.063	.113	.080	.055	.078	.056	.039	.045	.033	.023	.015	.011	.008	
6.0	.124	.083	.054	.106	.072	.047	.073	.050	.033	.043	.030	.020	.014	.010	.006	
7.0	.117	.075	.046	.100	.065	.040	.069	.046	.029	.040	.027	.017	.013	.009	.006	
8.0	.111	.069	.040	.095	.060	.035	.066	.042	.025	.038	.025	.015	.012	.008	.005	
9.0	.105	.064	.036	.091	.055	.031	.063	.039	.022	.037	.023	.013	.012	.008	.004	
10.0	.100	.059	.032	.087	.052	.028	.060	.036	.020	.035	.021	.012	.011	.007	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.6V I:0.0750A P:9.020W PF:0.9970 Freq:60.00Hz Lamp Flux:938.482x1 lm										
NAME: PG25					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.0	13.9	13.2	14.1	14.3	9.3	10.2	9.5	10.4	10.6
3H	13.2	14.1	13.5	14.3	14.5	10.1	11.0	10.3	11.2	11.4
4H	13.2	14.1	13.5	14.3	14.6	10.2	11.1	10.5	11.3	11.6
6H	13.3	14.1	13.6	14.4	14.6	10.2	11.1	10.6	11.3	11.6
8H	13.3	14.1	13.6	14.3	14.6	10.2	11.0	10.5	11.3	11.5
12H	13.3	14.1	13.6	14.3	14.6	10.2	10.9	10.5	11.2	11.5
4H 2H	12.9	13.8	13.2	14.0	14.2	9.6	10.4	9.8	10.6	10.9
3H	13.2	13.9	13.5	14.2	14.5	10.4	11.2	10.8	11.5	11.8
4H	13.3	14.0	13.6	14.3	14.6	10.7	11.3	11.0	11.7	12.0
6H	13.4	14.0	13.8	14.3	14.7	10.7	11.3	11.1	11.7	12.0
8H	13.4	14.0	13.8	14.3	14.7	10.7	11.2	11.1	11.6	12.0
12H	13.5	14.0	13.9	14.3	14.8	10.6	11.1	11.0	11.5	11.9
8H 4H	13.2	13.8	13.6	14.1	14.5	10.7	11.2	11.1	11.6	12.0
6H	13.3	13.8	13.8	14.2	14.6	10.7	11.2	11.2	11.6	12.0
8H	13.4	13.8	13.8	14.2	14.7	10.7	11.1	11.1	11.5	12.0
12H	13.5	13.8	13.9	14.3	14.7	10.6	11.0	11.1	11.4	11.9
12H 4H	13.2	13.7	13.6	14.1	14.5	10.6	11.1	11.0	11.5	11.9
6H	13.3	13.7	13.7	14.1	14.6	10.7	11.1	11.1	11.5	12.0
8H	13.4	13.7	13.8	14.2	14.6	10.7	11.0	11.1	11.5	12.0
Variations with the observer position at spacings:										
S = 1.0H	+ 2.8 / - 1.9					+ 0.5 / - 0.6				
1.5H	+ 4.3 / - 2.5					+ 0.4 / - 0.3				
2.0H	+ 3.5 / - 1.8					+ 0.7 / - 0.9				

CIE Pub.117 Corrected 938.5 lm Total Lamp Luminous Flux.(8log(F/F0) = -0.2)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.6V I:0.0750A P:9.020W PF:0.9970 Freq:60.00Hz Lamp Flux:938.482x1 lm		
NAME: PG25	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	80	73	68	80	73	68	79	72	68	64
0.80	88	81	77	88	81	77	86	80	76	72
1.00	94	87	83	93	87	82	91	87	82	77
1.25	99	92	88	97	92	87	95	90	87	82
1.50	102	96	92	100	95	91	98	94	90	85
2.00	105	100	96	104	99	96	101	97	94	88
2.50	108	103	99	106	102	98	103	99	96	90
3.00	110	105	102	108	104	101	104	101	99	92
4.00	112	109	106	110	107	104	106	104	102	94
5.00	114	111	108	111	109	107	107	105	104	95
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.6V I:0.0750A P:9.020W PF:0.9970 Freq:60.00Hz Lamp Flux:938.482x1 lm		
NAME: PG25	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

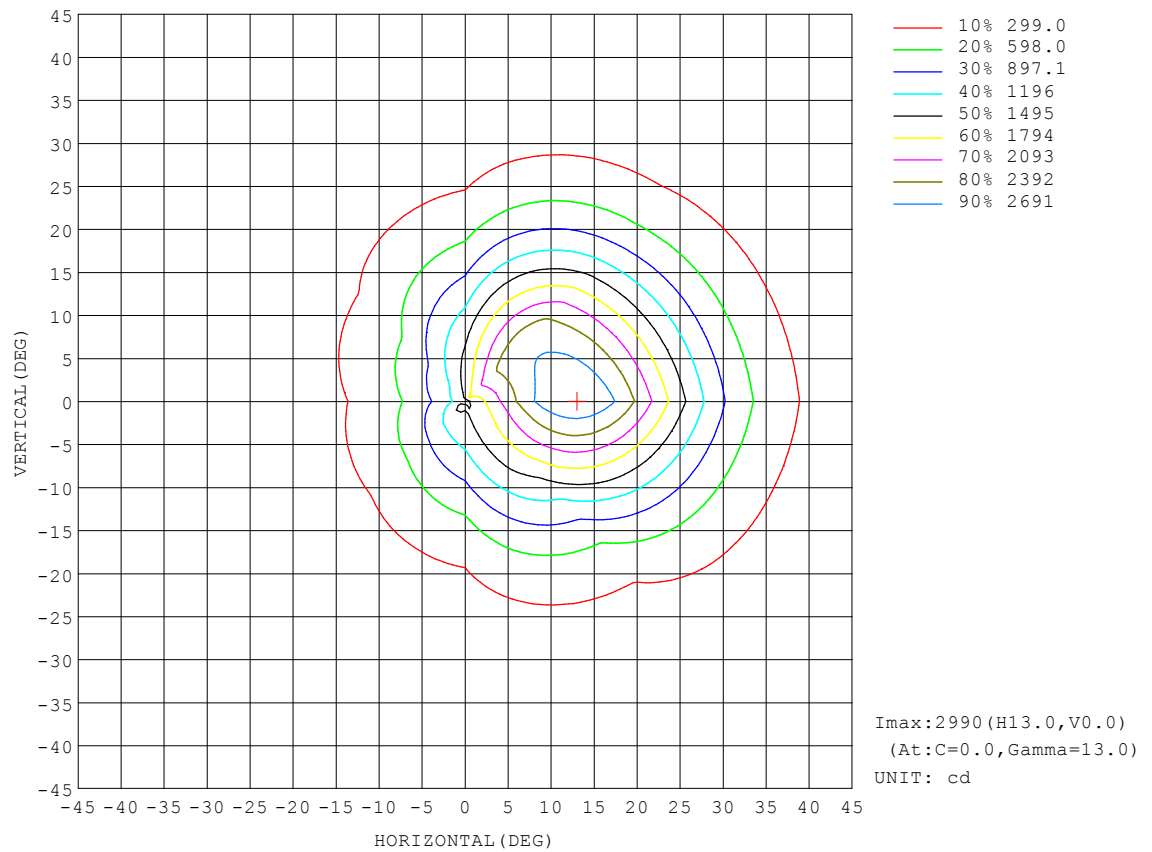


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:119.6V I:0.0750A P:9.020W PF:0.9970 Freq:60.00Hz Lamp Flux:938.482x1 lm		
NAME: PG25	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

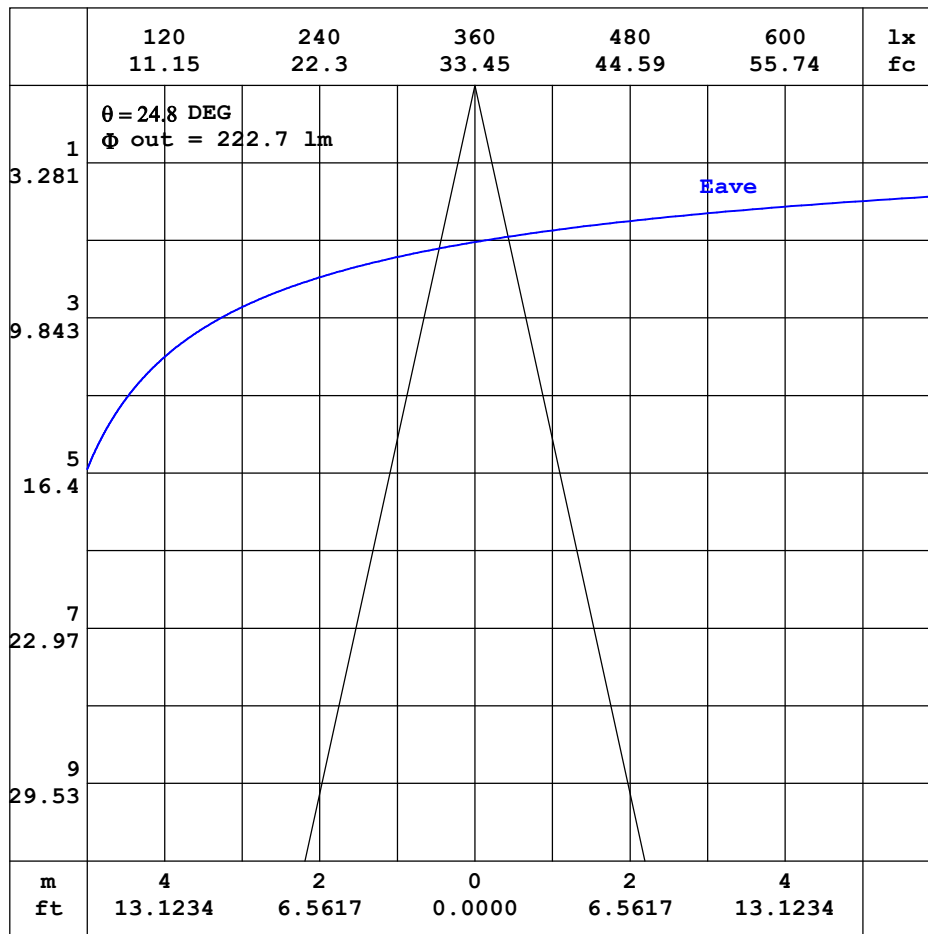


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.6V I:0.0750A P:9.020W PF:0.9970 Freq:60.00Hz Lamp Flux:938.482x1 lm		
NAME: PG25	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

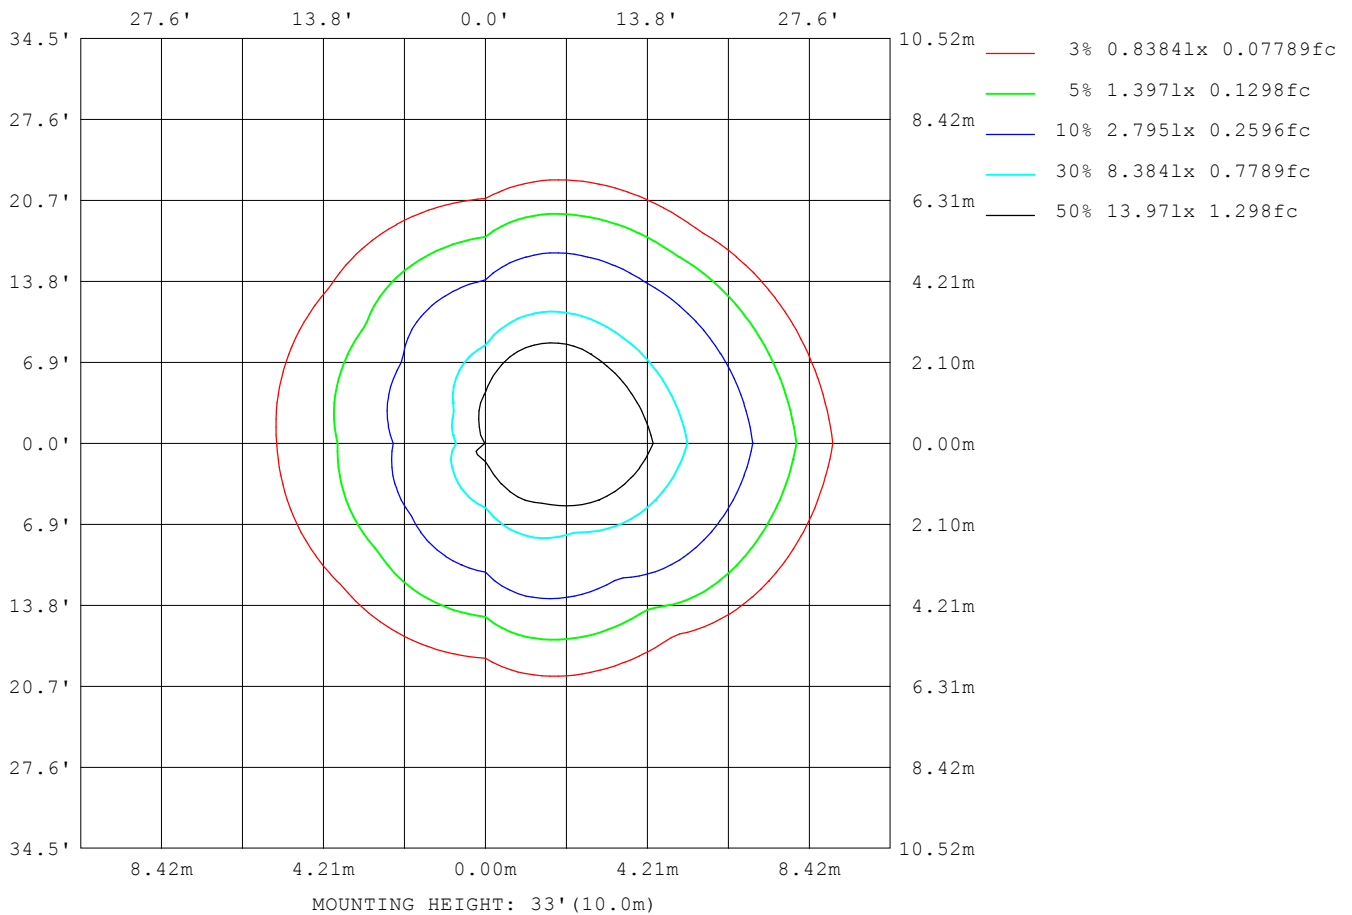

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.6V I:0.0750A P:9.020W PF:0.9970 Freq:60.00Hz Lamp Flux:938.482x1 lm		
NAME: PG25	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1272
L_0~180 (75) av	988
L_0~180 (85) av	1080
L_90~270 (65) av	1038
L_90~270 (75) av	591
L_90~270 (85) av	27
L_45 (65) av	1143
L_45 (75) av	758
L_45 (85) av	625

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

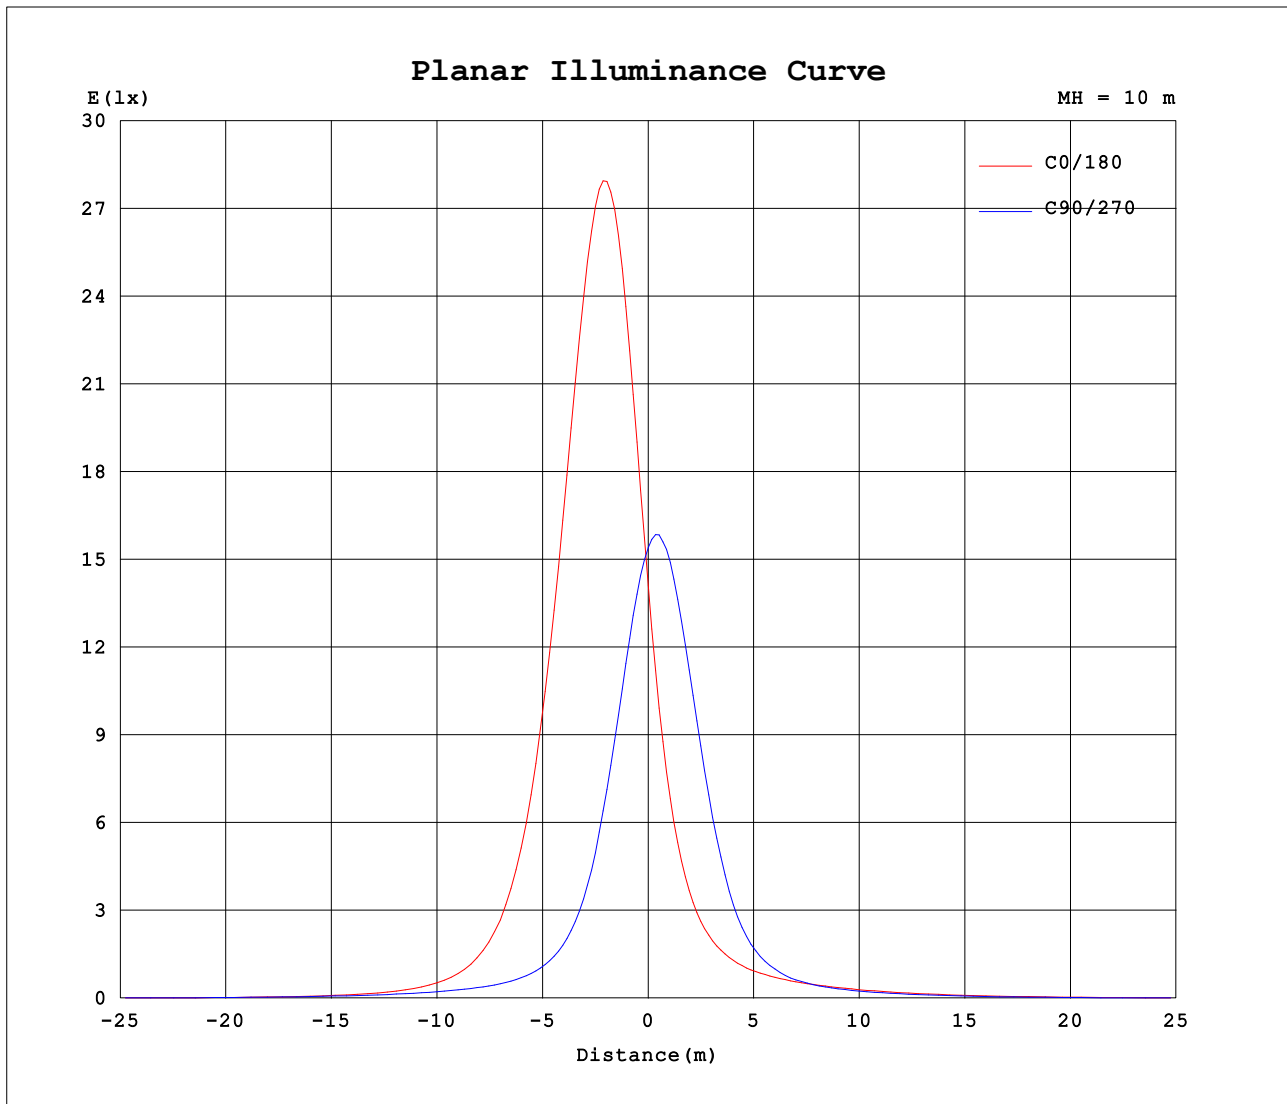

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.6V I:0.0750A P:9.020W PF:0.9970 Freq:60.00Hz Lamp Flux:938.482x1 lm		
NAME: PG25	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1413	1417	1540	1709	1413	1417	1540	1709										
5	2239	1732	1244	1017	783	977	1553	2391										
10	2886	1669	833	562	435	621	1265	2608										
15	2910	1276	487	313	264	381	863	2231										
20	2350	801	279	196	182	240	508	1552										
25	1588	449	172	138	139	166	284	906										
30	923	252	119	110	118	127	172	468										
35	488	153	90.6	92.6	103	103	115	245										
40	260	100.0	74.6	81.6	92.7	88.0	86.3	140										
45	149	71.7	63.6	72.4	83.5	77.5	69.8	89.6										
50	93.9	54.0	54.3	64.5	73.5	68.4	58.6	63.5										
55	61.6	41.0	46.1	56.2	63.8	59.3	48.0	47.1										
60	41.6	30.1	36.9	47.3	51.9	49.8	37.6	34.4										
65	27.8	20.8	26.8	37.9	40.0	39.4	28.4	23.6										
70	18.0	12.7	17.0	26.5	29.3	28.2	18.9	14.7										
75	11.3	6.92	8.67	16.5	20.9	17.4	10.6	8.69										
80	6.98	3.18	2.68	9.86	15.1	10.4	4.09	4.39										
85	3.94	1.11	0.08	5.22	7.92	5.71	0.22	1.69										
90	2.93	0.73	0.00	2.18	4.05	2.30	0.00	0.91										
95	2.56	0.70	0.00	1.82	2.48	1.59	0.00	0.87										
100	2.26	0.68	0.00	1.72	2.32	1.55	0.00	0.85										
105	2.17	0.63	0.00	1.65	2.45	1.43	0.00	0.66										
110	2.01	0.57	0.00	1.32	2.26	0.73	0.00	0.52										
115	1.84	0.55	0.01	1.13	1.88	0.87	0.01	0.48										
120	1.69	0.58	0.03	0.93	1.61	0.66	0.01	0.61										
125	1.32	0.60	0.04	0.78	1.39	0.53	0.03	0.62										
130	1.14	0.58	0.06	0.72	1.11	0.37	0.04	0.61										
135	1.11	0.52	0.09	0.70	1.01	0.43	0.07	0.52										
140	1.11	0.49	0.15	0.75	1.05	0.47	0.09	0.49										
145	0.98	0.47	0.23	0.83	1.13	0.60	0.16	0.48										
150	0.83	0.46	0.37	0.94	1.20	0.71	0.27	0.45										
155	0.75	0.52	0.52	0.99	1.19	0.82	0.43	0.51										
160	0.70	0.63	0.67	0.97	1.10	0.85	0.60	0.63										
165	0.78	0.72	0.74	0.91	1.00	0.82	0.75	0.68										
170	0.83	0.80	0.76	0.87	0.95	0.78	0.81	0.83										
175	0.91	0.82	0.75	0.89	0.96	0.79	0.81	0.93										
180	0.98	0.83	0.79	0.96	0.93	0.83	0.79	0.96										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: