


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:929.4x1 lm		
NAME: V25	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 103.27 lm/W			
MODEL		I _{max} (cd)	2862	S/MH (C0/180)	0.40
NOMINAL POWER(W)	10W	LOR(%)	100.0	S/MH (C90/270)	0.39
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	929.40	η UP,DN (C0-180)	0.3,51.3
NOMINAL FLUX(lm)	929.4	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.3,48.1
LAMPS INSIDE	1	η up (%)	0.6	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	120.0	η down (%)	99.4	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

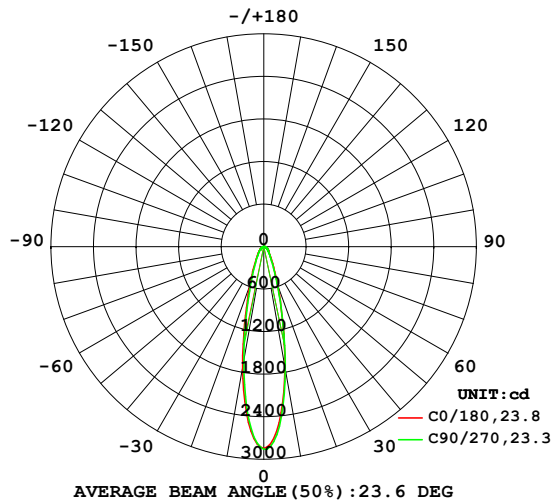

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

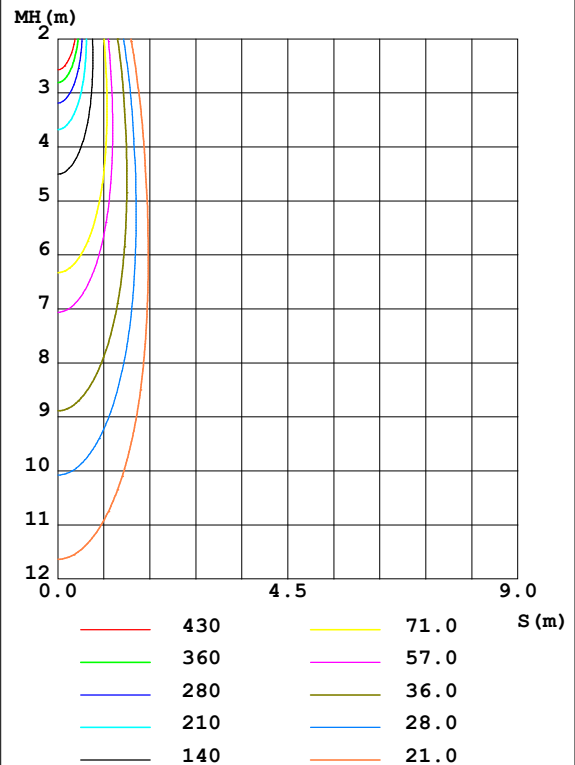

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1727	1711	1759	1955	1724	1687	1637	1530	0- 10	212.2	212.2	22.8,22.8
20	572.9	543.8	551.8	655.1	578.1	539.1	524.2	488.8	10- 20	278.6	490.8	52.8,52.8
30	229.4	215.1	214.4	244.2	231.3	215.5	209.1	198.5	20- 30	158.9	649.7	69.9,69.9
40	121.2	113.4	114.9	122.2	123.4	116.1	112.7	106.7	30- 40	98.90	748.6	80.6,80.6
50	76.23	71.06	69.97	74.65	76.19	73.96	68.79	66.16	40- 50	70.59	819.2	88.1,88.1
60	45.42	44.23	45.81	47.84	47.28	47.12	44.70	40.29	50- 60	51.89	871.1	93.7,93.7
70	24.41	22.44	23.30	25.55	23.17	23.48	22.61	19.16	60- 70	33.47	904.6	97.3,97.3
80	11.07	7.608	5.549	8.638	9.067	7.429	4.549	6.523	70- 80	15.36	919.9	99,99
90	3.036	1.770	0.0170	1.386	3.221	0.9824	0	1.904	80- 90	3.893	923.8	99.4,99.4
100	2.545	1.567	0.0194	0.9614	2.130	0.8938	0	1.628	90-100	1.456	925.3	99.6,99.6
110	2.328	0.9273	0.0218	0.8644	1.615	0.7776	0.0024	1.044	100-110	1.145	926.4	99.7,99.7
120	1.866	0.6247	0.0654	0.6418	1.080	0.3967	0.0267	0.6686	110-120	0.8007	927.2	99.8,99.8
130	1.100	0.5570	0.1282	0.6685	0.7819	0.6926	0.0800	0.5692	120-130	0.5662	927.8	99.8,99.8
140	0.7948	0.5789	0.2299	0.6102	0.8211	0.5935	0.1745	0.4987	130-140	0.4257	928.2	99.9,99.9
150	0.9176	0.7389	0.5300	0.7488	0.7787	0.6658	0.4266	0.6271	140-150	0.3704	928.6	99.9,99.9
160	1.155	1.090	1.005	1.185	1.049	0.9297	0.7996	0.8596	150-160	0.3892	929.0	100,100
170	1.129	1.124	1.150	1.295	1.073	1.046	0.9809	0.9929	160-170	0.3061	929.3	100,100
180	0.9978	1.003	1.029	1.066	0.9978	1.007	1.029	1.066	170-180	0.1015	929.4	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:929.4x1 lm		
NAME: V25	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

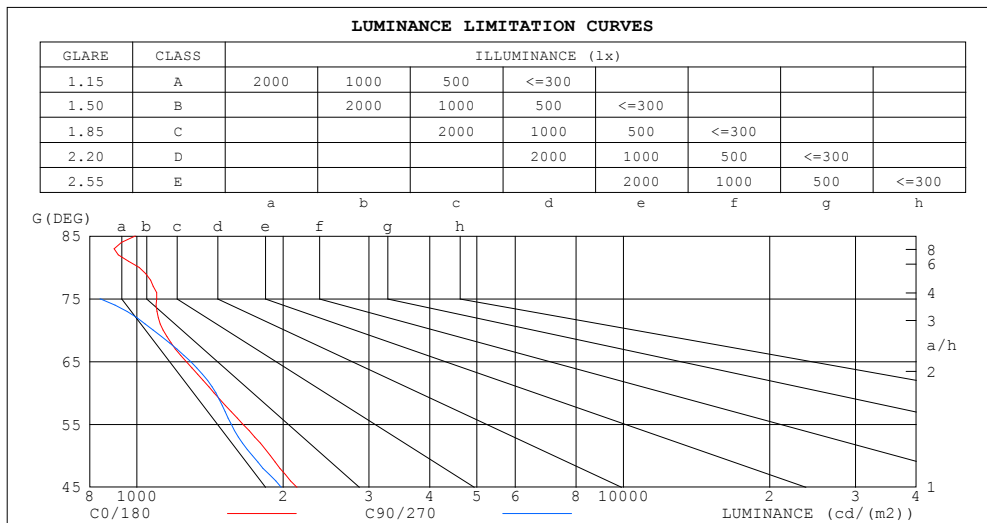


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:929.4x1 lm		
NAME: V25	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.10	1.07	1.05	1.08	1.05	1.03	1.03	1.02	.00	.00	.98	.97	.96	.95	.94	.92
2.0	1.02	.98	.94	1.00	.96	.93	.97	.94	.91	.94	.91	.89	.91	.89	.87	.85
3.0	.95	.90	.86	.93	.89	.85	.91	.87	.83	.88	.85	.82	.86	.83	.81	.79
4.0	.89	.83	.79	.88	.83	.79	.86	.81	.78	.83	.80	.77	.82	.78	.76	.74
5.0	.84	.78	.74	.83	.77	.73	.81	.76	.73	.79	.75	.72	.78	.74	.71	.70
6.0	.79	.73	.69	.79	.73	.69	.77	.72	.68	.76	.71	.68	.74	.70	.67	.66
7.0	.75	.70	.65	.75	.69	.65	.73	.68	.65	.72	.68	.65	.71	.67	.64	.63
8.0	.72	.66	.62	.71	.66	.62	.70	.65	.62	.69	.65	.61	.68	.64	.61	.60
9.0	.69	.63	.59	.68	.63	.59	.67	.62	.59	.66	.62	.59	.66	.62	.59	.57
10.0	.66	.60	.57	.65	.60	.57	.65	.60	.57	.64	.59	.56	.63	.59	.56	.55

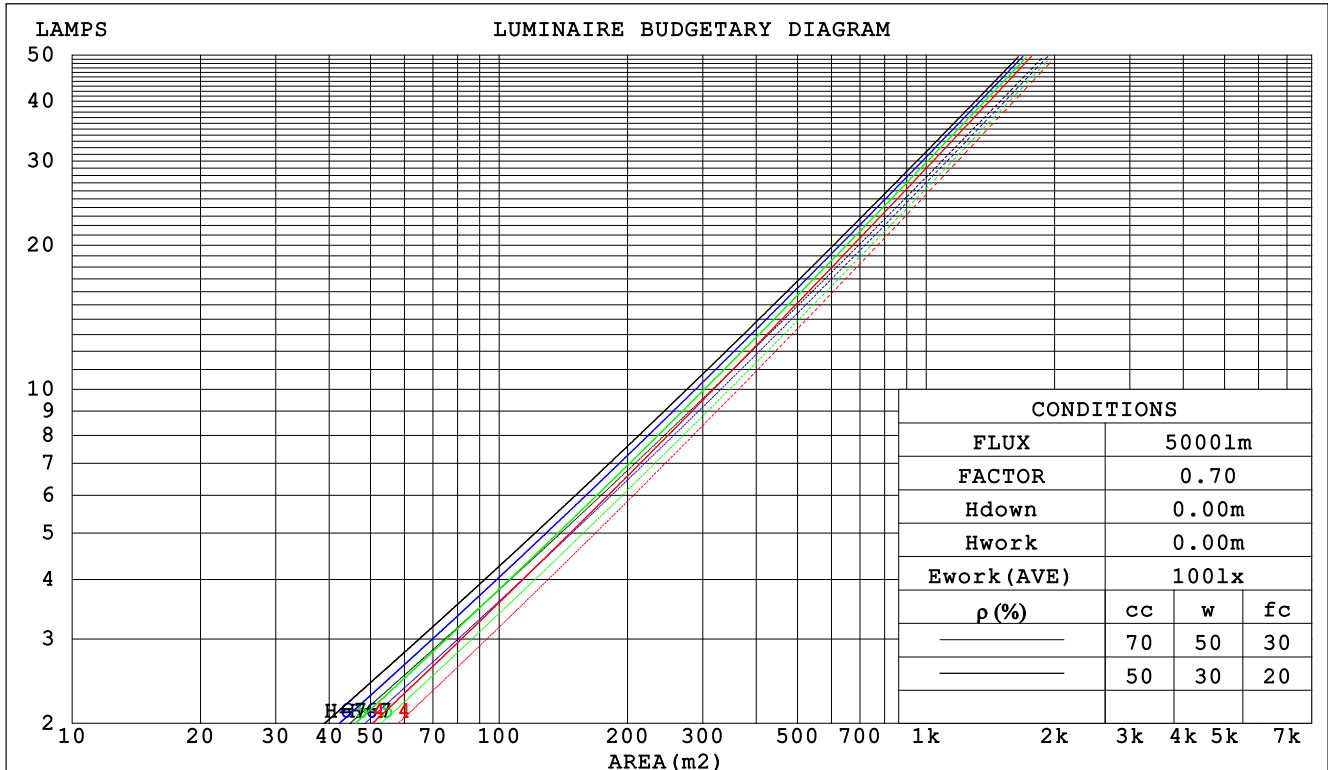

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:929.4x1 lm					
NAME: V25			TYPE:4000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.192	.109	.034	.185	.105	.033	.172	.098	.031	.160	.092	.030	.149	.086	.028		
2.0	.181	.099	.030	.175	.096	.030	.164	.091	.028	.154	.086	.027	.144	.082	.026		
3.0	.169	.090	.027	.164	.088	.026	.155	.084	.025	.146	.080	.025	.138	.076	.024		
4.0	.158	.082	.024	.154	.081	.024	.146	.077	.023	.138	.074	.022	.131	.071	.022		
5.0	.148	.076	.022	.145	.074	.022	.138	.072	.021	.131	.069	.021	.125	.067	.020		
6.0	.139	.070	.020	.136	.069	.020	.130	.067	.019	.124	.065	.019	.119	.063	.019		
7.0	.132	.065	.018	.129	.064	.018	.123	.062	.018	.118	.060	.018	.113	.059	.017		
8.0	.124	.061	.017	.122	.060	.017	.117	.058	.017	.112	.057	.016	.108	.055	.016		
9.0	.118	.057	.016	.116	.056	.016	.111	.055	.016	.107	.054	.015	.103	.052	.015		
10.0	.112	.054	.015	.110	.053	.015	.106	.052	.015	.102	.051	.014	.099	.050	.014		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.195	.195	.195	.167	.167	.167	.114	.114	.114	.065	.065	.065	.021	.021	.021	
1.0	.177	.162	.148	.151	.139	.128	.103	.096	.088	.060	.055	.051	.019	.018	.017	
2.0	.162	.137	.116	.139	.118	.100	.095	.082	.070	.055	.047	.041	.018	.015	.013	
3.0	.150	.118	.093	.128	.102	.081	.088	.071	.057	.051	.041	.033	.016	.013	.011	
4.0	.139	.104	.077	.119	.090	.066	.082	.062	.047	.047	.037	.028	.015	.012	.009	
5.0	.130	.092	.064	.112	.080	.056	.077	.056	.039	.045	.033	.023	.014	.011	.008	
6.0	.122	.083	.055	.105	.072	.047	.072	.050	.034	.042	.029	.020	.014	.010	.007	
7.0	.115	.075	.047	.099	.065	.041	.068	.046	.029	.040	.027	.017	.013	.009	.006	
8.0	.108	.069	.041	.093	.059	.036	.065	.042	.026	.038	.025	.015	.012	.008	.005	
9.0	.103	.063	.037	.088	.055	.032	.061	.039	.023	.036	.023	.014	.012	.007	.004	
10.0	.098	.059	.033	.084	.051	.029	.058	.036	.020	.034	.021	.012	.011	.007	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:929.4x1 lm										
NAME: V25					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	11.3	12.3	11.5	12.4	12.6	11.2	12.1	11.4	12.3	12.5
3H	12.2	13.1	12.5	13.3	13.5	12.1	13.0	12.4	13.2	13.4
4H	12.6	13.5	12.9	13.7	13.9	12.4	13.2	12.7	13.4	13.7
6H	13.0	13.7	13.3	14.0	14.3	12.5	13.3	12.8	13.5	13.8
8H	13.1	13.8	13.4	14.1	14.4	12.5	13.2	12.8	13.5	13.8
12H	13.1	13.9	13.5	14.1	14.4	12.4	13.1	12.8	13.4	13.7
4H 2H	11.7	12.5	12.0	12.8	13.0	11.6	12.4	11.9	12.6	12.9
3H	12.8	13.5	13.1	13.8	14.1	12.6	13.4	13.0	13.7	13.9
4H	13.3	13.9	13.6	14.2	14.6	13.0	13.7	13.4	14.0	14.3
6H	13.7	14.3	14.1	14.6	15.0	13.2	13.7	13.5	14.1	14.5
8H	13.8	14.4	14.2	14.7	15.1	13.2	13.7	13.6	14.1	14.4
12H	13.9	14.4	14.4	14.8	15.2	13.1	13.6	13.5	14.0	14.4
8H 4H	13.3	13.9	13.7	14.2	14.6	13.1	13.6	13.5	14.0	14.4
6H	13.9	14.3	14.3	14.7	15.1	13.3	13.8	13.8	14.2	14.6
8H	14.0	14.4	14.5	14.9	15.3	13.3	13.7	13.8	14.2	14.6
12H	14.2	14.6	14.7	15.0	15.5	13.3	13.7	13.8	14.1	14.6
12H 4H	13.3	13.8	13.7	14.2	14.6	13.1	13.6	13.5	14.0	14.4
6H	13.8	14.2	14.3	14.7	15.1	13.3	13.7	13.8	14.2	14.6
8H	14.1	14.4	14.5	14.9	15.3	13.4	13.7	13.8	14.2	14.6
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.4					+ 0.4 / - 0.5				
1.5H	+ 0.2 / - 0.3					+ 0.3 / - 0.3				
2.0H	+ 0.5 / - 0.5					+ 0.5 / - 0.5				

CIE Pub.117 Corrected 929.4 lm Total Lamp Luminous Flux.(8log(F/F0) = -0.3)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:929.4x1 lm		
NAME: V25	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	72	67	79	72	67	78	71	67	63
0.80	88	80	76	87	80	75	85	79	75	71
1.00	93	86	82	92	86	81	90	86	81	76
1.25	98	91	87	97	91	87	95	89	86	81
1.50	101	95	91	100	94	90	97	93	89	84
2.00	105	100	96	103	99	95	100	97	93	87
2.50	107	102	99	105	101	98	102	99	96	89
3.00	109	105	102	107	103	100	104	101	98	91
4.00	112	108	105	110	107	104	106	103	101	94
5.00	113	110	108	111	109	106	107	105	103	95
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:929.4x1 lm		
NAME: V25	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

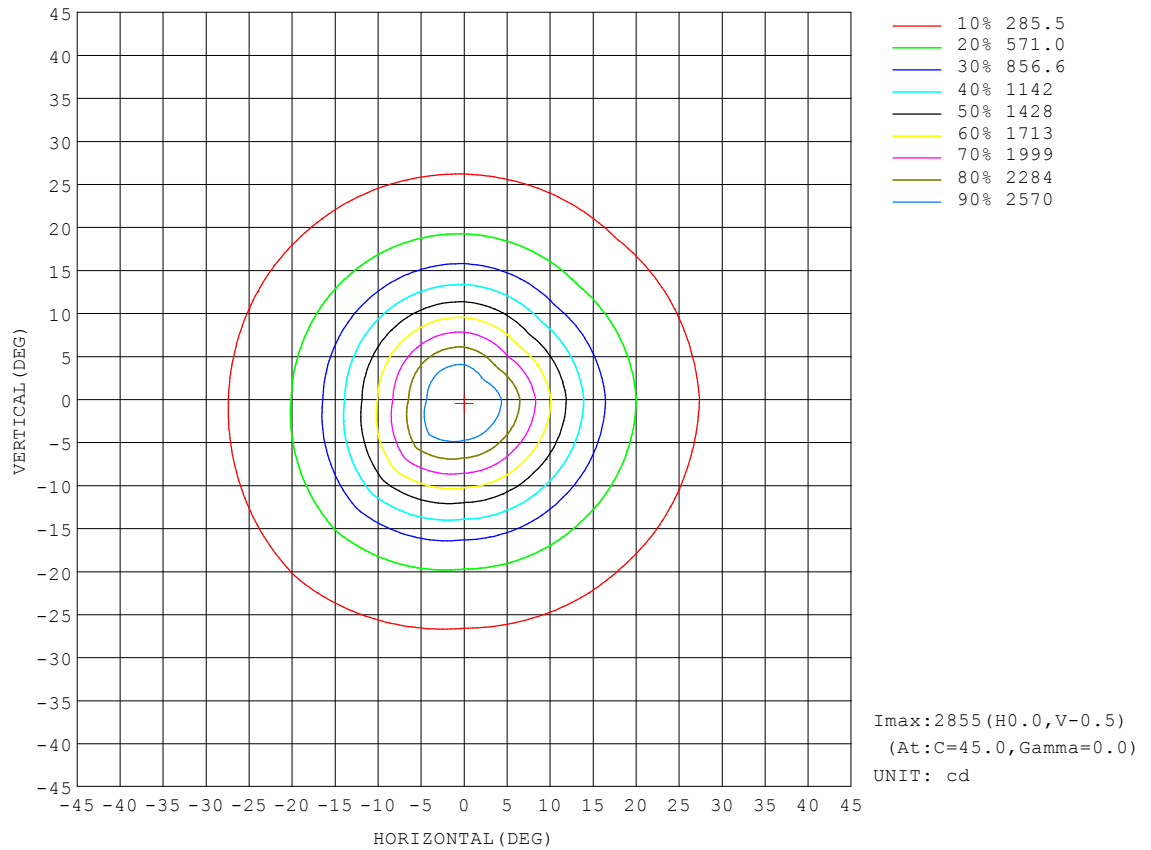


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:929.4x1 lm		
NAME: V25	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

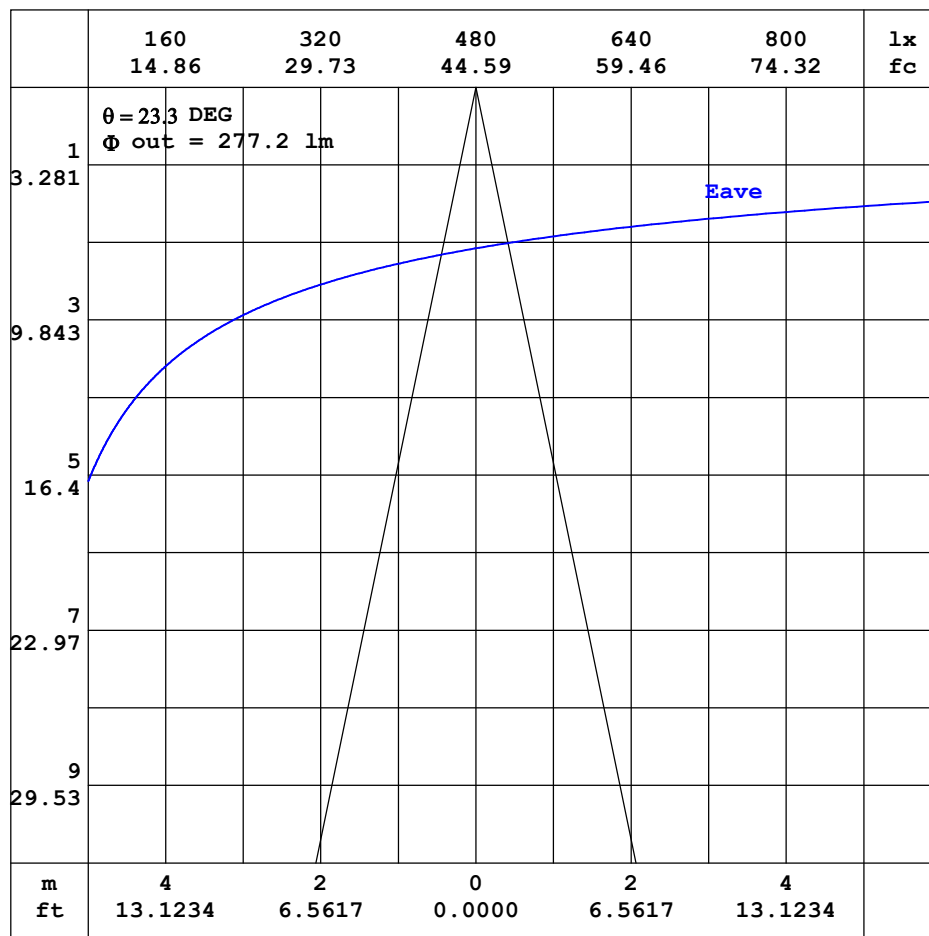


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:929.4x1 lm		
NAME: V25	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

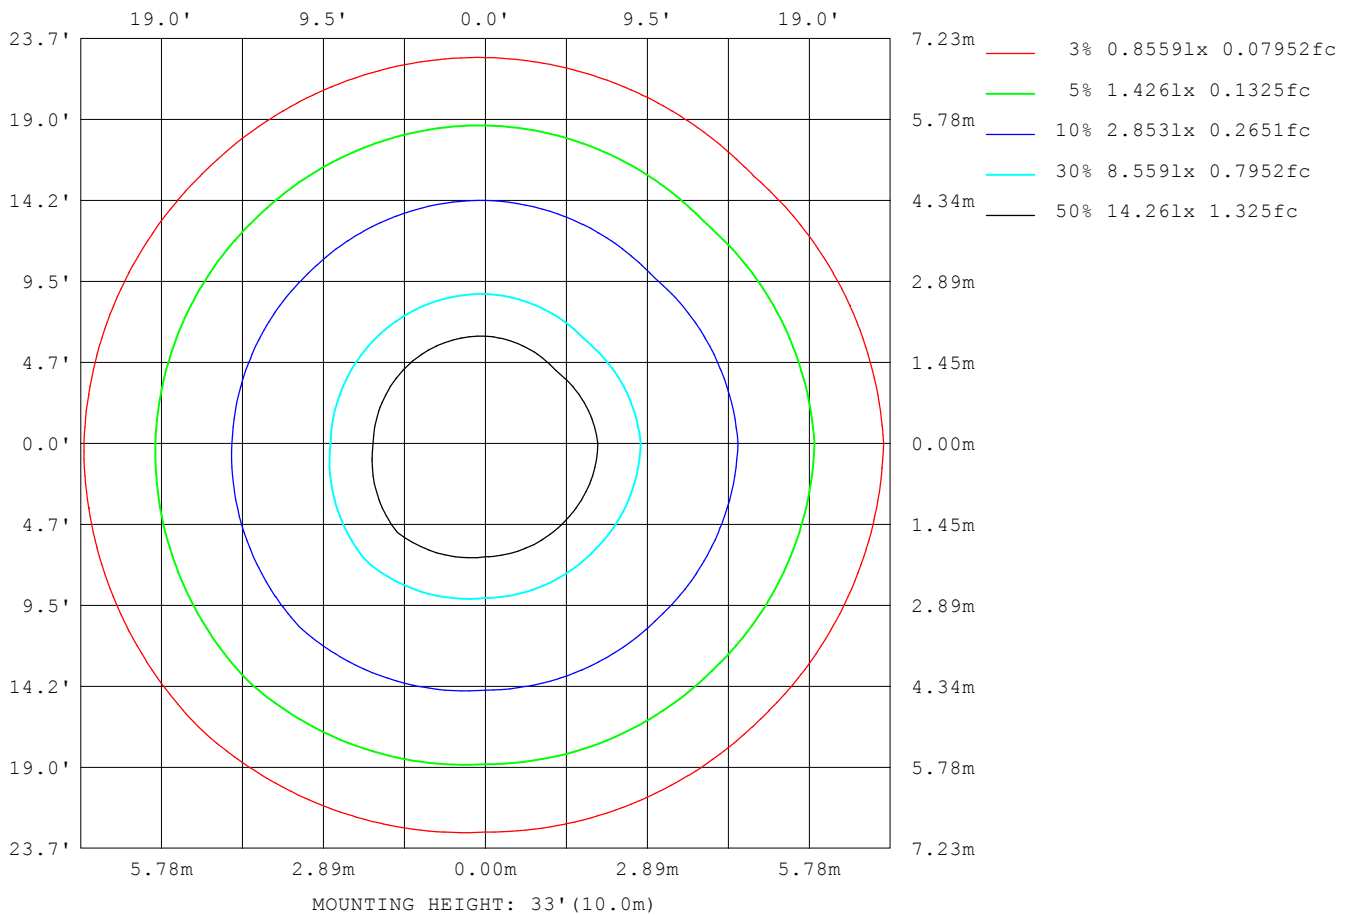

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:929.4x1 lm		
NAME: V25	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1281
L_0~180 (75) av	995
L_0~180 (85) av	947
L_90~270 (65) av	1280
L_90~270 (75) av	808
L_90~270 (85) av	101
L_45 (65) av	1253
L_45 (75) av	844
L_45 (85) av	579

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

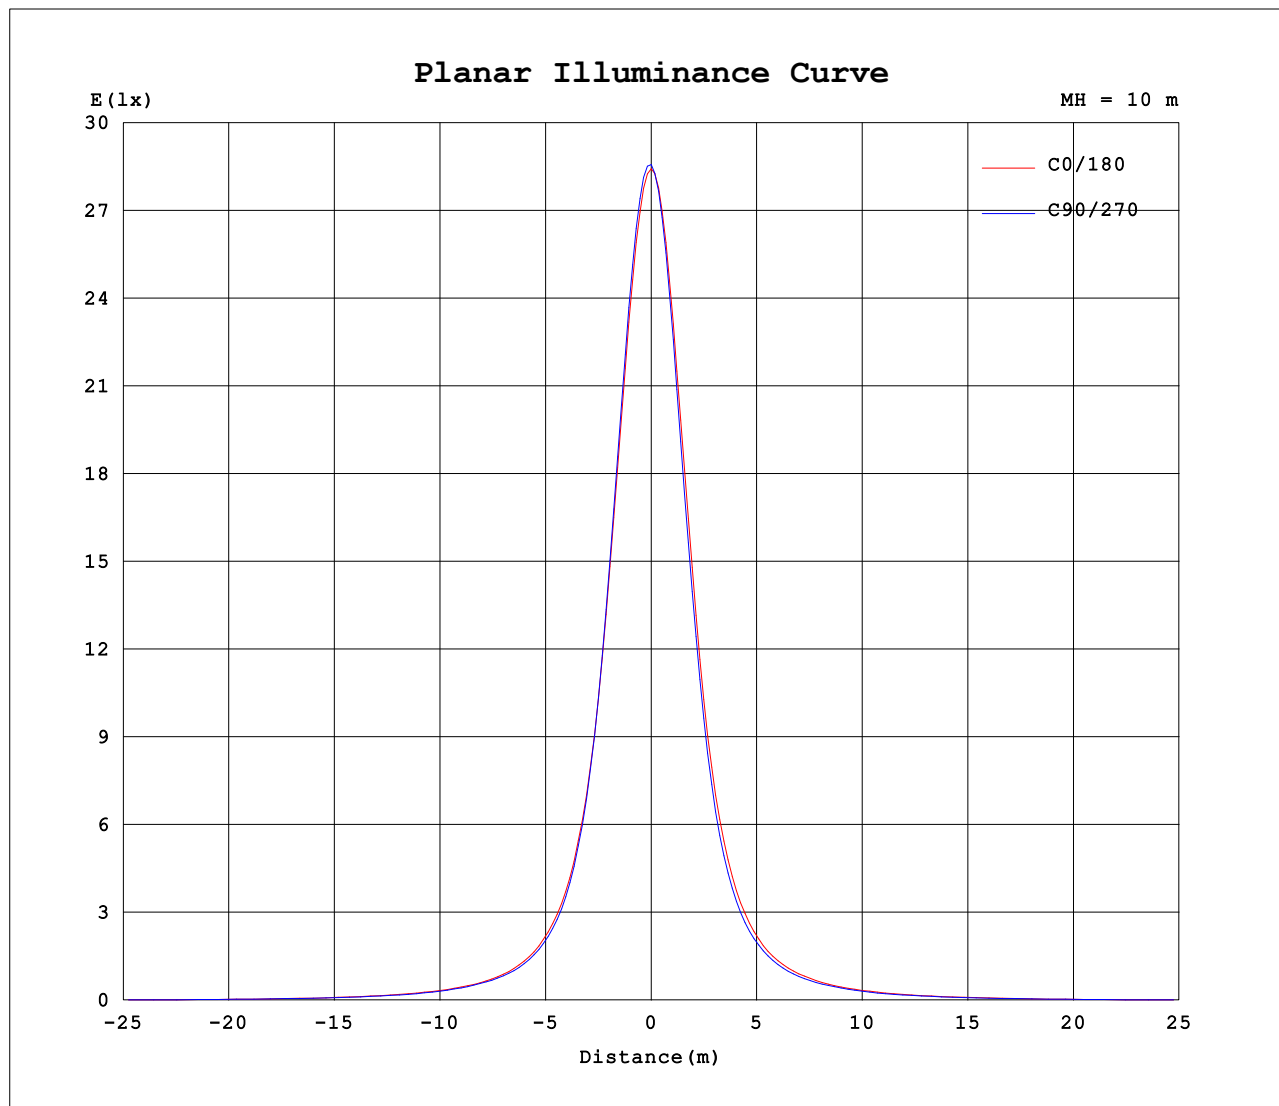

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:929.4x1 lm								
NAME: V25					TYPE:4000K			WEIGHT:
SPEC.:					DIM.:			SERIAL No.:
MFR.: EVERFINE					SUR.:			Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	2843	2862	2857	2828	2843	2862	2857	2828										
5	2492	2494	2544	2658	2488	2483	2443	2323										
10	1727	1711	1759	1955	1724	1687	1637	1530										
15	1009	980	1004	1181	1005	967	937	870										
20	573	544	552	655	578	539	524	489										
25	352	327	330	383	354	326	317	298										
30	229	215	214	244	231	215	209	198										
35	162	153	152	168	165	154	149	142										
40	121	113	115	122	123	116	113	107										
45	95.0	89.0	88.2	94.1	96.0	91.5	87.0	83.2										
50	76.2	71.1	70.0	74.7	76.2	74.0	68.8	66.2										
55	59.7	56.8	56.5	60.2	61.0	59.8	55.7	52.4										
60	45.4	44.2	45.8	47.8	47.3	47.1	44.7	40.3										
65	33.6	32.9	34.3	36.3	34.6	34.9	33.8	29.4										
70	24.4	22.4	23.3	25.5	23.2	23.5	22.6	19.2										
75	17.9	13.5	13.7	15.8	14.5	14.0	12.7	11.7										
80	11.1	7.61	5.55	8.64	9.07	7.43	4.55	6.52										
85	5.45	3.18	0.78	4.00	4.95	2.88	0.33	2.65										
90	3.04	1.77	0.02	1.39	3.22	0.98	0.00	1.90										
95	2.49	1.68	0.02	1.00	2.78	0.93	0.00	1.79										
100	2.54	1.57	0.02	0.96	2.13	0.89	0.00	1.63										
105	2.46	1.28	0.01	0.96	1.77	0.89	0.00	1.27										
110	2.33	0.93	0.02	0.86	1.62	0.78	0.00	1.04										
115	2.10	0.72	0.04	0.77	1.38	0.58	0.01	0.79										
120	1.87	0.62	0.07	0.64	1.08	0.40	0.03	0.67										
125	1.42	0.58	0.10	0.64	1.02	0.58	0.05	0.61										
130	1.10	0.56	0.13	0.67	0.78	0.69	0.08	0.57										
135	0.98	0.56	0.17	0.64	0.67	0.64	0.12	0.55										
140	0.79	0.58	0.23	0.61	0.82	0.59	0.17	0.50										
145	0.81	0.63	0.34	0.58	0.88	0.61	0.27	0.55										
150	0.92	0.74	0.53	0.75	0.78	0.67	0.43	0.63										
155	1.05	0.92	0.78	0.97	0.96	0.80	0.62	0.74										
160	1.15	1.09	1.00	1.18	1.05	0.93	0.80	0.86										
165	1.20	1.16	1.15	1.31	1.08	1.05	0.92	0.95										
170	1.13	1.12	1.15	1.30	1.07	1.05	0.98	0.99										
175	1.04	1.04	1.08	1.15	0.99	1.01	1.00	1.01										
180	1.00	1.00	1.03	1.07	1.00	1.01	1.03	1.07										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: