


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.0750A P:8.990W PF:0.9960 Freq:60.00Hz Lamp Flux:946.843x1 lm		
NAME: V40	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 105.32 lm/W			
MODEL		I _{max} (cd)	1739	S/MH(C0/180)	0.62
NOMINAL POWER(W)	10W	LOR(%)	100.0	S/MH(C90/270)	0.61
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	946.84	η UP,DN(C0-180)	0.3,49.6
NOMINAL FLUX(lm)	946.843	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.2,49.9
LAMPS INSIDE	1	η up(%)	0.5	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120.0	η down(%)	99.5	CIBSE SHR MAX	0.65

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

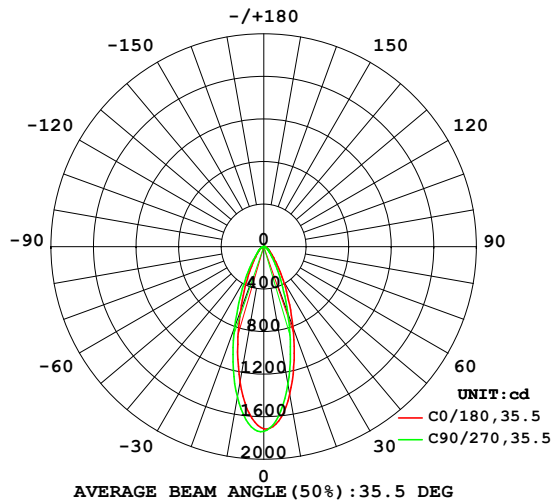

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

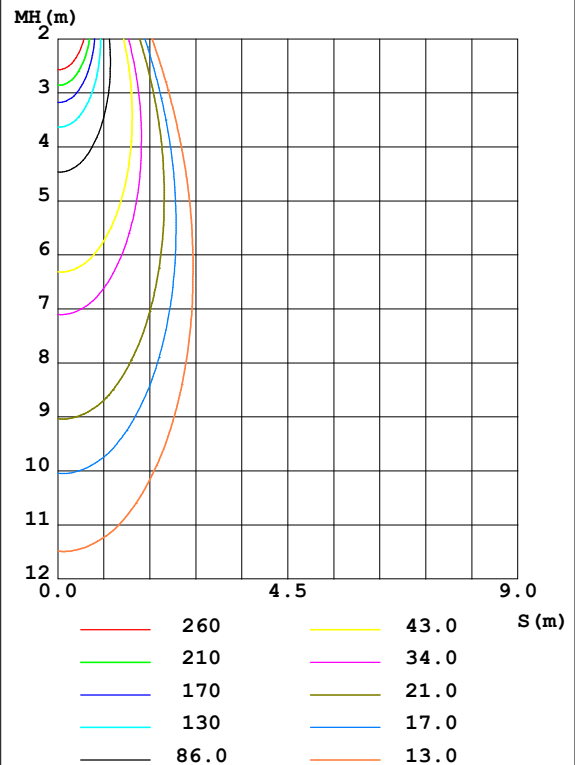

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1408	1355	1315	1355	1292	1385	1437	1377	0- 10	146.7	146.7	15.5,15.5
20	806.4	727.8	662.8	687.8	641.7	730.0	801.7	769.2	10- 20	285.7	432.4	45.7,45.7
30	367.3	315.3	266.9	280.8	263.3	300.9	339.7	338.9	20- 30	222.6	655.0	69.2,69.2
40	158.9	133.5	111.1	117.7	115.2	125.4	132.8	142.8	30- 40	126.7	781.7	82.6,82.6
50	82.18	68.47	58.79	61.98	62.72	64.59	68.35	71.21	40- 50	71.68	853.4	90.1,90.1
60	45.75	38.78	35.25	34.66	34.63	37.72	39.54	40.69	50- 60	46.13	899.5	95,95
70	24.47	18.28	16.03	15.72	15.50	17.41	19.06	19.36	60- 70	27.41	926.9	97.9,97.9
80	12.22	6.213	2.514	4.728	5.916	5.295	3.881	7.442	70- 80	12.05	938.9	99.2,99.2
90	3.261	1.499	0	0.7581	2.412	0.7689	0	1.619	80- 90	3.178	942.1	99.5,99.5
100	2.194	1.322	0	0.7725	1.104	0.3298	0	1.359	90-100	1.181	943.3	99.6,99.6
110	2.064	0.9467	0.0072	0.6514	0.9810	0.3511	0	0.9594	100-110	0.8723	944.2	99.7,99.7
120	1.768	0.6465	0.0412	0.5764	0.7867	0.3306	0.0170	0.6299	110-120	0.6669	944.8	99.8,99.8
130	1.212	0.5885	0.1162	0.5982	0.5035	0.4670	0.0703	0.5449	120-130	0.4875	945.3	99.8,99.8
140	0.9761	0.6467	0.2806	0.5741	0.8383	0.5178	0.1745	0.5448	130-140	0.4005	945.7	99.9,99.9
150	0.9614	0.7388	0.5495	0.7727	0.9084	0.6272	0.3831	0.6175	140-150	0.3870	946.1	99.9,99.9
160	1.012	0.9033	0.8449	0.9859	0.9833	0.8330	0.6784	0.7578	150-160	0.3615	946.5	100,100
170	1.032	0.9641	1.002	1.090	1.041	0.9687	0.9035	0.9467	160-170	0.2652	946.7	100,100
180	1.022	1.020	1.017	1.044	1.039	1.015	1.020	1.049	170-180	0.0962	946.8	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.5V I:0.0750A P:8.990W PF:0.9960 Freq:60.00Hz Lamp Flux:946.843x1 lm		
NAME: V40	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

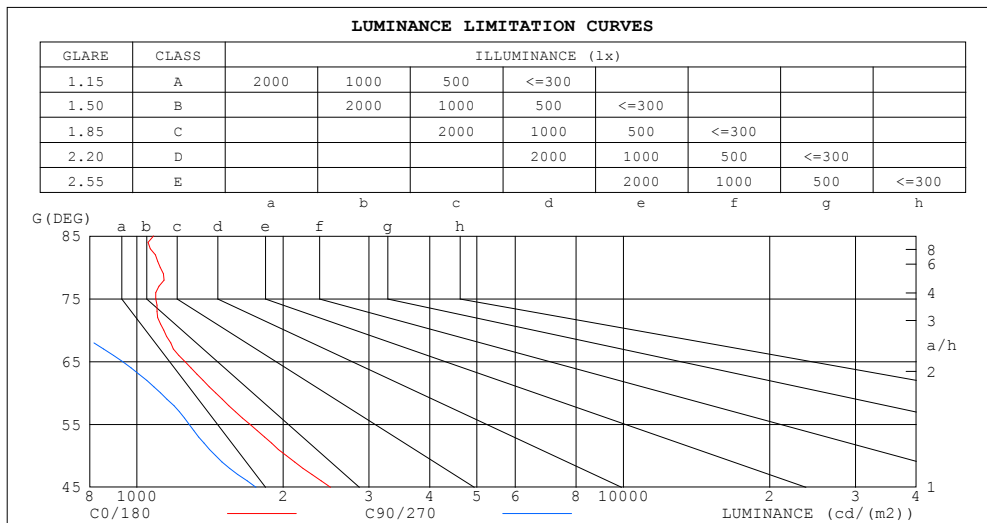


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.5V I:0.0750A P:8.990W PF:0.9960 Freq:60.00Hz Lamp Flux:946.843x1 lm		
NAME: V40	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.10	1.07	1.05	1.08	1.05	1.03	1.03	1.02	.00	.00	.98	.97	.96	.95	.94	.92
2.0	1.02	.97	.94	.90	.96	.93	.96	.93	.90	.93	.91	.88	.91	.88	.86	.85
3.0	.94	.89	.85	.93	.88	.84	.90	.86	.83	.88	.84	.81	.85	.83	.80	.78
4.0	.88	.82	.78	.87	.82	.77	.85	.80	.76	.83	.79	.76	.81	.77	.75	.73
5.0	.83	.77	.72	.82	.76	.72	.80	.75	.71	.78	.74	.70	.76	.73	.70	.68
6.0	.78	.72	.67	.77	.71	.67	.75	.70	.66	.74	.69	.66	.72	.69	.66	.64
7.0	.73	.67	.63	.73	.67	.63	.71	.66	.62	.70	.66	.62	.69	.65	.62	.60
8.0	.70	.64	.59	.69	.63	.59	.68	.63	.59	.67	.62	.59	.66	.62	.58	.57
9.0	.66	.60	.56	.66	.60	.56	.65	.59	.56	.64	.59	.56	.63	.59	.55	.54
10.0	.63	.57	.53	.62	.57	.53	.62	.57	.53	.61	.56	.53	.60	.56	.53	.51

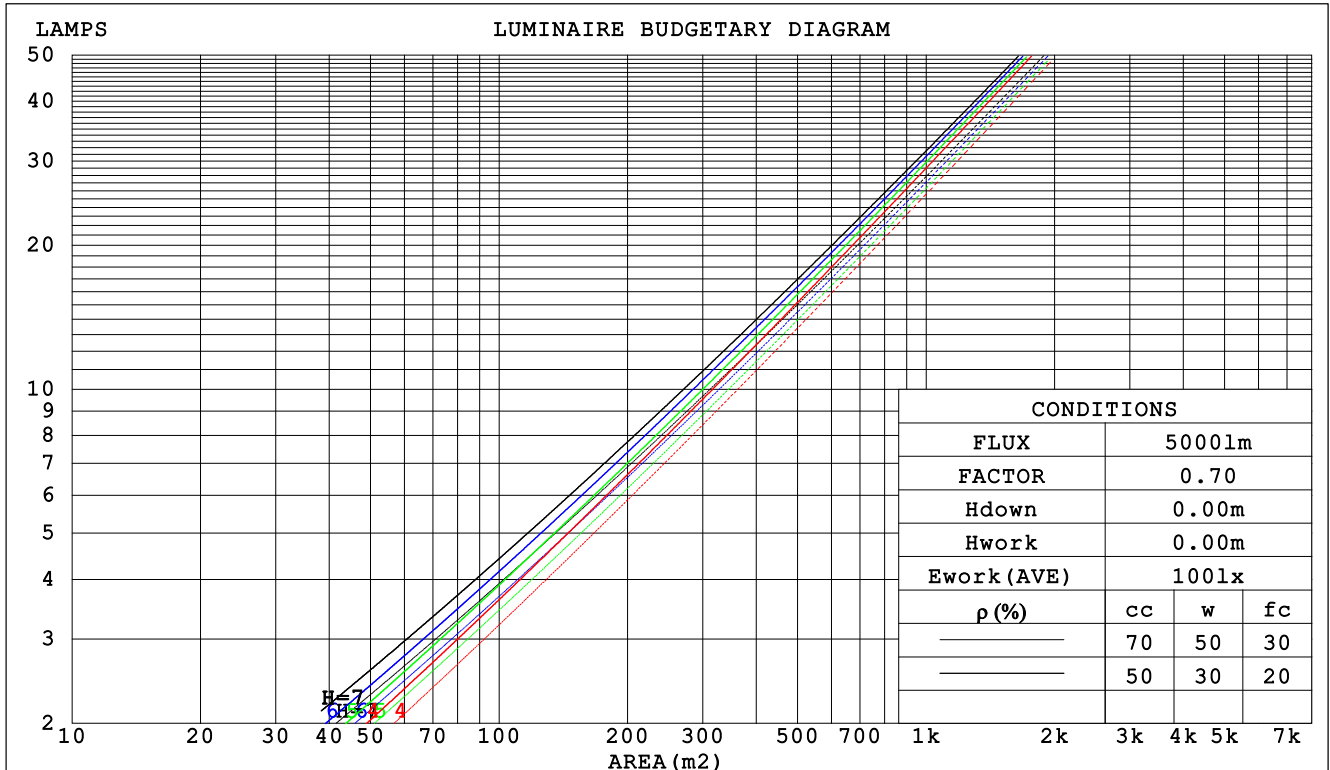

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.5V I:0.0750A P:8.990W PF:0.9960 Freq:60.00Hz Lamp Flux:946.843x1 lm					
NAME: V40			TYPE:4000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.193	.110	.035	.186	.106	.034	.173	.099	.032	.161	.093	.030	.150	.087	.028		
2.0	.183	.101	.031	.178	.098	.030	.167	.093	.029	.156	.088	.027	.147	.083	.026		
3.0	.173	.092	.028	.168	.090	.027	.158	.086	.026	.150	.082	.025	.142	.078	.024		
4.0	.163	.084	.025	.158	.083	.024	.150	.080	.024	.143	.077	.023	.135	.074	.022		
5.0	.153	.078	.023	.149	.077	.022	.142	.074	.022	.136	.072	.021	.130	.069	.021		
6.0	.145	.073	.021	.141	.071	.021	.135	.069	.020	.129	.067	.020	.124	.065	.019		
7.0	.137	.068	.019	.134	.067	.019	.129	.065	.019	.123	.063	.018	.119	.062	.018		
8.0	.130	.064	.018	.128	.063	.018	.123	.061	.017	.118	.060	.017	.114	.058	.017		
9.0	.124	.060	.017	.121	.059	.017	.117	.058	.016	.113	.057	.016	.109	.055	.016		
10.0	.118	.057	.016	.116	.056	.016	.112	.055	.015	.108	.054	.015	.105	.053	.015		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.176	.161	.147	.151	.138	.127	.103	.095	.088	.059	.055	.051	.019	.018	.017	
2.0	.162	.136	.115	.138	.117	.099	.095	.081	.069	.055	.047	.041	.018	.015	.013	
3.0	.150	.118	.092	.128	.101	.080	.088	.070	.056	.051	.041	.033	.016	.013	.011	
4.0	.139	.103	.075	.120	.089	.065	.082	.062	.046	.048	.036	.027	.015	.012	.009	
5.0	.131	.091	.063	.112	.079	.054	.077	.055	.038	.045	.032	.023	.014	.011	.008	
6.0	.123	.082	.053	.106	.071	.046	.073	.050	.033	.042	.029	.019	.014	.010	.006	
7.0	.116	.075	.046	.100	.065	.040	.069	.045	.028	.040	.027	.017	.013	.009	.006	
8.0	.110	.068	.040	.095	.059	.035	.066	.042	.025	.038	.025	.015	.012	.008	.005	
9.0	.105	.063	.035	.090	.055	.031	.062	.038	.022	.036	.023	.013	.012	.007	.004	
10.0	.100	.059	.031	.086	.051	.027	.060	.036	.019	.035	.021	.012	.011	.007	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.5V I:0.0750A P:8.990W PF:0.9960 Freq:60.00Hz Lamp Flux:946.843x1 lm										
NAME: V40					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	11.8	12.8	12.0	12.9	13.1	10.5	11.5	10.8	11.7	11.9
3H	12.5	13.4	12.8	13.6	13.8	11.1	12.0	11.4	12.2	12.4
4H	12.8	13.7	13.1	13.9	14.1	11.2	12.1	11.5	12.3	12.5
6H	13.2	14.0	13.5	14.2	14.5	11.2	12.0	11.5	12.3	12.5
8H	13.3	14.1	13.6	14.3	14.6	11.2	11.9	11.5	12.2	12.5
12H	13.4	14.1	13.7	14.4	14.7	11.1	11.9	11.5	12.1	12.4
4H 2H	11.9	12.8	12.2	13.0	13.3	10.9	11.7	11.2	12.0	12.2
3H	12.8	13.5	13.1	13.8	14.1	11.6	12.3	11.9	12.6	12.9
4H	13.2	13.9	13.6	14.2	14.5	11.7	12.4	12.1	12.7	13.1
6H	13.7	14.3	14.1	14.6	15.0	11.8	12.4	12.2	12.7	13.1
8H	13.9	14.4	14.3	14.8	15.2	11.7	12.3	12.1	12.7	13.0
12H	14.0	14.5	14.4	14.9	15.3	11.7	12.2	12.1	12.6	13.0
8H 4H	13.2	13.8	13.6	14.1	14.5	11.8	12.4	12.2	12.7	13.1
6H	13.8	14.2	14.2	14.6	15.1	11.9	12.4	12.3	12.8	13.2
8H	14.0	14.4	14.5	14.9	15.3	11.9	12.3	12.4	12.7	13.2
12H	14.2	14.6	14.7	15.0	15.5	11.9	12.2	12.3	12.7	13.1
12H 4H	13.2	13.7	13.6	14.1	14.5	11.8	12.3	12.2	12.7	13.1
6H	13.7	14.2	14.2	14.6	15.0	11.9	12.3	12.4	12.8	13.2
8H	14.0	14.4	14.5	14.8	15.3	11.9	12.3	12.4	12.7	13.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.6 / - 0.6					+ 0.7 / - 1.0				
1.5H	+ 1.1 / - 0.6					+ 0.9 / - 0.8				
2.0H	+ 1.2 / - 0.8					+ 0.9 / - 0.9				

CIE Pub.117 Corrected 946.8 lm Total Lamp Luminous Flux.(8log(F/F0) = -0.2)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.0750A P:8.990W PF:0.9960 Freq:60.00Hz Lamp Flux:946.843x1 lm		
NAME: V40	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	81	73	69	80	73	69	79	73	68	64
0.80	89	82	77	88	81	77	87	81	77	72
1.00	94	87	83	93	87	83	91	87	82	78
1.25	99	93	88	98	92	88	96	91	87	82
1.50	102	96	92	101	95	92	98	94	91	85
2.00	106	101	97	104	99	96	101	97	94	89
2.50	108	103	100	106	102	99	103	99	97	90
3.00	110	106	102	108	104	101	104	101	99	92
4.00	112	109	106	110	107	105	106	104	102	94
5.00	114	111	109	111	109	107	107	105	104	96
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.0750A P:8.990W PF:0.9960 Freq:60.00Hz Lamp Flux:946.843x1 lm		
NAME: V40	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

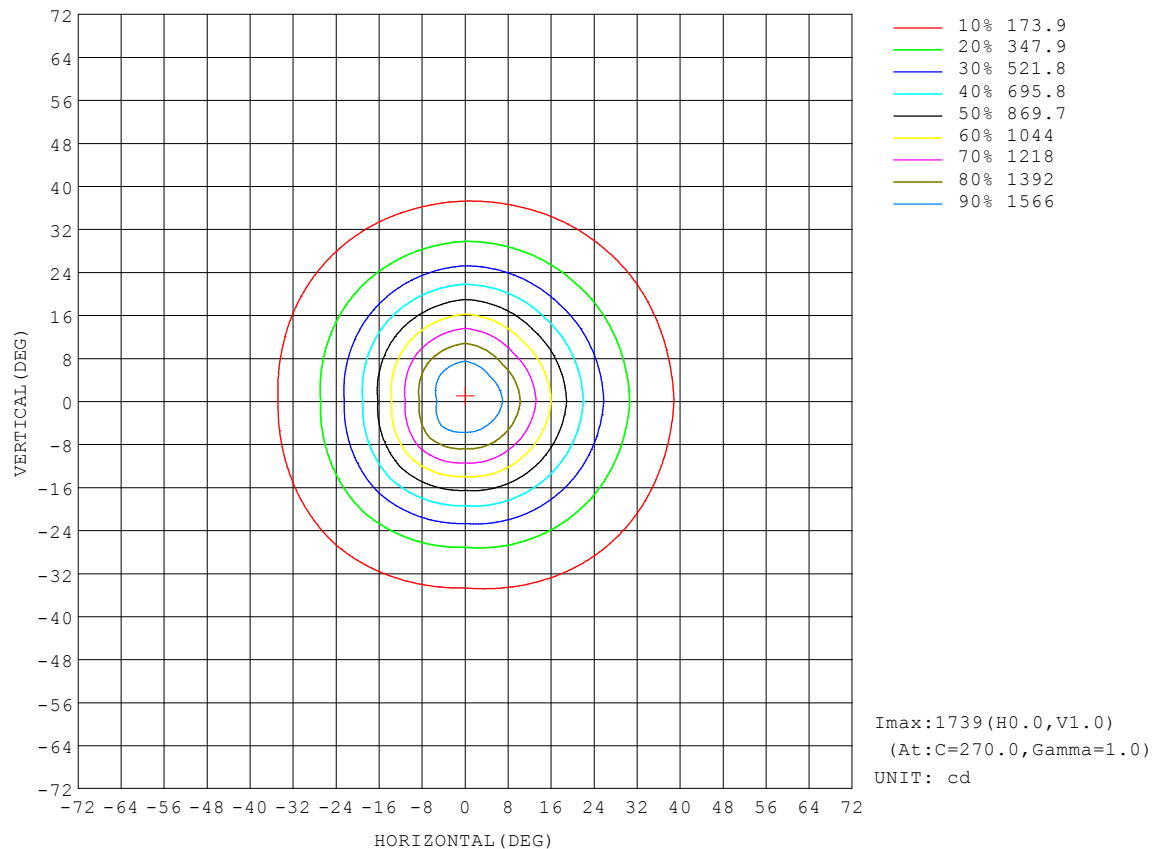


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:119.5V I:0.0750A P:8.990W PF:0.9960 Freq:60.00Hz Lamp Flux:946.843x1 lm		
NAME: V40	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

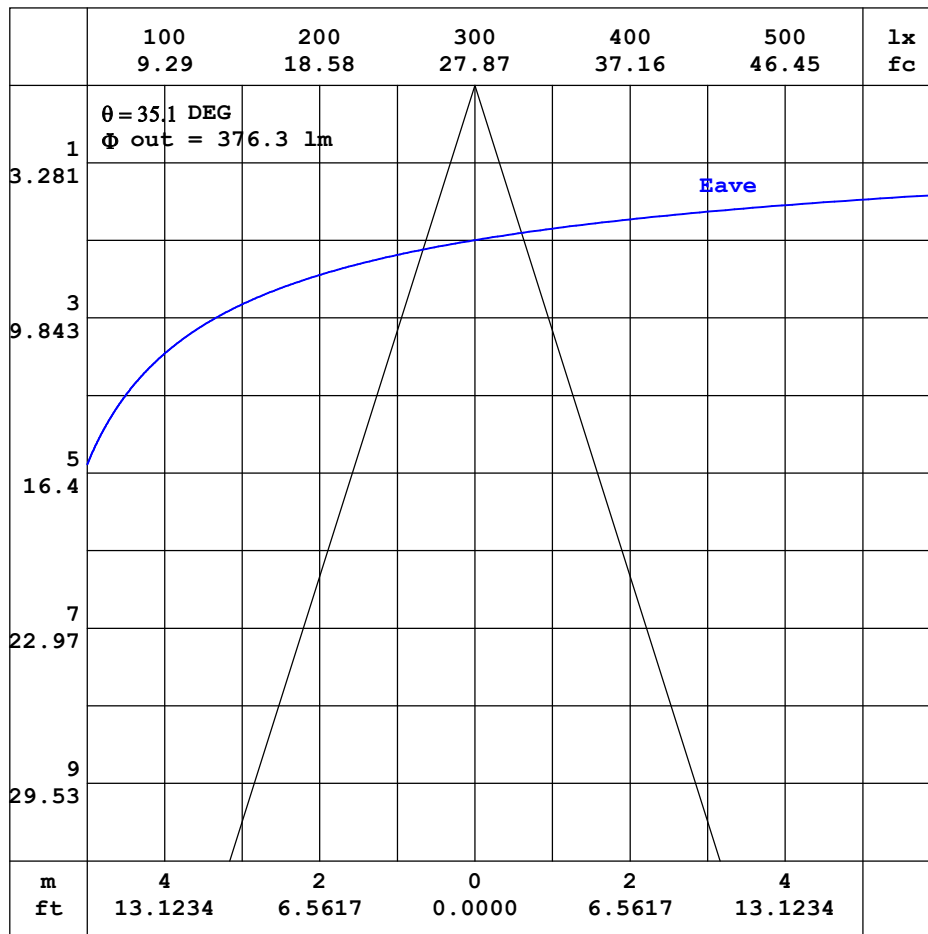


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.5V I:0.0750A P:8.990W PF:0.9960 Freq:60.00Hz Lamp Flux:946.843x1 lm		
NAME: V40	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

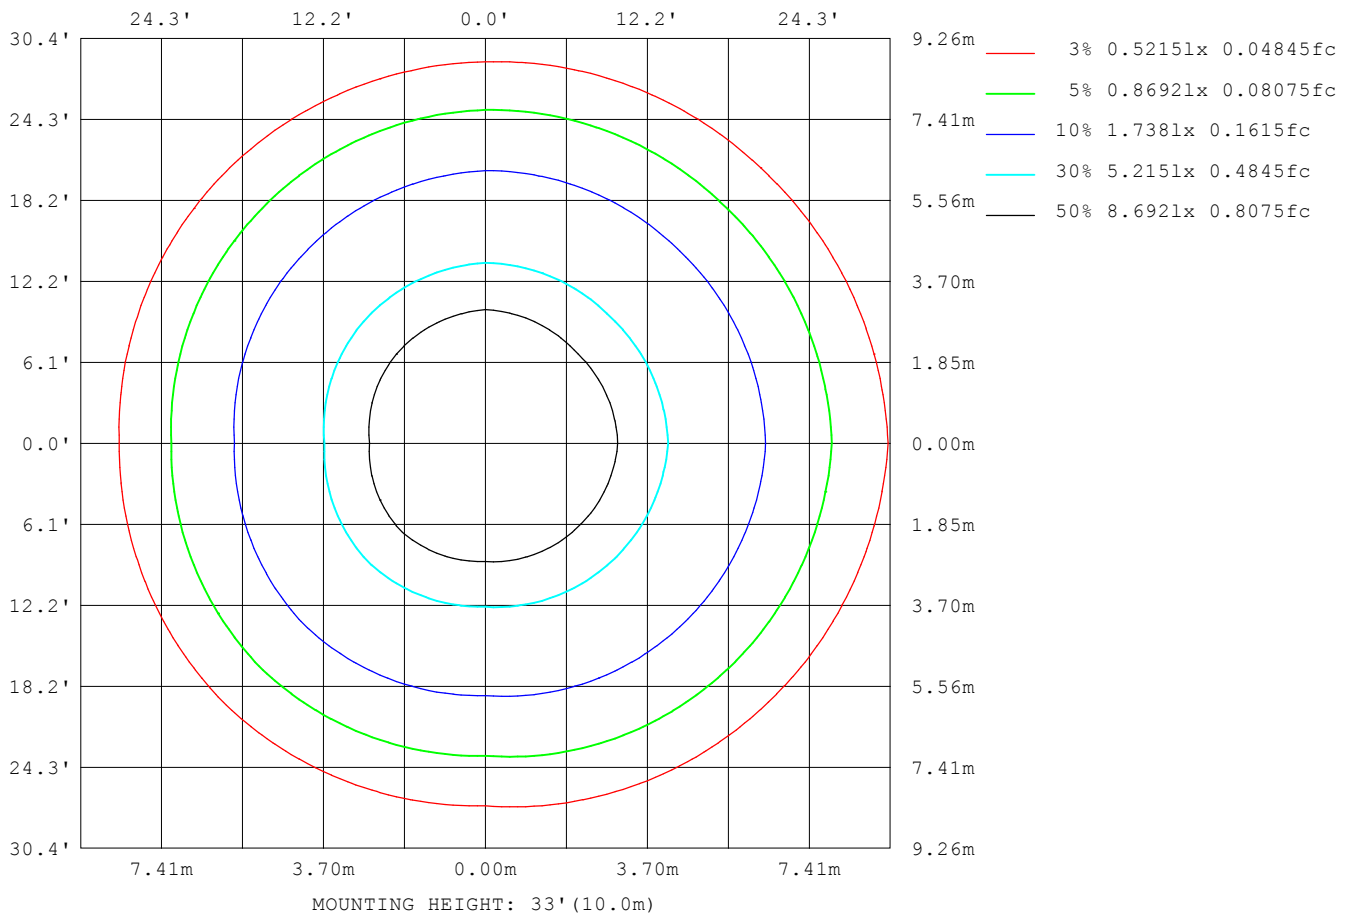

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.5V I:0.0750A P:8.990W PF:0.9960 Freq:60.00Hz Lamp Flux:946.843x1 lm		
NAME: V40	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1079
L_0~180 (75) av	842
L_0~180 (85) av	835
L_90~270 (65) av	1012
L_90~270 (75) av	572
L_90~270 (85) av	30
L_45 (65) av	1020
L_45 (75) av	646
L_45 (85) av	467

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

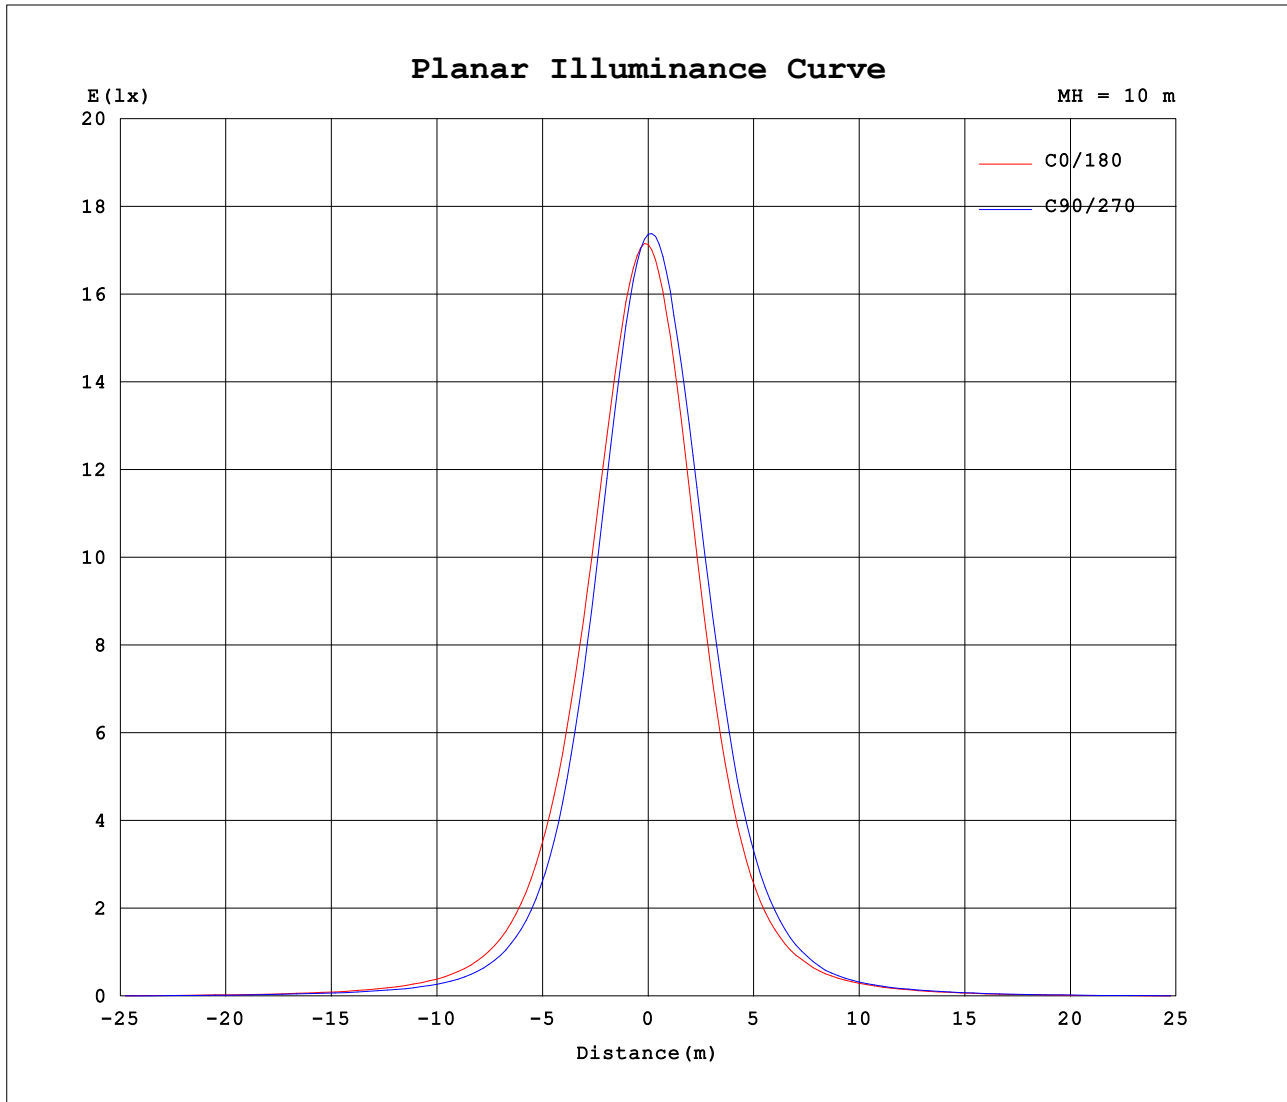

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.0750A P:8.990W PF:0.9960 Freq:60.00Hz Lamp Flux:946.843x1 lm		
NAME: V40	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1714	1727	1737	1735	1714	1727	1737	1735										
5	1643	1616	1601	1630	1574	1635	1669	1630										
10	1408	1355	1315	1355	1292	1385	1437	1377										
15	1105	1033	975	1012	952	1051	1122	1070										
20	806	728	663	688	642	730	802	769										
25	555	486	424	444	414	474	531	520										
30	367	315	267	281	263	301	340	339										
35	238	204	169	178	171	191	214	219										
40	159	134	111	118	115	125	133	143										
45	111	93.3	78.3	83.7	83.2	87.6	91.9	97.2										
50	82.2	68.5	58.8	62.0	62.7	64.6	68.3	71.2										
55	61.7	51.5	46.3	47.0	47.4	49.4	52.2	54.0										
60	45.7	38.8	35.2	34.7	34.6	37.7	39.5	40.7										
65	33.4	28.0	24.9	24.5	24.0	27.1	29.0	28.9										
70	24.5	18.3	16.0	15.7	15.5	17.4	19.1	19.4										
75	17.8	10.9	8.14	8.93	9.61	9.98	10.5	12.3										
80	12.2	6.21	2.51	4.73	5.92	5.29	3.88	7.44										
85	5.95	2.72	0.08	1.82	3.23	2.17	0.24	3.55										
90	3.26	1.50	0.00	0.76	2.41	0.77	0.00	1.62										
95	2.24	1.42	0.00	0.77	2.03	0.75	0.00	1.49										
100	2.19	1.32	0.00	0.77	1.10	0.33	0.00	1.36										
105	2.23	1.15	0.00	0.75	1.01	0.32	0.00	1.23										
110	2.06	0.95	0.01	0.65	0.98	0.35	0.00	0.96										
115	1.93	0.77	0.03	0.60	0.83	0.36	0.00	0.79										
120	1.77	0.65	0.04	0.58	0.79	0.33	0.02	0.63										
125	1.50	0.60	0.08	0.60	0.61	0.28	0.04	0.57										
130	1.21	0.59	0.12	0.60	0.50	0.47	0.07	0.54										
135	1.04	0.61	0.18	0.60	0.51	0.51	0.12	0.53										
140	0.98	0.65	0.28	0.57	0.84	0.52	0.17	0.54										
145	0.95	0.68	0.40	0.66	0.82	0.57	0.27	0.57										
150	0.96	0.74	0.55	0.77	0.91	0.63	0.38	0.62										
155	1.00	0.82	0.71	0.88	0.97	0.74	0.53	0.68										
160	1.01	0.90	0.84	0.99	0.98	0.83	0.68	0.76										
165	1.02	0.93	0.94	1.08	1.03	0.93	0.80	0.84										
170	1.03	0.96	1.00	1.09	1.04	0.97	0.90	0.95										
175	1.04	0.99	1.03	1.08	1.01	0.99	0.98	1.02										
180	1.02	1.02	1.02	1.04	1.04	1.01	1.02	1.05										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: