


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:955.138x1 lm		
NAME: V60	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 106.36 lm/W			
MODEL		I _{max} (cd)	1747	S/MH(C0/180)	0.63
NOMINAL POWER(W)	10W	LOR(%)	100.0	S/MH(C90/270)	0.63
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	955.14	η UP,DN(C0-180)	0.3,48.5
NOMINAL FLUX(lm)	955.138	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.2,51.0
LAMPS INSIDE	1	η up(%)	0.5	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120.0	η down(%)	99.5	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

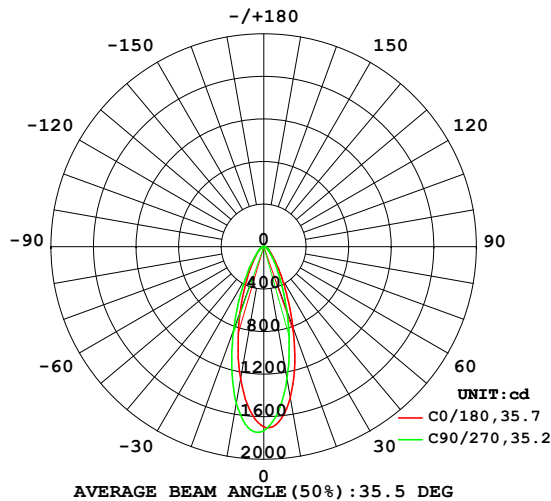

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

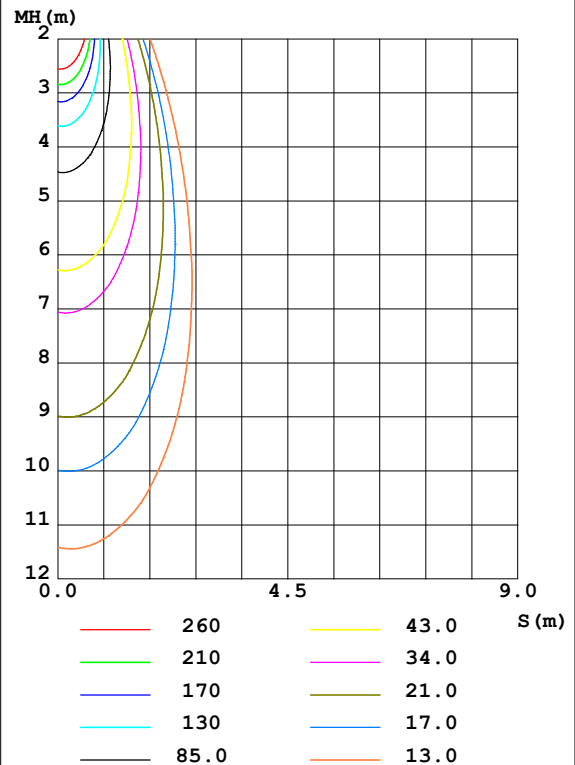

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1441	1326	1263	1303	1263	1391	1494	1452	0- 10	146.4	146.4	15.3,15.3
20	803.4	697.0	633.5	678.2	654.7	749.6	831.2	788.9	10- 20	286.1	432.5	45.3,45.3
30	344.9	297.2	264.4	290.0	280.3	320.1	351.1	333.0	20- 30	222.9	655.4	68.6,68.6
40	147.9	128.2	117.1	126.5	124.8	136.6	143.5	139.2	30- 40	128.0	783.4	82,82
50	76.08	69.52	65.23	69.05	67.51	71.78	70.23	70.65	40- 50	73.93	857.3	89.8,89.8
60	41.50	40.28	39.24	40.50	38.01	41.51	41.94	39.09	50- 60	48.19	905.5	94.8,94.8
70	22.12	18.71	19.04	18.89	17.89	19.60	21.60	18.29	60- 70	28.96	934.5	97.8,97.8
80	10.38	6.328	4.160	5.738	7.009	6.131	5.308	6.294	70- 80	12.93	947.4	99.2,99.2
90	2.769	1.417	0	0.8299	2.372	0.8564	0	1.509	80- 90	3.256	950.7	99.5,99.5
100	2.136	1.259	0	0.7217	1.529	0.5936	0	1.289	90-100	1.158	951.8	99.7,99.7
110	1.979	0.8812	0.0048	0.6417	0.9396	0.3197	0	0.8987	100-110	0.8601	952.7	99.7,99.7
120	1.642	0.5836	0.0411	0.5570	0.7723	0.3001	0.0121	0.5113	110-120	0.6228	953.3	99.8,99.8
130	1.081	0.5328	0.1113	0.6006	0.5472	0.4359	0.0631	0.3947	120-130	0.4460	953.8	99.9,99.9
140	0.8817	0.5740	0.2492	0.5473	0.6345	0.5063	0.1722	0.4286	130-140	0.3703	954.1	99.9,99.9
150	0.8307	0.6395	0.4961	0.6735	0.8406	0.6223	0.3830	0.5399	140-150	0.3453	954.5	99.9,99.9
160	0.8573	0.7920	0.7698	0.8672	0.9493	0.8064	0.6518	0.7239	150-160	0.3307	954.8	100,100
170	0.9081	0.9179	0.9251	0.9783	0.9904	0.9396	0.8672	0.9177	160-170	0.2457	955.0	100,100
180	0.9832	0.9614	0.9445	0.9808	0.9397	0.9275	0.9590	1.003	170-180	0.0902	955.1	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:955.138x1 lm		
NAME: V60	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

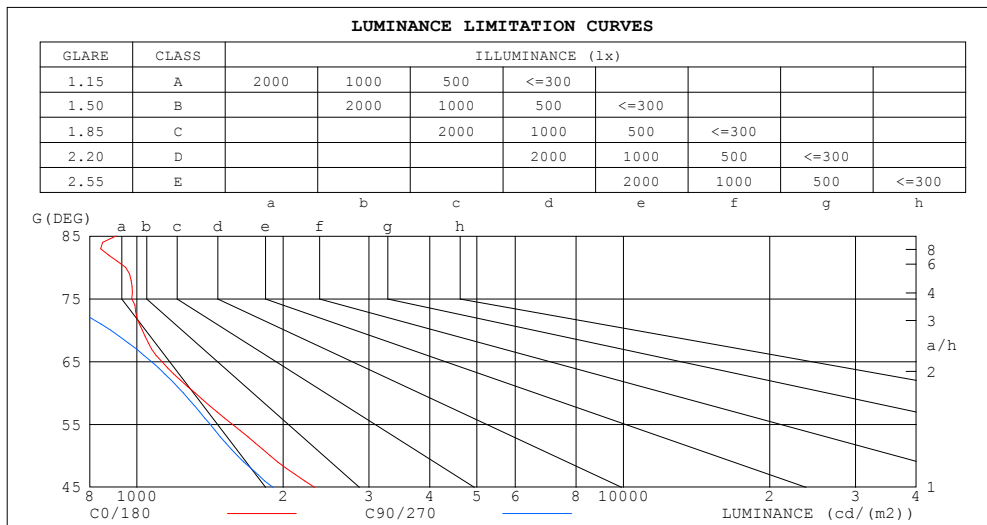


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:955.138x1 lm		
NAME: V60	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.10	1.07	1.05	1.08	1.05	1.03	1.03	1.01	.00	.00	.98	.97	.96	.95	.94	.92
2.0	1.01	.97	.93	.90	.96	.92	.96	.93	.90	.93	.91	.88	.90	.88	.86	.85
3.0	.94	.89	.85	.93	.88	.84	.90	.86	.83	.88	.84	.81	.85	.82	.80	.78
4.0	.88	.82	.78	.87	.81	.77	.84	.80	.76	.82	.78	.75	.80	.77	.74	.73
5.0	.82	.76	.72	.81	.76	.71	.79	.75	.71	.78	.73	.70	.76	.72	.69	.68
6.0	.77	.71	.67	.77	.71	.67	.75	.70	.66	.74	.69	.66	.72	.68	.65	.64
7.0	.73	.67	.63	.72	.67	.63	.71	.66	.62	.70	.65	.62	.69	.65	.61	.60
8.0	.69	.63	.59	.69	.63	.59	.67	.62	.59	.66	.62	.58	.65	.61	.58	.57
9.0	.66	.60	.56	.65	.60	.56	.64	.59	.55	.63	.59	.55	.62	.58	.55	.54
10.0	.63	.57	.53	.62	.57	.53	.61	.56	.53	.60	.56	.53	.60	.55	.52	.51

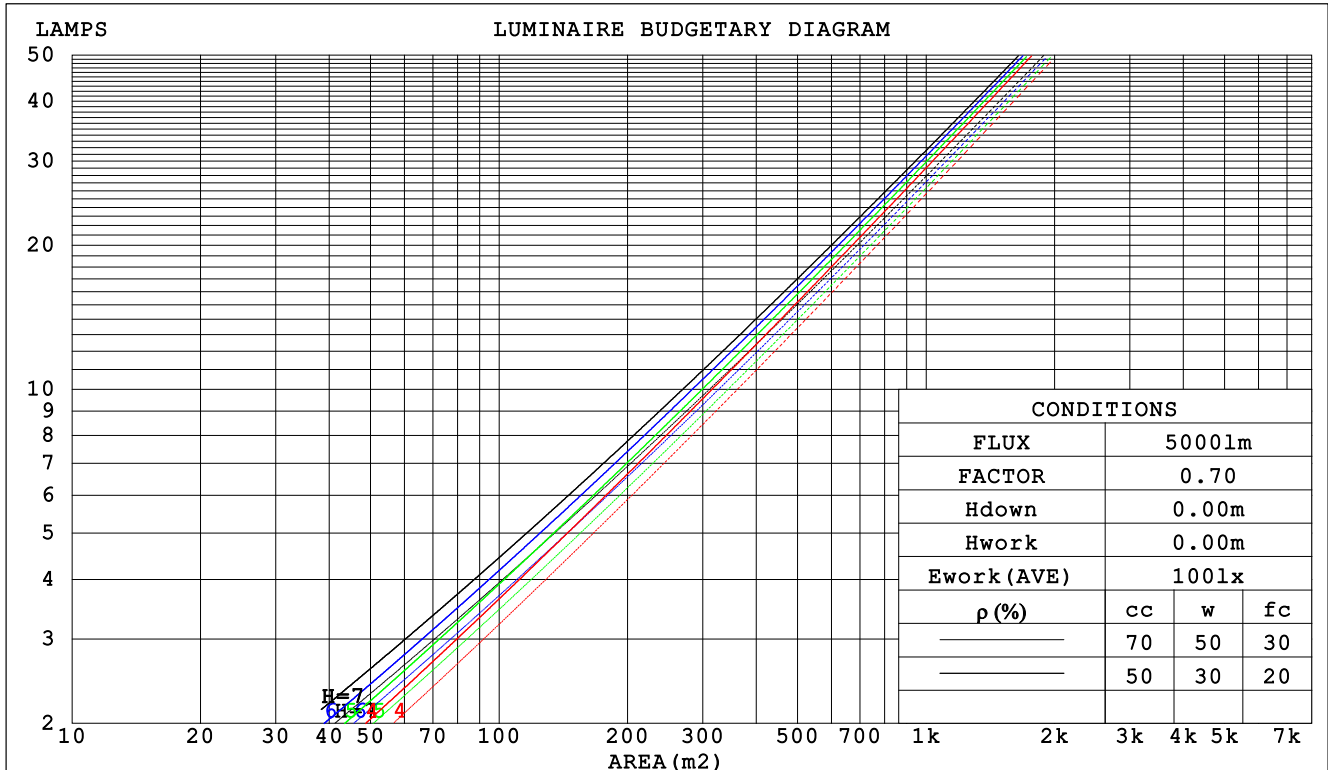

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:955.138x1 lm					
NAME: V60			TYPE:4000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.195	.111	.035	.188	.107	.034	.175	.100	.032	.163	.094	.030	.152	.088	.028		
2.0	.185	.101	.031	.179	.099	.030	.168	.093	.029	.158	.089	.028	.149	.084	.026		
3.0	.174	.093	.028	.169	.091	.027	.160	.087	.026	.151	.083	.025	.143	.079	.024		
4.0	.164	.085	.025	.159	.083	.025	.151	.080	.024	.144	.077	.023	.137	.074	.023		
5.0	.154	.079	.023	.151	.077	.023	.143	.075	.022	.137	.072	.021	.131	.070	.021		
6.0	.146	.073	.021	.142	.072	.021	.136	.070	.020	.130	.068	.020	.125	.066	.020		
7.0	.138	.068	.019	.135	.067	.019	.129	.065	.019	.124	.064	.019	.119	.062	.018		
8.0	.131	.064	.018	.128	.063	.018	.123	.062	.018	.119	.060	.017	.114	.059	.017		
9.0	.124	.060	.017	.122	.060	.017	.118	.058	.017	.114	.057	.016	.110	.056	.016		
10.0	.119	.057	.016	.117	.056	.016	.113	.055	.016	.109	.054	.015	.105	.053	.015		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.176	.161	.147	.151	.138	.127	.103	.095	.088	.059	.055	.051	.019	.018	.016	
2.0	.162	.136	.115	.138	.117	.099	.095	.081	.069	.055	.047	.040	.018	.015	.013	
3.0	.150	.117	.092	.128	.101	.079	.088	.070	.056	.051	.041	.033	.016	.013	.011	
4.0	.139	.103	.075	.120	.089	.065	.082	.062	.046	.048	.036	.027	.015	.012	.009	
5.0	.131	.091	.062	.112	.079	.054	.077	.055	.038	.045	.032	.023	.014	.011	.007	
6.0	.123	.082	.053	.106	.071	.046	.073	.050	.032	.042	.029	.019	.014	.010	.006	
7.0	.116	.074	.045	.100	.065	.039	.069	.045	.028	.040	.027	.017	.013	.009	.005	
8.0	.110	.068	.039	.095	.059	.034	.066	.042	.024	.038	.024	.015	.012	.008	.005	
9.0	.105	.063	.035	.090	.055	.030	.062	.038	.022	.036	.023	.013	.012	.007	.004	
10.0	.100	.058	.031	.086	.051	.027	.060	.036	.019	.035	.021	.011	.011	.007	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:955.138x1 lm										
NAME: V60					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	11.4	12.4	11.6	12.6	12.7	10.8	11.8	11.0	12.0	12.2
3H	12.1	13.0	12.3	13.2	13.4	11.5	12.4	11.8	12.6	12.8
4H	12.4	13.2	12.7	13.5	13.7	11.7	12.5	12.0	12.8	13.0
6H	12.7	13.5	13.0	13.7	14.0	11.7	12.5	12.0	12.8	13.0
8H	12.7	13.5	13.1	13.8	14.1	11.7	12.5	12.0	12.7	13.0
12H	12.8	13.6	13.1	13.8	14.1	11.6	12.4	12.0	12.7	13.0
4H 2H	11.6	12.5	11.9	12.7	12.9	11.1	12.0	11.4	12.2	12.5
3H	12.4	13.2	12.8	13.5	13.8	11.9	12.7	12.3	13.0	13.3
4H	12.8	13.5	13.2	13.8	14.2	12.2	12.9	12.5	13.2	13.5
6H	13.2	13.8	13.6	14.2	14.5	12.3	12.9	12.7	13.2	13.6
8H	13.3	13.9	13.8	14.3	14.7	12.3	12.8	12.7	13.2	13.6
12H	13.4	14.0	13.9	14.3	14.7	12.2	12.7	12.6	13.1	13.5
8H 4H	12.9	13.4	13.3	13.8	14.2	12.2	12.8	12.7	13.2	13.6
6H	13.3	13.8	13.8	14.2	14.6	12.4	12.9	12.8	13.3	13.7
8H	13.5	13.9	14.0	14.4	14.8	12.4	12.8	12.9	13.2	13.7
12H	13.7	14.0	14.2	14.5	15.0	12.4	12.7	12.9	13.2	13.7
12H 4H	12.8	13.4	13.3	13.7	14.1	12.2	12.7	12.7	13.1	13.5
6H	13.3	13.7	13.8	14.2	14.6	12.4	12.8	12.9	13.2	13.7
8H	13.5	13.9	14.0	14.3	14.8	12.4	12.8	12.9	13.2	13.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.6 / - 0.7					+ 0.6 / - 0.8				
1.5H	+ 1.0 / - 0.5					+ 0.7 / - 0.6				
2.0H	+ 1.0 / - 0.7					+ 0.8 / - 0.7				

CIE Pub.117 Corrected 955.1 lm Total Lamp Luminous Flux.(8log(F/F0) = -0.2)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:955.138x1 lm		
NAME: V60	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	80	73	68	80	73	68	79	72	68	64
0.80	88	81	77	88	81	77	86	80	76	72
1.00	94	87	83	93	87	82	91	87	82	77
1.25	99	92	88	97	92	88	95	90	87	82
1.50	102	96	92	101	95	91	98	94	90	85
2.00	106	100	97	104	99	96	101	97	94	88
2.50	108	103	99	106	102	98	103	99	97	90
3.00	110	105	102	108	104	101	104	101	99	92
4.00	112	109	106	110	107	105	106	104	102	94
5.00	114	111	108	111	109	107	107	105	104	96
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:955.138x1 lm		
NAME: V60	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

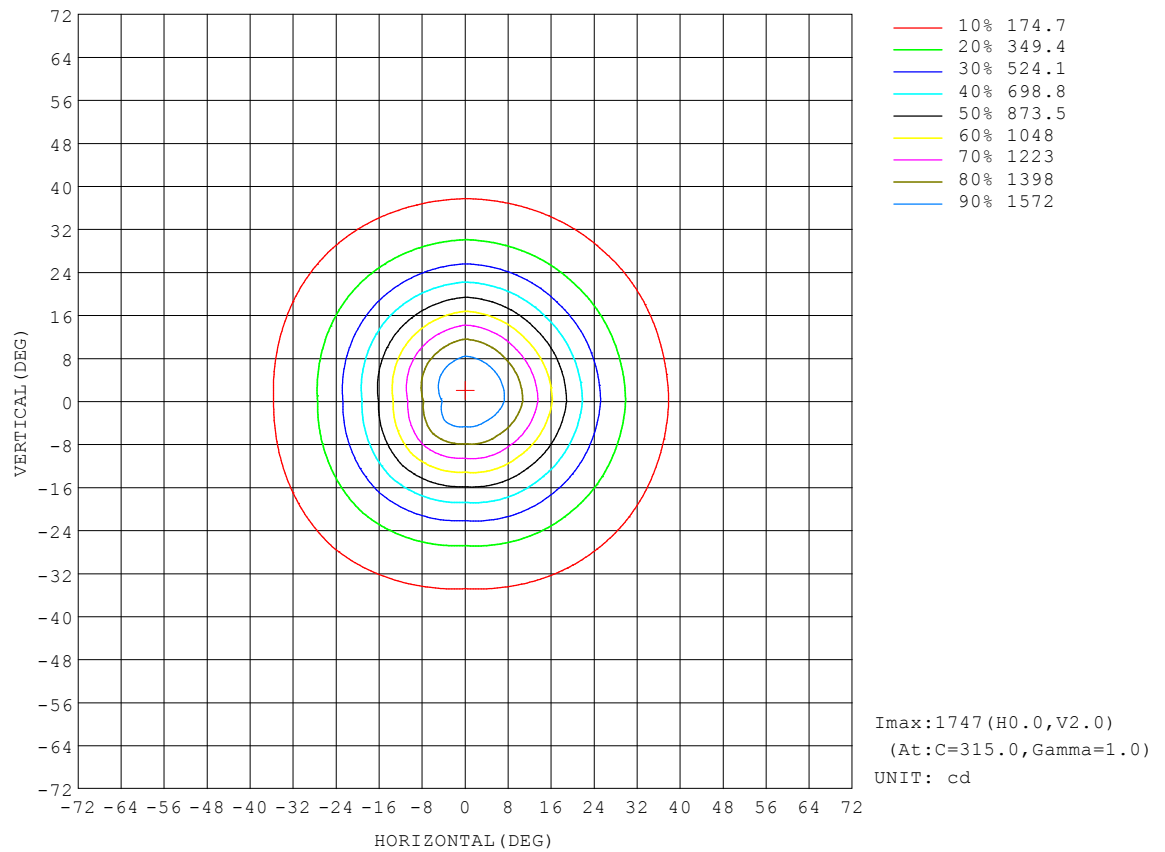


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:955.138x1 lm		
NAME: V60	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

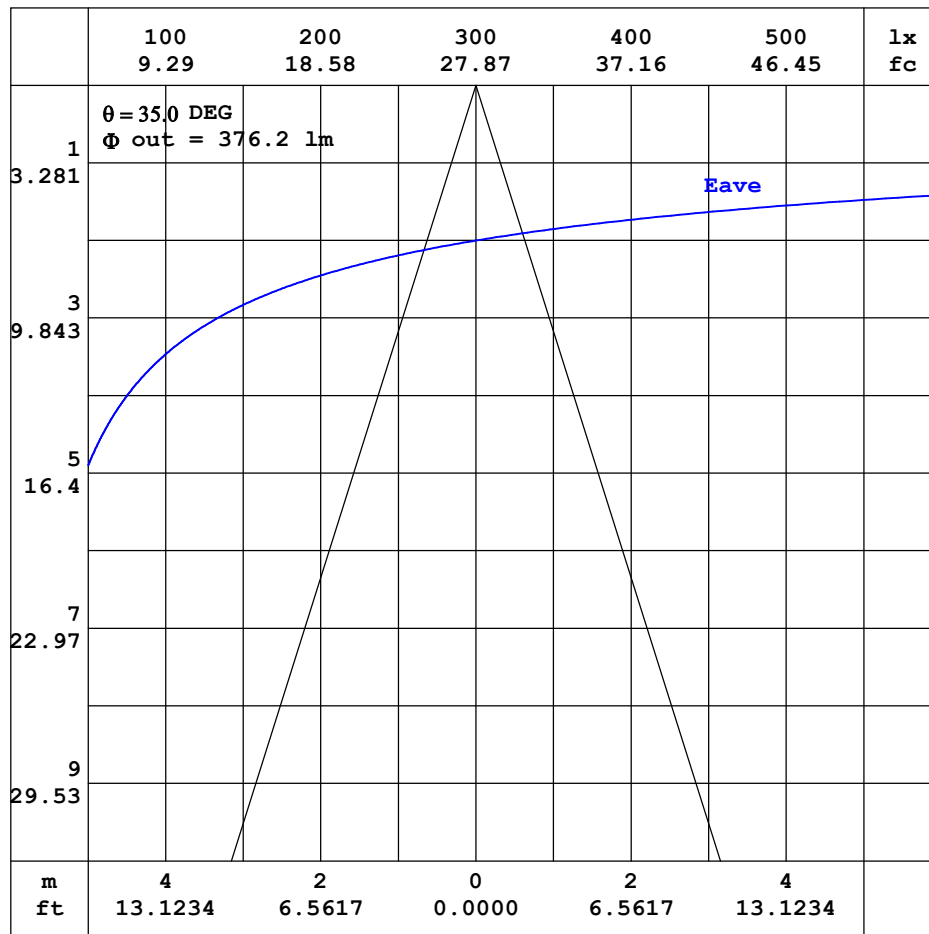


Note: The Curves indicate the illuminated area and the average illuminance when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:955.138x1 lm		
NAME: V60	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

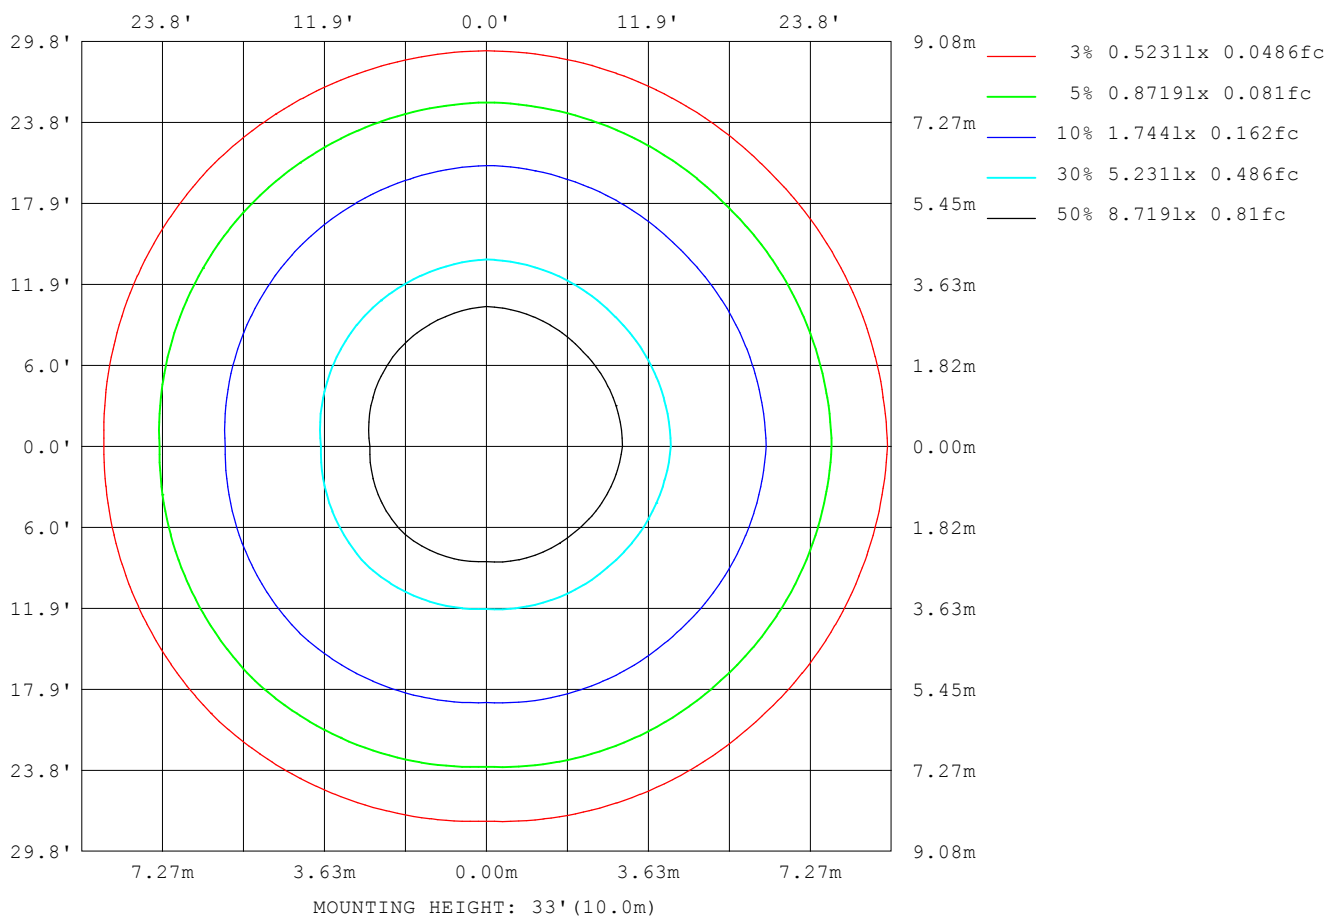

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:955.138x1 lm		
NAME: V60	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1063
L_0~180 (75) av	824
L_0~180 (85) av	790
L_90~270 (65) av	1131
L_90~270 (75) av	710
L_90~270 (85) av	147
L_45 (65) av	1083
L_45 (75) av	693
L_45 (85) av	457

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

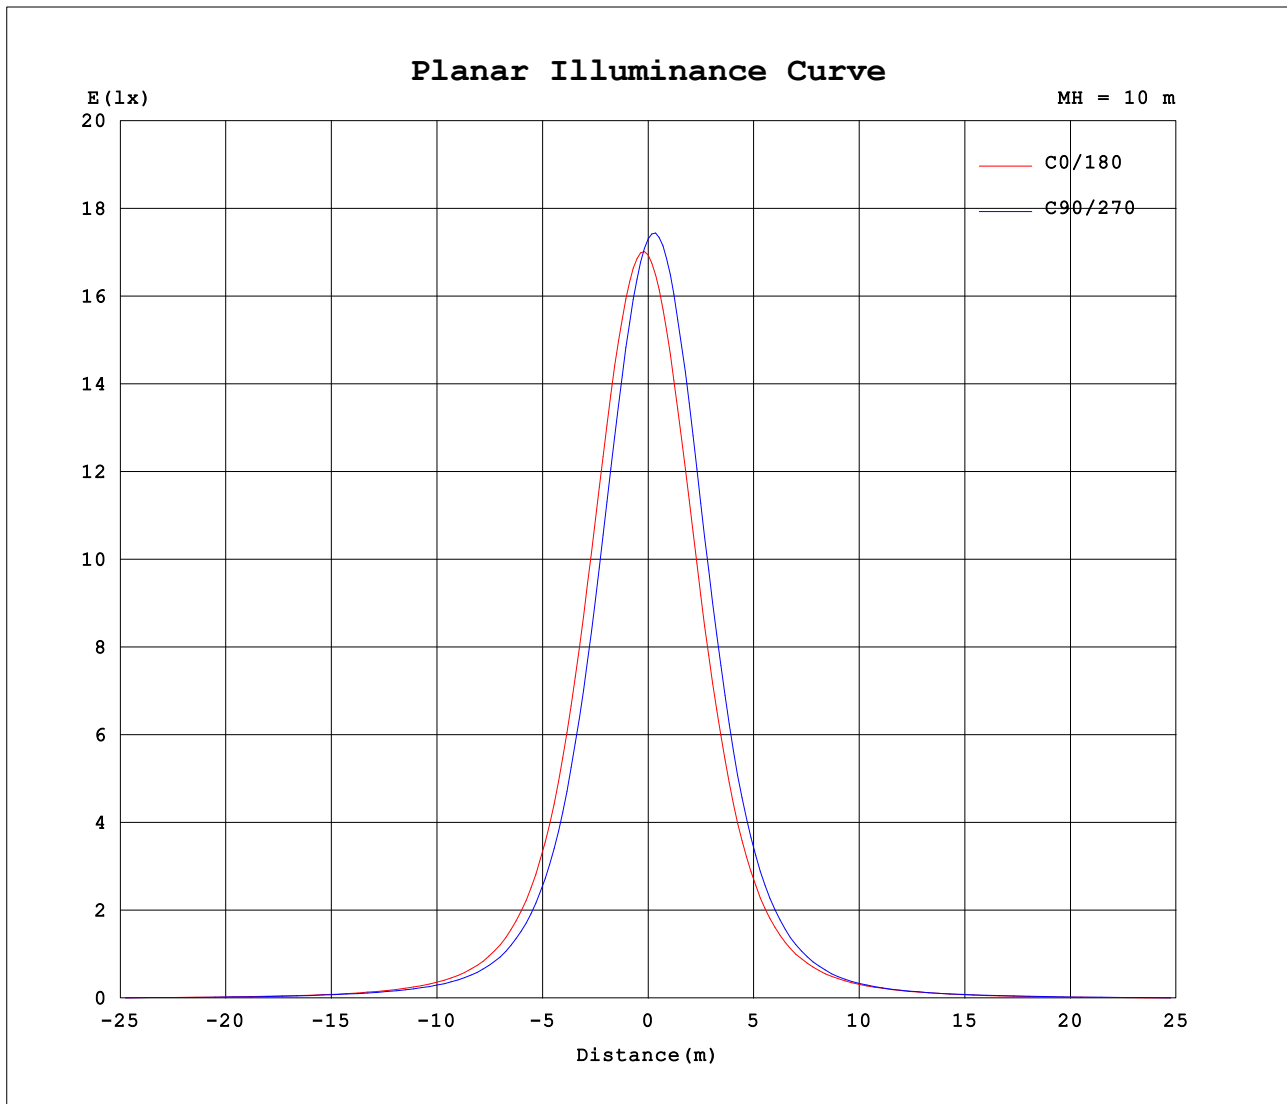

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.0750A P:8.980W PF:0.9950 Freq:60.00Hz Lamp Flux:955.138x1 lm		
NAME: V60	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1694	1714	1731	1740	1694	1714	1731	1740										
5	1652	1587	1558	1585	1542	1633	1706	1686										
10	1441	1326	1263	1303	1263	1391	1494	1452										
15	1129	1000	929	974	941	1064	1166	1121										
20	803	697	633	678	655	750	831	789										
25	533	460	410	448	433	495	550	520										
30	345	297	264	290	280	320	351	333										
35	222	193	172	189	183	206	222	213										
40	148	128	117	127	125	137	144	139										
45	103	92.1	84.8	91.0	89.8	96.1	96.1	96.6										
50	76.1	69.5	65.2	69.1	67.5	71.8	70.2	70.6										
55	56.7	53.4	51.1	53.4	51.6	54.7	53.9	52.5										
60	41.5	40.3	39.2	40.5	38.0	41.5	41.9	39.1										
65	30.0	28.7	28.5	28.9	26.7	29.9	31.7	27.7										
70	22.1	18.7	19.0	18.9	17.9	19.6	21.6	18.3										
75	15.9	11.4	10.6	11.0	11.0	11.6	12.5	11.2										
80	10.4	6.33	4.16	5.74	7.01	6.13	5.31	6.29										
85	4.97	2.50	0.67	2.33	3.70	2.50	0.94	2.70										
90	2.77	1.42	0.00	0.83	2.37	0.86	0.00	1.51										
95	2.14	1.33	0.00	0.74	2.18	0.71	0.00	1.41										
100	2.14	1.26	0.00	0.72	1.53	0.59	0.00	1.29										
105	2.11	1.06	0.00	0.72	1.10	0.34	0.00	1.10										
110	1.98	0.88	0.00	0.64	0.94	0.32	0.00	0.90										
115	1.81	0.69	0.01	0.58	0.87	0.33	0.00	0.71										
120	1.64	0.58	0.04	0.56	0.77	0.30	0.01	0.51										
125	1.36	0.55	0.07	0.58	0.57	0.33	0.03	0.41										
130	1.08	0.53	0.11	0.60	0.55	0.44	0.06	0.39										
135	0.95	0.54	0.16	0.58	0.53	0.49	0.11	0.41										
140	0.88	0.57	0.25	0.55	0.63	0.51	0.17	0.43										
145	0.85	0.60	0.36	0.56	0.79	0.52	0.27	0.46										
150	0.83	0.64	0.50	0.67	0.84	0.62	0.38	0.54										
155	0.85	0.70	0.64	0.78	0.94	0.71	0.52	0.62										
160	0.86	0.79	0.77	0.87	0.95	0.81	0.65	0.72										
165	0.88	0.85	0.86	0.95	0.97	0.91	0.78	0.82										
170	0.91	0.92	0.93	0.98	0.99	0.94	0.87	0.92										
175	0.96	0.95	0.94	0.97	0.93	0.95	0.93	0.98										
180	0.98	0.96	0.94	0.98	0.94	0.93	0.96	1.00										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: