


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:962.687x1 lm		
NAME: V05	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 106.97 lm/W			
MODEL		I _{max} (cd)	25634	S/MH(C0/180)	0.07
NOMINAL POWER(W)	10W	LOR(%)	100.0	S/MH(C90/270)	0.14
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	962.69	η UP,DN(C0-180)	0.2,38.3
NOMINAL FLUX(lm)	962.687	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.2,61.2
LAMPS INSIDE	1	η up(%)	0.4	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	120.0	η down(%)	99.6	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

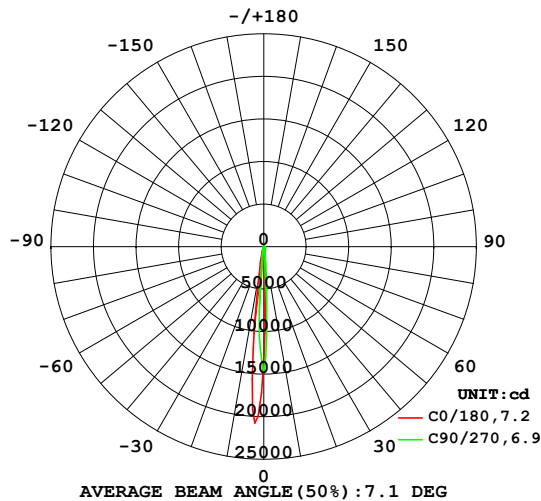

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

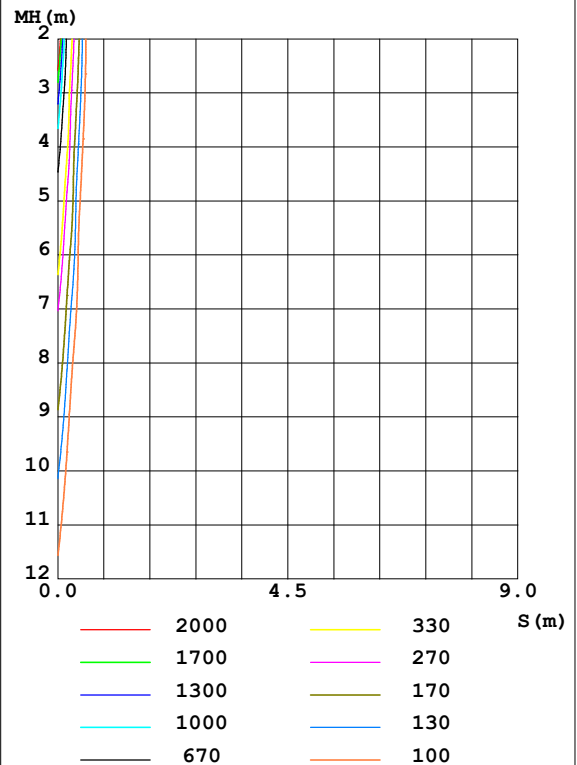

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	94.79	77.26	93.02	206.1	324.1	238.2	122.9	79.60	0- 10	497.1	497.1	51.6, 51.6
20	26.63	24.10	27.54	40.05	53.19	42.66	32.77	24.19	10- 20	189.3	686.5	71.3, 71.3
30	12.13	10.74	12.09	15.77	18.92	16.28	13.66	10.78	20- 30	98.05	784.5	81.5, 81.5
40	6.726	6.309	6.806	8.176	9.744	8.450	7.239	6.236	30- 40	62.56	847.1	88, 88
50	4.124	4.038	4.317	5.069	5.819	5.222	4.486	3.808	40- 50	45.46	892.5	92.7, 92.7
60	2.317	2.426	2.851	3.230	3.508	3.347	2.918	2.194	50- 60	32.81	925.3	96.1, 96.1
70	1.198	1.051	1.485	1.761	1.873	1.812	1.540	0.9403	60- 70	21.03	946.4	98.3, 98.3
80	0.3990	0.3045	0.3423	0.6336	0.7580	0.6286	0.3539	0.2641	70- 80	9.695	956.1	99.3, 99.3
90	0.1718	0.0998	0	0.1238	0.2598	0.1034	0	0.1071	80- 90	2.581	958.7	99.6, 99.6
100	0.1691	0.0828	0	0.0516	0.1488	0.0467	0	0.0879	90-100	0.9070	959.6	99.7, 99.7
110	0.1468	0.0484	0	0.0518	0.1104	0.0436	0	0.0577	100-110	0.6837	960.2	99.7, 99.7
120	0.1112	0.0346	0.0036	0.0433	0.0683	0.0351	0	0.0405	110-120	0.4933	960.7	99.8, 99.8
130	0.0756	0.0303	0.0087	0.0404	0.0578	0.0334	0.0029	0.0332	120-130	0.3411	961.1	99.8, 99.8
140	0.0569	0.0334	0.0162	0.0385	0.0458	0.0310	0.0082	0.0276	130-140	0.2525	961.3	99.9, 99.9
150	0.0815	0.0699	0.0426	0.0477	0.0538	0.0353	0.0262	0.0585	140-150	0.2348	961.6	99.9, 99.9
160	0.2156	0.2651	0.2444	0.1812	0.1335	0.1304	0.1340	0.1494	150-160	0.4890	962.1	99.9, 99.9
170	0.1262	0.1363	0.1643	0.2101	0.1264	0.1424	0.1453	0.1298	160-170	0.5054	962.6	100, 100
180	0.0920	0.1107	0.1238	0.1298	0.0923	0.1097	0.1245	0.1303	170-180	0.1257	962.7	100, 100
DEG	LUMINOUS INTENSITY: $\times 10\text{cd}$									UNIT: lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:962.687x1 lm		
NAME: V05	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

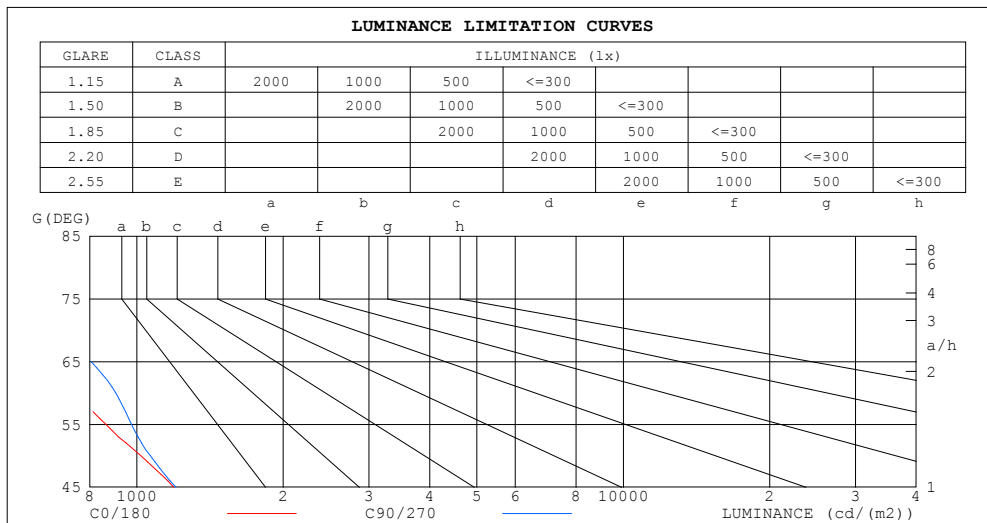


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:962.687x1 lm		
NAME: V05	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.98	.98	.97	.95
2.0	1.06	1.03	.00	1.04	1.01	.99	1.01	.98	.96	.98	.96	.94	.95	.94	.92	.91
3.0	1.01	.97	.94	.99	.96	.93	.97	.94	.91	.94	.92	.90	.92	.90	.88	.87
4.0	.97	.92	.89	.95	.91	.88	.93	.90	.87	.91	.89	.86	.90	.87	.85	.84
5.0	.93	.88	.85	.92	.88	.85	.90	.87	.84	.89	.86	.83	.87	.85	.82	.81
6.0	.90	.85	.82	.89	.85	.82	.88	.84	.81	.86	.83	.81	.85	.82	.80	.79
7.0	.87	.83	.79	.86	.82	.79	.85	.81	.79	.84	.81	.78	.83	.80	.78	.77
8.0	.85	.80	.77	.84	.80	.77	.83	.79	.77	.82	.79	.76	.81	.78	.76	.75
9.0	.82	.78	.75	.82	.78	.75	.81	.78	.75	.80	.77	.75	.80	.77	.74	.74
10.0	.80	.76	.74	.80	.76	.74	.79	.76	.73	.79	.75	.73	.78	.75	.73	.72

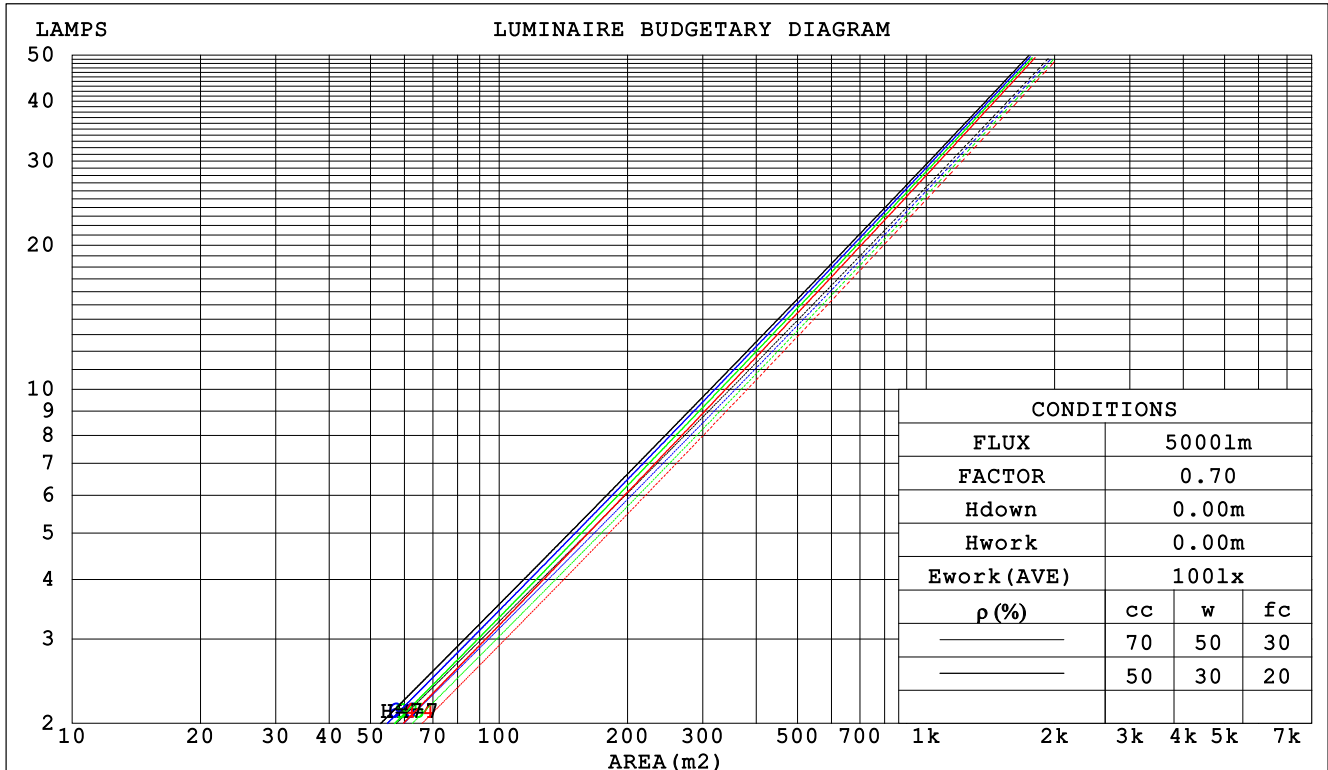

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:962.687x1 lm					
NAME: V05			TYPE:4000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.153	.087	.028	.147	.084	.027	.134	.077	.025	.122	.071	.023	.112	.065	.021		
2.0	.143	.078	.024	.137	.075	.023	.126	.070	.022	.117	.065	.020	.108	.061	.019		
3.0	.132	.070	.021	.127	.068	.021	.118	.064	.019	.110	.060	.019	.102	.057	.018		
4.0	.122	.064	.019	.118	.062	.018	.111	.059	.018	.104	.056	.017	.097	.053	.016		
5.0	.114	.058	.017	.110	.057	.017	.104	.054	.016	.098	.052	.015	.092	.049	.015		
6.0	.106	.053	.015	.103	.052	.015	.098	.050	.015	.093	.048	.014	.088	.046	.014		
7.0	.100	.049	.014	.097	.048	.014	.092	.047	.013	.088	.045	.013	.084	.043	.013		
8.0	.094	.046	.013	.092	.045	.013	.087	.044	.012	.083	.042	.012	.080	.041	.012		
9.0	.089	.043	.012	.087	.042	.012	.083	.041	.012	.079	.040	.011	.076	.039	.011		
10.0	.084	.040	.011	.082	.040	.011	.079	.039	.011	.076	.038	.011	.073	.037	.010		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.173	.161	.150	.148	.138	.129	.101	.095	.089	.058	.055	.052	.019	.018	.017	
2.0	.156	.136	.119	.133	.117	.103	.091	.081	.072	.053	.047	.042	.017	.015	.014	
3.0	.141	.117	.097	.121	.101	.084	.083	.070	.059	.048	.041	.035	.015	.013	.011	
4.0	.129	.101	.080	.111	.088	.070	.076	.061	.049	.044	.036	.029	.014	.012	.010	
5.0	.118	.089	.068	.102	.077	.059	.070	.054	.042	.041	.032	.025	.013	.010	.008	
6.0	.109	.079	.058	.094	.069	.050	.065	.048	.036	.038	.028	.021	.012	.009	.007	
7.0	.101	.071	.050	.087	.062	.044	.060	.043	.031	.035	.025	.018	.011	.008	.006	
8.0	.094	.064	.044	.081	.056	.038	.056	.039	.027	.033	.023	.016	.011	.008	.005	
9.0	.088	.059	.039	.076	.051	.034	.053	.036	.024	.031	.021	.014	.010	.007	.005	
10.0	.083	.054	.034	.072	.047	.030	.050	.033	.021	.029	.019	.013	.009	.006	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:962.687x1 lm										
NAME: V05					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.9	7.6	7.2	7.8	8.0	7.4	8.1	7.6	8.3	8.4
3H	7.7	8.4	8.0	8.6	8.8	8.4	9.1	8.6	9.2	9.4
4H	8.0	8.7	8.3	8.9	9.1	8.7	9.3	9.0	9.5	9.8
6H	8.2	8.8	8.5	9.0	9.3	8.8	9.4	9.1	9.6	9.9
8H	8.2	8.8	8.5	9.0	9.3	8.8	9.3	9.1	9.6	9.9
12H	8.2	8.8	8.6	9.1	9.4	8.7	9.3	9.0	9.6	9.8
4H 2H	7.3	8.0	7.6	8.2	8.4	7.7	8.4	8.0	8.6	8.8
3H	8.2	8.8	8.5	9.0	9.3	8.8	9.4	9.1	9.6	9.9
4H	8.6	9.1	8.9	9.4	9.7	9.2	9.7	9.5	10.0	10.3
6H	8.8	9.3	9.2	9.6	9.9	9.3	9.8	9.7	10.1	10.4
8H	8.9	9.3	9.2	9.6	10.0	9.3	9.7	9.7	10.1	10.4
12H	8.9	9.3	9.3	9.7	10.1	9.3	9.6	9.7	10.0	10.4
8H 4H	8.6	9.1	9.0	9.4	9.8	9.2	9.6	9.6	9.9	10.3
6H	8.9	9.2	9.3	9.6	10.1	9.3	9.7	9.8	10.1	10.5
8H	9.0	9.3	9.4	9.7	10.2	9.3	9.7	9.8	10.1	10.5
12H	9.1	9.3	9.5	9.8	10.3	9.3	9.6	9.8	10.0	10.5
12H 4H	8.6	9.0	9.0	9.4	9.8	9.1	9.5	9.5	9.9	10.3
6H	8.9	9.2	9.3	9.6	10.0	9.3	9.6	9.8	10.0	10.5
8H	9.0	9.2	9.4	9.7	10.2	9.3	9.6	9.8	10.0	10.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.4 / - 0.6					+ 0.4 / - 0.5				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.8 / - 0.8					+ 0.7 / - 0.7				

CIE Pub.117 Corrected 962.7 lm Total Lamp Luminous Flux.(8log(F/F0) = -0.1)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:962.687x1 lm		
NAME: V05	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	84	77	73	84	77	73	83	77	73	69
0.80	92	85	81	91	85	81	90	84	81	77
1.00	97	90	86	96	90	86	94	90	85	81
1.25	101	95	91	100	94	91	98	93	90	85
1.50	104	98	95	102	98	94	100	96	93	88
2.00	107	102	99	105	101	98	103	99	96	91
2.50	109	105	101	107	103	100	104	101	98	92
3.00	111	107	104	109	105	103	105	103	100	94
4.00	113	110	107	111	108	106	107	105	103	96
5.00	114	112	110	112	110	108	108	106	105	97
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:962.687x1 lm		
NAME: V05	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

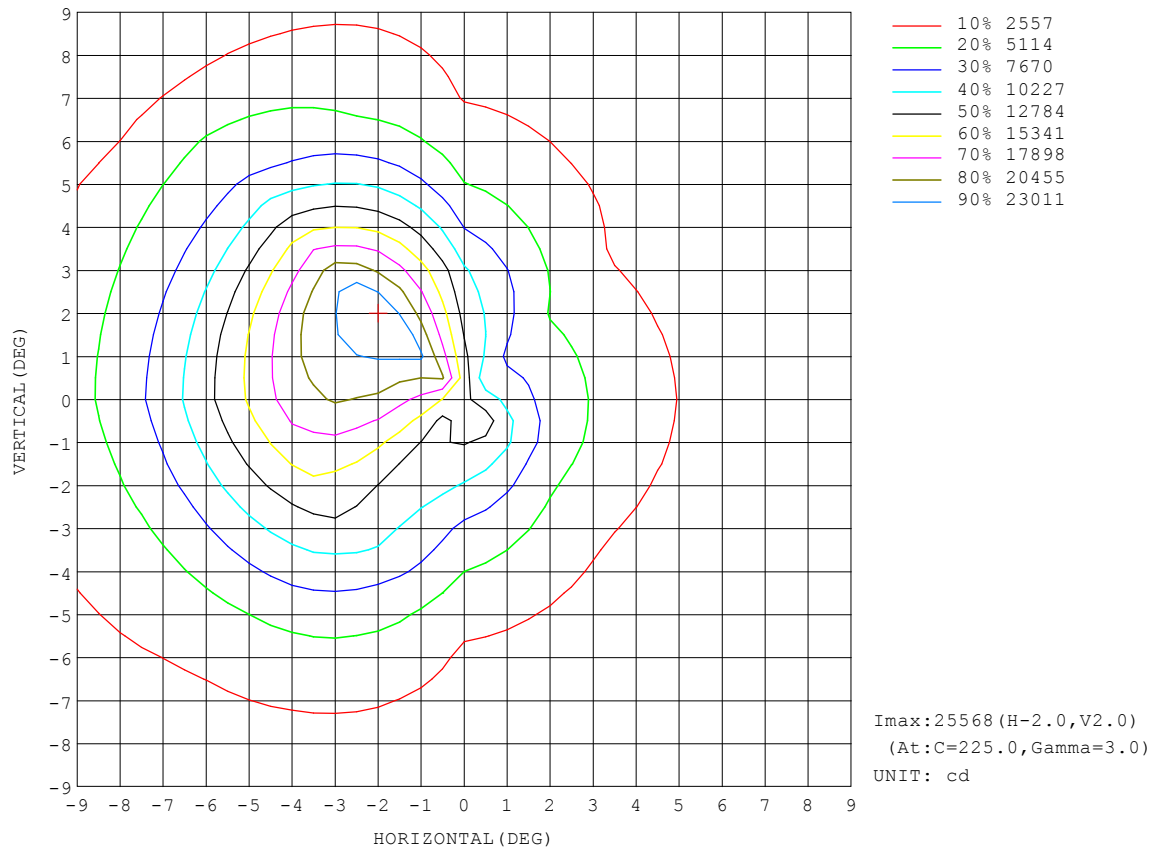


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:962.687x1 lm		
NAME: V05	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

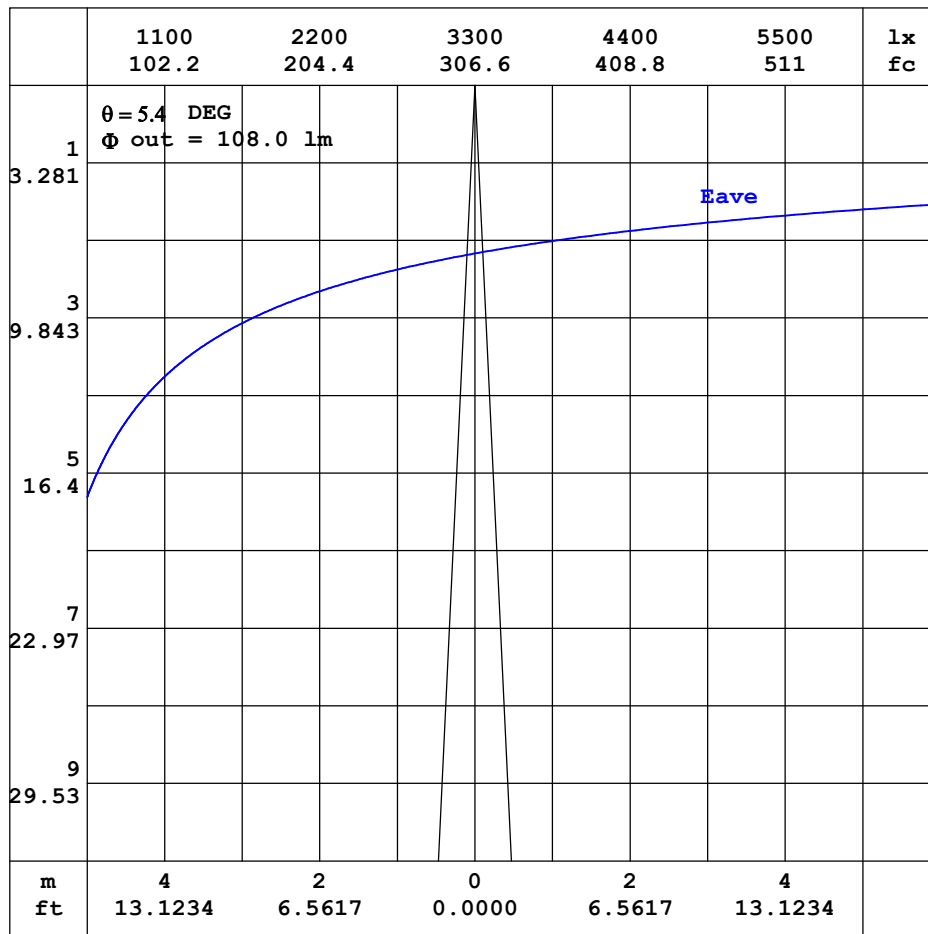


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:962.687x1 lm		
NAME: V05	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

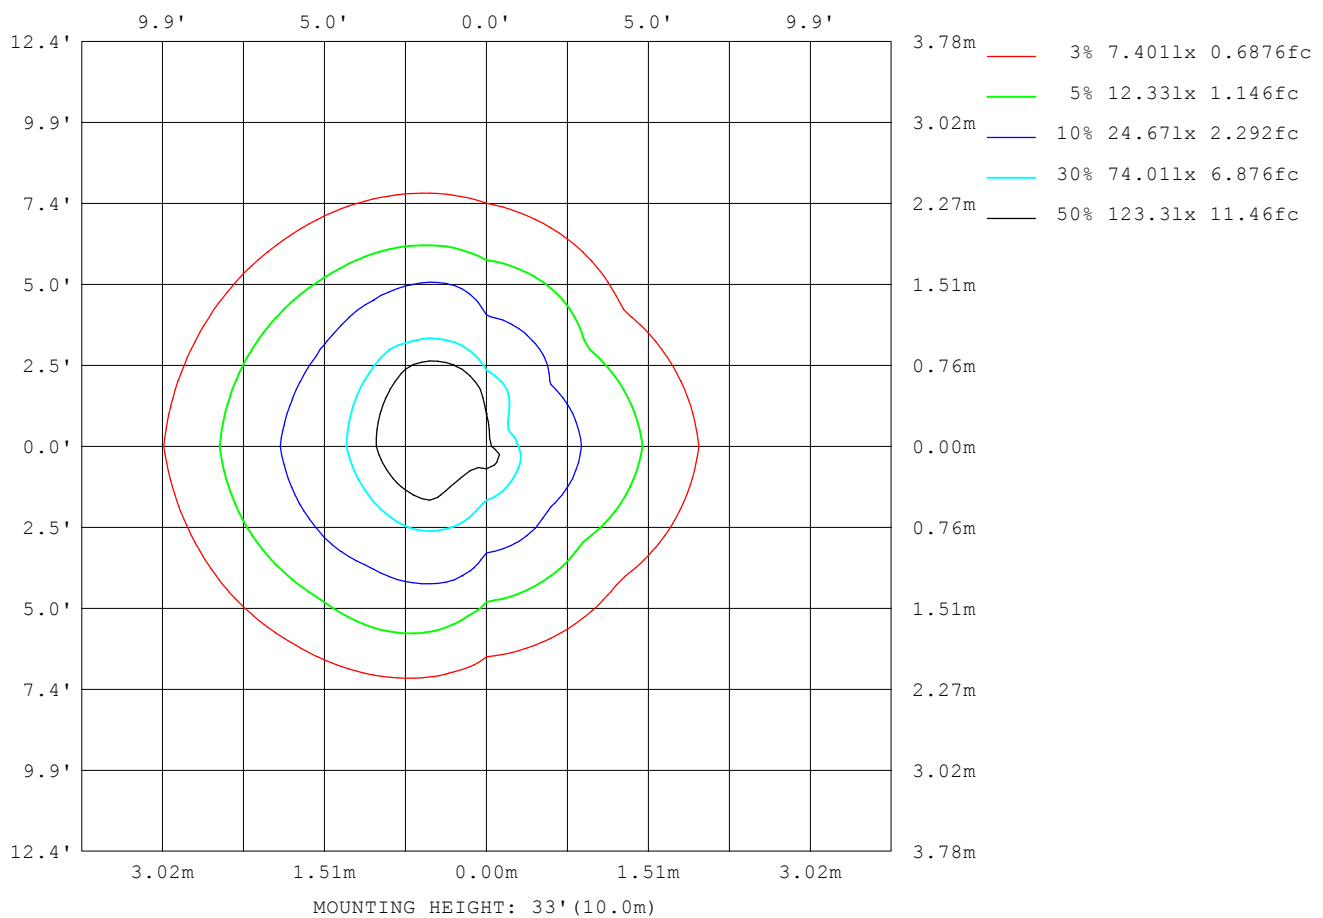

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:962.687x1 lm		
NAME: V05	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	814
L_0~180 (75) av	624
L_0~180 (85) av	645
L_90~270 (65) av	817
L_90~270 (75) av	528
L_90~270 (85) av	117
L_45 (65) av	773
L_45 (75) av	529
L_45 (85) av	395

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

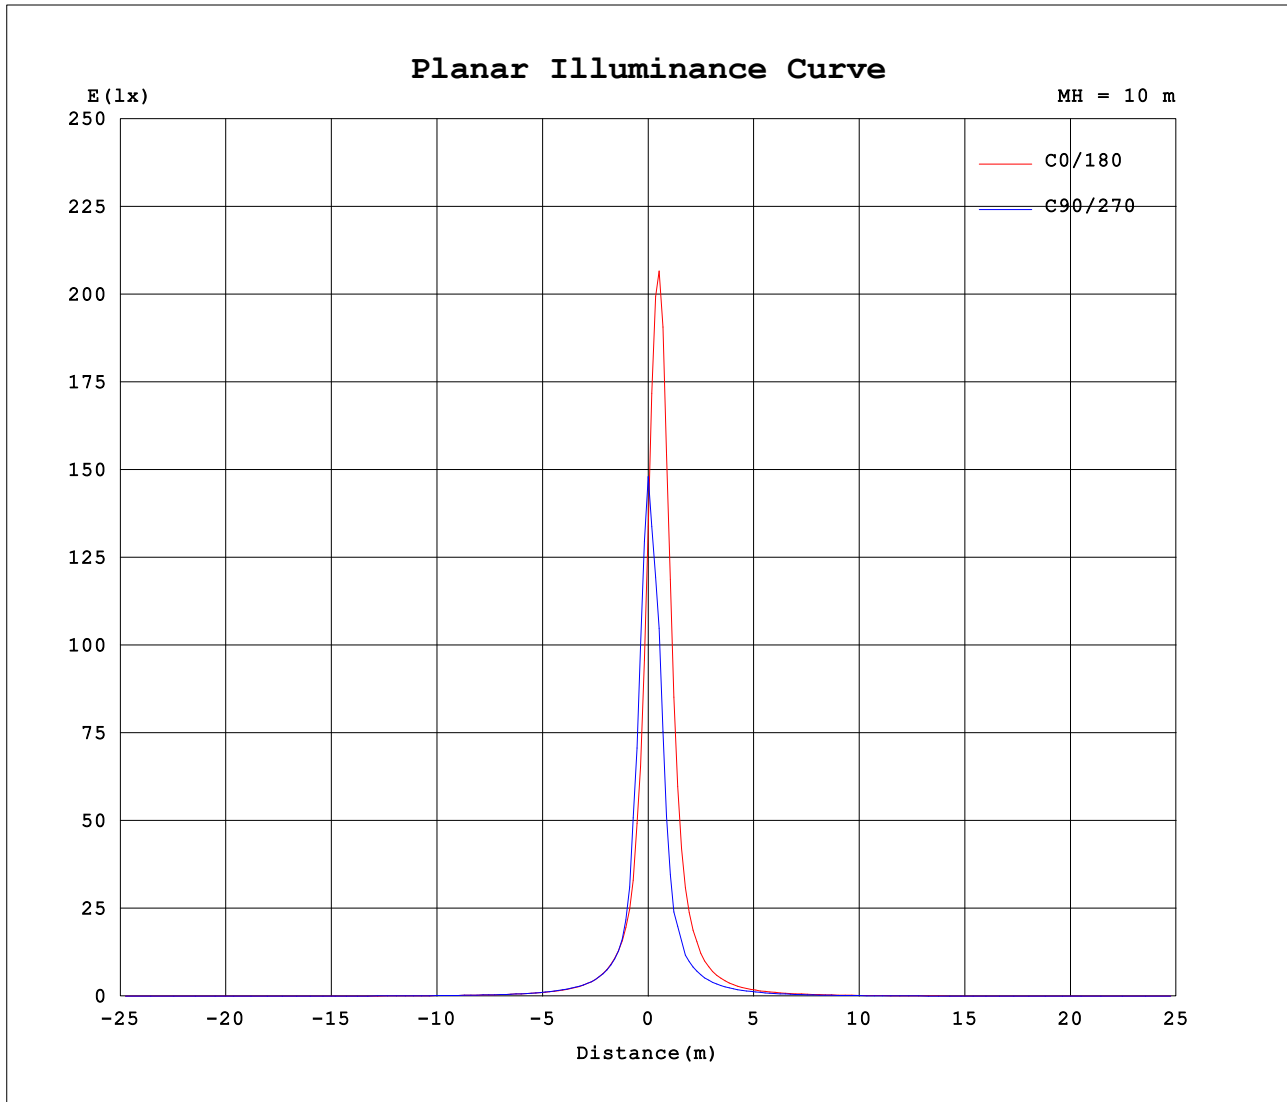

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.0750A P:9.000W PF:0.9970 Freq:60.00Hz Lamp Flux:962.687x1 lm		
NAME: V05	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1338	1736	1481	1036	1338	1736	1481	1036										
5	251	221	315	1025	1564	1754	519	229										
10	94.8	77.3	93.0	206	324	238	123	79.6										
15	46.5	40.6	46.4	75.3	112	83.5	58.5	41.2										
20	26.6	24.1	27.5	40.0	53.2	42.7	32.8	24.2										
25	17.2	15.7	18.1	24.0	30.0	25.0	20.5	15.6										
30	12.1	10.7	12.1	15.8	18.9	16.3	13.7	10.8										
35	8.83	8.00	8.80	10.9	12.8	11.4	9.68	8.03										
40	6.73	6.31	6.81	8.18	9.74	8.45	7.24	6.24										
45	5.30	5.05	5.36	6.38	7.58	6.58	5.64	4.88										
50	4.12	4.04	4.32	5.07	5.82	5.22	4.49	3.81										
55	3.12	3.20	3.52	4.07	4.54	4.17	3.62	2.94										
60	2.32	2.43	2.85	3.23	3.51	3.35	2.92	2.19										
65	1.67	1.68	2.14	2.49	2.66	2.58	2.20	1.49										
70	1.20	1.05	1.49	1.76	1.87	1.81	1.54	0.94										
75	0.80	0.63	0.85	1.12	1.24	1.14	0.88	0.56										
80	0.40	0.30	0.34	0.63	0.76	0.63	0.35	0.26										
85	0.22	0.12	0.07	0.32	0.49	0.30	0.06	0.12										
90	0.17	0.10	0.00	0.12	0.26	0.10	0.00	0.11										
95	0.17	0.09	0.00	0.05	0.16	0.05	0.00	0.10										
100	0.17	0.08	0.00	0.05	0.15	0.05	0.00	0.09										
105	0.16	0.06	0.00	0.05	0.12	0.05	0.00	0.07										
110	0.15	0.05	0.00	0.05	0.11	0.04	0.00	0.06										
115	0.14	0.04	0.00	0.05	0.10	0.03	0.00	0.05										
120	0.11	0.03	0.00	0.04	0.07	0.04	0.00	0.04										
125	0.09	0.03	0.01	0.04	0.07	0.03	0.00	0.04										
130	0.08	0.03	0.01	0.04	0.06	0.03	0.00	0.03										
135	0.06	0.03	0.01	0.04	0.04	0.03	0.00	0.03										
140	0.06	0.03	0.02	0.04	0.05	0.03	0.01	0.03										
145	0.06	0.04	0.02	0.04	0.05	0.03	0.01	0.03										
150	0.08	0.07	0.04	0.05	0.05	0.04	0.03	0.06										
155	0.15	0.17	0.11	0.08	0.07	0.06	0.07	0.12										
160	0.22	0.27	0.24	0.18	0.13	0.13	0.13	0.15										
165	0.15	0.18	0.24	0.30	0.14	0.15	0.15	0.15										
170	0.13	0.14	0.16	0.21	0.13	0.14	0.15	0.13										
175	0.10	0.11	0.14	0.15	0.11	0.13	0.13	0.12										
180	0.09	0.11	0.12	0.13	0.09	0.11	0.12	0.13										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: