


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.7V I:0.1070A P:12.20W PF:0.9440 Freq:60.00Hz Lamp Flux:1532.12x1 lm		
NAME: 3寸筒灯 15W 15度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 105.86 lm/W			
MODEL		I _{max} (cd)	4882	S/MH (C0/180)	0.44
NOMINAL POWER (W)	15W	LOR (%)	84.3	S/MH (C90/270)	0.38
RATED VOLTAGE (V)	120.0	TOTAL FLUX (lm)	1291.4	η UP, DN (C0-180)	0.3, 46.7
NOMINAL FLUX (lm)	1532.12	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 37.3
LAMPS INSIDE	1	η up (%)	0.3	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	120.0	η down (%)	83.9	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

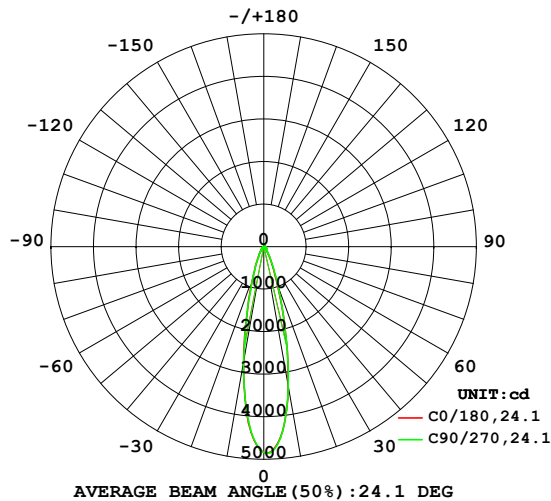

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

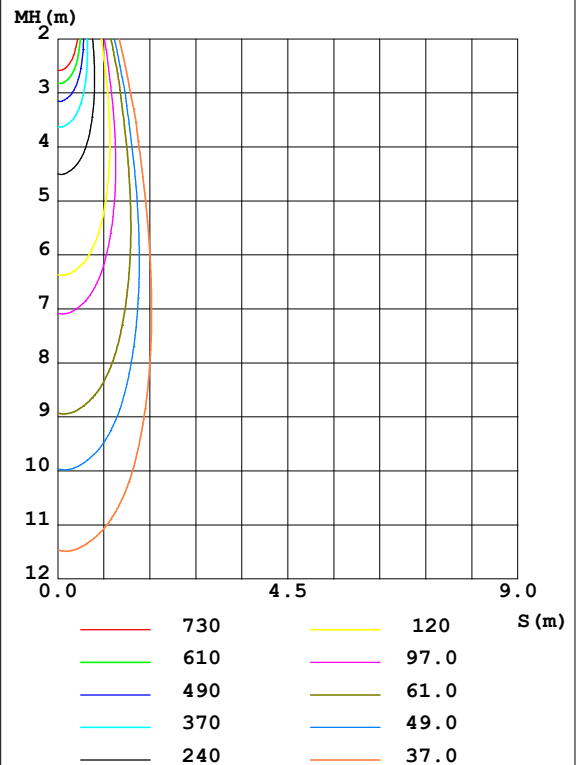

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3323	3432	3332	3489	2743	2618	2734	2696	0- 10	371.7	371.7	28.8,24.3
20	931.0	980.0	974.0	1039	739.9	689.9	708.0	706.4	10- 20	472.2	843.9	65.3,55.1
30	259.1	268.8	276.4	296.4	228.7	212.7	213.7	208.8	20- 30	211.7	1056	81.7,68.9
40	104.0	107.4	110.8	115.2	99.72	95.22	91.94	89.70	30- 40	97.91	1154	89.3,75.3
50	55.58	57.57	58.88	60.85	55.53	53.77	51.54	50.26	40- 50	57.65	1211	93.8,79.1
60	31.88	33.07	33.42	34.62	31.47	30.48	29.66	28.78	50- 60	37.93	1249	96.7,81.5
70	16.80	17.69	17.70	18.60	16.33	15.69	15.43	14.72	60- 70	23.50	1273	98.5,83.1
80	5.386	5.939	5.893	6.443	5.148	4.974	4.887	4.324	70- 80	11.15	1284	99.4,83.8
90	0.1301	0.1178	0.2302	0.5289	0	0.0012	0	0	80- 90	2.457	1286	99.6,83.9
100	0.0529	0.0365	0.0387	0.0341	0	0	0	0	90-100	0.0189	1286	99.6,83.9
110	0.1180	0.0971	0.1064	0.1022	0	0	0	0	100-110	0.0368	1286	99.6,84
120	0.2311	0.2038	0.1959	0.1996	0.0193	0.0169	0.0291	0.0243	110-120	0.0786	1286	99.6,84
130	0.4695	0.4222	0.4063	0.4164	0.0725	0.0823	0.0921	0.0996	120-130	0.1563	1286	99.6,84
140	1.213	1.080	1.081	1.132	0.2366	0.2712	0.2910	0.3086	130-140	0.3316	1287	99.6,84
150	3.821	3.434	3.404	3.682	0.7603	0.8503	0.8797	0.9140	140-150	0.8099	1288	99.7,84
160	8.417	8.390	8.074	8.899	1.691	1.810	1.840	1.877	150-160	1.654	1289	99.8,84.2
170	8.475	9.288	9.122	9.732	2.544	2.668	2.775	2.826	160-170	1.636	1291	100,84.3
180	4.492	5.031	5.133	5.249	4.490	5.002	5.133	5.249	170-180	0.5301	1291	100,84.3
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.7V I:0.1070A P:12.20W PF:0.9440 Freq:60.00Hz Lamp Flux:1532.12x1 lm		
NAME: 3寸筒灯 15W 15度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

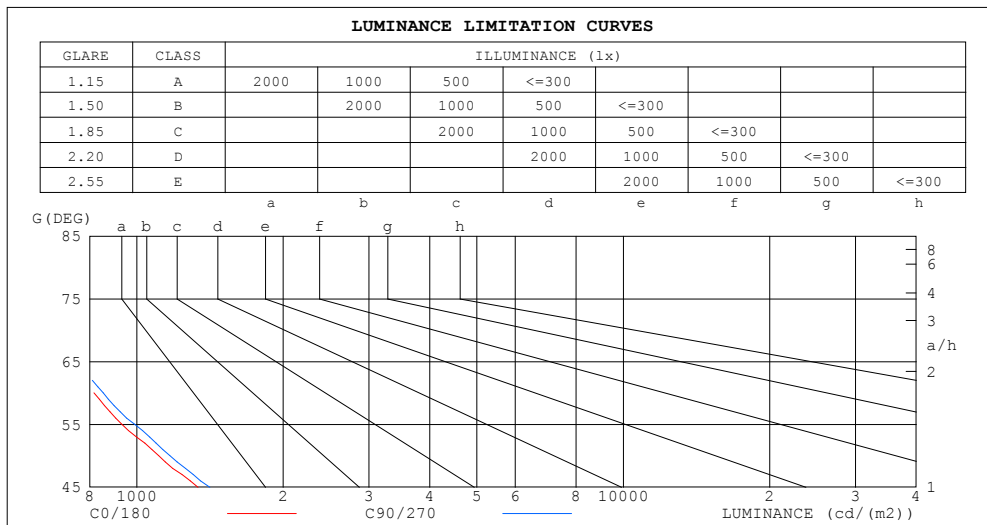

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	308	329
80	398	433
75	521	553
70	629	661
65	723	754
60	817	853
55	932	990
50	1108	1169
45	1337	1413


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.7V I:0.1070A P:12.20W PF:0.9440 Freq:60.00Hz Lamp Flux:1532.12x1 lm		
NAME: 3寸筒灯 15W 15度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.00	1.00	1.00	.98	.98	.98	.93	.93	.93	.89	.89	.89	.86	.86	.86	.84
1.0	.94	.92	.90	.92	.90	.89	.89	.87	.86	.85	.84	.83	.82	.82	.81	.79
2.0	.88	.85	.83	.87	.84	.82	.84	.82	.80	.81	.80	.78	.79	.78	.76	.75
3.0	.83	.80	.77	.82	.79	.76	.80	.77	.75	.78	.76	.74	.76	.74	.72	.71
4.0	.79	.75	.72	.78	.74	.71	.76	.73	.71	.75	.72	.70	.73	.71	.69	.68
5.0	.75	.71	.68	.75	.71	.68	.73	.70	.67	.72	.69	.66	.70	.68	.66	.65
6.0	.72	.68	.65	.71	.67	.64	.70	.67	.64	.69	.66	.64	.68	.65	.63	.62
7.0	.69	.65	.62	.69	.65	.62	.68	.64	.61	.67	.63	.61	.66	.63	.61	.60
8.0	.66	.62	.59	.66	.62	.59	.65	.62	.59	.64	.61	.59	.63	.61	.58	.58
9.0	.64	.60	.57	.64	.60	.57	.63	.59	.57	.62	.59	.57	.62	.59	.56	.56
10.0	.62	.58	.55	.61	.58	.55	.61	.57	.55	.60	.57	.55	.60	.57	.55	.54

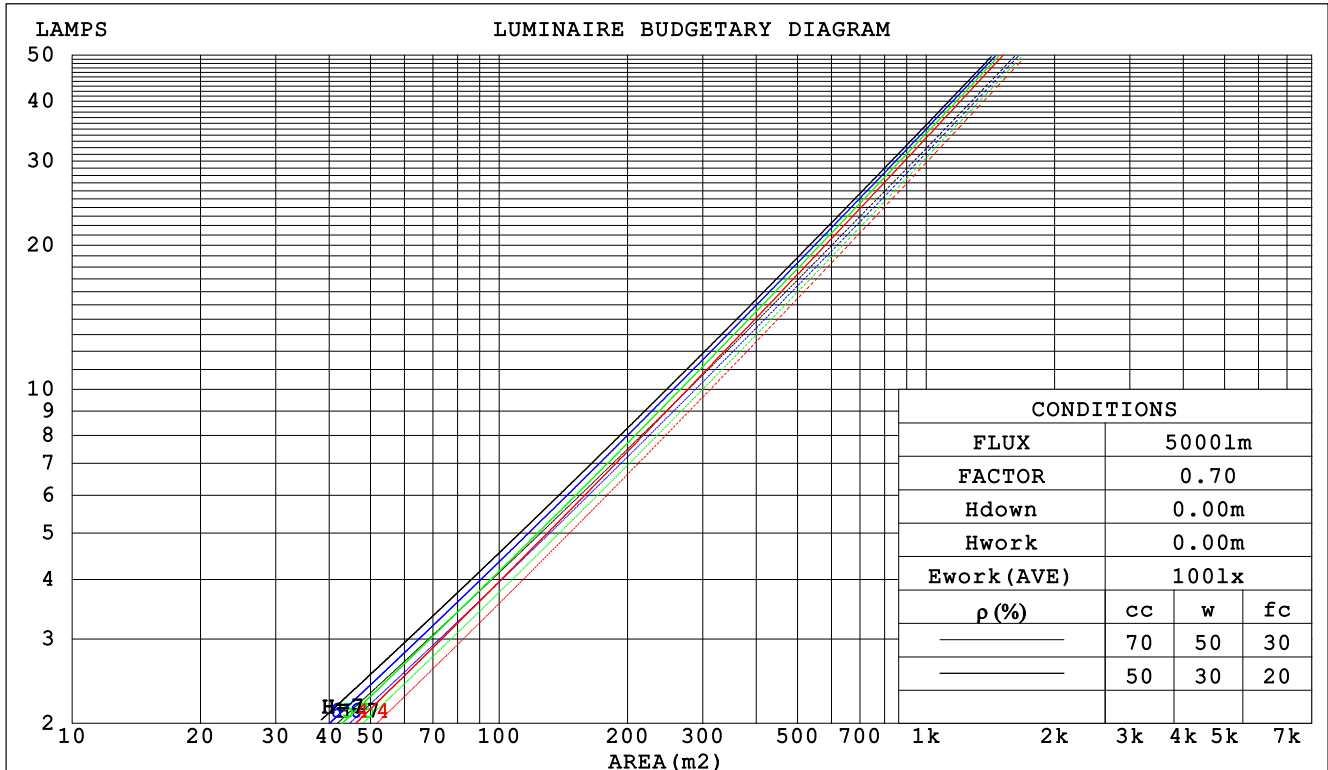

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.7V I:0.1070A P:12.20W PF:0.9440 Freq:60.00Hz Lamp Flux:1532.12x1 lm					
NAME: 3寸筒灯 15W 15度			TYPE:5000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.139	.079	.025	.133	.076	.024	.122	.070	.022	.112	.065	.021	.103	.060	.019		
2.0	.130	.071	.022	.126	.069	.021	.117	.065	.020	.108	.061	.019	.101	.057	.018		
3.0	.122	.065	.019	.118	.063	.019	.110	.060	.018	.103	.057	.017	.097	.053	.017		
4.0	.114	.059	.017	.111	.058	.017	.104	.055	.017	.098	.053	.016	.093	.050	.015		
5.0	.107	.055	.016	.104	.054	.016	.099	.051	.015	.093	.049	.015	.089	.047	.014		
6.0	.101	.051	.015	.099	.050	.014	.094	.048	.014	.089	.046	.014	.085	.045	.013		
7.0	.096	.047	.013	.093	.047	.013	.089	.045	.013	.085	.044	.013	.081	.042	.012		
8.0	.091	.044	.012	.089	.044	.012	.085	.042	.012	.081	.041	.012	.078	.040	.012		
9.0	.086	.042	.012	.085	.041	.012	.081	.040	.011	.078	.039	.011	.075	.038	.011		
10.0	.082	.040	.011	.081	.039	.011	.078	.038	.011	.075	.037	.011	.072	.036	.010		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.163	.163	.163	.139	.139	.139	.095	.095	.095	.055	.055	.055	.017	.017	.017	
1.0	.146	.135	.126	.125	.116	.108	.086	.080	.075	.049	.046	.043	.016	.015	.014	
2.0	.132	.114	.099	.113	.098	.086	.078	.068	.060	.045	.040	.035	.014	.013	.011	
3.0	.121	.098	.080	.104	.085	.070	.071	.059	.049	.041	.034	.029	.013	.011	.009	
4.0	.111	.086	.066	.095	.074	.057	.066	.052	.040	.038	.030	.024	.012	.010	.008	
5.0	.103	.076	.055	.088	.065	.048	.061	.046	.034	.035	.027	.020	.011	.009	.007	
6.0	.096	.067	.047	.082	.058	.041	.057	.041	.029	.033	.024	.017	.011	.008	.006	
7.0	.090	.061	.041	.077	.053	.035	.053	.037	.025	.031	.022	.015	.010	.007	.005	
8.0	.084	.055	.035	.073	.048	.031	.050	.034	.022	.029	.020	.013	.009	.007	.004	
9.0	.080	.051	.031	.069	.044	.027	.047	.031	.019	.028	.018	.011	.009	.006	.004	
10.0	.075	.047	.028	.065	.041	.024	.045	.029	.017	.026	.017	.010	.009	.006	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.7V I:0.1070A P:12.20W PF:0.9440 Freq:60.00Hz Lamp Flux:1532.12x1 lm										
NAME: 3寸筒灯 15W 15度					TYPE:5000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	7.9	8.7	8.1	8.8	9.0	8.1	8.9	8.3	9.0	9.2
3H	8.6	9.3	8.9	9.5	9.8	8.8	9.6	9.1	9.8	10.0
4H	8.9	9.6	9.1	9.8	10.0	9.1	9.8	9.4	10.0	10.3
6H	9.0	9.7	9.3	9.9	10.2	9.2	9.9	9.5	10.2	10.4
8H	9.0	9.7	9.3	9.9	10.2	9.3	9.9	9.6	10.2	10.4
12H	9.0	9.6	9.3	9.9	10.2	9.3	9.9	9.6	10.2	10.4
4H 2H	8.2	8.9	8.5	9.1	9.3	8.4	9.1	8.6	9.3	9.5
3H	9.1	9.7	9.4	10.0	10.3	9.3	9.9	9.6	10.2	10.5
4H	9.5	10.0	9.8	10.3	10.6	9.7	10.2	10.0	10.5	10.8
6H	9.7	10.2	10.0	10.5	10.9	9.9	10.4	10.3	10.7	11.1
8H	9.7	10.2	10.1	10.5	10.9	9.9	10.4	10.3	10.8	11.1
12H	9.7	10.1	10.1	10.5	10.9	9.9	10.4	10.4	10.7	11.1
8H 4H	9.6	10.0	10.0	10.4	10.8	9.7	10.2	10.1	10.6	10.9
6H	9.8	10.2	10.3	10.6	11.0	10.0	10.4	10.5	10.8	11.2
8H	9.9	10.3	10.4	10.7	11.1	10.1	10.5	10.6	10.9	11.3
12H	9.9	10.2	10.4	10.7	11.2	10.2	10.5	10.6	10.9	11.4
12H 4H	9.5	10.0	9.9	10.3	10.7	9.7	10.1	10.1	10.5	10.9
6H	9.8	10.2	10.3	10.6	11.0	10.0	10.4	10.5	10.8	11.2
8H	9.9	10.2	10.4	10.7	11.1	10.1	10.4	10.6	10.9	11.3
Variations with the observer position at spacings:										
S = 1.0H	+ 0.5 / - 0.7					+ 0.5 / - 0.7				
1.5H	+ 0.7 / - 0.5					+ 0.8 / - 0.4				
2.0H	+ 0.9 / - 0.7					+ 0.9 / - 0.6				

CIE Pub.117 Corrected 1532 lm Total Lamp Luminous Flux.(8log(F/F0) = 1.5)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.7V I:0.1070A P:12.20W PF:0.9440 Freq:60.00Hz Lamp Flux:1532.12x1 lm		
NAME: 3寸筒灯 15W 15度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	72	66	62	71	66	62	70	65	62	59
0.80	78	73	69	77	72	69	76	72	69	65
1.00	82	77	74	81	76	73	80	76	73	69
1.25	85	81	78	85	80	77	83	79	77	73
1.50	88	84	81	87	83	80	85	82	79	75
2.00	90	87	84	89	86	83	87	84	82	77
2.50	92	89	86	91	87	85	88	85	83	78
3.00	93	90	88	92	89	87	89	87	85	79
4.00	95	93	91	94	91	90	90	89	87	81
5.00	96	94	93	95	93	91	91	90	89	82
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.7V I:0.1070A P:12.20W PF:0.9440 Freq:60.00Hz Lamp Flux:1532.12x1 lm		
NAME: 3寸筒灯 15W 15度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

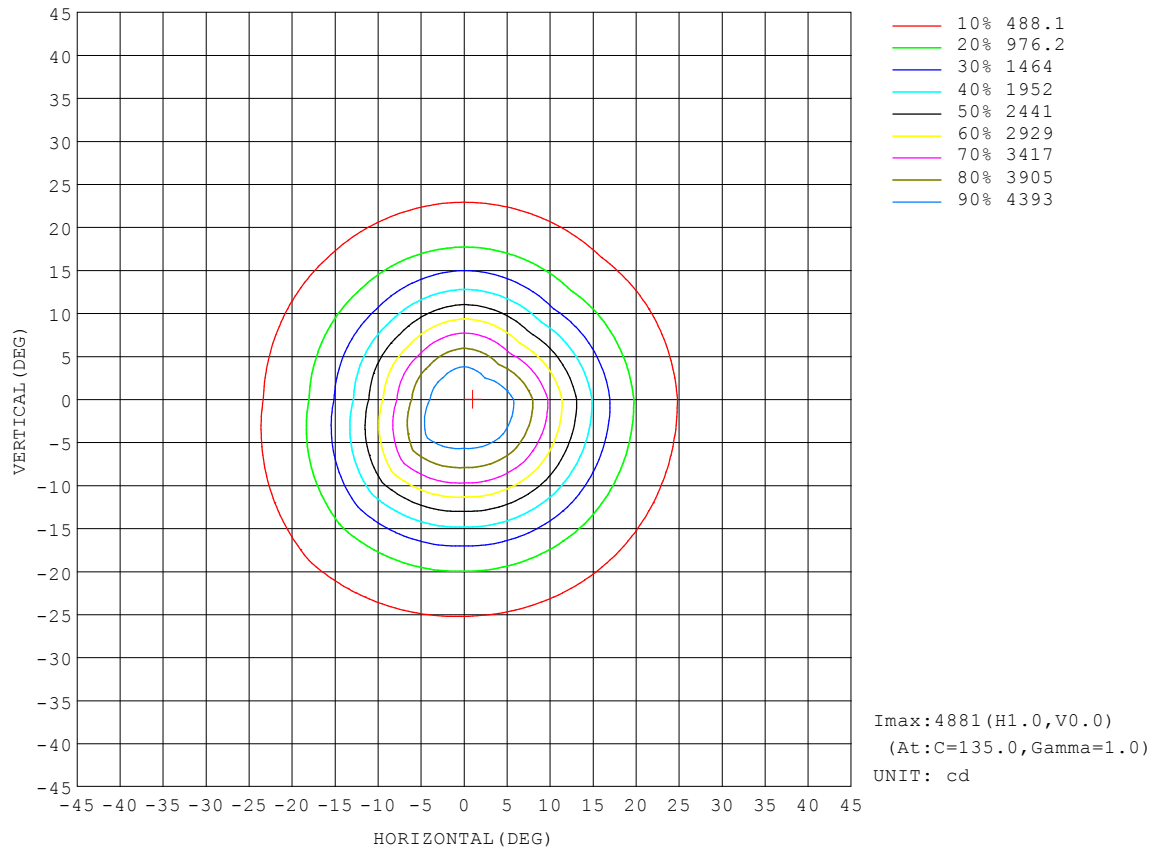


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.7V I:0.1070A P:12.20W PF:0.9440 Freq:60.00Hz Lamp Flux:1532.12x1 lm		
NAME: 3寸筒灯 15W 15度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

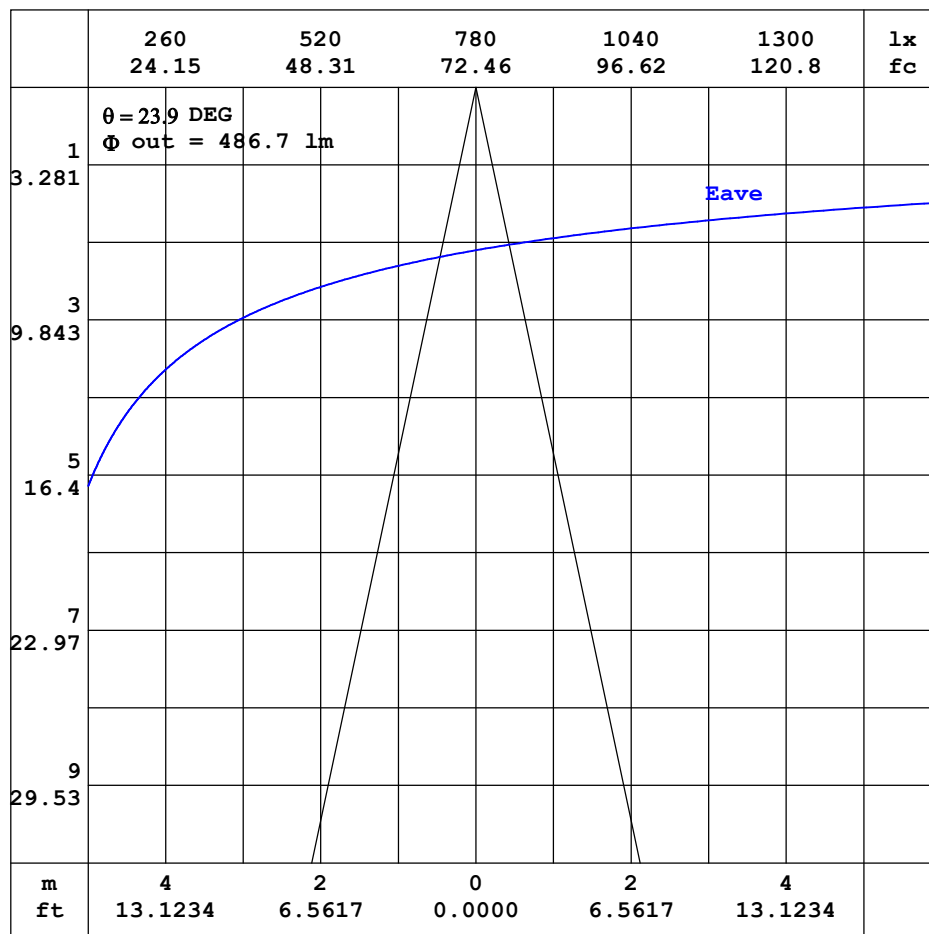


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.7V I:0.1070A P:12.20W PF:0.9440 Freq:60.00Hz Lamp Flux:1532.12x1 lm		
NAME: 3寸筒灯 15W 15度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

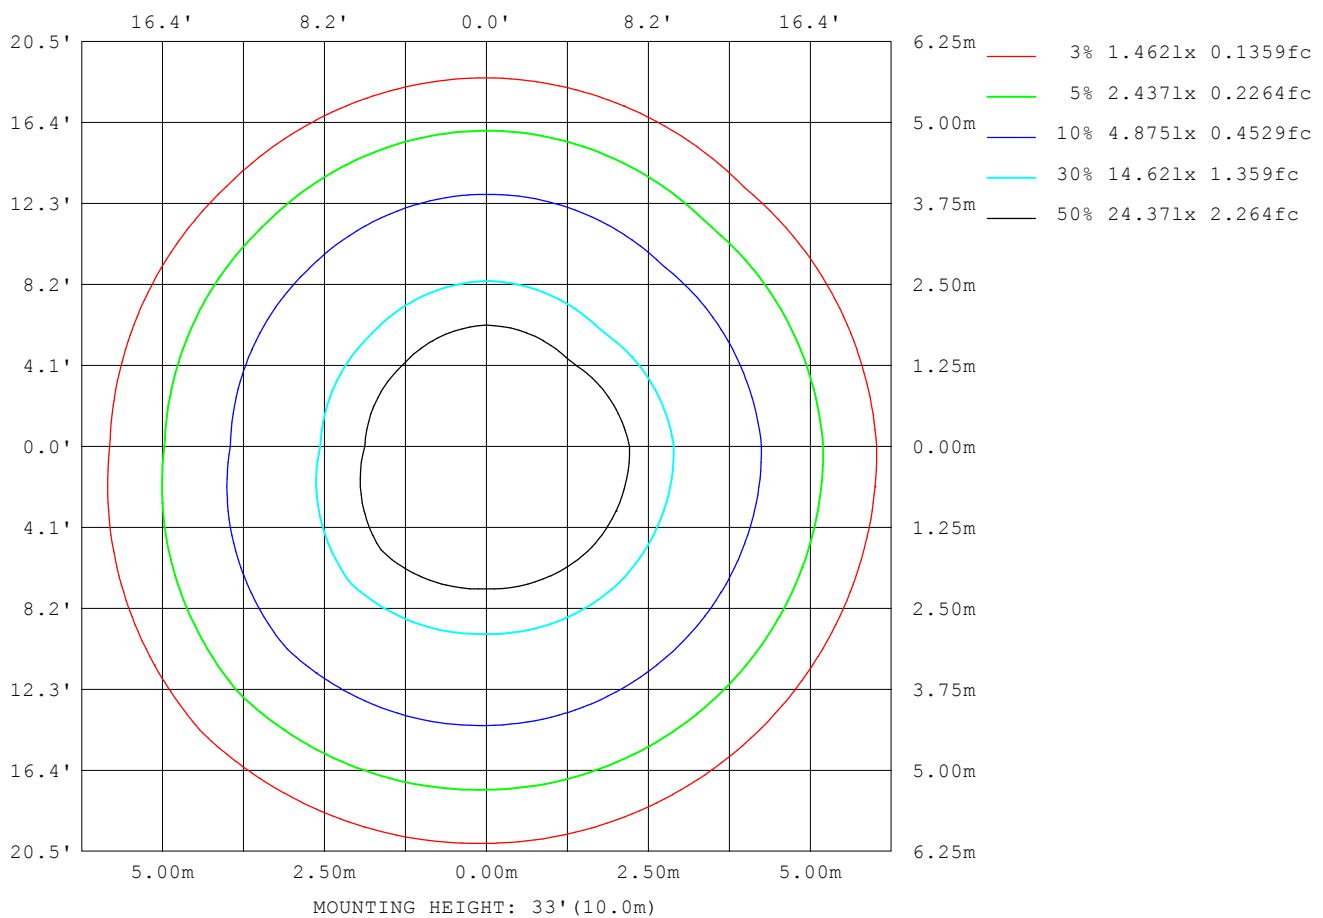

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.7V I:0.1070A P:12.20W PF:0.9440 Freq:60.00Hz Lamp Flux:1532.12x1 lm		
NAME: 3寸筒灯 15W 15度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	712
L_0~180 (75) av	507
L_0~180 (85) av	281
L_90~270 (65) av	709
L_90~270 (75) av	509
L_90~270 (85) av	287
L_45 (65) av	714
L_45 (75) av	515
L_45 (85) av	290

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

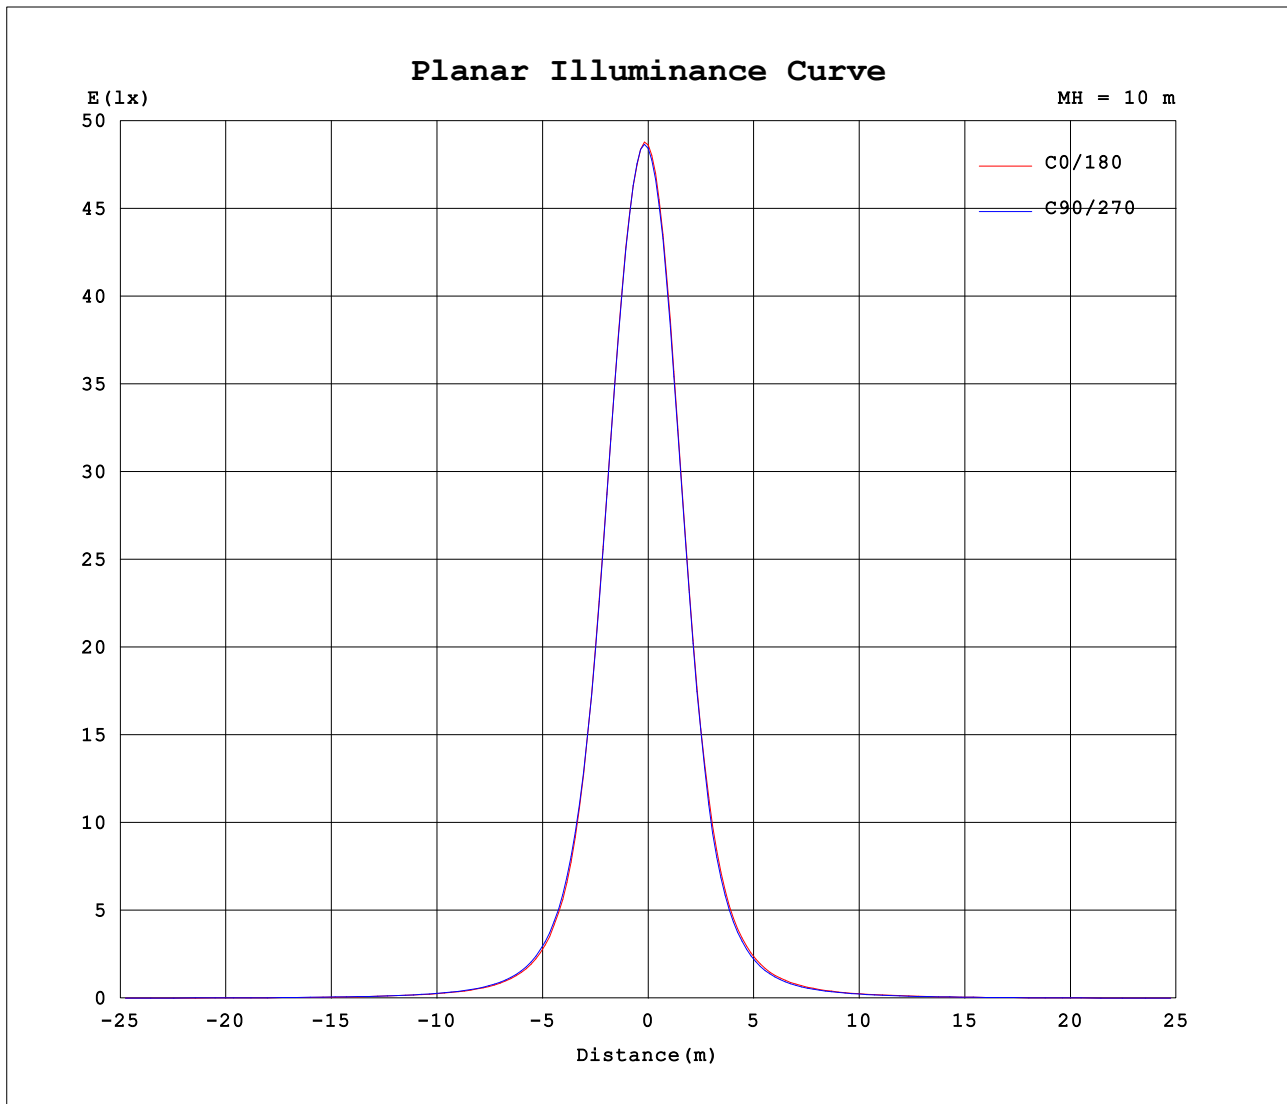

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.7V I:0.1070A P:12.20W PF:0.9440 Freq:60.00Hz Lamp Flux:1532.12x1 lm								
NAME: 3寸筒灯 15W 15度					TYPE:5000K			WEIGHT:
SPEC.:					DIM.:			SERIAL No.:
MFR.: EVERFINE					SUR.:			Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	4839	4839	4839	4839	4839	4839	4839	4839										
5	4505	4584	4516	4617	4154	4069	4135	4094										
10	3323	3432	3332	3489	2743	2618	2734	2696										
15	1911	1983	1910	2044	1479	1381	1457	1416										
20	931	980	974	1039	740	690	708	706										
25	470	490	501	539	399	367	377	370										
30	259	269	276	296	229	213	214	209										
35	157	162	167	176	147	137	133	131										
40	104	107	111	115	99.7	95.2	91.9	89.7										
45	73.8	76.0	78.3	81.8	73.4	70.0	67.2	66.0										
50	55.6	57.6	58.9	60.9	55.5	53.8	51.5	50.3										
55	41.7	43.3	44.5	46.7	41.7	40.5	38.9	37.9										
60	31.9	33.1	33.4	34.6	31.5	30.5	29.7	28.8										
65	23.8	24.8	25.0	25.9	23.3	22.6	22.0	21.3										
70	16.8	17.7	17.7	18.6	16.3	15.7	15.4	14.7										
75	10.5	11.3	11.2	12.1	10.1	9.63	9.45	8.77										
80	5.39	5.94	5.89	6.44	5.15	4.97	4.89	4.32										
85	2.09	2.04	2.24	2.65	1.74	1.97	1.68	1.26										
90	0.13	0.12	0.23	0.53	0.00	0.00	0.00	0.00										
95	0.03	0.01	0.03	0.01	0.00	0.00	0.00	0.00										
100	0.05	0.04	0.04	0.03	0.00	0.00	0.00	0.00										
105	0.08	0.07	0.07	0.06	0.00	0.00	0.00	0.00										
110	0.12	0.10	0.11	0.10	0.00	0.00	0.00	0.00										
115	0.17	0.15	0.15	0.14	0.01	0.00	0.00	0.01										
120	0.23	0.20	0.20	0.20	0.02	0.02	0.03	0.02										
125	0.31	0.29	0.29	0.29	0.04	0.04	0.06	0.05										
130	0.47	0.42	0.41	0.42	0.07	0.08	0.09	0.10										
135	0.73	0.65	0.64	0.67	0.13	0.15	0.16	0.17										
140	1.21	1.08	1.08	1.13	0.24	0.27	0.29	0.31										
145	2.15	1.90	1.91	2.03	0.43	0.50	0.53	0.53										
150	3.82	3.43	3.40	3.68	0.76	0.85	0.88	0.91										
155	6.20	5.82	5.60	6.25	1.25	1.36	1.39	1.41										
160	8.42	8.39	8.07	8.90	1.69	1.81	1.84	1.88										
165	9.29	9.76	9.49	10.3	2.10	2.21	2.27	2.32										
170	8.47	9.29	9.12	9.73	2.54	2.67	2.78	2.83										
175	6.48	7.30	7.30	7.62	3.22	3.49	3.62	3.68										
180	4.49	5.03	5.13	5.25	4.49	5.00	5.13	5.25										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: