


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.7V I:0.1250A P:14.80W PF:0.9820 Freq:60.00Hz Lamp Flux:4143.53x1 lm		
NAME: 3寸筒灯 15W 15度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 103.52 lm/W			
MODEL		I _{max} (cd)	5763	S/MH(C0/180)	0.44
NOMINAL POWER(W)	15W	LOR(%)	37.0	S/MH(C90/270)	0.38
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	1532.1	η UP,DN(C0-180)	0.1,20.4
NOMINAL FLUX(lm)	4143.53	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,16.4
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	120.0	η down(%)	36.8	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

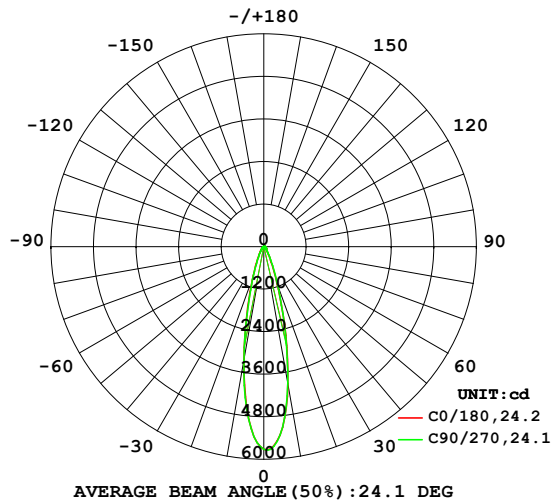

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

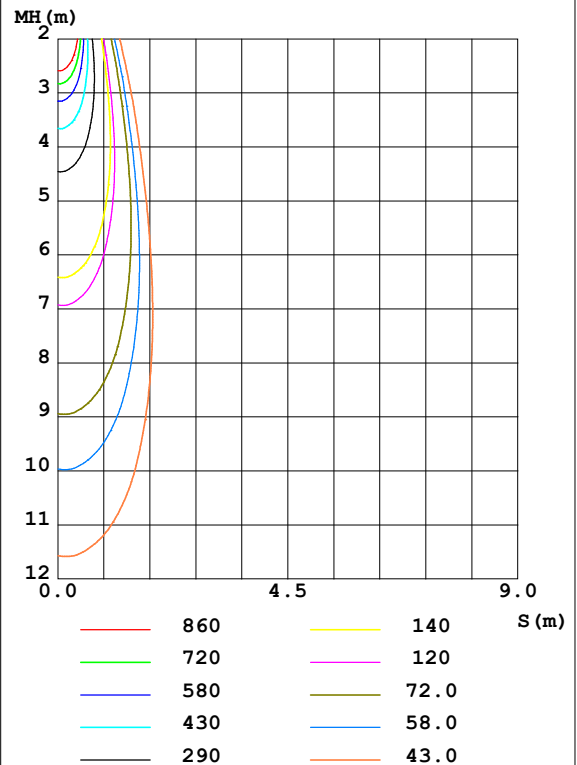

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3928	4054	3920	4129	3237	3097	3254	3186	0- 10	439.0	439.0	28.7,10.6
20	1106	1161	1146	1231	882.9	821.1	847.6	838.7	10- 20	559.3	998.3	65.2,24.1
30	308.4	320.9	327.9	353.3	275.1	254.2	255.9	248.9	20- 30	251.8	1250	81.6,30.2
40	123.8	128.3	131.8	139.2	119.9	114.2	110.5	107.2	30- 40	117.1	1367	89.2,33
50	66.11	68.82	70.27	72.67	66.85	64.31	61.92	60.02	40- 50	68.89	1436	93.7,34.7
60	38.00	39.70	39.77	41.35	37.85	36.49	35.59	34.38	50- 60	45.36	1481	96.7,35.8
70	20.03	21.31	21.04	22.19	19.61	18.78	18.53	17.59	60- 70	28.11	1510	98.5,36.4
80	6.432	7.123	6.976	7.698	6.237	5.953	5.896	5.174	70- 80	13.34	1523	99.4,36.8
90	0.1404	0.1610	0.2462	0.6532	0	0.0015	0	0	80- 90	2.946	1526	99.6,36.8
100	0.0721	0.0654	0.0630	0.0488	0	0	0	0	90-100	0.0279	1526	99.6,36.8
110	0.1515	0.1405	0.1307	0.1292	0	0	0	0	100-110	0.0507	1526	99.6,36.8
120	0.2766	0.2567	0.2470	0.2510	0.0265	0.0362	0.0364	0.0365	110-120	0.1007	1526	99.6,36.8
130	0.5627	0.5136	0.5037	0.5120	0.0892	0.1040	0.1213	0.1241	120-130	0.1956	1526	99.6,36.8
140	1.452	1.292	1.295	1.368	0.2845	0.3216	0.3495	0.3626	130-140	0.4012	1527	99.6,36.8
150	4.493	4.065	4.038	4.355	0.9038	0.9992	1.039	1.078	140-150	0.9621	1528	99.7,36.9
160	9.844	9.882	9.529	10.47	2.008	2.142	2.178	2.252	150-160	1.950	1530	99.8,36.9
170	9.939	10.93	10.73	11.43	3.020	3.173	3.278	3.353	160-170	1.925	1531	100,37
180	5.333	5.898	6.010	6.168	5.333	5.900	6.035	6.175	170-180	0.6241	1532	100,37
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.7V I:0.1250A P:14.80W PF:0.9820 Freq:60.00Hz Lamp Flux:4143.53x1 lm		
NAME: 3寸筒灯 15W 15度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

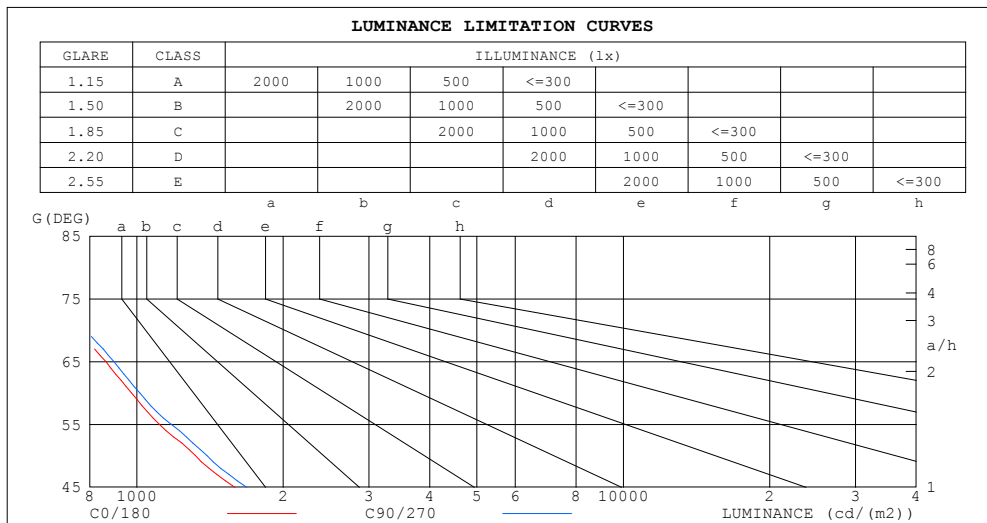

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	367	386
80	475	512
75	624	656
70	752	784
65	863	897
60	975	1014
55	1112	1177
50	1320	1393
45	1591	1682


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.7V I:0.1250A P:14.80W PF:0.9820 Freq:60.00Hz Lamp Flux:4143.53x1 lm		
NAME: 3寸筒灯 15W 15度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	.44	.44	.44	.43	.43	.43	.41	.41	.41	.39	.39	.39	.38	.38	.38	.37
1.0	.41	.40	.40	.40	.40	.39	.39	.38	.38	.37	.37	.37	.36	.36	.35	.35
2.0	.39	.37	.36	.38	.37	.36	.37	.36	.35	.36	.35	.34	.35	.34	.33	.33
3.0	.37	.35	.34	.36	.35	.33	.35	.34	.33	.34	.33	.32	.33	.32	.32	.31
4.0	.35	.33	.32	.34	.33	.31	.33	.32	.31	.33	.32	.31	.32	.31	.30	.30
5.0	.33	.31	.30	.33	.31	.30	.32	.31	.29	.31	.30	.29	.31	.30	.29	.28
6.0	.32	.30	.28	.31	.30	.28	.31	.29	.28	.30	.29	.28	.30	.29	.28	.27
7.0	.30	.28	.27	.30	.28	.27	.30	.28	.27	.29	.28	.27	.29	.28	.27	.26
8.0	.29	.27	.26	.29	.27	.26	.29	.27	.26	.28	.27	.26	.28	.27	.26	.25
9.0	.28	.26	.25	.28	.26	.25	.28	.26	.25	.27	.26	.25	.27	.26	.25	.24
10.0	.27	.25	.24	.27	.25	.24	.27	.25	.24	.26	.25	.24	.26	.25	.24	.24

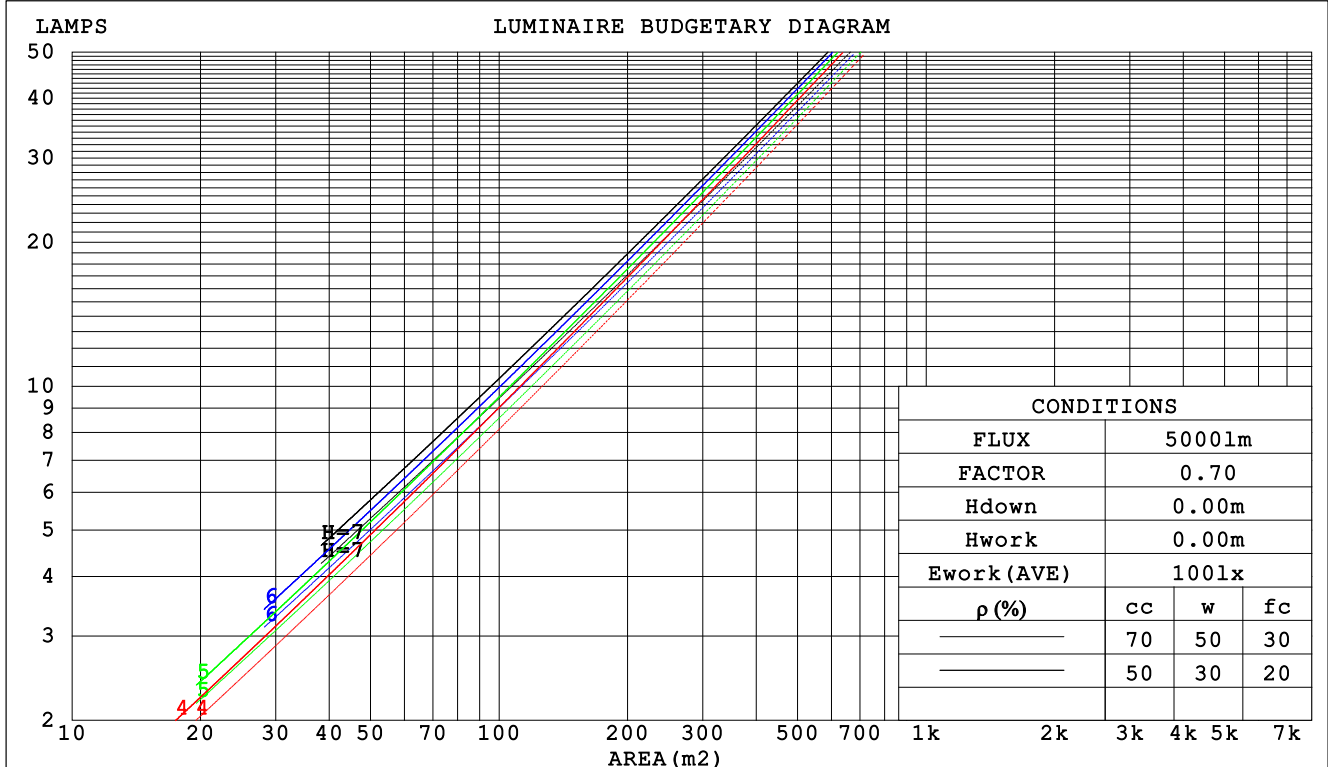

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.7V I:0.1250A P:14.80W PF:0.9820 Freq:60.00Hz Lamp Flux:4143.53x1 lm		
NAME: 3寸筒灯 15W 15度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.061	.035	.011	.059	.033	.011	.054	.031	.010	.049	.029	.009	.045	.026	.008		
2.0	.057	.031	.010	.055	.030	.009	.051	.028	.009	.048	.027	.008	.044	.025	.008		
3.0	.054	.029	.009	.052	.028	.008	.048	.026	.008	.045	.025	.008	.042	.024	.007		
4.0	.050	.026	.008	.049	.025	.008	.046	.024	.007	.043	.023	.007	.041	.022	.007		
5.0	.047	.024	.007	.046	.024	.007	.043	.023	.007	.041	.022	.006	.039	.021	.006		
6.0	.044	.022	.006	.043	.022	.006	.041	.021	.006	.039	.020	.006	.037	.020	.006		
7.0	.042	.021	.006	.041	.020	.006	.039	.020	.006	.037	.019	.006	.036	.019	.005		
8.0	.040	.020	.005	.039	.019	.005	.037	.019	.005	.036	.018	.005	.034	.018	.005		
9.0	.038	.018	.005	.037	.018	.005	.036	.018	.005	.034	.017	.005	.033	.017	.005		
10.0	.036	.017	.005	.036	.017	.005	.034	.017	.005	.033	.016	.005	.032	.016	.005		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.072	.072	.072	.061	.061	.061	.042	.042	.042	.024	.024	.024	.008	.008	.008	
1.0	.064	.059	.055	.055	.051	.047	.038	.035	.033	.022	.020	.019	.007	.007	.006	
2.0	.058	.050	.044	.050	.043	.038	.034	.030	.026	.020	.017	.015	.006	.006	.005	
3.0	.053	.043	.035	.046	.037	.031	.031	.026	.021	.018	.015	.013	.006	.005	.004	
4.0	.049	.038	.029	.042	.032	.025	.029	.023	.018	.017	.013	.010	.005	.004	.003	
5.0	.045	.033	.024	.039	.029	.021	.027	.020	.015	.015	.012	.009	.005	.004	.003	
6.0	.042	.030	.021	.036	.026	.018	.025	.018	.013	.014	.011	.008	.005	.003	.002	
7.0	.039	.027	.018	.034	.023	.015	.023	.016	.011	.014	.010	.007	.004	.003	.002	
8.0	.037	.024	.015	.032	.021	.013	.022	.015	.010	.013	.009	.006	.004	.003	.002	
9.0	.035	.022	.014	.030	.019	.012	.021	.014	.008	.012	.008	.005	.004	.003	.002	
10.0	.033	.020	.012	.029	.018	.011	.020	.013	.008	.012	.007	.004	.004	.002	.001	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.7V I:0.1250A P:14.80W PF:0.9820 Freq:60.00Hz Lamp Flux:4143.53x1 lm										
NAME: 3寸筒灯 15W 15度					TYPE:5000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	8.5	9.3	8.7	9.5	9.6	8.7	9.5	8.9	9.7	9.8
3H	9.3	10.0	9.5	10.2	10.4	9.5	10.2	9.7	10.4	10.6
4H	9.5	10.2	9.8	10.4	10.7	9.7	10.4	10.0	10.7	10.9
6H	9.7	10.3	9.9	10.6	10.8	9.9	10.5	10.2	10.8	11.0
8H	9.7	10.3	10.0	10.6	10.8	9.9	10.5	10.2	10.8	11.1
12H	9.7	10.3	10.0	10.6	10.8	9.9	10.5	10.2	10.8	11.1
4H 2H	8.8	9.5	9.1	9.8	10.0	9.0	9.7	9.3	9.9	10.2
3H	9.8	10.4	10.1	10.7	10.9	9.9	10.5	10.2	10.8	11.1
4H	10.1	10.7	10.5	11.0	11.3	10.3	10.9	10.6	11.2	11.5
6H	10.3	10.8	10.7	11.2	11.5	10.5	11.0	10.9	11.3	11.7
8H	10.4	10.8	10.8	11.2	11.6	10.6	11.0	10.9	11.4	11.8
12H	10.4	10.8	10.8	11.2	11.6	10.6	11.0	11.0	11.4	11.8
8H 4H	10.2	10.7	10.6	11.0	11.4	10.4	10.8	10.8	11.2	11.6
6H	10.5	10.9	10.9	11.3	11.7	10.7	11.0	11.1	11.4	11.9
8H	10.6	10.9	11.0	11.3	11.8	10.7	11.1	11.2	11.5	12.0
12H	10.6	10.9	11.1	11.3	11.8	10.8	11.1	11.3	11.5	12.0
12H 4H	10.2	10.6	10.6	11.0	11.4	10.3	10.8	10.8	11.2	11.5
6H	10.5	10.8	10.9	11.2	11.7	10.6	11.0	11.1	11.4	11.9
8H	10.6	10.9	11.0	11.3	11.8	10.8	11.1	11.2	11.5	12.0
Variations with the observer position at spacings:										
S = 1.0H	+ 0.6 / - 0.7					+ 0.6 / - 0.7				
1.5H	+ 0.7 / - 0.5					+ 0.8 / - 0.4				
2.0H	+ 0.9 / - 0.7					+ 0.9 / - 0.7				

CIE Pub.117 Corrected 4144 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.9)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.7V I:0.1250A P:14.80W PF:0.9820 Freq:60.00Hz Lamp Flux:4143.53x1 lm		
NAME: 3寸筒灯 15W 15度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	31	29	27	31	29	27	31	29	27	26
0.80	34	32	30	34	32	30	33	31	30	29
1.00	36	34	32	36	34	32	35	33	32	30
1.25	37	35	34	37	35	34	36	35	34	32
1.50	39	37	35	38	36	35	37	36	35	33
2.00	40	38	37	39	38	36	38	37	36	34
2.50	40	39	38	40	38	37	39	37	37	34
3.00	41	40	39	40	39	38	39	38	37	35
4.00	42	41	40	41	40	39	40	39	38	36
5.00	42	41	41	42	41	40	40	39	39	36
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.7V I:0.1250A P:14.80W PF:0.9820 Freq:60.00Hz Lamp Flux:4143.53x1 lm		
NAME: 3寸筒灯 15W 15度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

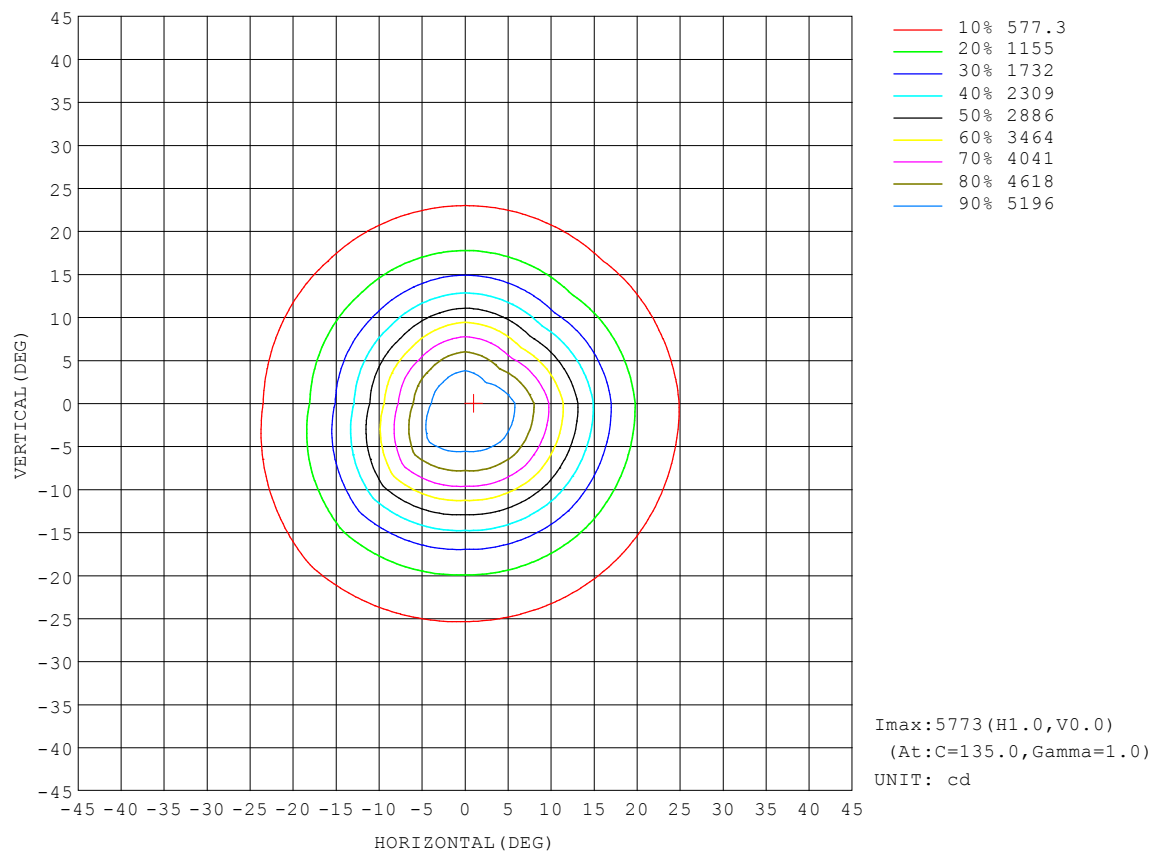


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.7V I:0.1250A P:14.80W PF:0.9820 Freq:60.00Hz Lamp Flux:4143.53x1 lm		
NAME: 3寸筒灯 15W 15度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

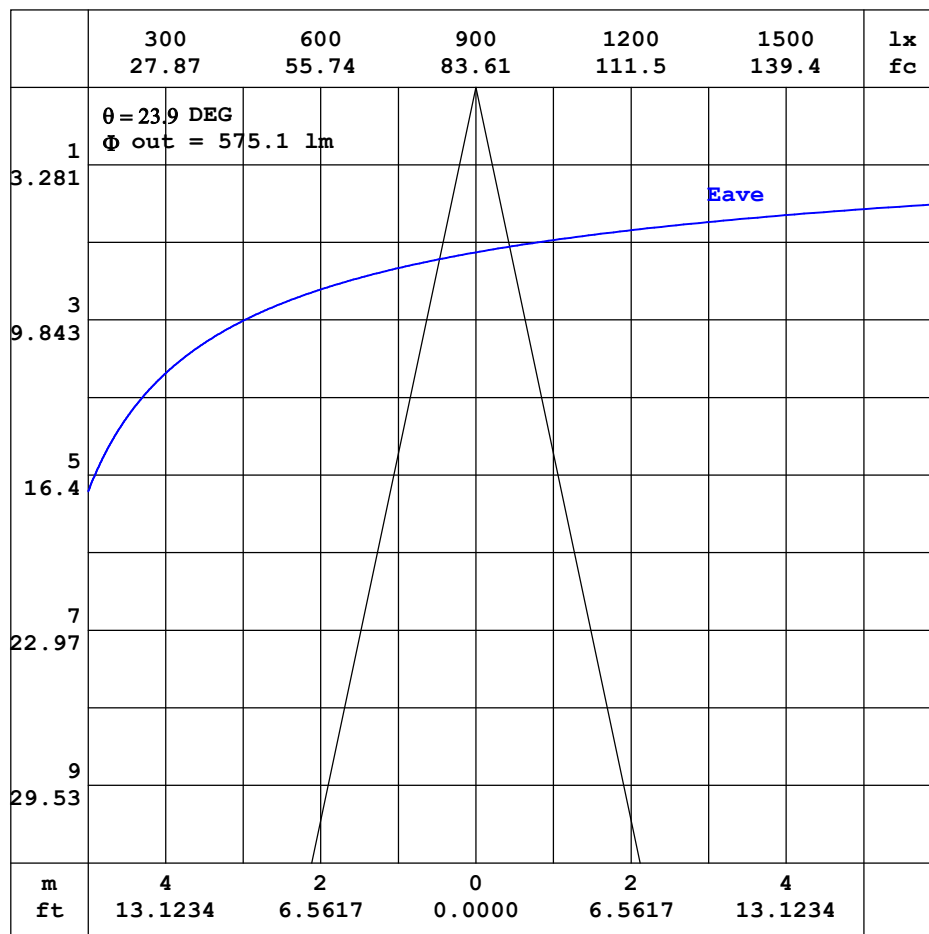


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.7V I:0.1250A P:14.80W PF:0.9820 Freq:60.00Hz Lamp Flux:4143.53x1 lm		
NAME: 3寸筒灯 15W 15度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

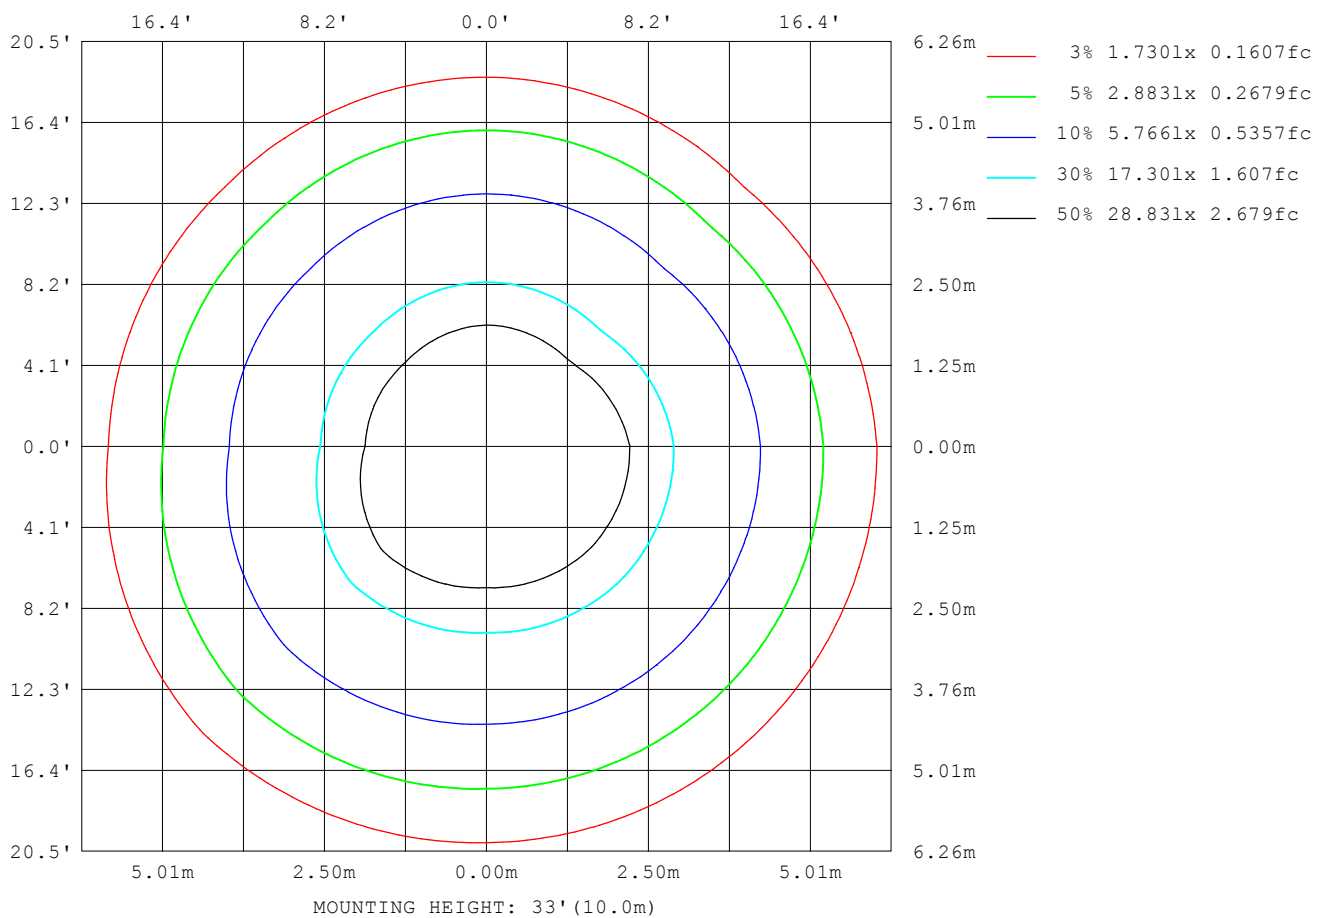

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.7V I:0.1250A P:14.80W PF:0.9820 Freq:60.00Hz Lamp Flux:4143.53x1 lm		
NAME: 3寸筒灯 15W 15度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	852
L_0~180 (75) av	609
L_0~180 (85) av	338
L_90~270 (65) av	848
L_90~270 (75) av	608
L_90~270 (85) av	343
L_45 (65) av	855
L_45 (75) av	616
L_45 (85) av	347

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

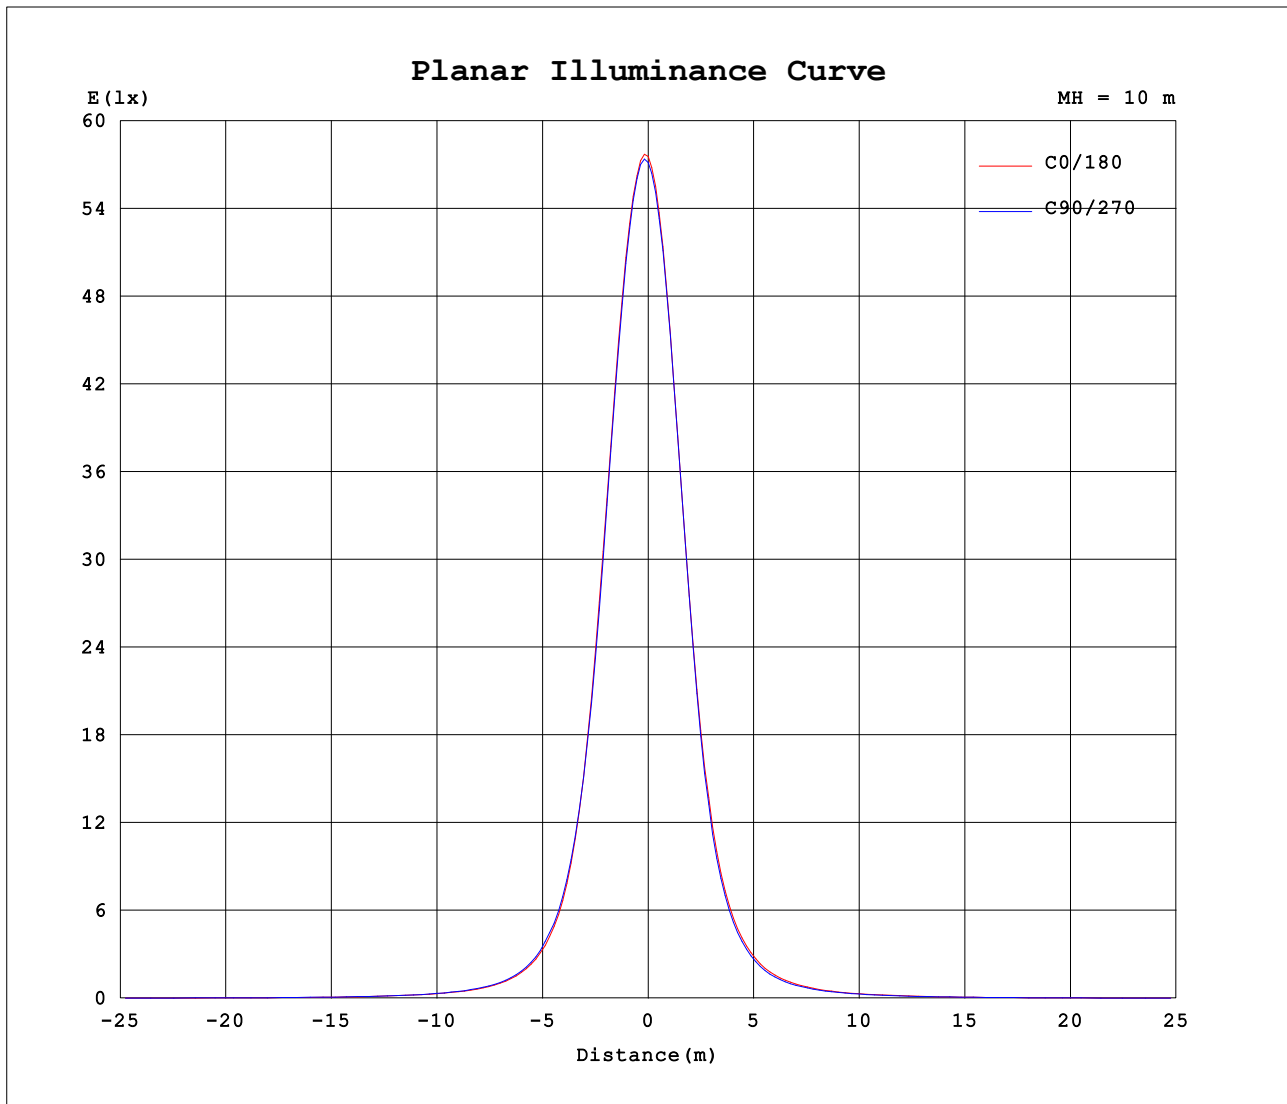

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.7V I:0.1250A P:14.80W PF:0.9820 Freq:60.00Hz Lamp Flux:4143.53x1 lm		
NAME: 3寸筒灯 15W 15度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	5719	5719	5719	5719	5719	5719	5719	5719										
5	5326	5412	5327	5455	4888	4814	4899	4834										
10	3928	4054	3920	4129	3237	3097	3254	3186										
15	2270	2346	2246	2416	1744	1642	1707	1679										
20	1106	1161	1146	1231	883	821	848	839										
25	566	583	605	639	479	438	451	441										
30	308	321	328	353	275	254	256	249										
35	186	194	198	210	176	164	162	156										
40	124	128	132	139	120	114	110	107										
45	87.7	90.9	93.3	97.7	88.1	84.0	80.7	78.2										
50	66.1	68.8	70.3	72.7	66.8	64.3	61.9	60.0										
55	49.7	51.7	52.9	55.8	50.3	48.4	46.6	45.2										
60	38.0	39.7	39.8	41.4	37.8	36.5	35.6	34.4										
65	28.4	29.9	29.7	31.0	28.0	27.0	26.4	25.4										
70	20.0	21.3	21.0	22.2	19.6	18.8	18.5	17.6										
75	12.6	13.6	13.3	14.4	12.1	11.5	11.4	10.5										
80	6.43	7.12	6.98	7.70	6.24	5.95	5.90	5.17										
85	2.49	2.46	2.64	3.17	2.12	2.35	2.04	1.50										
90	0.14	0.16	0.25	0.65	0.00	0.00	0.00	0.00										
95	0.05	0.03	0.03	0.02	0.00	0.00	0.00	0.00										
100	0.07	0.07	0.06	0.05	0.00	0.00	0.00	0.00										
105	0.11	0.09	0.09	0.08	0.00	0.00	0.00	0.00										
110	0.15	0.14	0.13	0.13	0.00	0.00	0.00	0.00										
115	0.20	0.19	0.18	0.18	0.00	0.01	0.01	0.02										
120	0.28	0.26	0.25	0.25	0.03	0.04	0.04	0.04										
125	0.39	0.36	0.35	0.35	0.05	0.06	0.08	0.07										
130	0.56	0.51	0.50	0.51	0.09	0.10	0.12	0.12										
135	0.88	0.79	0.78	0.81	0.16	0.18	0.20	0.20										
140	1.45	1.29	1.29	1.37	0.28	0.32	0.35	0.36										
145	2.56	2.26	2.29	2.41	0.52	0.59	0.62	0.64										
150	4.49	4.06	4.04	4.36	0.90	1.00	1.04	1.08										
155	7.27	6.85	6.62	7.36	1.47	1.61	1.63	1.69										
160	9.84	9.88	9.53	10.5	2.01	2.14	2.18	2.25										
165	10.9	11.5	11.2	12.1	2.50	2.61	2.68	2.75										
170	9.94	10.9	10.7	11.4	3.02	3.17	3.28	3.35										
175	7.64	8.60	8.57	8.98	3.82	4.10	4.25	4.33										
180	5.33	5.90	6.01	6.17	5.33	5.90	6.03	6.18										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: