


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.7V I:0.1230A P:14.50W PF:0.9810 Freq:60.00Hz Lamp Flux:990.567x1 lm		
NAME: 3寸筒灯 15W 30度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 99.17 lm/W			
MODEL		I _{max} (cd)	4102	S/MH(C0/180)	0.49
NOMINAL POWER(W)	15W	LOR(%)	145.2	S/MH(C90/270)	0.45
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	1437.9	η UP,DN(C0-180)	0.5,78.8
NOMINAL FLUX(lm)	990.567	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,65.8
LAMPS INSIDE	1	η up(%)	0.6	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120.0	η down(%)	144.6	CIBSE SHR MAX	0.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

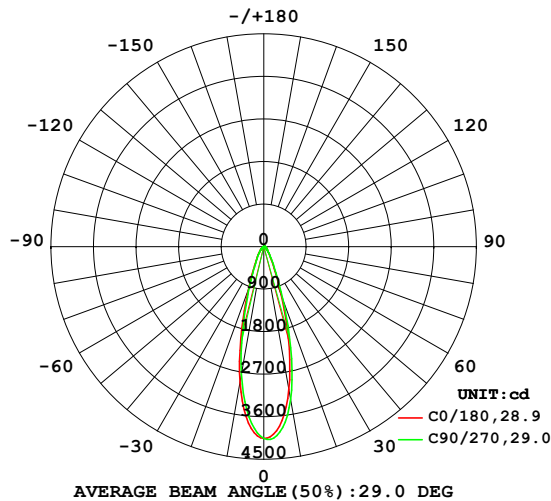

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

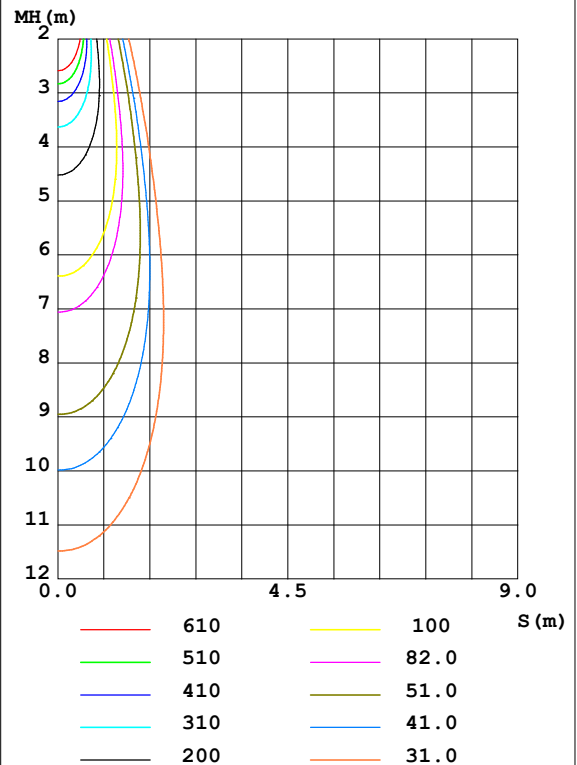

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3068	3210	3276	3386	2916	2799	2738	2669	0- 10	336.2	336.2	23.4,33.9
20	1079	1155	1179	1273	940.5	893.3	876.1	837.6	10- 20	526.7	862.9	60,87.1
30	335.3	344.4	354.2	379.5	309.3	299.0	290.7	276.3	20- 30	263.6	1126	78.3,114
40	147.8	148.8	151.3	161.0	138.3	136.4	131.2	127.5	30- 40	134.3	1261	87.7,127
50	75.19	75.22	75.90	79.12	69.25	69.90	67.95	66.52	40- 50	78.71	1339	93.2,135
60	40.51	40.39	40.61	41.89	36.44	37.34	36.21	35.53	50- 60	47.84	1387	96.5,140
70	21.74	21.08	21.21	21.99	18.20	19.20	18.72	18.32	60- 70	28.46	1416	98.5,143
80	7.821	7.165	7.154	7.632	5.212	5.860	5.967	5.779	70- 80	13.38	1429	99.4,144
90	0.3042	0.1536	0.1448	0.4282	0	0.0013	0	0	80- 90	2.893	1432	99.6,145
100	0.0601	0.0557	0.0605	0.0537	0	0	0	0	90-100	0.0233	1432	99.6,145
110	0.1491	0.1476	0.1380	0.1366	0	0	0.0024	0	100-110	0.0504	1432	99.6,145
120	0.3101	0.3001	0.2858	0.2879	0.0433	0.0338	0.0485	0.0512	110-120	0.1145	1432	99.6,145
130	0.6659	0.6149	0.5935	0.5955	0.1061	0.1281	0.1311	0.1511	120-130	0.2306	1432	99.6,145
140	1.603	1.467	1.397	1.428	0.3036	0.3431	0.3812	0.4116	130-140	0.4539	1433	99.7,145
150	4.663	4.232	3.982	4.220	0.8649	0.9668	1.017	1.072	140-150	1.002	1434	99.7,145
160	8.404	8.369	7.970	8.754	1.875	2.019	2.081	2.138	150-160	1.797	1436	99.8,145
170	8.409	9.035	9.139	9.749	2.862	3.056	3.161	3.205	160-170	1.638	1437	100,145
180	5.007	5.590	5.915	6.074	5.031	5.604	5.932	6.084	170-180	0.5660	1438	100,145
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.7V I:0.1230A P:14.50W PF:0.9810 Freq:60.00Hz Lamp Flux:990.567x1 lm		
NAME: 3寸筒灯 15W 30度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

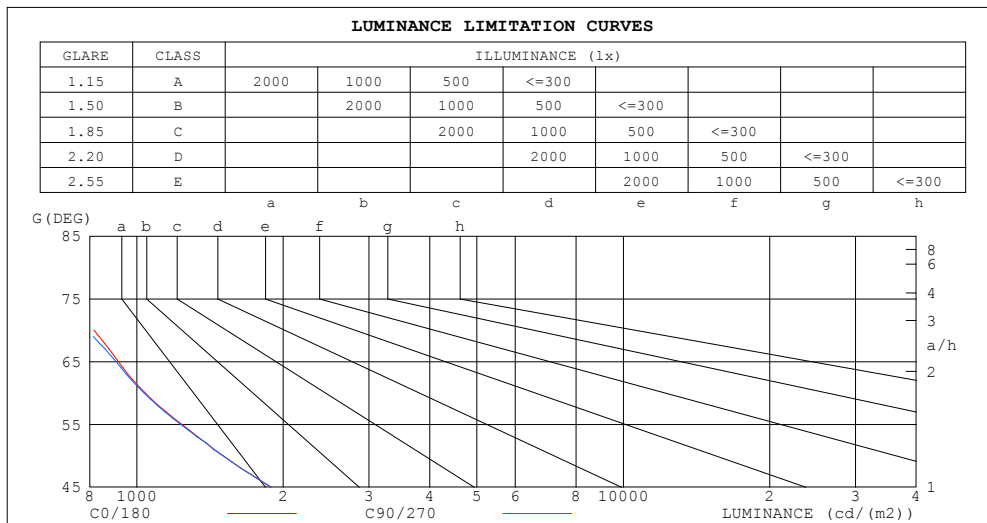

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	421	351
80	578	525
75	690	642
70	816	790
65	916	906
60	1040	1035
55	1236	1230
50	1502	1505
45	1885	1893


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.7V I:0.1230A P:14.50W PF:0.9810 Freq:60.00Hz Lamp Flux:990.567x1 lm		
NAME: 3寸筒灯 15W 30度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.73	1.73	1.73	1.69	1.69	1.69	1.61	1.61	1.61	1.54	1.54	1.54	1.48	1.48	1.48	1.45
1.0	1.61	1.58	1.54	1.58	1.55	1.52	1.52	1.49	1.47	1.46	1.44	1.43	1.41	1.40	1.38	1.36
2.0	1.51	1.45	1.40	1.48	1.43	1.39	1.43	1.39	1.36	1.39	1.36	1.33	1.35	1.32	1.30	1.28
3.0	1.42	1.35	1.30	1.40	1.33	1.28	1.36	1.31	1.26	1.32	1.28	1.24	1.29	1.25	1.22	1.20
4.0	1.34	1.26	1.21	1.32	1.25	1.20	1.29	1.23	1.19	1.26	1.21	1.17	1.23	1.19	1.16	1.14
5.0	1.27	1.19	1.13	1.25	1.18	1.13	1.23	1.17	1.12	1.20	1.15	1.11	1.18	1.14	1.10	1.08
6.0	1.21	1.13	1.07	1.20	1.12	1.07	1.17	1.11	1.06	1.15	1.10	1.05	1.14	1.09	1.05	1.03
7.0	1.15	1.07	1.02	1.14	1.07	1.02	1.12	1.06	1.01	1.11	1.05	1.01	1.09	1.04	1.00	.98
8.0	1.10	1.03	.97	1.09	1.02	.97	1.08	1.01	.97	1.06	1.01	.96	1.05	.99	.96	.94
9.0	1.06	.98	.93	1.05	.98	.93	1.04	.97	.93	1.03	.97	.92	1.01	.96	.92	.90
10.0	1.02	.94	.89	1.01	.94	.89	.99	.94	.89	.99	.93	.89	.98	.92	.89	.87

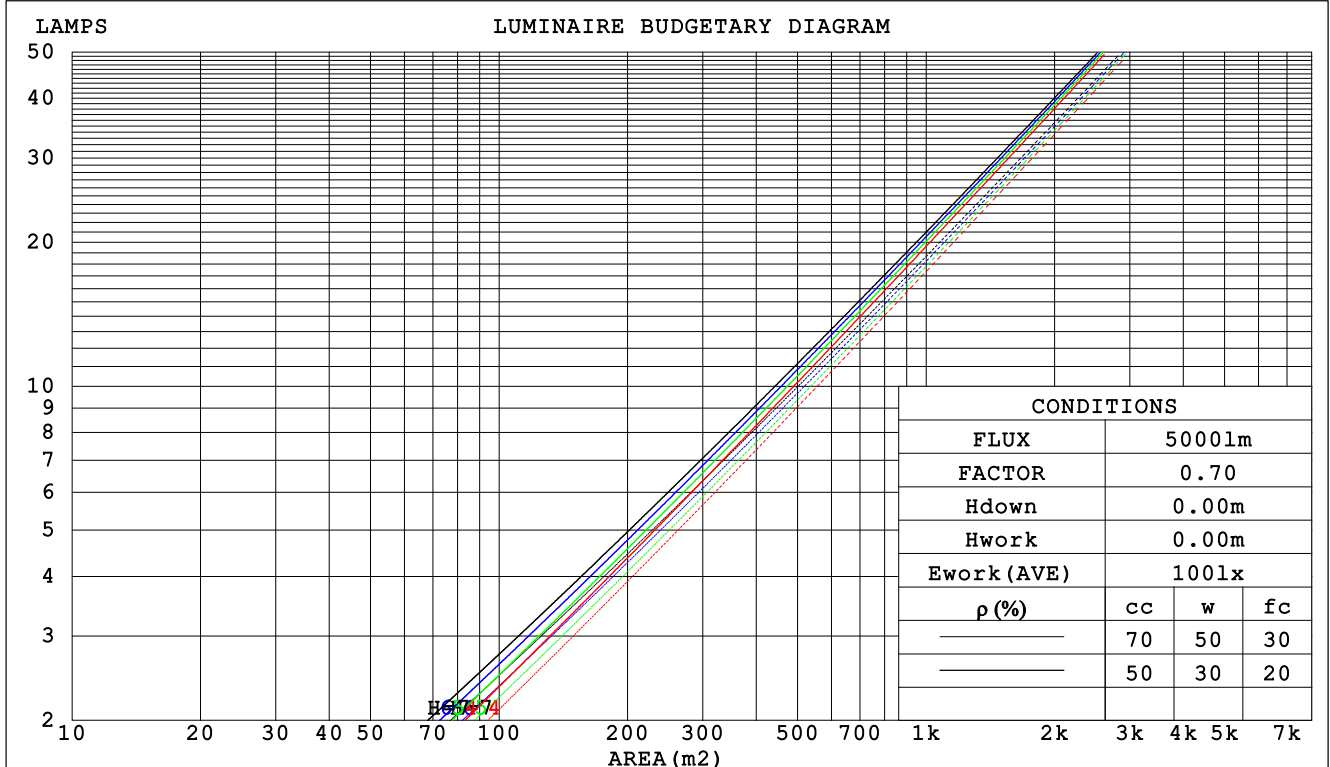

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.7V I:0.1230A P:14.50W PF:0.9810 Freq:60.00Hz Lamp Flux:990.567x1 lm					
NAME: 3寸筒灯 15W 30度			TYPE:5000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.250	.142	.045	.240	.137	.044	.222	.127	.041	.205	.118	.038	.189	.110	.035		
2.0	.236	.129	.040	.228	.125	.039	.212	.118	.037	.198	.111	.035	.185	.104	.033		
3.0	.222	.118	.035	.214	.115	.035	.201	.109	.033	.189	.104	.032	.178	.098	.030		
4.0	.208	.108	.032	.202	.106	.031	.191	.101	.030	.180	.097	.029	.170	.092	.028		
5.0	.196	.100	.029	.191	.098	.029	.181	.094	.028	.172	.091	.027	.163	.087	.026		
6.0	.185	.093	.027	.180	.091	.026	.172	.088	.026	.164	.085	.025	.156	.082	.024		
7.0	.175	.087	.025	.171	.085	.024	.164	.083	.024	.157	.080	.023	.150	.078	.023		
8.0	.166	.081	.023	.163	.080	.023	.156	.078	.022	.150	.076	.022	.144	.074	.022		
9.0	.158	.077	.021	.155	.076	.021	.149	.074	.021	.144	.072	.021	.138	.070	.020		
10.0	.151	.072	.020	.148	.072	.020	.143	.070	.020	.138	.068	.019	.133	.067	.019		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.281	.281	.281	.240	.240	.240	.164	.164	.164	.094	.094	.094	.030	.030	.030	
1.0	.253	.233	.215	.216	.200	.185	.148	.138	.128	.085	.080	.075	.027	.026	.024	
2.0	.230	.197	.170	.197	.170	.147	.135	.117	.102	.078	.068	.060	.025	.022	.020	
3.0	.211	.169	.137	.181	.146	.118	.124	.102	.083	.072	.059	.049	.023	.019	.016	
4.0	.194	.148	.112	.167	.128	.097	.115	.089	.069	.066	.052	.041	.021	.017	.013	
5.0	.181	.131	.094	.155	.113	.082	.107	.079	.058	.062	.046	.034	.020	.015	.011	
6.0	.169	.117	.079	.145	.101	.069	.100	.071	.049	.058	.042	.029	.019	.014	.010	
7.0	.158	.105	.068	.136	.091	.060	.094	.064	.042	.055	.038	.025	.018	.012	.008	
8.0	.149	.096	.060	.129	.083	.052	.089	.059	.037	.052	.035	.022	.017	.011	.007	
9.0	.141	.088	.052	.122	.077	.046	.084	.054	.032	.049	.032	.019	.016	.010	.006	
10.0	.134	.082	.047	.116	.071	.041	.080	.050	.029	.047	.029	.017	.015	.010	.006	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.7V I:0.1230A P:14.50W PF:0.9810 Freq:60.00Hz Lamp Flux:990.567x1 lm										
NAME: 3寸筒灯 15W 30度					TYPE:5000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.4	10.3	9.6	10.4	10.6	9.5	10.3	9.7	10.5	10.6
3H	10.1	10.9	10.4	11.1	11.3	10.1	10.9	10.4	11.1	11.3
4H	10.3	11.1	10.6	11.3	11.5	10.3	11.1	10.6	11.3	11.5
6H	10.5	11.2	10.8	11.5	11.7	10.4	11.1	10.7	11.4	11.6
8H	10.5	11.2	10.9	11.5	11.7	10.5	11.1	10.8	11.4	11.7
12H	10.5	11.2	10.9	11.5	11.8	10.5	11.1	10.8	11.4	11.7
4H 2H	9.7	10.4	9.9	10.6	10.9	9.7	10.4	10.0	10.7	10.9
3H	10.5	11.2	10.8	11.4	11.7	10.5	11.2	10.8	11.4	11.7
4H	10.8	11.4	11.2	11.7	12.1	10.8	11.4	11.2	11.7	12.0
6H	11.1	11.6	11.5	11.9	12.3	11.0	11.5	11.4	11.9	12.2
8H	11.1	11.6	11.5	12.0	12.4	11.0	11.5	11.4	11.9	12.3
12H	11.2	11.6	11.6	12.0	12.4	11.0	11.5	11.5	11.9	12.3
8H 4H	10.9	11.4	11.3	11.8	12.1	10.9	11.4	11.3	11.7	12.1
6H	11.2	11.6	11.6	12.0	12.4	11.1	11.5	11.6	11.9	12.4
8H	11.3	11.7	11.8	12.1	12.6	11.2	11.6	11.7	12.0	12.4
12H	11.4	11.7	11.8	12.1	12.6	11.2	11.6	11.7	12.0	12.5
12H 4H	10.9	11.3	11.3	11.7	12.1	10.8	11.3	11.2	11.7	12.1
6H	11.2	11.6	11.7	12.0	12.4	11.1	11.5	11.6	11.9	12.4
8H	11.3	11.6	11.8	12.1	12.6	11.2	11.5	11.7	12.0	12.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.6 / - 0.8					+ 0.7 / - 0.9				
1.5H	+ 0.8 / - 0.5					+ 1.0 / - 0.6				
2.0H	+ 1.2 / - 0.8					+ 1.2 / - 0.8				

CIE Pub.117 Corrected 990.6 lm Total Lamp Luminous Flux.(8log(F/F0) = -0.0)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.7V I:0.1230A P:14.50W PF:0.9810 Freq:60.00Hz Lamp Flux:990.567x1 lm		
NAME: 3寸筒灯 15W 30度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	122	112	106	121	111	106	120	111	105	100
0.80	133	124	118	132	123	117	130	122	117	111
1.00	140	131	125	139	130	125	136	130	124	118
1.25	146	138	132	145	137	132	142	135	131	124
1.50	151	143	138	149	142	137	145	140	135	128
2.00	155	149	143	153	147	142	149	144	140	132
2.50	158	152	147	156	150	146	151	146	143	134
3.00	161	155	151	158	153	149	153	149	146	136
4.00	164	159	156	161	157	154	155	152	150	139
5.00	166	162	159	163	159	157	157	154	152	141
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.7V I:0.1230A P:14.50W PF:0.9810 Freq:60.00Hz Lamp Flux:990.567x1 lm		
NAME: 3寸筒灯 15W 30度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

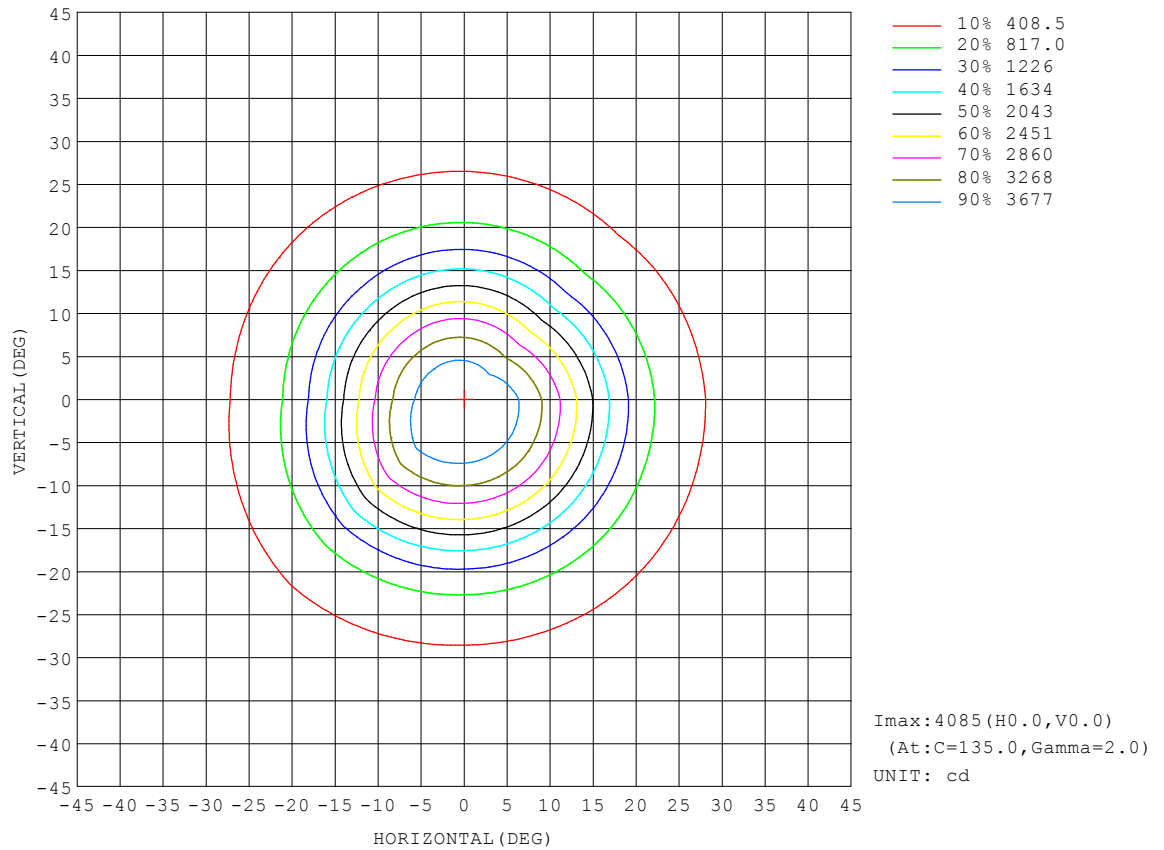


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.7V I:0.1230A P:14.50W PF:0.9810 Freq:60.00Hz Lamp Flux:990.567x1 lm		
NAME: 3寸筒灯 15W 30度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

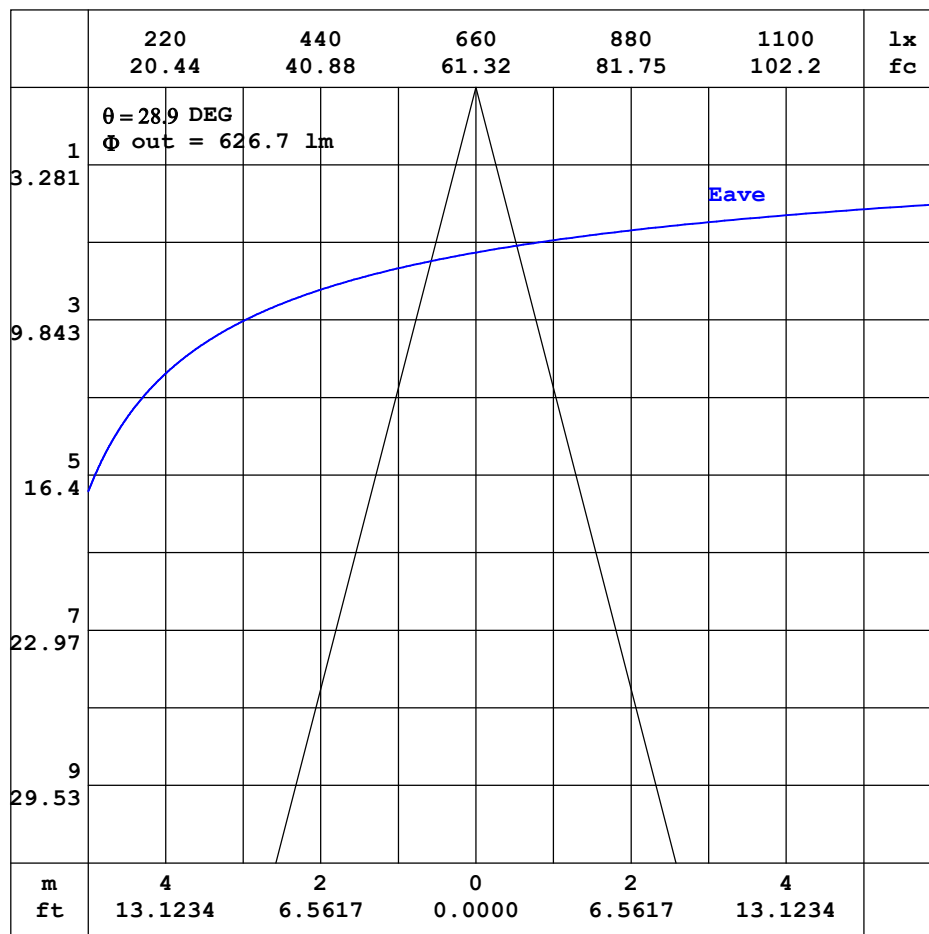


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.7V I:0.1230A P:14.50W PF:0.9810 Freq:60.00Hz Lamp Flux:990.567x1 lm		
NAME: 3寸筒灯 15W 30度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

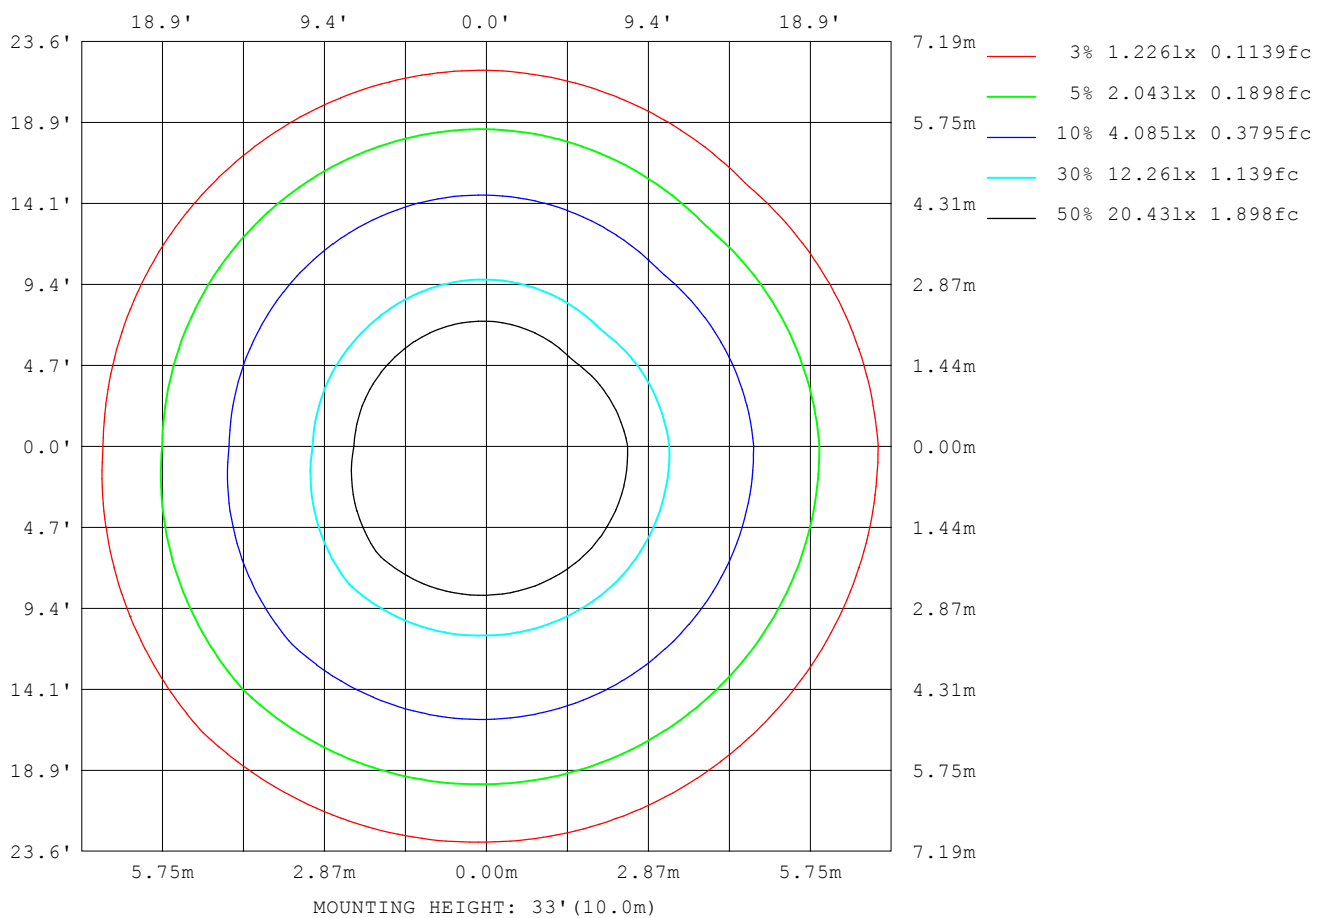

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.7V I:0.1230A P:14.50W PF:0.9810 Freq:60.00Hz Lamp Flux:990.567x1 lm		
NAME: 3寸筒灯 15W 30度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	858
L_0~180 (75) av	607
L_0~180 (85) av	320
L_90~270 (65) av	857
L_90~270 (75) av	601
L_90~270 (85) av	315
L_45 (65) av	865
L_45 (75) av	611
L_45 (85) av	318

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

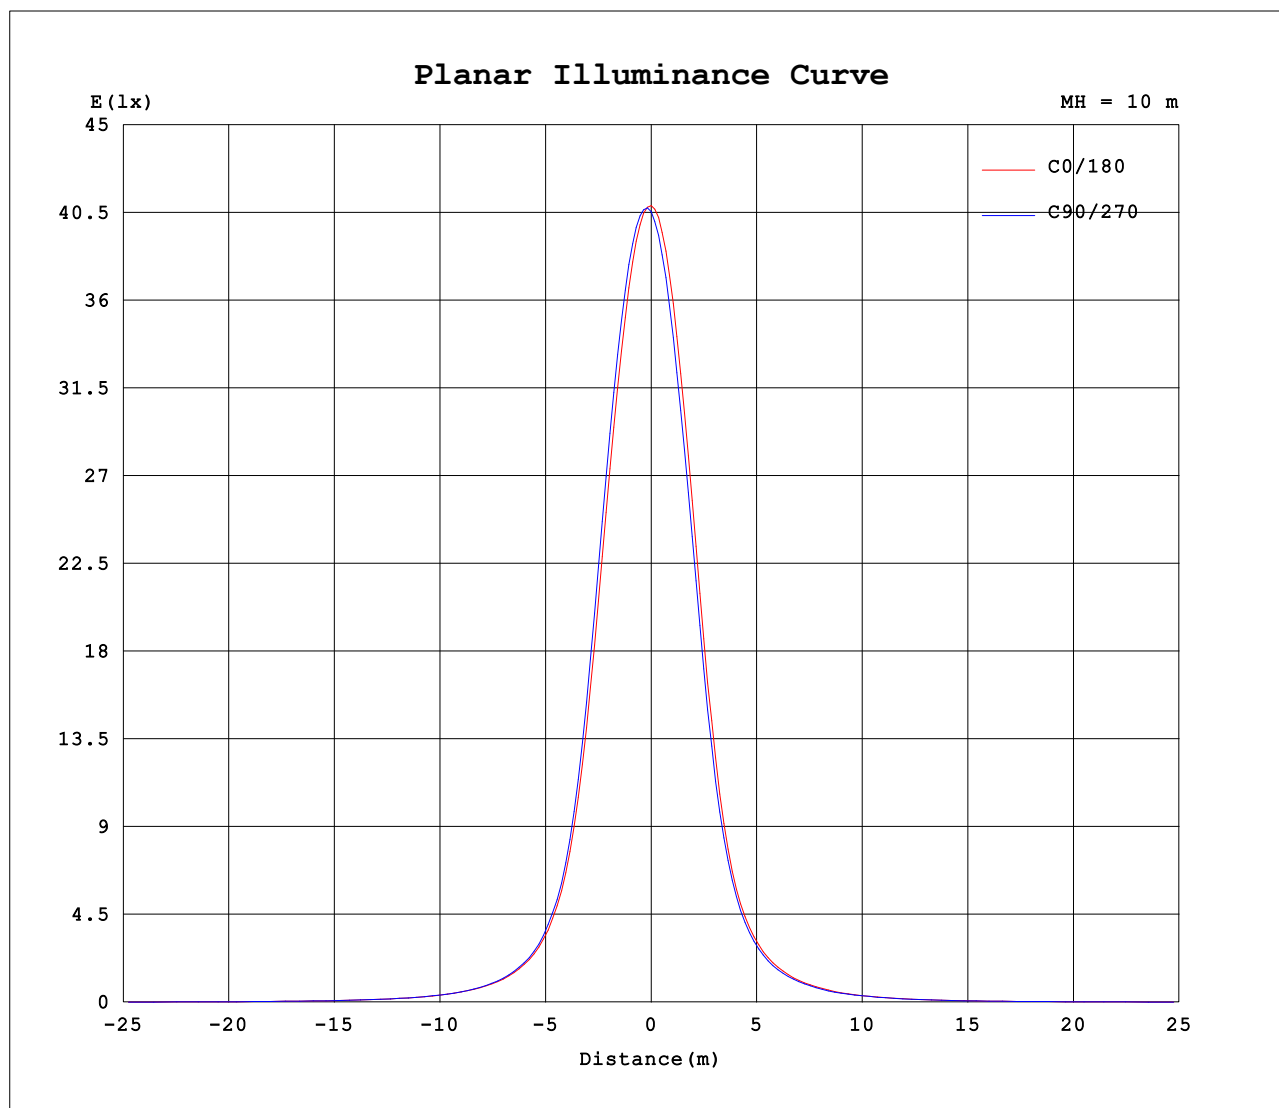

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.7V I:0.1230A P:14.50W PF:0.9810 Freq:60.00Hz Lamp Flux:990.567x1 lm		
NAME: 3寸筒灯 15W 30度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	4058	4058	4058	4058	4058	4058	4058	4058										
5	3814	3894	3938	4005	3747	3667	3617	3581										
10	3068	3210	3276	3386	2916	2799	2738	2669										
15	2020	2150	2216	2336	1805	1704	1667	1603										
20	1079	1155	1179	1273	941	893	876	838										
25	576	596	619	655	511	491	480	456										
30	335	344	354	380	309	299	291	276										
35	216	218	225	240	202	198	192	183										
40	148	149	151	161	138	136	131	128										
45	104	103	105	110	96.7	97.4	94.2	91.4										
50	75.2	75.2	75.9	79.1	69.2	69.9	68.0	66.5										
55	55.2	55.1	55.4	57.2	49.9	50.9	49.3	48.4										
60	40.5	40.4	40.6	41.9	36.4	37.3	36.2	35.5										
65	30.2	29.8	30.0	31.0	26.7	27.6	26.8	26.3										
70	21.7	21.1	21.2	22.0	18.2	19.2	18.7	18.3										
75	13.9	13.1	13.0	13.8	10.7	11.8	11.4	11.0										
80	7.82	7.17	7.15	7.63	5.21	5.86	5.97	5.78										
85	2.86	2.59	2.40	2.60	1.52	1.50	1.90	2.01										
90	0.30	0.15	0.14	0.43	0.00	0.00	0.00	0.00										
95	0.03	0.03	0.02	0.03	0.00	0.00	0.00	0.00										
100	0.06	0.06	0.06	0.05	0.00	0.00	0.00	0.00										
105	0.10	0.09	0.09	0.09	0.00	0.00	0.00	0.00										
110	0.15	0.15	0.14	0.14	0.00	0.00	0.00	0.00										
115	0.22	0.21	0.21	0.20	0.02	0.02	0.02	0.02										
120	0.31	0.30	0.29	0.29	0.04	0.03	0.05	0.05										
125	0.45	0.43	0.41	0.41	0.07	0.07	0.09	0.09										
130	0.67	0.61	0.59	0.60	0.11	0.13	0.13	0.15										
135	1.00	0.92	0.89	0.90	0.18	0.20	0.22	0.23										
140	1.60	1.47	1.40	1.43	0.30	0.34	0.38	0.41										
145	2.76	2.48	2.37	2.44	0.52	0.59	0.64	0.67										
150	4.66	4.23	3.98	4.22	0.86	0.97	1.02	1.07										
155	6.79	6.46	5.99	6.59	1.39	1.53	1.57	1.62										
160	8.40	8.37	7.97	8.75	1.88	2.02	2.08	2.14										
165	9.00	9.31	9.15	9.92	2.34	2.48	2.56	2.61										
170	8.41	9.03	9.14	9.75	2.86	3.06	3.16	3.21										
175	6.87	7.63	7.89	8.27	3.65	3.98	4.17	4.25										
180	5.01	5.59	5.92	6.07	5.03	5.60	5.93	6.08										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: