


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.7V I:0.1220A P:14.40W PF:0.9810 Freq:60.00Hz Lamp Flux:1425.03x1 lm		
NAME: 3寸筒灯 15W 50度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 95.02 lm/W			
MODEL		I _{max} (cd)	1850	S/MH (C0/180)	0.72
NOMINAL POWER (W)	15W	LOR (%)	96.0	S/MH (C90/270)	0.66
RATED VOLTAGE (V)	120.0	TOTAL FLUX (lm)	1368.3	η UP, DN (C0-180)	0.3, 51.7
NOMINAL FLUX (lm)	1425.03	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 43.9
LAMPS INSIDE	1	η up (%)	0.4	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	120.0	η down (%)	95.6	CIBSE SHR MAX	0.75

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

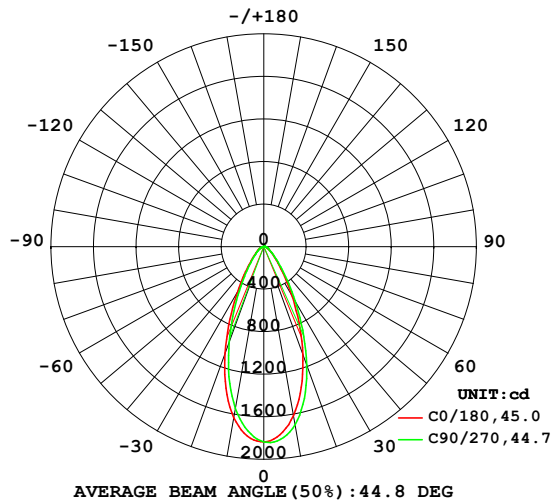

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

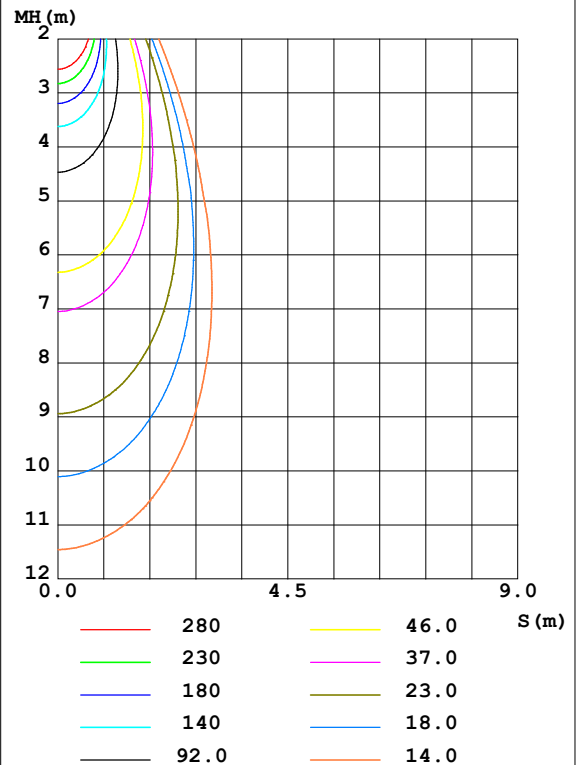

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1612	1659	1700	1733	1632	1585	1544	1519	0- 10	165.0	165.0	12.1,11.6
20	1076	1137	1181	1225	1064	994.5	953.8	932.0	10- 20	378.2	543.2	39.7,38.1
30	527.2	573.3	593.5	619.9	498.2	449.9	436.9	425.2	20- 30	352.0	895.2	65.4,62.8
40	222.6	241.0	248.4	261.6	208.2	188.8	184.6	183.0	30- 40	212.7	1108	81,77.7
50	106.7	111.2	115.8	120.9	100.7	94.86	91.78	91.79	40- 50	116.4	1224	89.5,85.9
60	59.16	60.05	62.32	64.79	55.03	53.63	51.68	51.58	50- 60	69.55	1294	94.6,90.8
70	33.09	32.49	34.18	36.12	29.57	29.63	28.32	27.80	60- 70	43.01	1337	97.7,93.8
80	11.79	11.07	12.27	13.83	9.096	9.037	8.631	8.106	70- 80	21.80	1359	99.3,95.3
90	0.4534	0.3767	0.2688	0.5521	0	0.0002	0	0.0000	80- 90	4.297	1363	99.6,95.6
100	0.1185	0.1040	0.1065	0.0973	0	0	0	0	90-100	0.0478	1363	99.6,95.6
110	0.2392	0.2128	0.2105	0.2091	0.0121	0.0169	0.0195	0.0219	100-110	0.0851	1363	99.6,95.7
120	0.4736	0.4160	0.4041	0.4181	0.0775	0.0917	0.1042	0.1068	110-120	0.1795	1363	99.6,95.7
130	1.039	0.8952	0.8759	0.9119	0.1889	0.2271	0.2448	0.2452	120-130	0.3546	1364	99.7,95.7
140	2.269	2.018	1.965	2.040	0.3995	0.4855	0.5066	0.5171	130-140	0.6796	1364	99.7,95.7
150	3.940	3.700	3.602	3.782	0.8353	0.9735	0.9989	1.022	140-150	1.111	1365	99.8,95.8
160	5.124	5.085	4.988	5.331	1.762	2.015	2.106	2.096	150-160	1.366	1367	99.9,95.9
170	5.267	5.490	5.568	5.775	2.925	3.311	3.487	3.490	160-170	1.125	1368	100,96
180	4.367	4.716	4.929	5.000	4.372	4.745	4.926	5.003	170-180	0.4380	1368	100,96
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.7V I:0.1220A P:14.40W PF:0.9810 Freq:60.00Hz Lamp Flux:1425.03x1 lm		
NAME: 3寸筒灯 15W 50度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

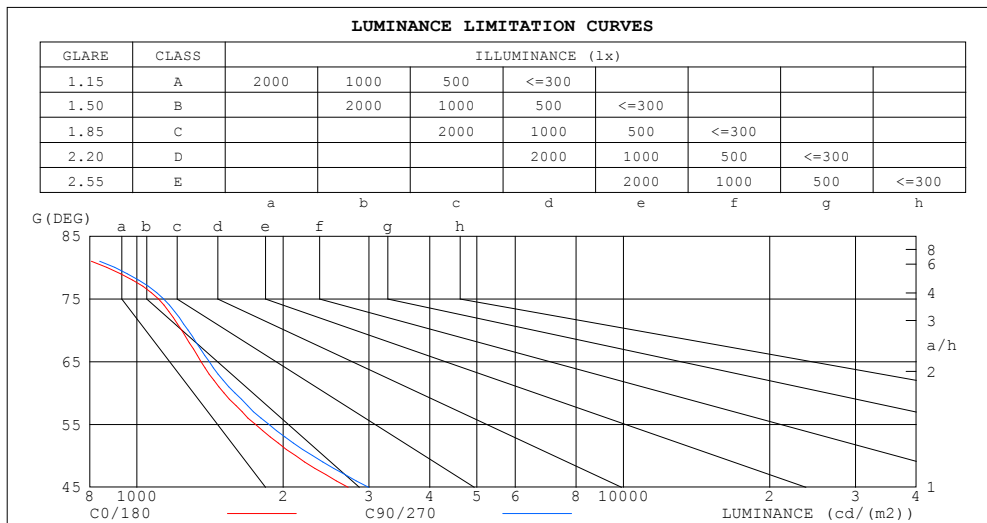


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.7V I:0.1220A P:14.40W PF:0.9810 Freq:60.00Hz Lamp Flux:1425.03x1 lm		
NAME: 3寸筒灯 15W 50度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.14	1.14	1.14	1.12	1.12	1.12	1.06	1.06	1.06	1.02	1.02	1.02	.98	.98	.98	.96
1.0	1.05	1.02	.00	1.03	1.01	.98	.99	.97	.95	.95	.94	.92	.92	.91	.90	.88
2.0	.97	.92	.89	.95	.91	.88	.92	.89	.86	.89	.86	.84	.86	.84	.82	.80
3.0	.89	.84	.80	.88	.83	.79	.85	.81	.78	.83	.80	.77	.81	.78	.75	.74
4.0	.83	.77	.73	.82	.77	.72	.80	.75	.71	.78	.74	.71	.76	.73	.70	.68
5.0	.78	.71	.67	.77	.71	.67	.75	.70	.66	.73	.69	.65	.71	.68	.65	.63
6.0	.73	.66	.62	.72	.66	.62	.70	.65	.61	.69	.64	.61	.67	.64	.60	.59
7.0	.68	.62	.58	.68	.62	.58	.66	.61	.57	.65	.60	.57	.64	.60	.57	.55
8.0	.64	.58	.54	.64	.58	.54	.63	.57	.54	.62	.57	.53	.61	.56	.53	.52
9.0	.61	.55	.51	.60	.55	.51	.59	.54	.51	.58	.54	.50	.58	.53	.50	.49
10.0	.58	.52	.48	.57	.52	.48	.56	.51	.48	.55	.51	.48	.55	.50	.47	.46

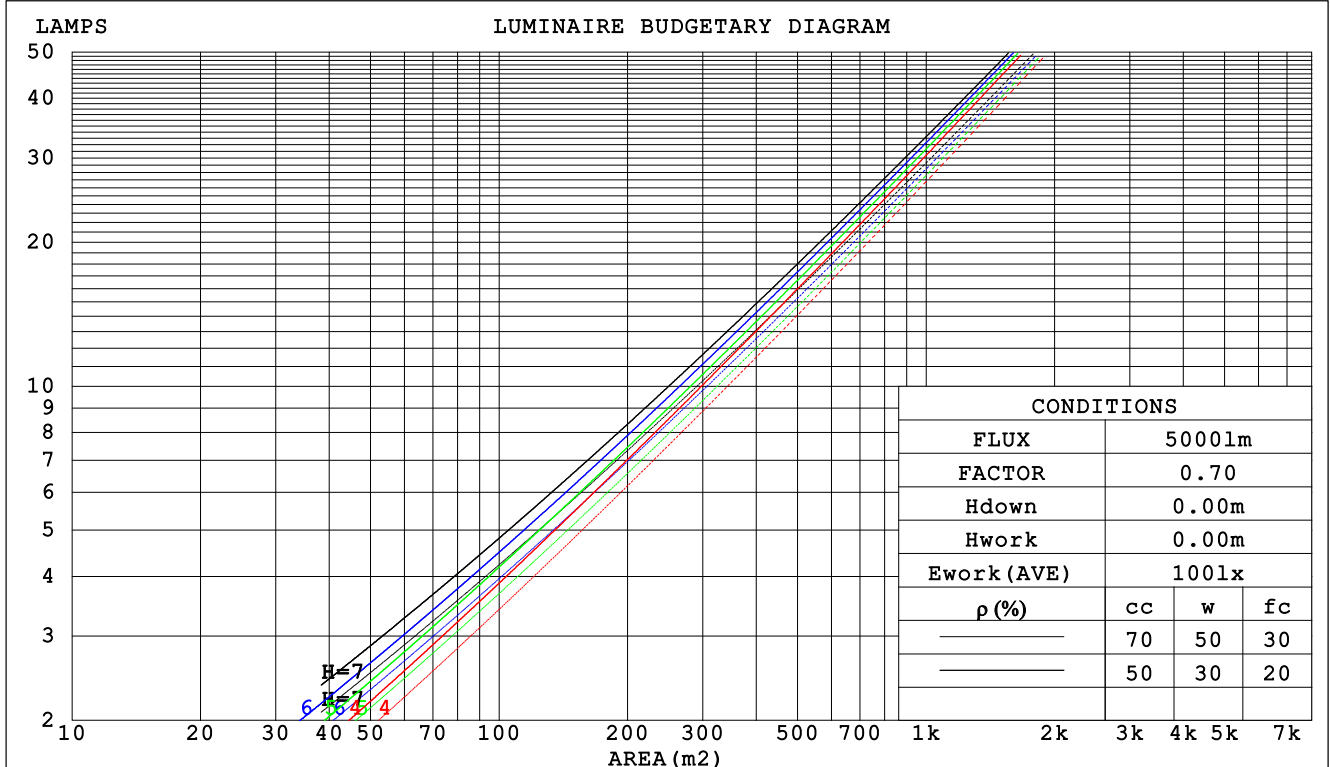

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.7V I:0.1220A P:14.40W PF:0.9810 Freq:60.00Hz Lamp Flux:1425.03x1 lm					
NAME: 3寸筒灯 15W 50度			TYPE:5000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.193	.110	.035	.186	.106	.034	.174	.100	.032	.163	.094	.030	.152	.088	.028		
2.0	.184	.101	.031	.178	.098	.030	.168	.093	.029	.158	.089	.028	.149	.084	.027		
3.0	.174	.092	.028	.169	.090	.027	.160	.087	.026	.151	.083	.025	.143	.079	.025		
4.0	.163	.085	.025	.159	.083	.025	.151	.080	.024	.144	.077	.023	.137	.075	.023		
5.0	.154	.079	.023	.151	.077	.023	.144	.075	.022	.137	.072	.022	.131	.070	.021		
6.0	.146	.073	.021	.143	.072	.021	.136	.070	.020	.131	.068	.020	.125	.066	.020		
7.0	.138	.068	.019	.135	.067	.019	.130	.066	.019	.125	.064	.019	.120	.062	.018		
8.0	.131	.064	.018	.129	.063	.018	.124	.062	.018	.119	.060	.017	.115	.059	.017		
9.0	.125	.060	.017	.122	.060	.017	.118	.058	.017	.114	.057	.016	.110	.056	.016		
10.0	.119	.057	.016	.117	.056	.016	.113	.055	.016	.109	.054	.015	.106	.053	.015		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.186	.186	.186	.159	.159	.159	.108	.108	.108	.062	.062	.062	.020	.020	.020	
1.0	.169	.154	.140	.144	.132	.121	.099	.091	.083	.057	.053	.049	.018	.017	.016	
2.0	.155	.130	.109	.133	.112	.094	.091	.077	.066	.053	.045	.038	.017	.015	.013	
3.0	.144	.112	.086	.124	.097	.075	.085	.067	.053	.049	.039	.031	.016	.013	.010	
4.0	.135	.098	.070	.116	.085	.061	.080	.059	.043	.046	.035	.025	.015	.011	.008	
5.0	.127	.087	.058	.109	.076	.051	.075	.053	.036	.043	.031	.021	.014	.010	.007	
6.0	.119	.078	.049	.103	.068	.043	.071	.048	.030	.041	.028	.018	.013	.009	.006	
7.0	.113	.071	.042	.097	.062	.037	.067	.043	.026	.039	.026	.015	.013	.008	.005	
8.0	.107	.065	.037	.092	.057	.032	.064	.040	.023	.037	.023	.013	.012	.008	.004	
9.0	.102	.060	.032	.088	.052	.028	.061	.037	.020	.036	.022	.012	.012	.007	.004	
10.0	.097	.056	.029	.084	.049	.025	.058	.034	.018	.034	.020	.011	.011	.007	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.7V I:0.1220A P:14.40W PF:0.9810 Freq:60.00Hz Lamp Flux:1425.03x1 lm										
NAME: 3寸筒灯 15W 50度					TYPE:5000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	12.4	13.4	12.6	13.6	13.8	12.7	13.8	13.0	13.9	14.1
3H	13.1	14.0	13.3	14.2	14.4	13.4	14.3	13.6	14.5	14.7
4H	13.4	14.3	13.6	14.5	14.7	13.6	14.5	13.9	14.8	15.0
6H	13.5	14.4	13.8	14.6	14.9	13.8	14.6	14.1	14.9	15.2
8H	13.5	14.4	13.9	14.6	14.9	13.8	14.6	14.1	14.9	15.2
12H	13.5	14.3	13.9	14.6	14.9	13.8	14.6	14.1	14.9	15.2
4H 2H	12.6	13.5	12.9	13.8	14.0	12.9	13.8	13.2	14.1	14.3
3H	13.5	14.3	13.8	14.5	14.8	13.7	14.5	14.1	14.8	15.1
4H	13.9	14.6	14.2	14.9	15.2	14.1	14.8	14.5	15.1	15.4
6H	14.1	14.7	14.5	15.1	15.4	14.3	15.0	14.7	15.3	15.7
8H	14.2	14.8	14.6	15.1	15.5	14.4	15.0	14.8	15.3	15.7
12H	14.2	14.7	14.6	15.1	15.5	14.4	14.9	14.8	15.3	15.7
8H 4H	14.0	14.5	14.4	14.9	15.3	14.2	14.8	14.6	15.1	15.5
6H	14.3	14.8	14.7	15.2	15.6	14.5	15.0	14.9	15.4	15.8
8H	14.4	14.8	14.8	15.2	15.7	14.6	15.0	15.0	15.4	15.9
12H	14.4	14.8	14.9	15.2	15.7	14.6	15.0	15.1	15.4	15.9
12H 4H	13.9	14.5	14.4	14.8	15.2	14.1	14.7	14.6	15.1	15.5
6H	14.3	14.7	14.7	15.1	15.6	14.5	14.9	14.9	15.3	15.8
8H	14.4	14.7	14.9	15.2	15.7	14.6	15.0	15.1	15.4	15.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.7 / - 0.9					+ 0.7 / - 0.9				
1.5H	+ 1.0 / - 0.7					+ 1.3 / - 0.6				
2.0H	+ 1.2 / - 0.7					+ 1.3 / - 0.8				

CIE Pub.117 Corrected 1425 lm Total Lamp Luminous Flux.(8log(F/F0) = 1.2)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.7V I:0.1220A P:14.40W PF:0.9810 Freq:60.00Hz Lamp Flux:1425.03x1 lm		
NAME: 3寸筒灯 15W 50度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	77	69	65	76	69	65	75	69	65	60
0.80	84	77	73	84	77	73	82	76	72	68
1.00	90	83	79	89	83	78	87	83	78	73
1.25	94	88	84	93	88	84	91	86	83	78
1.50	98	92	88	96	91	87	94	90	86	81
2.00	101	96	92	100	95	92	97	93	90	84
2.50	103	99	95	102	97	94	98	95	92	86
3.00	105	101	98	103	100	97	100	97	95	88
4.00	107	104	102	105	103	100	102	99	98	90
5.00	109	106	104	107	104	102	103	101	99	92
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.7V I:0.1220A P:14.40W PF:0.9810 Freq:60.00Hz Lamp Flux:1425.03x1 lm		
NAME: 3寸筒灯 15W 50度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

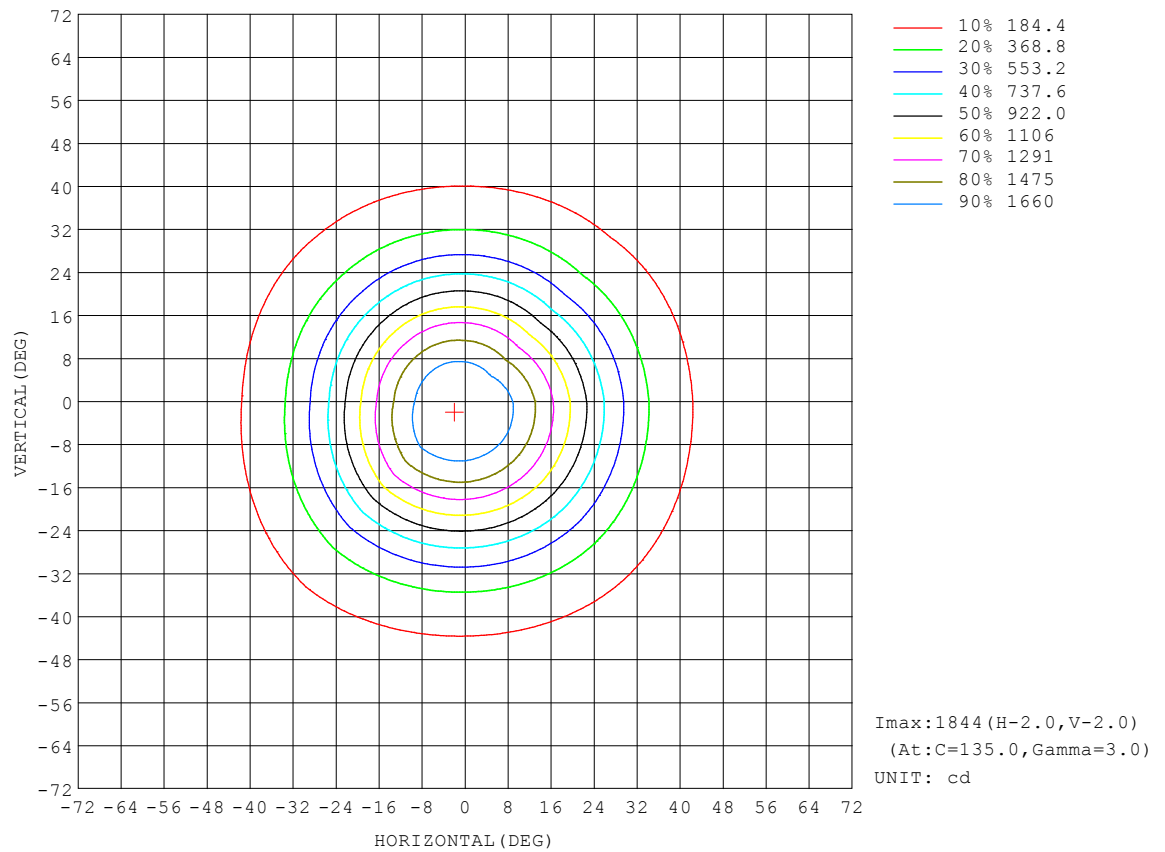


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.7V I:0.1220A P:14.40W PF:0.9810 Freq:60.00Hz Lamp Flux:1425.03x1 lm		
NAME: 3寸筒灯 15W 50度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

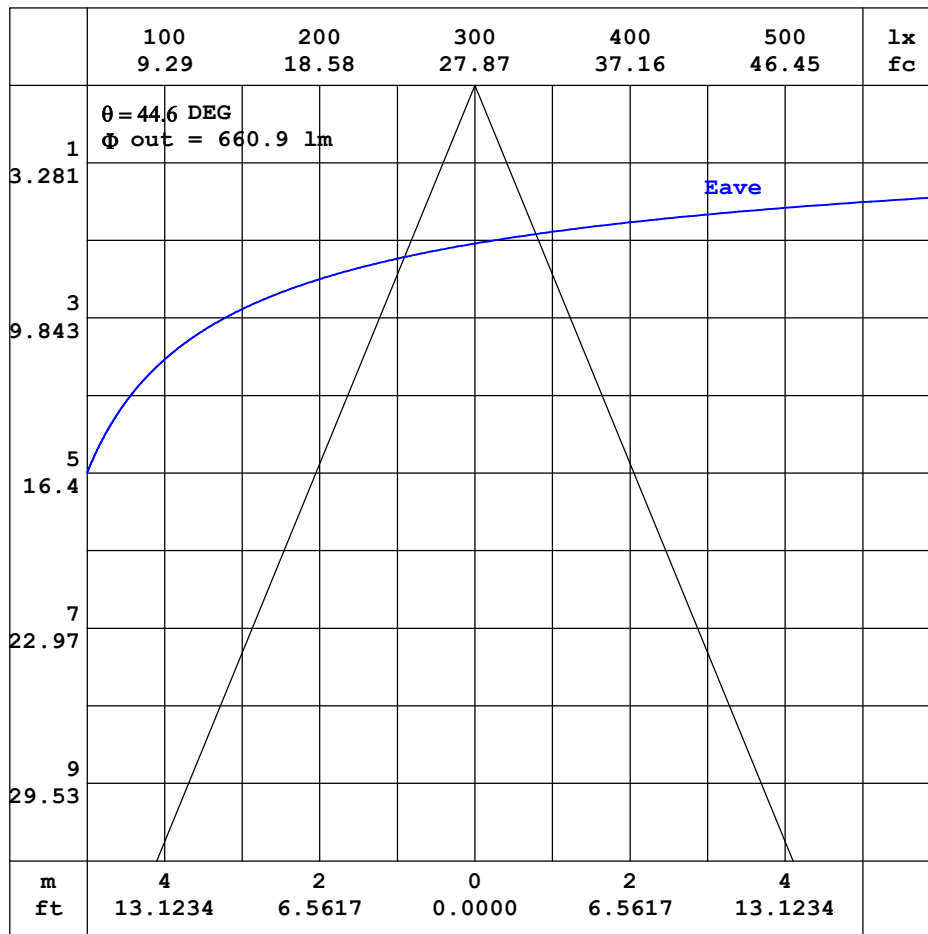


Note: The Curves indicate the illuminated area and the average illuminance when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.7V I:0.1220A P:14.40W PF:0.9810 Freq:60.00Hz Lamp Flux:1425.03x1 lm		
NAME: 3寸筒灯 15W 50度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

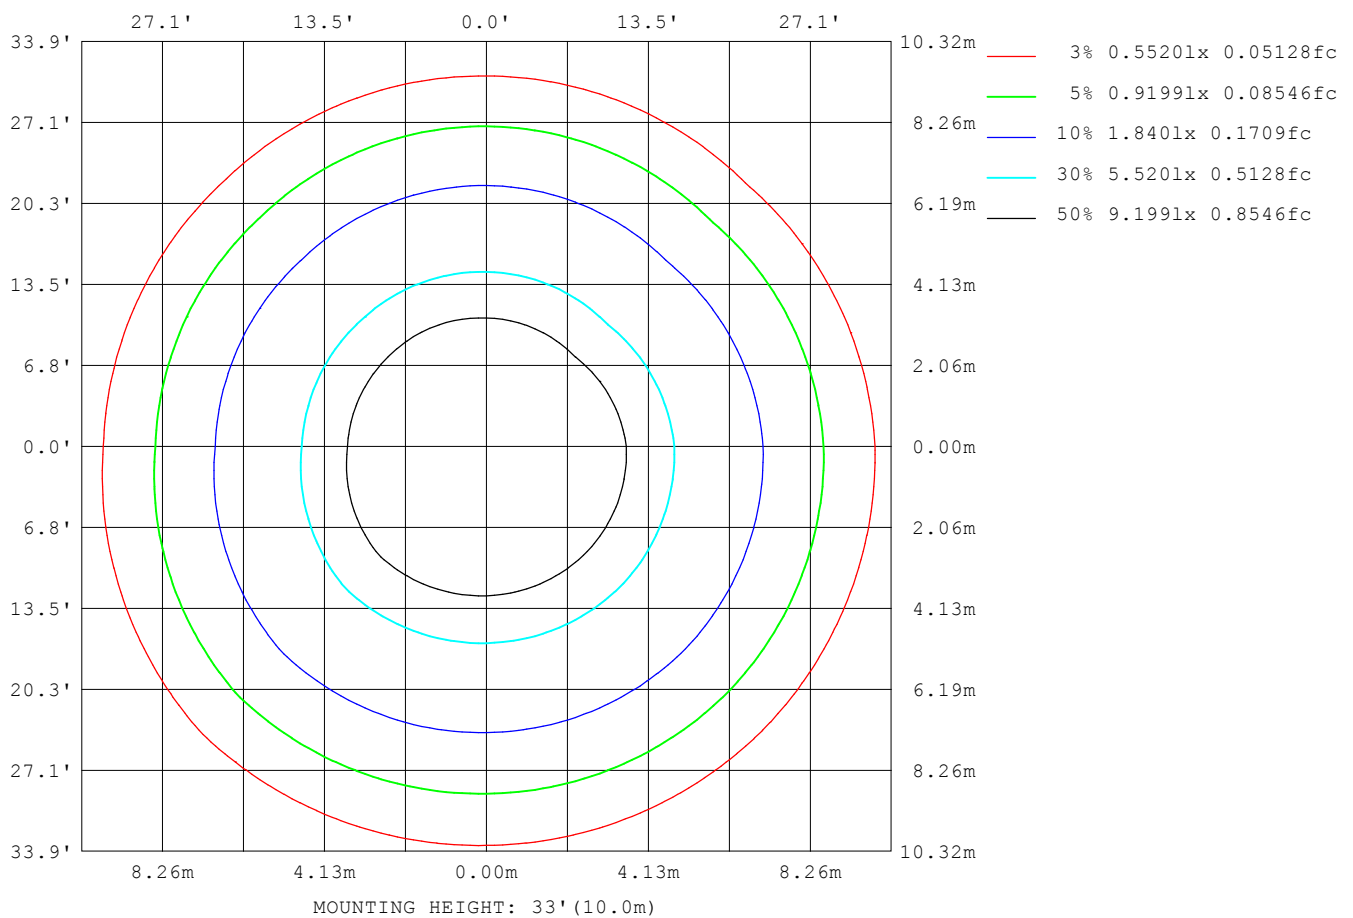

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.7V I:0.1220A P:14.40W PF:0.9810 Freq:60.00Hz Lamp Flux:1425.03x1 lm		
NAME: 3寸筒灯 15W 50度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1297
L_0~180 (75) av	1017
L_0~180 (85) av	444
L_90~270 (65) av	1295
L_90~270 (75) av	1011
L_90~270 (85) av	464
L_45 (65) av	1306
L_45 (75) av	1020
L_45 (85) av	468

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

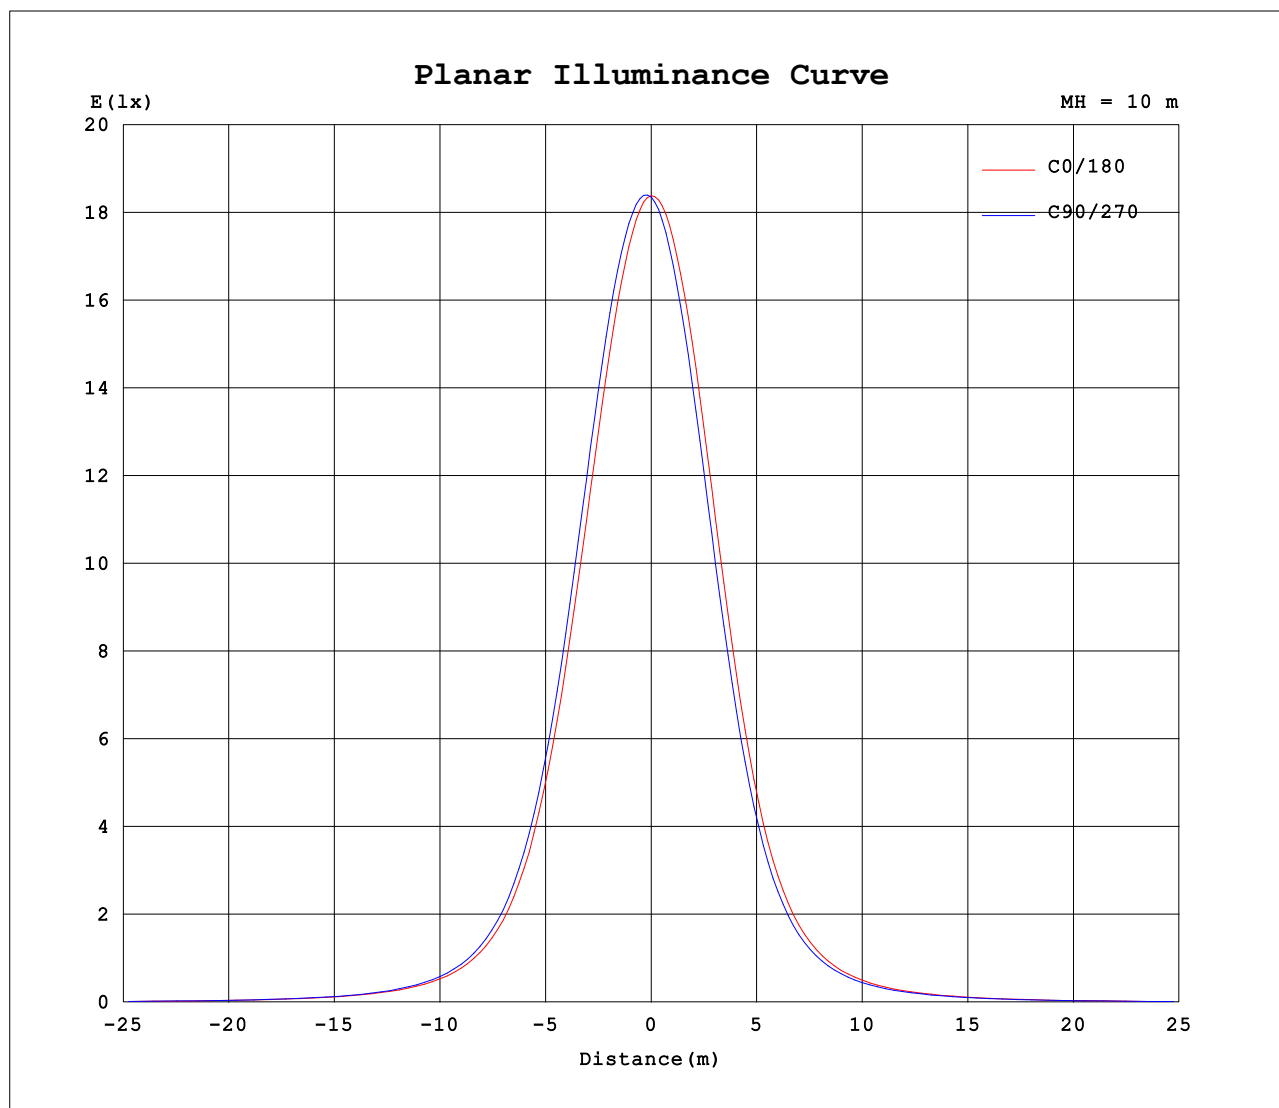

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.7V I:0.1220A P:14.40W PF:0.9810 Freq:60.00Hz Lamp Flux:1425.03x1 lm		
NAME: 3寸筒灯 15W 50度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1836	1836	1836	1836	1836	1836	1836	1836										
5	1773	1800	1820	1839	1789	1763	1738	1726										
10	1612	1659	1700	1733	1632	1585	1544	1519										
15	1368	1427	1477	1517	1378	1312	1267	1239										
20	1076	1137	1181	1225	1064	994	954	932										
25	784	837	869	905	755	693	665	649										
30	527	573	593	620	498	450	437	425										
35	342	373	384	404	320	287	280	275										
40	223	241	248	262	208	189	185	183										
45	150	161	166	175	143	131	127	127										
50	107	111	116	121	101	94.9	91.8	91.8										
55	78.7	80.9	84.0	87.6	74.0	70.7	68.3	68.4										
60	59.2	60.1	62.3	64.8	55.0	53.6	51.7	51.6										
65	44.8	44.8	46.7	48.7	41.1	40.8	39.1	38.8										
70	33.1	32.5	34.2	36.1	29.6	29.6	28.3	27.8										
75	22.4	21.4	23.0	24.9	18.8	19.2	18.0	17.3										
80	11.8	11.1	12.3	13.8	9.10	9.04	8.63	8.11										
85	3.41	3.47	3.93	4.79	2.65	2.40	2.41	2.14										
90	0.45	0.38	0.27	0.55	0.00	0.00	0.00	0.00										
95	0.07	0.06	0.06	0.06	0.00	0.00	0.00	0.00										
100	0.12	0.10	0.11	0.10	0.00	0.00	0.00	0.00										
105	0.17	0.15	0.15	0.15	0.00	0.00	0.01	0.00										
110	0.24	0.21	0.21	0.21	0.01	0.02	0.02	0.02										
115	0.33	0.29	0.29	0.30	0.04	0.05	0.07	0.06										
120	0.47	0.42	0.40	0.42	0.08	0.09	0.10	0.11										
125	0.69	0.60	0.60	0.61	0.13	0.15	0.16	0.16										
130	1.04	0.90	0.88	0.91	0.19	0.23	0.24	0.25										
135	1.56	1.36	1.34	1.37	0.28	0.34	0.35	0.35										
140	2.27	2.02	1.96	2.04	0.40	0.49	0.51	0.52										
145	3.11	2.83	2.78	2.87	0.57	0.67	0.70	0.71										
150	3.94	3.70	3.60	3.78	0.84	0.97	1.00	1.02										
155	4.64	4.49	4.33	4.64	1.31	1.50	1.57	1.57										
160	5.12	5.08	4.99	5.33	1.76	2.02	2.11	2.10										
165	5.35	5.42	5.41	5.70	2.28	2.60	2.73	2.73										
170	5.27	5.49	5.57	5.77	2.93	3.31	3.49	3.49										
175	4.95	5.26	5.40	5.54	3.66	4.06	4.25	4.29										
180	4.37	4.72	4.93	5.00	4.37	4.75	4.93	5.00										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: