


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.0V I:0.1510A P:17.70W PF:0.9700 Freq:60.00Hz Lamp Flux:2425.76x1 lm		
NAME: 4寸筒灯 15度 18W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 104.98 lm/W			
MODEL		I _{max} (cd)	2169	S/MH(C0/180)	0.86
NOMINAL POWER(W)	18W	LOR(%)	76.6	S/MH(C90/270)	0.79
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	1858.2	η UP,DN(C0-180)	0.2,41.6
NOMINAL FLUX(lm)	2425.76	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,34.7
LAMPS INSIDE	1	η up(%)	0.3	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120.0	η down(%)	76.3	CIBSE SHR MAX	0.90

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

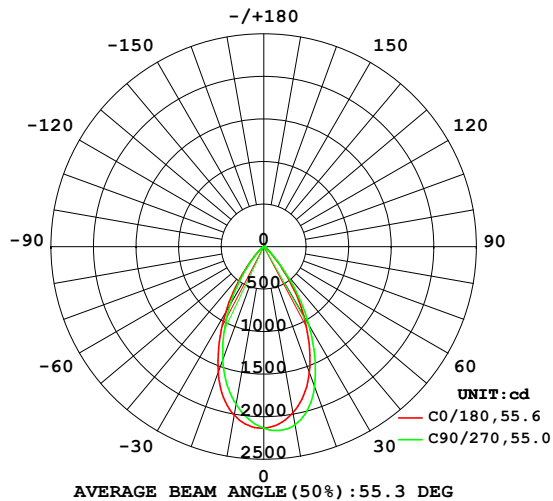

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

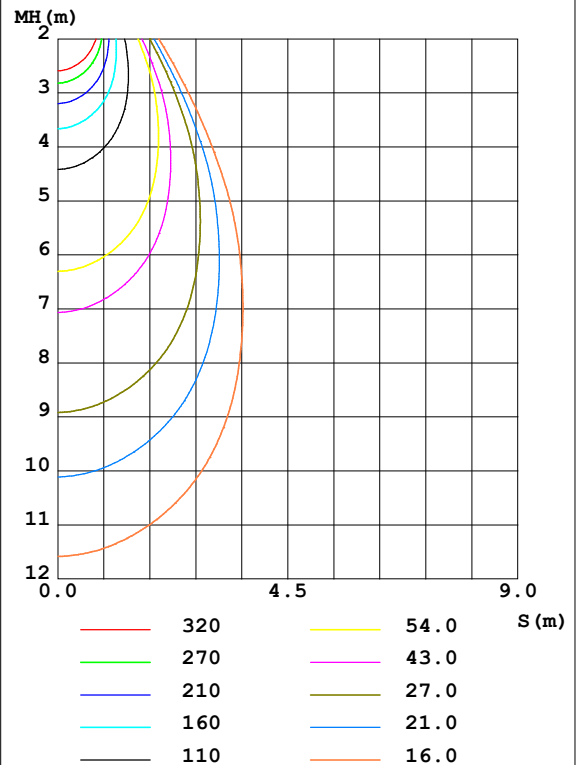

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1981	2072	2124	2127	2011	1939	1881	1871	0- 10	197.3	197.3	10.6,8.13
20	1571	1699	1747	1766	1567	1477	1412	1391	10- 20	508.7	706.0	38,29.1
30	941.7	1039	1061	1094	901.2	837.9	799.6	777.7	20- 30	573.8	1280	68.9,52.8
40	344.2	386.5	389.6	425.6	305.4	279.7	269.6	253.4	30- 40	380.2	1660	89.3,68.4
50	76.22	82.42	84.92	94.04	60.46	60.72	54.92	51.77	40- 50	132.2	1792	96.4,73.9
60	21.73	22.05	21.73	21.57	20.02	20.35	20.38	20.13	50- 60	31.21	1823	98.1,75.2
70	12.54	12.96	12.80	12.82	10.99	11.16	11.19	10.97	60- 70	16.23	1840	99,75.8
80	5.304	5.459	5.442	5.601	4.296	4.323	4.301	4.095	70- 80	8.664	1848	99.5,76.2
90	0.0040	0.0264	0.0801	0.3330	0	0	0	0	80- 90	2.341	1851	99.6,76.3
100	0.0216	0.0169	0.0291	0.0243	0	0	0	0	90-100	0.0077	1851	99.6,76.3
110	0.0769	0.0630	0.0654	0.0682	0	0	0.0000	0	100-110	0.0213	1851	99.6,76.3
120	0.4614	0.3947	0.3685	0.3801	0.0627	0.0894	0.0998	0.0996	110-120	0.1096	1851	99.6,76.3
130	1.714	1.492	1.404	1.476	0.2603	0.3336	0.3720	0.3647	120-130	0.4739	1851	99.6,76.3
140	3.632	3.335	3.244	3.399	0.6141	0.7470	0.8044	0.8001	130-140	1.130	1852	99.7,76.4
150	5.433	5.248	5.156	5.472	1.171	1.393	1.485	1.484	140-150	1.683	1854	99.8,76.4
160	6.495	6.595	6.565	7.062	2.690	3.237	3.483	3.432	150-160	1.892	1856	99.9,76.5
170	6.791	7.264	7.474	7.707	4.601	5.344	5.651	5.593	160-170	1.584	1858	100,76.6
180	6.166	6.923	7.278	7.278	6.243	6.947	7.215	7.215	170-180	0.6291	1858	100,76.6
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.0V I:0.1510A P:17.70W PF:0.9700 Freq:60.00Hz Lamp Flux:2425.76x1 lm		
NAME: 4寸筒灯 15度 18W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

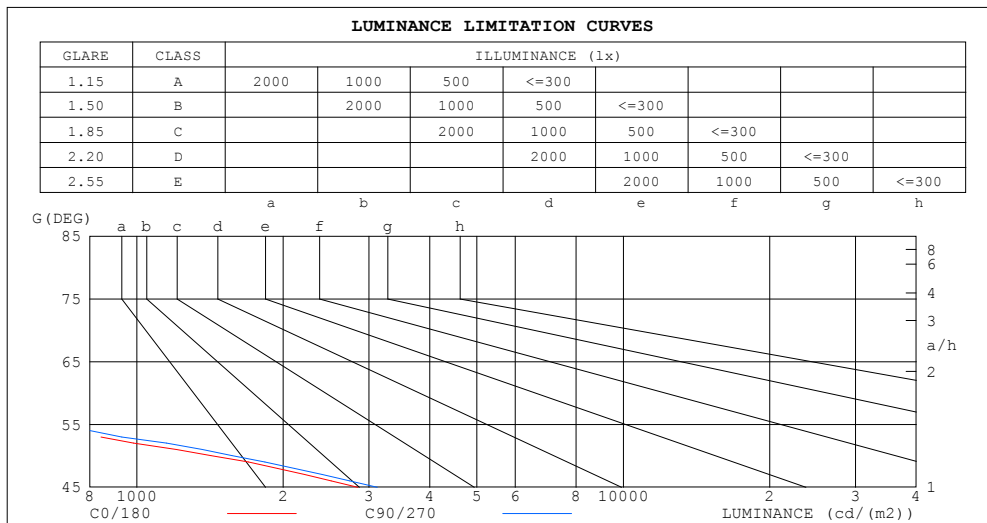

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	332	343
80	366	372
75	401	407
70	439	444
65	485	489
60	521	516
55	654	698
50	1421	1568
45	2847	3123


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.0V I:0.1510A P:17.70W PF:0.9700 Freq:60.00Hz Lamp Flux:2425.76x1 lm		
NAME: 4寸筒灯 15度 18W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	.91	.91	.91	.89	.89	.89	.85	.85	.85	.81	.81	.81	.78	.78	.78	.76
1.0	.85	.83	.81	.83	.81	.79	.80	.78	.77	.77	.76	.75	.74	.73	.72	.71
2.0	.78	.75	.73	.77	.74	.72	.75	.72	.70	.72	.70	.69	.70	.68	.67	.66
3.0	.73	.69	.66	.72	.68	.65	.70	.67	.64	.68	.65	.63	.66	.64	.62	.61
4.0	.68	.64	.60	.67	.63	.60	.65	.62	.59	.64	.61	.59	.62	.60	.58	.57
5.0	.64	.59	.56	.63	.59	.55	.61	.58	.55	.60	.57	.54	.59	.56	.54	.53
6.0	.60	.55	.52	.59	.55	.51	.58	.54	.51	.57	.53	.51	.56	.53	.50	.49
7.0	.56	.51	.48	.55	.51	.48	.54	.50	.48	.54	.50	.47	.53	.49	.47	.46
8.0	.53	.48	.45	.52	.48	.45	.51	.47	.45	.51	.47	.44	.50	.47	.44	.43
9.0	.50	.45	.42	.49	.45	.42	.49	.45	.42	.48	.44	.42	.47	.44	.41	.40
10.0	.47	.43	.40	.47	.42	.39	.46	.42	.39	.45	.42	.39	.45	.42	.39	.38

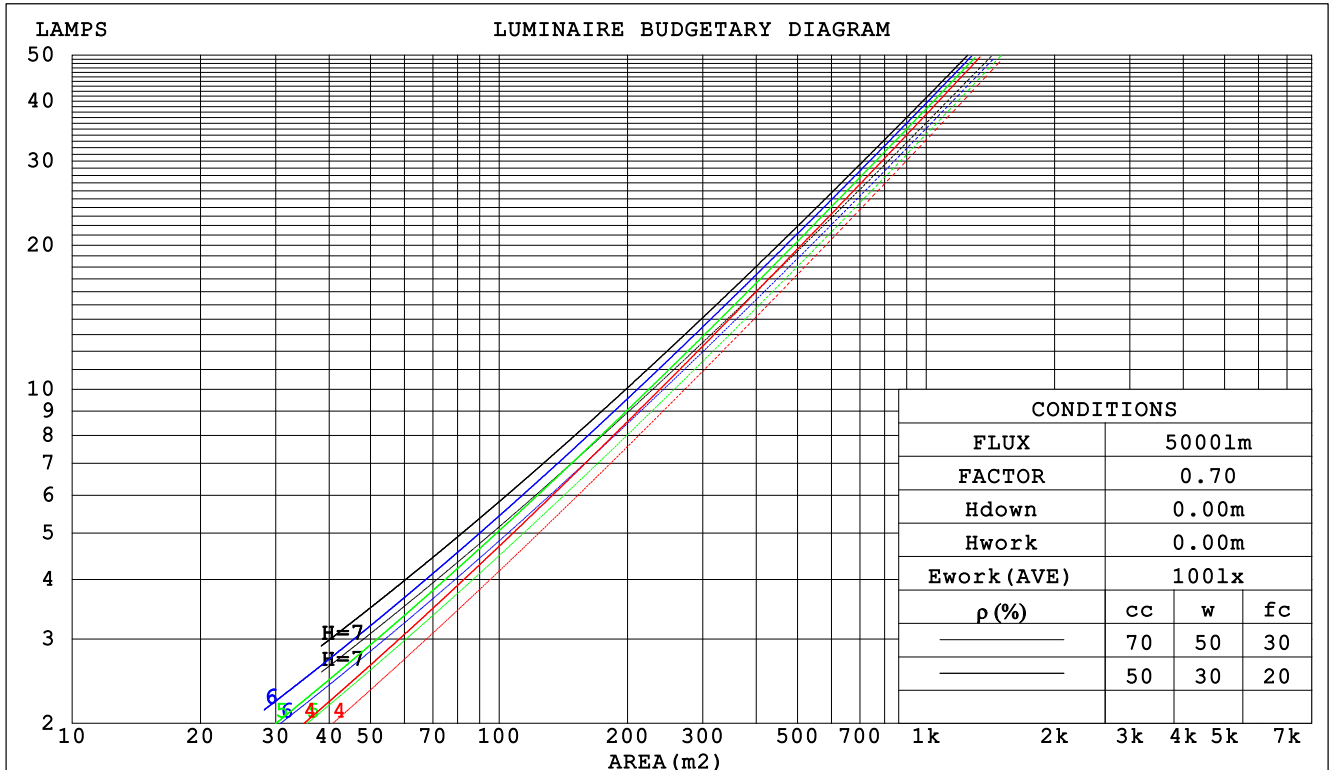

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.0V I:0.1510A P:17.70W PF:0.9700 Freq:60.00Hz Lamp Flux:2425.76x1 lm					
NAME: 4寸筒灯 15度 18W			TYPE:5000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.141	.080	.025	.136	.077	.025	.126	.072	.023	.117	.067	.022	.109	.063	.020		
2.0	.135	.074	.023	.131	.072	.022	.122	.068	.021	.115	.064	.020	.107	.061	.019		
3.0	.128	.068	.020	.125	.067	.020	.117	.064	.019	.111	.061	.019	.105	.058	.018		
4.0	.122	.063	.019	.119	.062	.018	.113	.060	.018	.107	.057	.017	.102	.055	.017		
5.0	.116	.059	.017	.113	.058	.017	.108	.056	.017	.103	.054	.016	.098	.052	.016		
6.0	.111	.056	.016	.108	.055	.016	.103	.053	.015	.099	.051	.015	.095	.050	.015		
7.0	.106	.052	.015	.103	.052	.015	.099	.050	.014	.095	.049	.014	.092	.048	.014		
8.0	.101	.049	.014	.099	.049	.014	.095	.048	.014	.092	.046	.013	.088	.045	.013		
9.0	.097	.047	.013	.095	.046	.013	.091	.045	.013	.088	.044	.013	.085	.043	.013		
10.0	.093	.044	.012	.091	.044	.012	.088	.043	.012	.085	.042	.012	.082	.041	.012		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.148	.148	.148	.127	.127	.127	.086	.086	.086	.050	.050	.050	.016	.016	.016	
1.0	.134	.123	.113	.115	.105	.097	.078	.073	.067	.045	.042	.039	.014	.014	.013	
2.0	.123	.104	.088	.105	.089	.076	.072	.062	.053	.041	.036	.031	.013	.012	.010	
3.0	.113	.089	.070	.097	.077	.061	.067	.054	.043	.039	.031	.025	.012	.010	.008	
4.0	.106	.078	.057	.091	.068	.050	.062	.047	.035	.036	.028	.021	.012	.009	.007	
5.0	.099	.069	.048	.085	.060	.041	.059	.042	.029	.034	.025	.017	.011	.008	.006	
6.0	.093	.062	.040	.080	.054	.035	.055	.038	.025	.032	.022	.015	.010	.007	.005	
7.0	.089	.057	.034	.076	.049	.030	.053	.034	.021	.031	.020	.013	.010	.007	.004	
8.0	.084	.052	.030	.073	.045	.026	.050	.032	.018	.029	.019	.011	.009	.006	.004	
9.0	.080	.048	.026	.069	.042	.023	.048	.029	.016	.028	.017	.010	.009	.006	.003	
10.0	.077	.045	.023	.066	.039	.020	.046	.027	.014	.027	.016	.009	.009	.005	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.0V I:0.1510A P:17.70W PF:0.9700 Freq:60.00Hz Lamp Flux:2425.76x1 lm										
NAME: 4寸筒灯 15度 18W					TYPE:5000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	12.2	13.2	12.4	13.4	13.5	12.6	13.6	12.9	13.8	13.9
3H	12.1	13.0	12.4	13.2	13.4	12.5	13.4	12.8	13.6	13.8
4H	12.1	12.9	12.4	13.2	13.4	12.5	13.3	12.8	13.6	13.8
6H	12.0	12.8	12.4	13.1	13.3	12.4	13.2	12.8	13.5	13.7
8H	12.0	12.8	12.3	13.0	13.3	12.4	13.2	12.7	13.4	13.7
12H	12.0	12.7	12.3	13.0	13.3	12.4	13.1	12.7	13.4	13.7
4H 2H	12.0	12.8	12.3	13.1	13.3	12.4	13.3	12.7	13.5	13.7
3H	12.0	12.7	12.3	13.0	13.2	12.4	13.1	12.7	13.4	13.6
4H	11.9	12.6	12.3	12.9	13.2	12.3	13.0	12.7	13.3	13.6
6H	11.9	12.5	12.3	12.9	13.2	12.3	12.9	12.7	13.2	13.6
8H	11.9	12.5	12.3	12.8	13.2	12.3	12.8	12.7	13.2	13.6
12H	11.9	12.4	12.3	12.8	13.2	12.3	12.8	12.7	13.1	13.5
8H 4H	11.9	12.4	12.3	12.7	13.1	12.2	12.8	12.6	13.1	13.5
6H	11.9	12.3	12.3	12.7	13.1	12.2	12.7	12.7	13.1	13.5
8H	11.9	12.3	12.3	12.7	13.1	12.2	12.6	12.7	13.0	13.5
12H	11.9	12.2	12.3	12.6	13.1	12.2	12.6	12.7	13.0	13.5
12H 4H	11.8	12.3	12.2	12.7	13.1	12.2	12.7	12.6	13.1	13.5
6H	11.8	12.2	12.3	12.6	13.1	12.2	12.6	12.7	13.0	13.5
8H	11.8	12.2	12.3	12.6	13.1	12.2	12.5	12.7	13.0	13.5
Variations with the observer position at spacings:										
S = 1.0H	+ 2.4 / - 5.8					+ 2.8 / - 6.1				
1.5H	+ 4.3 / - 5.7					+ 4.7 / - 6.1				
2.0H	+ 4.8 / - 2.7					+ 5.1 / - 3.0				

CIE Pub.117 Corrected 2426 lm Total Lamp Luminous Flux.(8log(F/F0) = 3.1)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.0V I:0.1510A P:17.70W PF:0.9700 Freq:60.00Hz Lamp Flux:2425.76x1 lm		
NAME: 4寸筒灯 15度 18W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	65	60	57	65	60	57	64	59	57	54
0.80	71	66	63	70	66	63	69	65	63	60
1.00	75	70	67	74	70	67	73	70	67	63
1.25	78	74	71	77	73	71	76	72	70	67
1.50	80	76	74	79	76	73	77	75	72	69
2.00	82	79	77	81	78	76	79	77	75	71
2.50	84	81	78	83	80	78	80	78	76	71
3.00	85	82	80	84	81	79	81	79	78	72
4.00	87	84	83	85	83	82	82	81	79	74
5.00	88	86	84	86	84	83	83	82	81	75
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:121.0V I:0.1510A P:17.70W PF:0.9700 Freq:60.00Hz Lamp Flux:2425.76x1 lm		
NAME: 4寸筒灯 15度 18W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

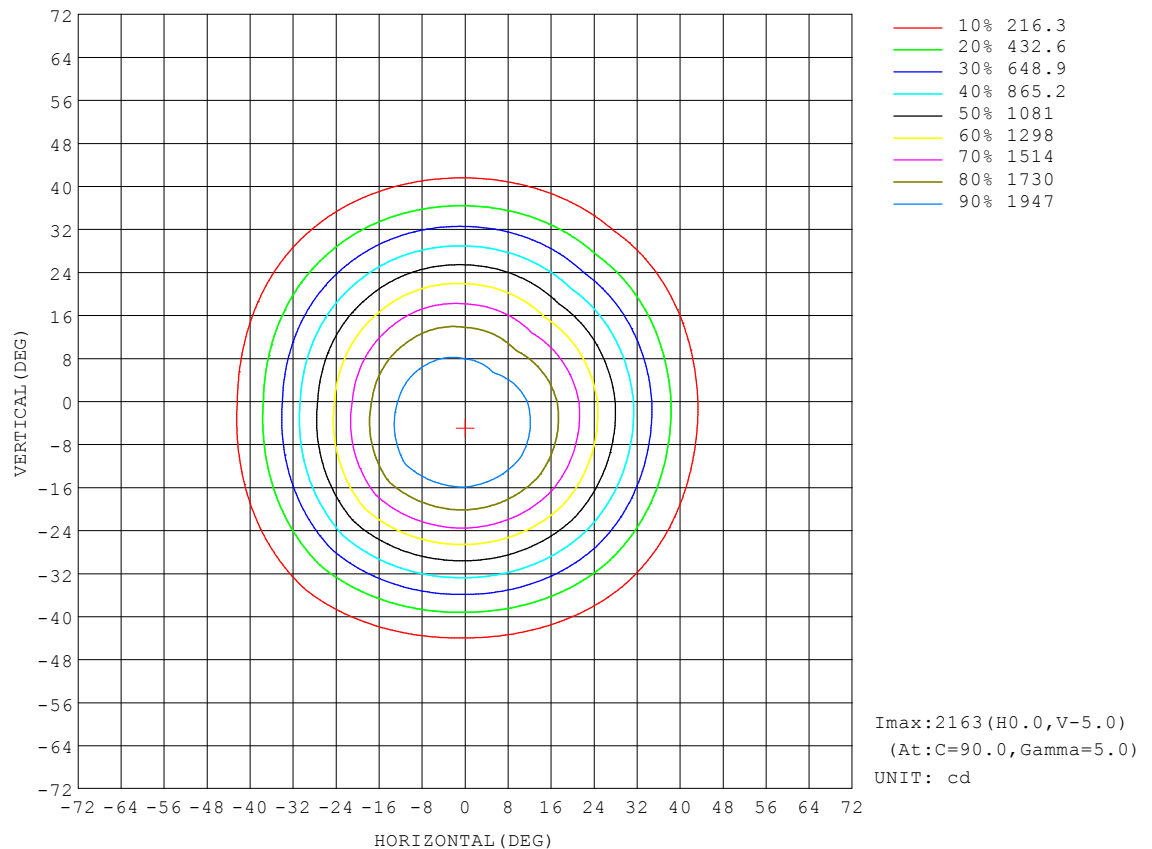


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:121.0V I:0.1510A P:17.70W PF:0.9700 Freq:60.00Hz Lamp Flux:2425.76x1 lm		
NAME: 4寸筒灯 15度 18W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

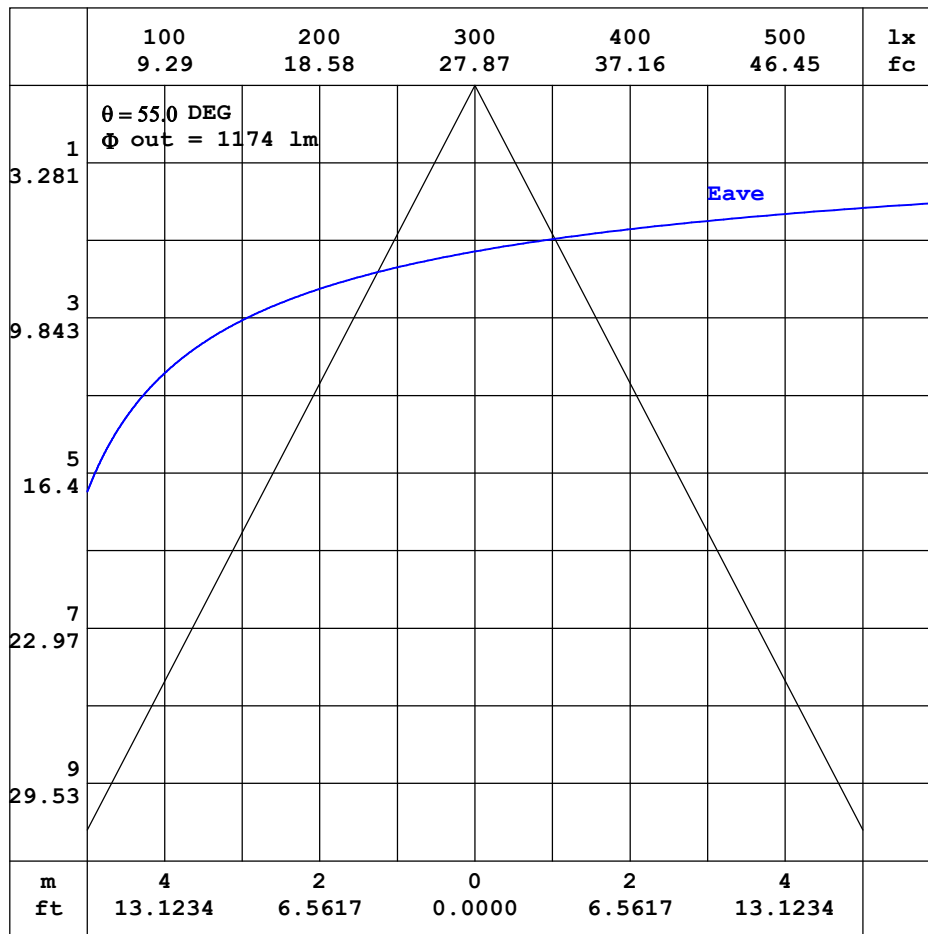


Note: The Curves indicate the illuminated area and the average illuminance when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:121.0V I:0.1510A P:17.70W PF:0.9700 Freq:60.00Hz Lamp Flux:2425.76x1 lm		
NAME: 4寸筒灯 15度 18W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

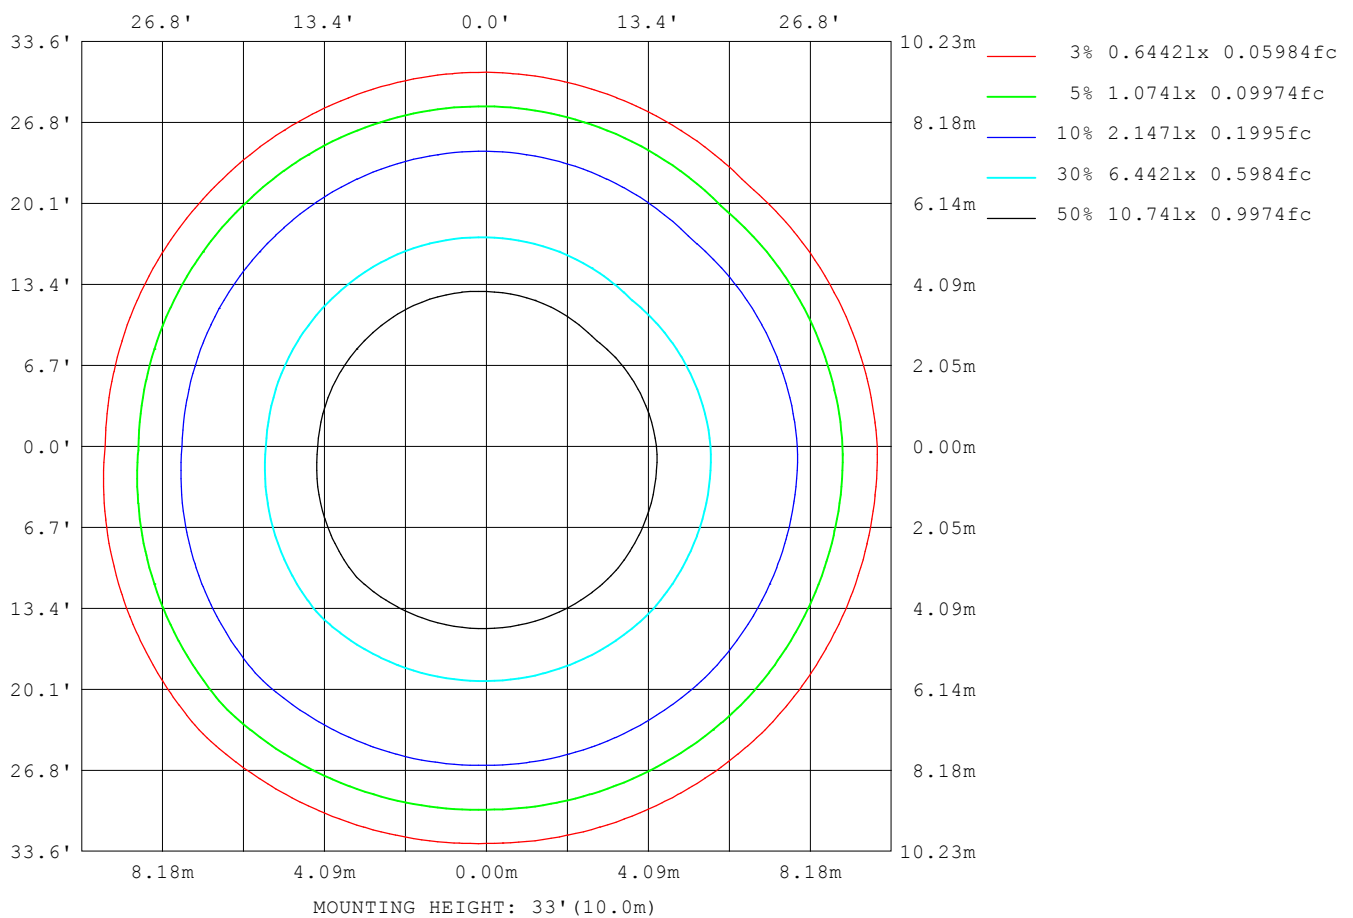

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:121.0V I:0.1510A P:17.70W PF:0.9700 Freq:60.00Hz Lamp Flux:2425.76x1 lm		
NAME: 4寸筒灯 15度 18W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	455
L_0~180 (75) av	369
L_0~180 (85) av	278
L_90~270 (65) av	463
L_90~270 (75) av	377
L_90~270 (85) av	278
L_45 (65) av	462
L_45 (75) av	376
L_45 (85) av	279

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

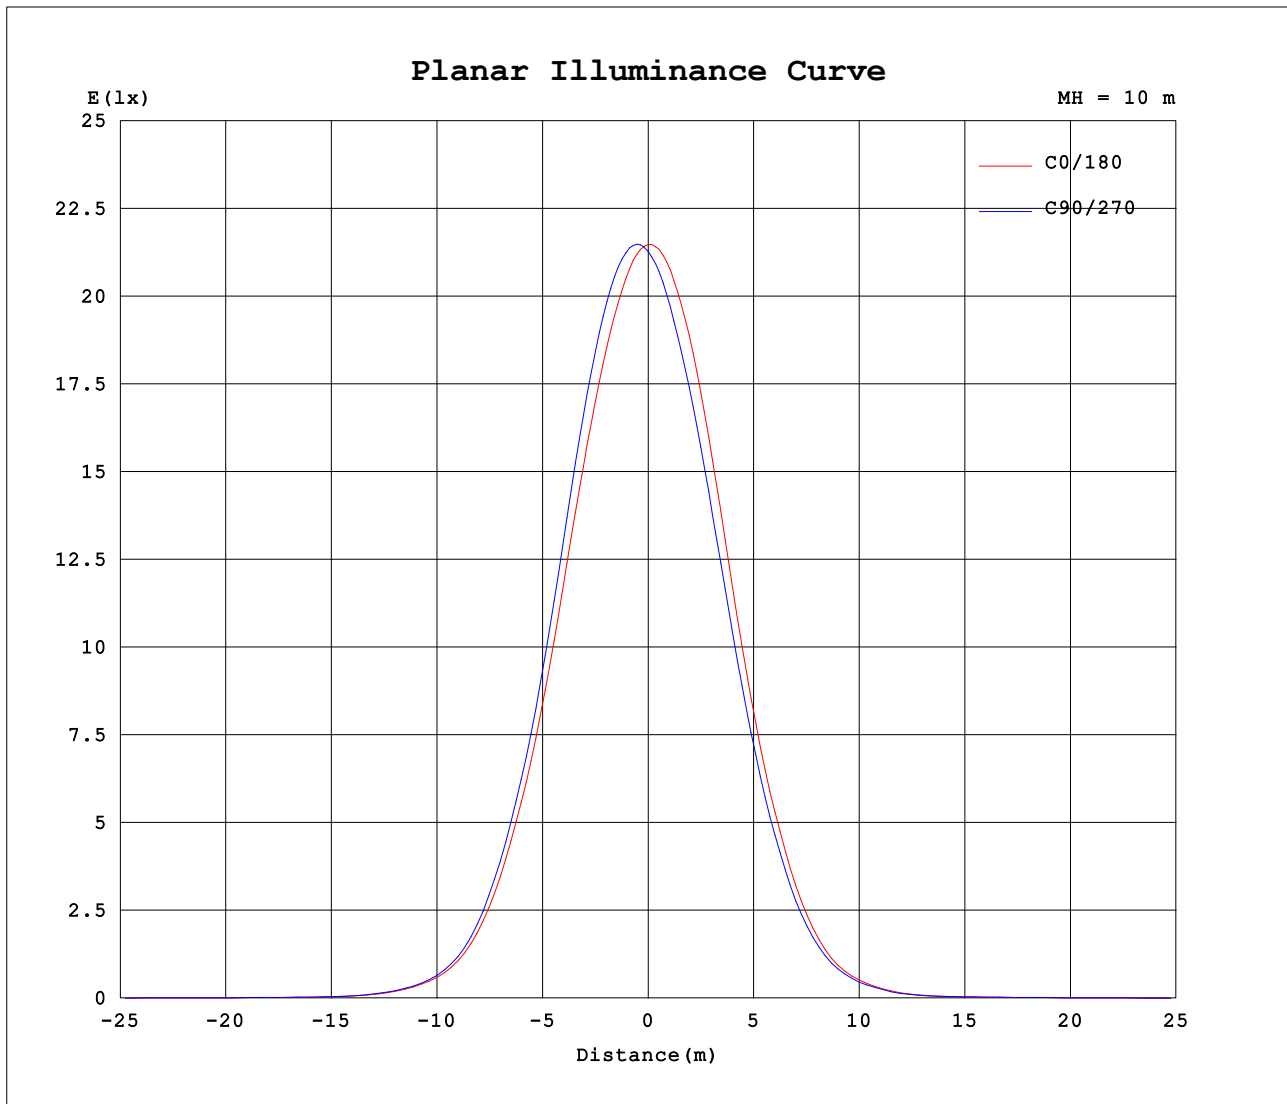

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.0V I:0.1510A P:17.70W PF:0.9700 Freq:60.00Hz Lamp Flux:2425.76x1 lm								
NAME: 4寸筒灯 15度 18W					TYPE:5000K			WEIGHT:
SPEC.:					DIM.:			SERIAL No.:
MFR.: EVERFINE					SUR.:			Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	2134	2134	2134	2134	2134	2134	2134	2134										
5	2090	2139	2169	2168	2110	2068	2036	2028										
10	1981	2072	2124	2127	2011	1939	1881	1871										
15	1812	1931	1989	1995	1836	1744	1679	1661										
20	1571	1699	1747	1766	1567	1477	1412	1391										
25	1264	1383	1419	1447	1239	1158	1108	1083										
30	942	1039	1061	1094	901	838	800	778										
35	628	701	713	748	579	528	506	484										
40	344	387	390	426	305	280	270	253										
45	168	186	186	206	147	135	132	126										
50	76.2	82.4	84.9	94.0	60.5	60.7	54.9	51.8										
55	31.3	32.7	33.7	35.9	27.1	27.0	26.1	25.6										
60	21.7	22.1	21.7	21.6	20.0	20.3	20.4	20.1										
65	17.1	17.6	17.4	17.4	15.2	15.4	15.5	15.2										
70	12.5	13.0	12.8	12.8	11.0	11.2	11.2	11.0										
75	8.66	8.96	8.87	8.95	7.39	7.49	7.52	7.29										
80	5.30	5.46	5.44	5.60	4.30	4.32	4.30	4.10										
85	2.41	2.48	2.52	2.74	1.66	1.62	1.55	1.33										
90	0.00	0.03	0.08	0.33	0.00	0.00	0.00	0.00										
95	0.02	0.00	0.01	0.00	0.00	0.00	0.00	0.00										
100	0.02	0.02	0.03	0.02	0.00	0.00	0.00	0.00										
105	0.04	0.04	0.04	0.03	0.00	0.00	0.00	0.00										
110	0.08	0.06	0.07	0.07	0.00	0.00	0.00	0.00										
115	0.20	0.16	0.16	0.16	0.01	0.03	0.03	0.03										
120	0.46	0.39	0.37	0.38	0.06	0.09	0.10	0.10										
125	0.95	0.80	0.76	0.78	0.14	0.19	0.22	0.21										
130	1.71	1.49	1.40	1.48	0.26	0.33	0.37	0.36										
135	2.64	2.35	2.28	2.38	0.41	0.52	0.57	0.56										
140	3.63	3.34	3.24	3.40	0.61	0.75	0.80	0.80										
145	4.60	4.32	4.27	4.45	0.84	1.00	1.08	1.06										
150	5.43	5.25	5.16	5.47	1.17	1.39	1.49	1.48										
155	6.06	6.01	5.87	6.34	1.84	2.20	2.37	2.34										
160	6.49	6.59	6.57	7.06	2.69	3.24	3.48	3.43										
165	6.72	7.01	7.11	7.49	3.65	4.32	4.60	4.54										
170	6.79	7.26	7.47	7.71	4.60	5.34	5.65	5.59										
175	6.61	7.27	7.56	7.65	5.50	6.25	6.56	6.53										
180	6.17	6.92	7.28	7.28	6.24	6.95	7.21	7.21										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: