


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.4V I:0.1650A P:19.40W PF:0.9740 Freq:60.00Hz Lamp Flux:2996.92x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 108.68 lm/W			
MODEL		I _{max} (cd)	2448	S/MH (C0/180)	0.87
NOMINAL POWER(W)	20W	LOR(%)	70.3	S/MH (C90/270)	0.82
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	2108.3	η UP,DN (C0-180)	0.1,38.2
NOMINAL FLUX(lm)	2996.92	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.0,32.1
LAMPS INSIDE	1	η up (%)	0.1	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	120.0	η down (%)	70.3	CIBSE SHR MAX	0.90

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

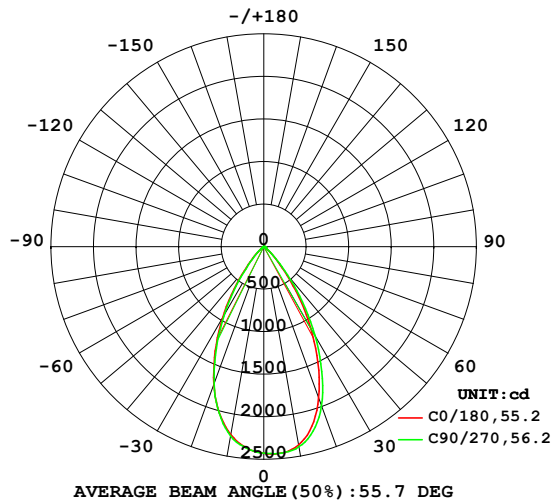

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

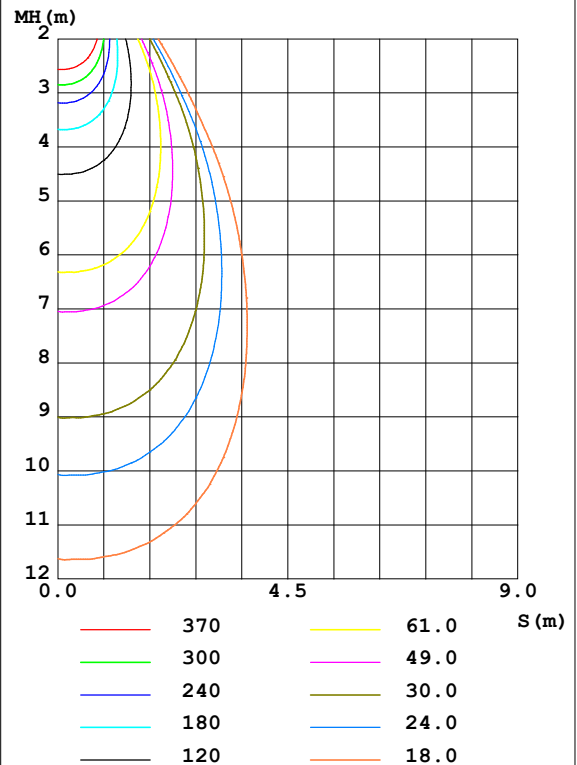

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2364	2396	2386	2351	2243	2215	2257	2284	0- 10	226.8	226.8	10.8,7.57
20	1889	1971	1989	1942	1719	1674	1713	1724	10- 20	589.0	815.8	38.7,27.2
30	1102	1186	1204	1201	975.6	929.0	939.5	932.9	20- 30	659.8	1476	70,49.2
40	382.5	435.6	435.5	455.9	319.8	290.7	288.0	273.2	30- 40	423.7	1899	90.1,63.4
50	76.99	89.21	90.30	96.94	61.36	58.35	54.02	51.78	40- 50	141.4	2041	96.8,68.1
60	25.52	26.46	27.09	27.01	23.74	22.75	22.52	22.63	50- 60	34.07	2075	98.4,69.2
70	14.17	14.86	15.27	15.47	12.67	12.01	11.94	11.96	60- 70	18.75	2094	99.3,69.9
80	5.631	5.952	6.111	6.268	4.527	4.283	4.237	4.137	70- 80	9.621	2103	99.8,70.2
90	0	0	0.0001	0	0	0	0	0	80- 90	2.214	2105	99.9,70.3
100	0	0	0	0	0	0	0	0	90-100	0.0000	2105	99.9,70.3
110	0	0	0	0	0	0	0	0	100-110	0	2105	99.9,70.3
120	0.0845	0.0680	0.0532	0.0509	0.0267	0.0532	0.0656	0.0652	110-120	0.0147	2105	99.9,70.3
130	0.4249	0.3472	0.3173	0.3318	0.2059	0.2714	0.3134	0.3141	120-130	0.1465	2106	99.9,70.3
140	1.007	0.9029	0.8675	0.9077	0.5686	0.6835	0.7380	0.7277	130-140	0.4142	2106	99.9,70.3
150	1.651	1.577	1.506	1.585	1.040	1.198	1.276	1.253	140-150	0.6786	2107	99.9,70.3
160	2.202	2.176	2.083	2.199	1.594	1.780	1.866	1.848	150-160	0.7681	2107	100,70.3
170	2.618	2.632	2.549	2.618	2.234	2.401	2.470	2.477	160-170	0.6285	2108	100,70.3
180	2.688	2.779	2.775	2.799	2.688	2.774	2.758	2.794	170-180	0.2500	2108	100,70.3
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.4V I:0.1650A P:19.40W PF:0.9740 Freq:60.00Hz Lamp Flux:2996.92x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

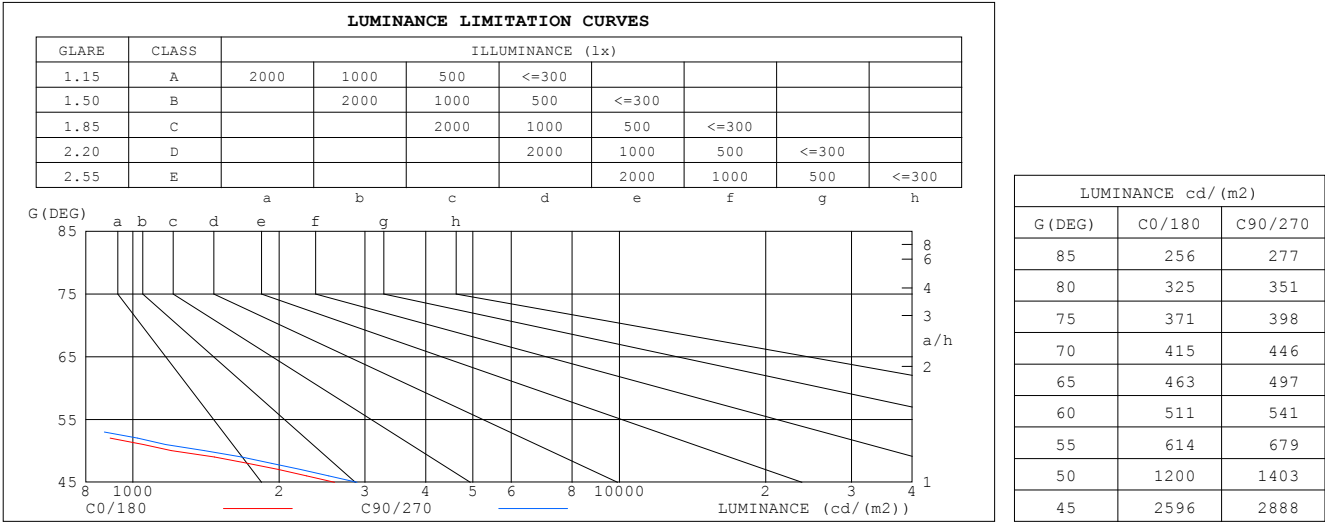


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.4V I:0.1650A P:19.40W PF:0.9740 Freq:60.00Hz Lamp Flux:2996.92x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	.84	.84	.84	.82	.82	.82	.78	.78	.78	.75	.75	.75	.72	.72	.72	.70
1.0	.78	.76	.74	.76	.75	.73	.73	.72	.71	.71	.70	.69	.68	.67	.67	.65
2.0	.72	.69	.67	.71	.68	.66	.69	.66	.65	.67	.65	.63	.65	.63	.62	.61
3.0	.67	.64	.61	.66	.63	.60	.64	.62	.59	.63	.60	.58	.61	.59	.57	.56
4.0	.63	.59	.56	.62	.58	.55	.60	.57	.55	.59	.56	.54	.58	.55	.53	.52
5.0	.59	.54	.51	.58	.54	.51	.57	.53	.51	.56	.53	.50	.54	.52	.50	.49
6.0	.55	.51	.48	.54	.50	.48	.53	.50	.47	.52	.49	.47	.51	.49	.47	.46
7.0	.52	.47	.44	.51	.47	.44	.50	.47	.44	.49	.46	.44	.49	.46	.44	.43
8.0	.49	.44	.42	.48	.44	.41	.48	.44	.41	.47	.43	.41	.46	.43	.41	.40
9.0	.46	.42	.39	.46	.42	.39	.45	.41	.39	.44	.41	.39	.44	.41	.38	.38
10.0	.44	.39	.37	.43	.39	.37	.43	.39	.37	.42	.39	.36	.42	.38	.36	.35

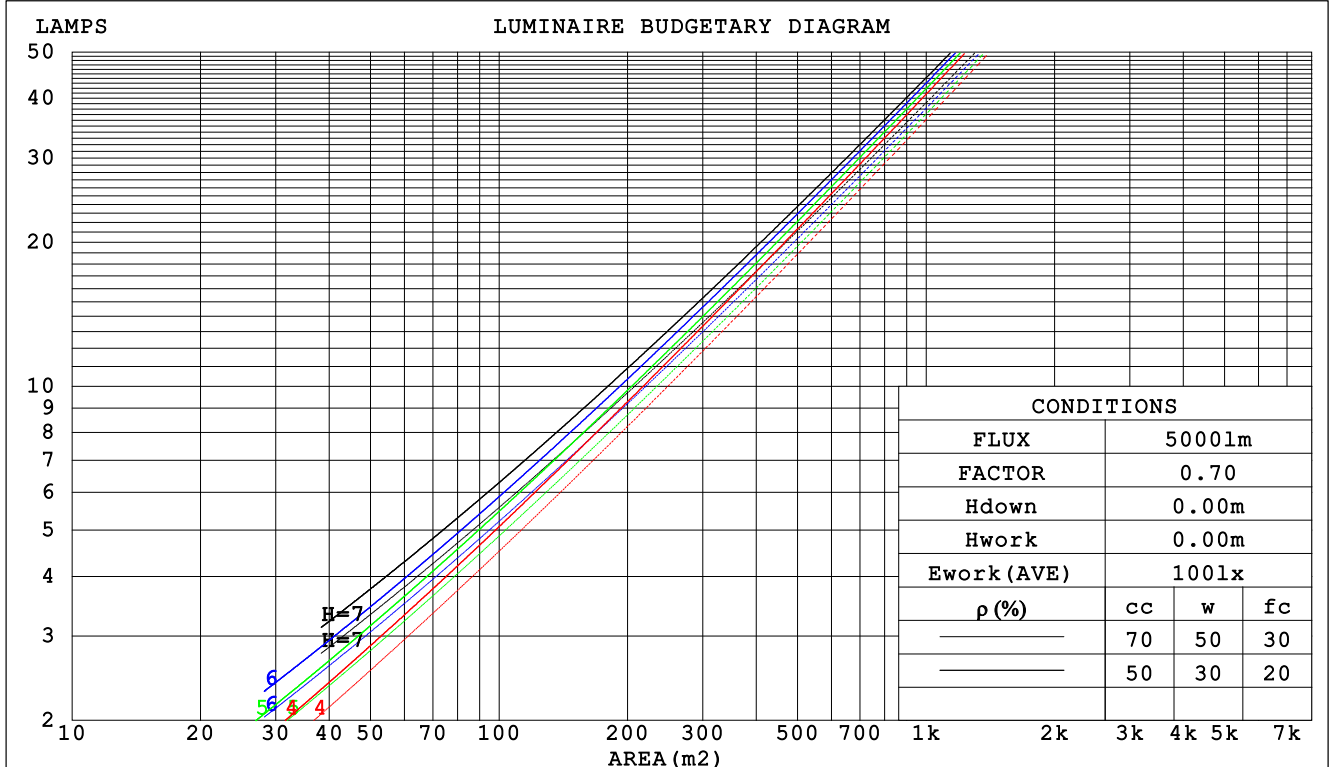

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.4V I:0.1650A P:19.40W PF:0.9740 Freq:60.00Hz Lamp Flux:2996.92x1 lm								
NAME: 4寸B款			TYPE:5000K			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: EVERFINE			SUR.:			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.129	.073	.023	.124	.071	.022	.115	.066	.021	.107	.062	.020	.099	.057	.019		
2.0	.123	.067	.021	.119	.066	.020	.112	.062	.019	.105	.059	.018	.098	.056	.018		
3.0	.117	.062	.019	.114	.061	.018	.107	.058	.018	.101	.055	.017	.096	.053	.016		
4.0	.111	.058	.017	.108	.057	.017	.103	.055	.016	.098	.052	.016	.093	.050	.015		
5.0	.106	.054	.016	.103	.053	.015	.099	.051	.015	.094	.050	.015	.090	.048	.014		
6.0	.101	.051	.014	.099	.050	.014	.094	.048	.014	.090	.047	.014	.087	.046	.014		
7.0	.096	.048	.014	.094	.047	.013	.091	.046	.013	.087	.045	.013	.084	.043	.013		
8.0	.092	.045	.013	.090	.044	.013	.087	.043	.012	.084	.042	.012	.081	.041	.012		
9.0	.088	.043	.012	.087	.042	.012	.084	.041	.012	.081	.040	.012	.078	.040	.011		
10.0	.085	.041	.011	.083	.040	.011	.080	.039	.011	.078	.039	.011	.075	.038	.011		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.135	.135	.135	.115	.115	.115	.079	.079	.079	.045	.045	.045	.014	.014	.014	
1.0	.121	.111	.102	.104	.096	.088	.071	.066	.061	.041	.038	.035	.013	.012	.011	
2.0	.111	.094	.080	.095	.081	.069	.065	.056	.048	.038	.033	.028	.012	.011	.009	
3.0	.102	.081	.063	.088	.070	.055	.060	.048	.039	.035	.028	.023	.011	.009	.007	
4.0	.095	.070	.051	.082	.061	.045	.056	.042	.031	.033	.025	.019	.010	.008	.006	
5.0	.089	.062	.042	.077	.054	.037	.053	.038	.026	.031	.022	.015	.010	.007	.005	
6.0	.084	.056	.035	.072	.048	.031	.050	.034	.022	.029	.020	.013	.009	.007	.004	
7.0	.080	.050	.030	.068	.044	.026	.047	.031	.019	.027	.018	.011	.009	.006	.004	
8.0	.076	.046	.026	.065	.040	.023	.045	.028	.016	.026	.017	.010	.008	.005	.003	
9.0	.072	.042	.023	.062	.037	.020	.043	.026	.014	.025	.015	.008	.008	.005	.003	
10.0	.069	.039	.020	.059	.034	.017	.041	.024	.012	.024	.014	.007	.008	.005	.002	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.4V I:0.1650A P:19.40W PF:0.9740 Freq:60.00Hz Lamp Flux:2996.92x1 lm										
NAME: 4寸B款					TYPE:5000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	12.0	13.0	12.2	13.1	13.3	12.4	13.4	12.6	13.5	13.7
3H	11.9	12.8	12.2	13.0	13.2	12.3	13.2	12.6	13.4	13.6
4H	11.9	12.7	12.2	13.0	13.2	12.3	13.1	12.6	13.3	13.6
6H	11.8	12.6	12.1	12.9	13.1	12.2	13.0	12.5	13.3	13.5
8H	11.8	12.6	12.1	12.8	13.1	12.2	13.0	12.5	13.2	13.5
12H	11.8	12.5	12.1	12.8	13.1	12.2	12.9	12.5	13.2	13.4
4H 2H	11.8	12.6	12.1	12.9	13.1	12.2	13.0	12.5	13.2	13.5
3H	11.8	12.5	12.1	12.8	13.0	12.1	12.9	12.5	13.1	13.4
4H	11.7	12.4	12.1	12.7	13.0	12.1	12.8	12.5	13.1	13.4
6H	11.7	12.3	12.1	12.6	13.0	12.1	12.7	12.5	13.0	13.4
8H	11.7	12.2	12.1	12.6	13.0	12.1	12.6	12.5	13.0	13.3
12H	11.7	12.2	12.1	12.5	12.9	12.1	12.5	12.5	12.9	13.3
8H 4H	11.7	12.2	12.0	12.5	12.9	12.0	12.6	12.4	12.9	13.3
6H	11.7	12.1	12.1	12.5	12.9	12.0	12.5	12.5	12.9	13.3
8H	11.6	12.0	12.1	12.5	12.9	12.0	12.4	12.5	12.8	13.3
12H	11.6	12.0	12.1	12.4	12.9	12.0	12.3	12.5	12.8	13.2
12H 4H	11.6	12.1	12.0	12.5	12.9	12.0	12.5	12.4	12.8	13.2
6H	11.6	12.0	12.1	12.4	12.9	12.0	12.4	12.4	12.8	13.2
8H	11.6	11.9	12.1	12.4	12.9	12.0	12.3	12.5	12.8	13.2
Variations with the observer position at spacings:										
S = 1.0H	+ 2.5 / - 5.8					+ 2.8 / - 6.0				
1.5H	+ 4.4 / - 5.7					+ 4.7 / - 5.9				
2.0H	+ 4.7 / - 2.6					+ 5.0 / - 2.6				

CIE Pub.117 Corrected 2997 lm Total Lamp Luminous Flux. (8log(F/F0) = 3.8)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.4V I:0.1650A P:19.40W PF:0.9740 Freq:60.00Hz Lamp Flux:2996.92x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	60	55	53	60	55	52	59	55	52	50
0.80	65	61	58	65	61	58	64	60	58	55
1.00	69	65	62	68	64	62	67	64	61	59
1.25	72	68	65	71	68	65	70	67	65	62
1.50	74	70	68	73	70	67	71	69	67	63
2.00	76	73	70	75	72	70	73	71	69	65
2.50	77	74	72	76	73	71	74	72	70	66
3.00	78	76	74	77	75	73	75	73	71	67
4.00	80	78	76	78	77	75	76	74	73	68
5.00	81	79	78	79	78	76	76	75	74	69
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.4V I:0.1650A P:19.40W PF:0.9740 Freq:60.00Hz Lamp Flux:2996.92x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

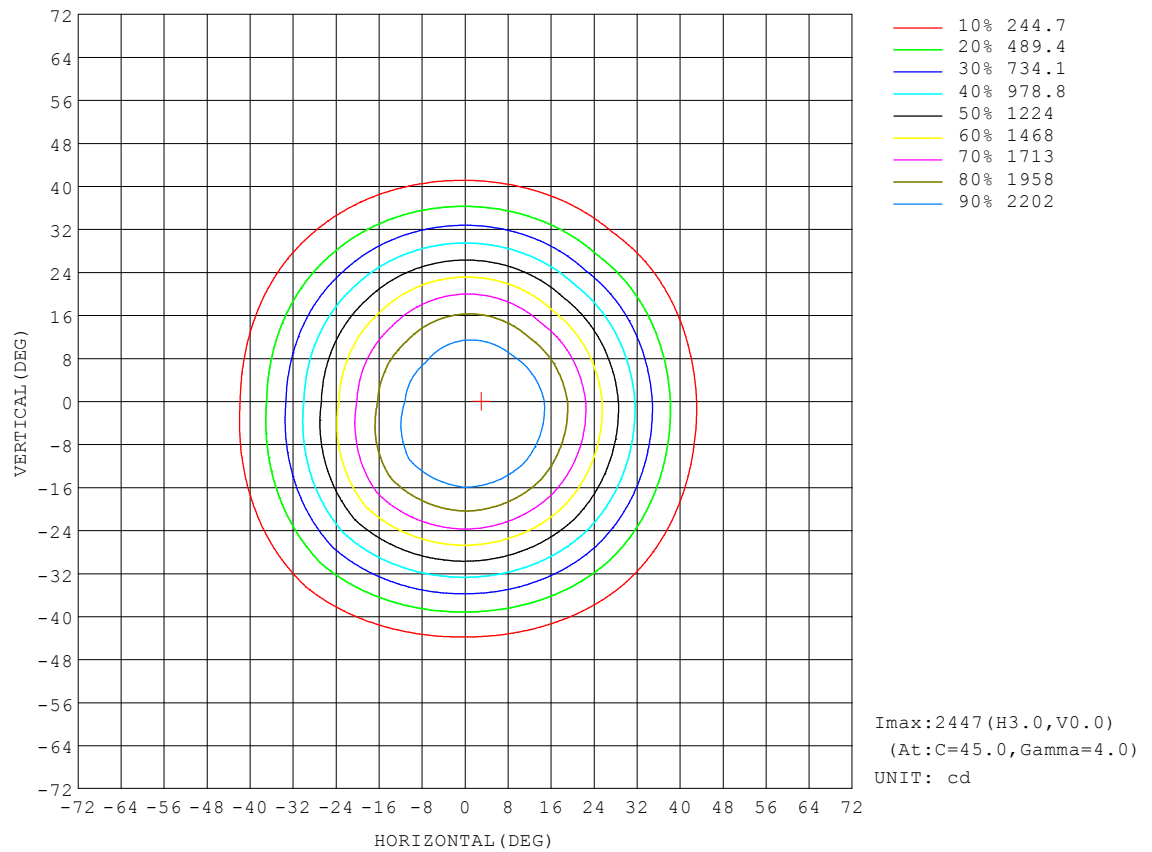


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.4V I:0.1650A P:19.40W PF:0.9740 Freq:60.00Hz Lamp Flux:2996.92x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

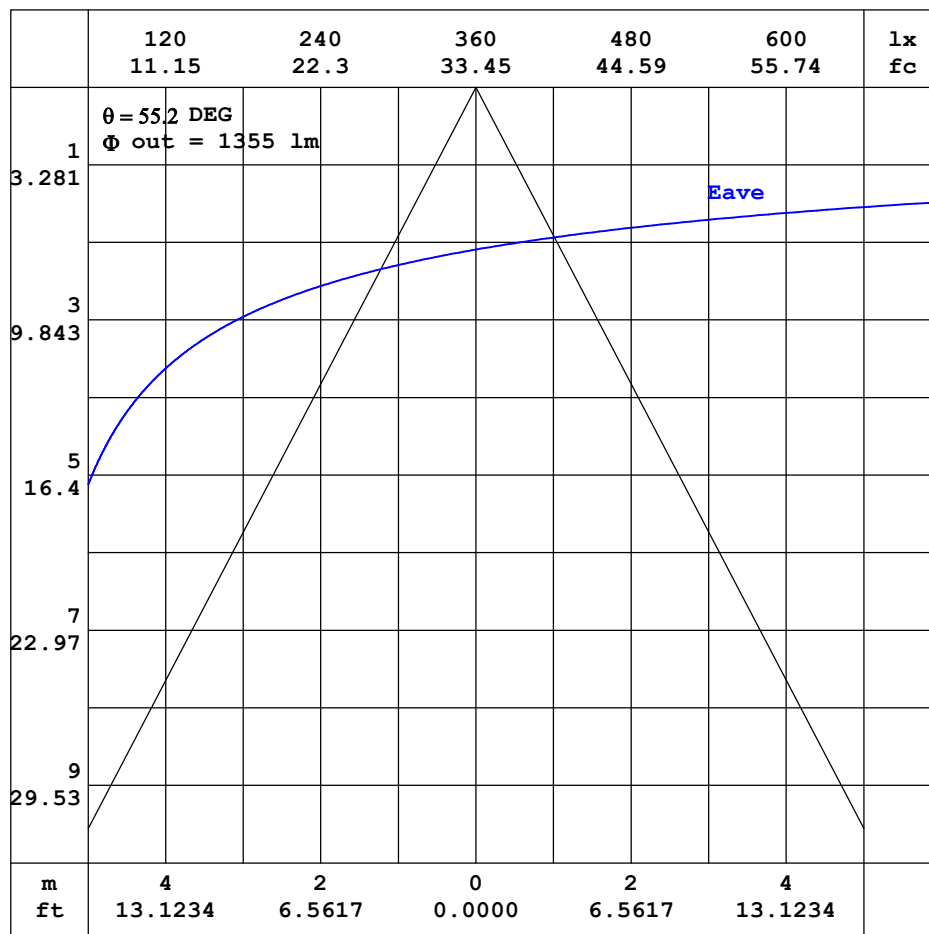


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.4V I:0.1650A P:19.40W PF:0.9740 Freq:60.00Hz Lamp Flux:2996.92x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

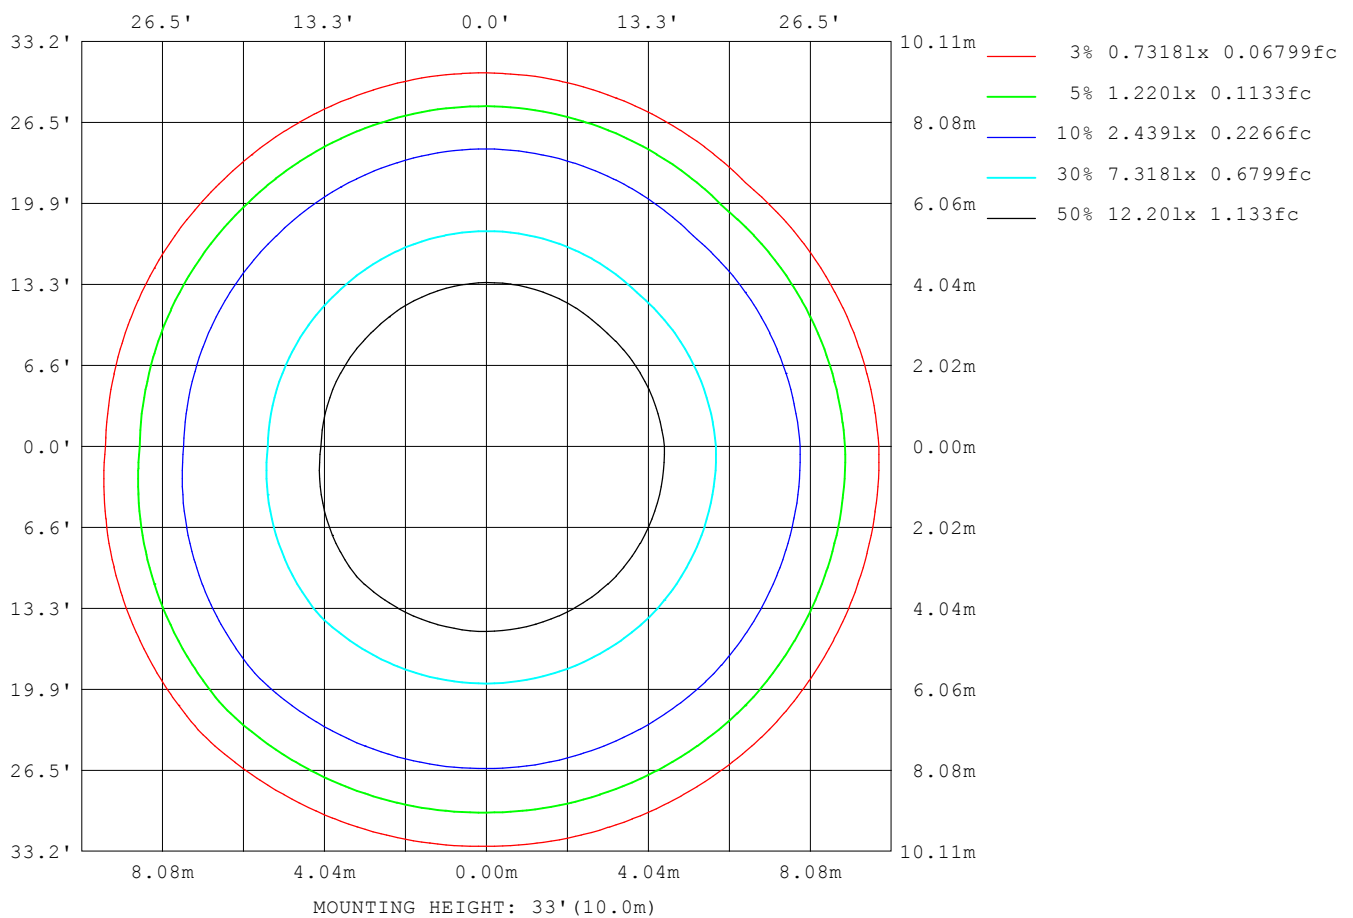

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.4V I:0.1650A P:19.40W PF:0.9740 Freq:60.00Hz Lamp Flux:2996.92x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	442
L_0~180 (75) av	345
L_0~180 (85) av	207
L_90~270 (65) av	448
L_90~270 (75) av	350
L_90~270 (85) av	210
L_45 (65) av	447
L_45 (75) av	350
L_45 (85) av	212

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

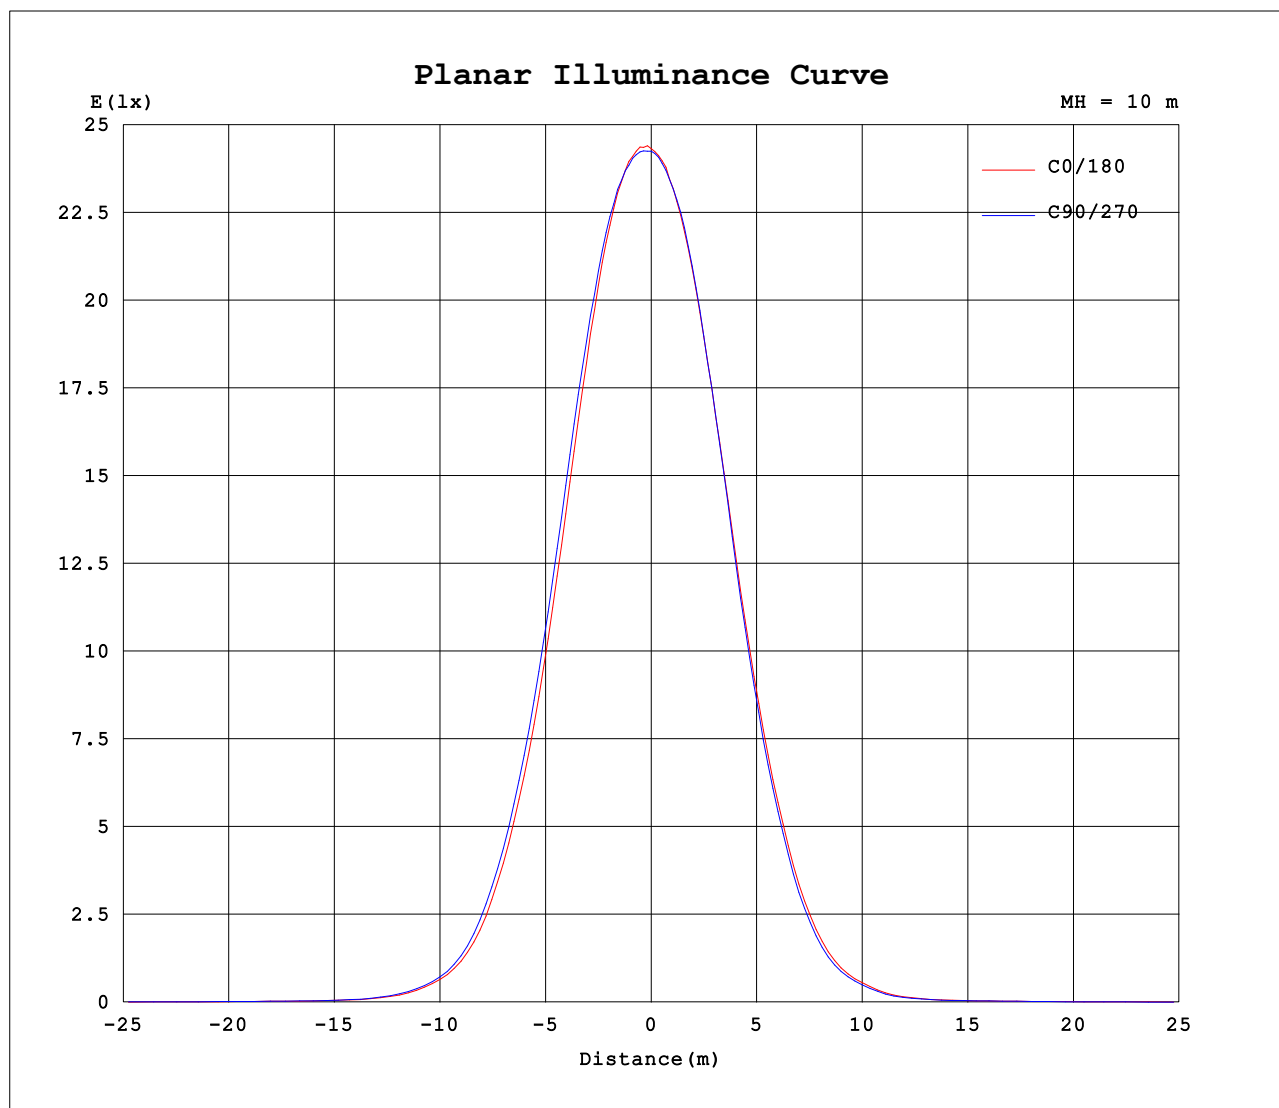

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.1650A P:19.40W PF:0.9740 Freq:60.00Hz Lamp Flux:2996.92x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	2428	2428	2428	2428	2428	2428	2428	2428										
5	2434	2446	2436	2413	2368	2362	2375	2403										
10	2364	2396	2386	2351	2243	2215	2257	2284										
15	2186	2241	2243	2197	2022	1991	2027	2057										
20	1889	1971	1989	1942	1719	1674	1713	1724										
25	1508	1594	1618	1600	1353	1305	1323	1326										
30	1102	1186	1204	1201	976	929	940	933										
35	720	788	798	810	613	575	572	561										
40	382	436	436	456	320	291	288	273										
45	183	206	205	218	157	141	140	129										
50	77.0	89.2	90.3	96.9	61.4	58.3	54.0	51.8										
55	35.2	37.4	39.0	40.1	29.8	28.7	28.3	28.3										
60	25.5	26.5	27.1	27.0	23.7	22.8	22.5	22.6										
65	19.5	20.5	21.0	21.2	17.8	17.0	16.8	16.9										
70	14.2	14.9	15.3	15.5	12.7	12.0	11.9	12.0										
75	9.57	10.1	10.3	10.5	8.27	7.87	7.81	7.78										
80	5.63	5.95	6.11	6.27	4.53	4.28	4.24	4.14										
85	2.23	2.38	2.42	2.67	1.37	1.29	1.25	1.07										
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
115	0.02	0.01	0.01	0.00	0.00	0.00	0.01	0.01										
120	0.08	0.07	0.05	0.05	0.03	0.05	0.07	0.07										
125	0.21	0.17	0.14	0.15	0.10	0.14	0.17	0.16										
130	0.42	0.35	0.32	0.33	0.21	0.27	0.31	0.31										
135	0.69	0.60	0.56	0.59	0.36	0.46	0.51	0.49										
140	1.01	0.90	0.87	0.91	0.57	0.68	0.74	0.73										
145	1.34	1.24	1.21	1.25	0.79	0.93	1.00	0.98										
150	1.65	1.58	1.51	1.59	1.04	1.20	1.28	1.25										
155	1.95	1.89	1.81	1.89	1.31	1.47	1.56	1.53										
160	2.20	2.18	2.08	2.20	1.59	1.78	1.87	1.85										
165	2.43	2.42	2.33	2.42	1.92	2.12	2.20	2.18										
170	2.62	2.63	2.55	2.62	2.23	2.40	2.47	2.48										
175	2.70	2.75	2.72	2.74	2.51	2.64	2.68	2.68										
180	2.69	2.78	2.77	2.80	2.69	2.77	2.76	2.79										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: