


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.0V I:0.2010A P:23.80W PF:0.9780 Freq:60.00Hz Lamp Flux:2936.4x1 lm		
NAME: 4寸筒灯 15度 24W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 101.92 lm/W			
MODEL		I _{max} (cd)	2830	S/MH(C0/180)	0.86
NOMINAL POWER(W)	24W	LOR(%)	82.6	S/MH(C90/270)	0.79
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	2425.8	η UP,DN(C0-180)	0.2,44.8
NOMINAL FLUX(lm)	2936.4	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,37.5
LAMPS INSIDE	1	η up(%)	0.3	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120.0	η down(%)	82.3	CIBSE SHR MAX	0.90

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

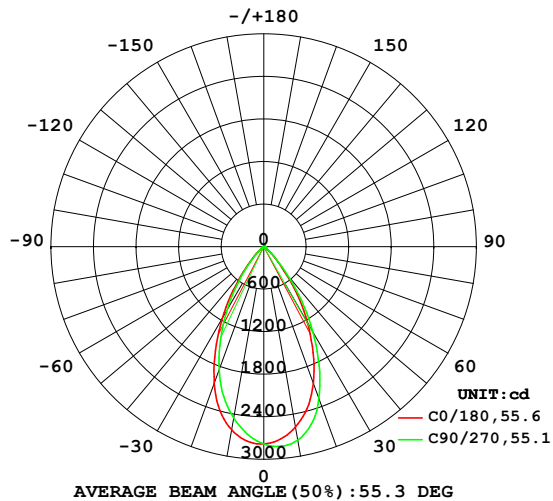

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

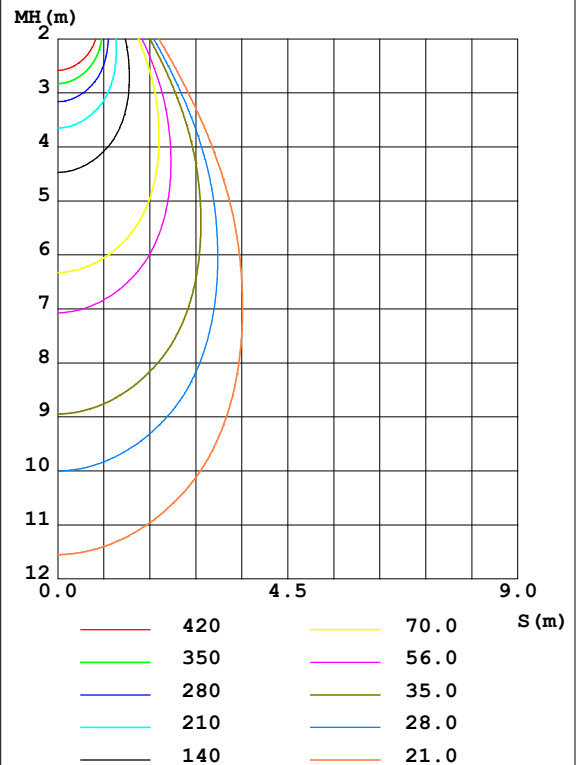

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2583	2703	2770	2774	2622	2530	2453	2442	0- 10	257.4	257.4	10.6,8.77
20	2049	2215	2279	2303	2047	1928	1843	1816	10- 20	663.7	921.1	38,31.4
30	1230	1350	1384	1429	1177	1095	1045	1017	20- 30	749.1	1670	68.9,56.9
40	449.0	501.9	508.7	556.8	399.1	365.5	352.1	331.2	30- 40	496.6	2167	89.3,73.8
50	99.45	107.7	110.9	122.2	78.67	74.40	71.76	68.45	40- 50	172.8	2340	96.4,79.7
60	28.42	28.83	28.40	28.25	26.17	26.59	26.64	26.34	50- 60	40.62	2380	98.1,81.1
70	16.41	16.95	16.76	16.84	14.39	14.60	14.64	14.37	60- 70	21.22	2401	99,81.8
80	6.937	7.130	7.106	7.320	5.622	5.659	5.633	5.374	70- 80	11.34	2413	99.5,82.2
90	0.0269	0.0433	0.1496	0.4206	0	0	0	0	80- 90	3.077	2416	99.6,82.3
100	0.0481	0.0460	0.0436	0.0366	0	0	0	0	90-100	0.0169	2416	99.6,82.3
110	0.1152	0.0992	0.1043	0.0976	0.0024	0.0048	0.0050	0.0146	100-110	0.0354	2416	99.6,82.3
120	0.6122	0.5229	0.4947	0.5123	0.1012	0.1232	0.1485	0.1557	110-120	0.1581	2416	99.6,82.3
130	2.248	1.953	1.851	1.935	0.3515	0.4348	0.5107	0.5186	120-130	0.6329	2417	99.6,82.3
140	4.735	4.364	4.240	4.427	0.8084	0.9497	1.094	1.098	130-140	1.487	2418	99.7,82.4
150	7.097	6.854	6.723	7.105	1.531	1.776	2.006	2.024	140-150	2.205	2420	99.8,82.4
160	8.502	8.599	8.560	9.158	3.510	4.178	4.640	4.540	150-160	2.476	2423	99.9,82.5
170	8.910	9.418	9.755	9.969	5.999	6.954	7.445	7.325	160-170	2.068	2425	100,82.6
180	8.066	8.970	9.506	9.423	8.035	8.973	9.450	9.359	170-180	0.8203	2426	100,82.6
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.0V I:0.2010A P:23.80W PF:0.9780 Freq:60.00Hz Lamp Flux:2936.4x1 lm		
NAME: 4寸筒灯 15度 24W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

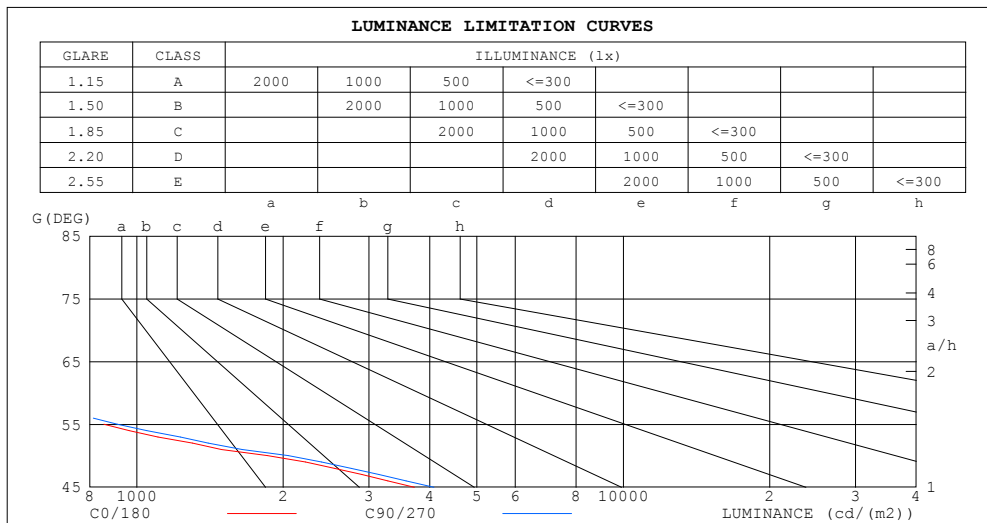

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	433	455
80	479	486
75	525	531
70	575	582
65	634	639
60	682	674
55	855	913
50	1855	2049
45	3721	4080


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.0V I:0.2010A P:23.80W PF:0.9780 Freq:60.00Hz Lamp Flux:2936.4x1 lm		
NAME: 4寸筒灯 15度 24W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	.98	.98	.98	.96	.96	.96	.92	.92	.92	.88	.88	.88	.84	.84	.84	.82
1.0	.91	.89	.87	.89	.87	.86	.86	.84	.83	.83	.82	.80	.80	.79	.78	.77
2.0	.85	.81	.78	.83	.80	.77	.80	.78	.76	.78	.76	.74	.76	.74	.72	.71
3.0	.79	.74	.71	.77	.74	.70	.75	.72	.69	.73	.70	.68	.71	.69	.67	.66
4.0	.73	.69	.65	.72	.68	.65	.71	.67	.64	.69	.66	.63	.67	.65	.62	.61
5.0	.69	.64	.60	.68	.63	.60	.66	.62	.59	.65	.61	.59	.64	.60	.58	.57
6.0	.64	.59	.56	.64	.59	.55	.62	.58	.55	.61	.57	.55	.60	.57	.54	.53
7.0	.60	.55	.52	.60	.55	.52	.59	.54	.51	.58	.54	.51	.57	.53	.51	.50
8.0	.57	.52	.48	.56	.52	.48	.55	.51	.48	.55	.51	.48	.54	.50	.48	.46
9.0	.54	.49	.45	.53	.48	.45	.52	.48	.45	.52	.48	.45	.51	.47	.45	.44
10.0	.51	.46	.43	.50	.46	.43	.50	.45	.42	.49	.45	.42	.48	.45	.42	.41

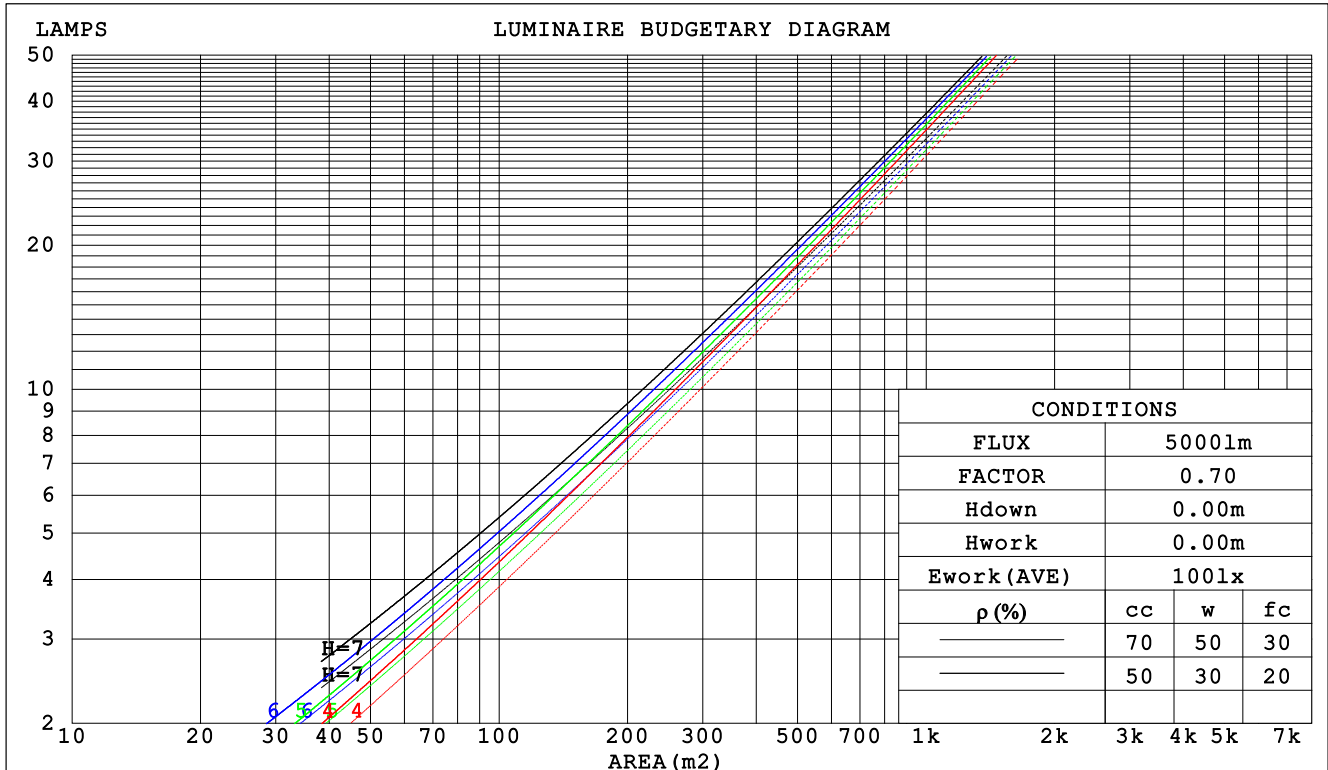

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.0V I:0.2010A P:23.80W PF:0.9780 Freq:60.00Hz Lamp Flux:2936.4x1 lm					
NAME: 4寸筒灯 15度 24W			TYPE:5000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.152	.087	.027	.146	.084	.027	.136	.078	.025	.126	.073	.023	.117	.068	.022		
2.0	.146	.080	.024	.141	.078	.024	.132	.073	.023	.124	.069	.022	.116	.066	.021		
3.0	.138	.074	.022	.134	.072	.022	.127	.069	.021	.120	.066	.020	.113	.063	.019		
4.0	.132	.068	.020	.128	.067	.020	.121	.064	.019	.115	.062	.019	.110	.060	.018		
5.0	.125	.064	.018	.122	.063	.018	.116	.061	.018	.111	.059	.017	.106	.057	.017		
6.0	.119	.060	.017	.117	.059	.017	.112	.057	.017	.107	.055	.016	.102	.054	.016		
7.0	.114	.056	.016	.112	.056	.016	.107	.054	.016	.103	.053	.015	.099	.051	.015		
8.0	.109	.053	.015	.107	.053	.015	.103	.051	.015	.099	.050	.014	.095	.049	.014		
9.0	.104	.050	.014	.102	.050	.014	.099	.049	.014	.095	.048	.014	.092	.047	.013		
10.0	.100	.048	.013	.098	.047	.013	.095	.046	.013	.092	.046	.013	.089	.045	.013		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.160	.160	.160	.137	.137	.137	.093	.093	.093	.054	.054	.054	.017	.017	.017	
1.0	.144	.132	.122	.124	.114	.105	.084	.078	.072	.049	.045	.042	.016	.015	.014	
2.0	.132	.112	.095	.113	.096	.082	.078	.067	.057	.045	.039	.034	.014	.013	.011	
3.0	.122	.096	.076	.105	.083	.066	.072	.058	.046	.042	.034	.027	.013	.011	.009	
4.0	.114	.084	.062	.098	.073	.054	.067	.051	.038	.039	.030	.022	.013	.010	.007	
5.0	.107	.075	.051	.092	.065	.045	.063	.045	.031	.037	.027	.019	.012	.009	.006	
6.0	.101	.067	.043	.087	.058	.038	.060	.041	.027	.035	.024	.016	.011	.008	.005	
7.0	.096	.061	.037	.082	.053	.032	.057	.037	.023	.033	.022	.014	.011	.007	.004	
8.0	.091	.056	.032	.078	.049	.028	.054	.034	.020	.031	.020	.012	.010	.007	.004	
9.0	.087	.052	.028	.075	.045	.025	.052	.032	.017	.030	.019	.010	.010	.006	.003	
10.0	.083	.048	.025	.071	.042	.022	.050	.029	.016	.029	.017	.009	.009	.006	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.0V I:0.2010A P:23.80W PF:0.9780 Freq:60.00Hz Lamp Flux:2936.4x1 lm										
NAME: 4寸筒灯 15度 24W					TYPE:5000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.1	14.1	13.4	14.3	14.5	13.5	14.5	13.8	14.7	14.9
3H	13.1	14.0	13.3	14.2	14.4	13.5	14.4	13.7	14.6	14.8
4H	13.0	13.9	13.3	14.1	14.3	13.4	14.3	13.7	14.5	14.7
6H	13.0	13.8	13.3	14.0	14.3	13.4	14.2	13.7	14.4	14.7
8H	13.0	13.7	13.3	14.0	14.3	13.3	14.1	13.7	14.4	14.6
12H	12.9	13.7	13.3	13.9	14.2	13.3	14.0	13.6	14.3	14.6
4H 2H	12.9	13.8	13.2	14.0	14.2	13.3	14.2	13.6	14.4	14.6
3H	12.9	13.6	13.2	13.9	14.2	13.3	14.0	13.6	14.3	14.6
4H	12.9	13.5	13.2	13.8	14.2	13.3	13.9	13.6	14.2	14.5
6H	12.9	13.4	13.3	13.8	14.1	13.2	13.8	13.6	14.2	14.5
8H	12.9	13.4	13.3	13.8	14.1	13.2	13.8	13.6	14.1	14.5
12H	12.8	13.3	13.2	13.7	14.1	13.2	13.7	13.6	14.1	14.5
8H 4H	12.8	13.3	13.2	13.7	14.1	13.2	13.7	13.6	14.1	14.4
6H	12.8	13.2	13.2	13.6	14.1	13.2	13.6	13.6	14.0	14.4
8H	12.8	13.2	13.3	13.6	14.1	13.2	13.5	13.6	14.0	14.4
12H	12.8	13.1	13.3	13.6	14.1	13.1	13.5	13.6	13.9	14.4
12H 4H	12.7	13.2	13.2	13.6	14.0	13.1	13.6	13.5	14.0	14.4
6H	12.8	13.2	13.2	13.6	14.0	13.1	13.5	13.6	13.9	14.4
8H	12.8	13.1	13.2	13.6	14.0	13.1	13.5	13.6	13.9	14.4
Variations with the observer position at spacings:										
S = 1.0H	+ 2.5 / - 5.8					+ 2.8 / - 6.1				
1.5H	+ 4.3 / - 5.7					+ 4.7 / - 6.0				
2.0H	+ 4.8 / - 2.7					+ 5.1 / - 2.9				

CIE Pub.117 Corrected 2936 lm Total Lamp Luminous Flux.(8log(F/F0) = 3.7)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.0V I:0.2010A P:23.80W PF:0.9780 Freq:60.00Hz Lamp Flux:2936.4x1 lm		
NAME: 4寸筒灯 15度 24W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	70	65	61	70	64	61	69	64	61	58
0.80	77	71	68	76	71	68	75	71	68	64
1.00	81	76	72	80	75	72	78	75	72	68
1.25	84	80	76	83	79	76	82	78	75	72
1.50	86	82	79	85	82	79	83	80	78	74
2.00	89	85	83	88	84	82	85	83	81	76
2.50	90	87	84	89	86	84	86	84	82	77
3.00	92	89	86	90	88	85	87	85	84	78
4.00	94	91	89	92	90	88	89	87	86	80
5.00	95	93	91	93	91	90	89	88	87	81
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:121.0V I:0.2010A P:23.80W PF:0.9780 Freq:60.00Hz Lamp Flux:2936.4x1 lm		
NAME: 4寸筒灯 15度 24W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

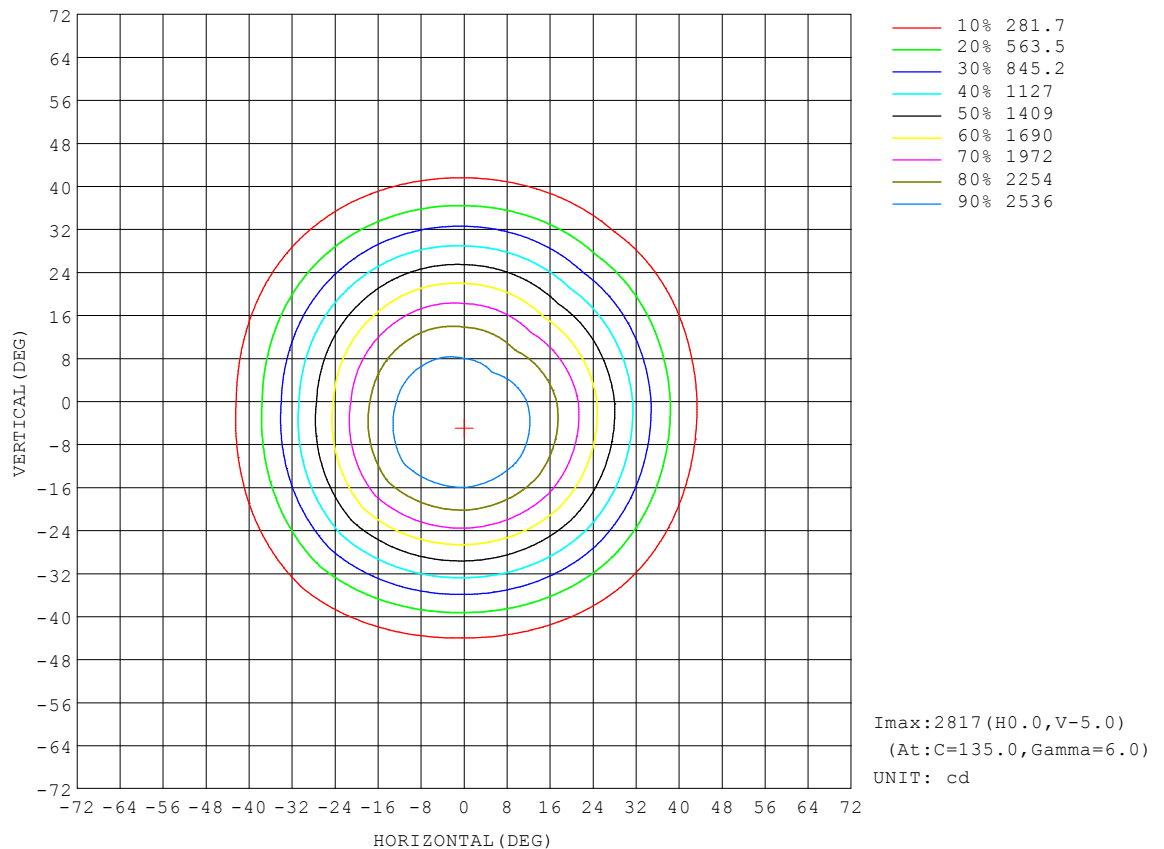


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:121.0V I:0.2010A P:23.80W PF:0.9780 Freq:60.00Hz Lamp Flux:2936.4x1 lm		
NAME: 4寸筒灯 15度 24W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

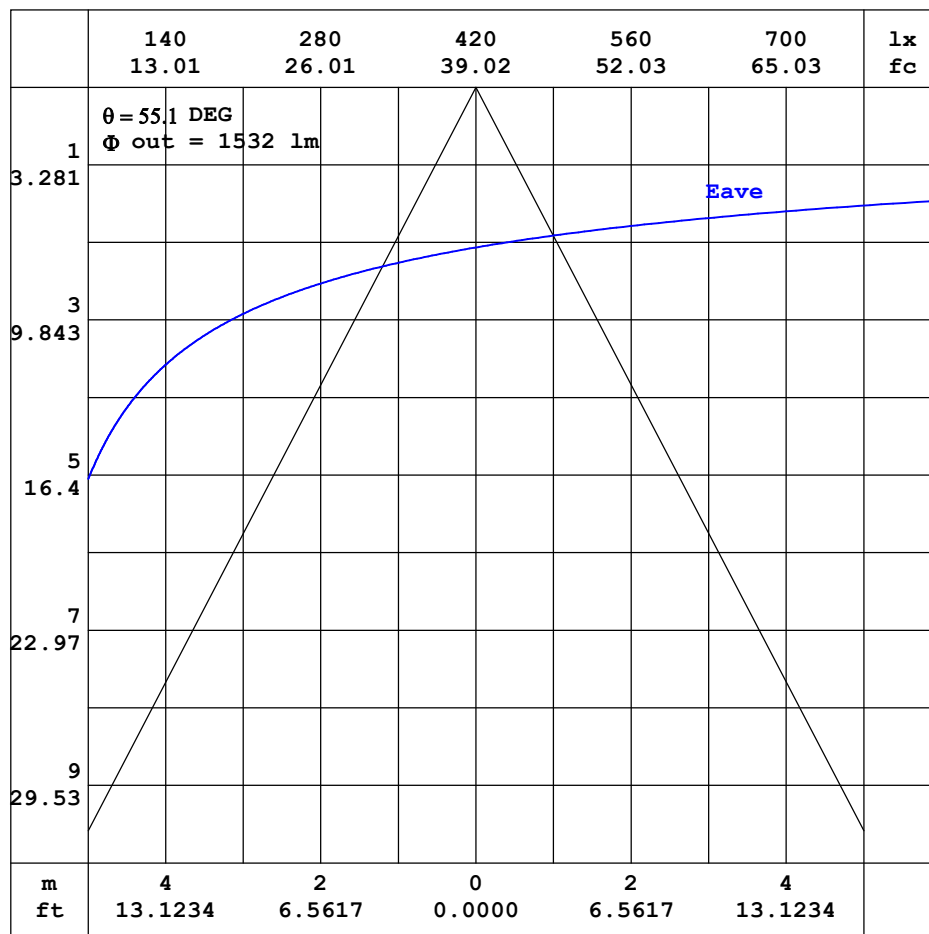


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:121.0V I:0.2010A P:23.80W PF:0.9780 Freq:60.00Hz Lamp Flux:2936.4x1 lm		
NAME: 4寸筒灯 15度 24W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

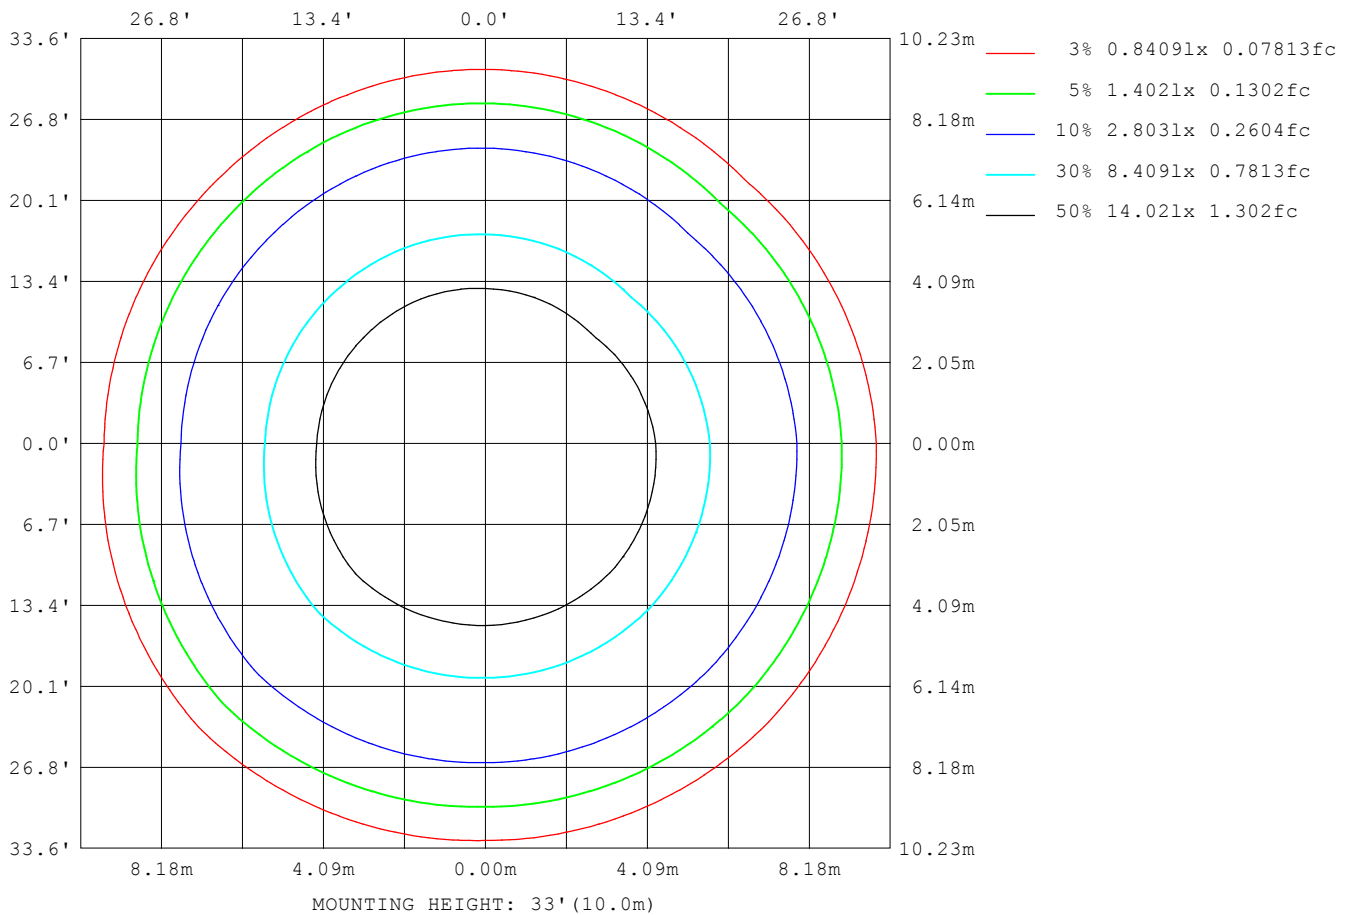

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:121.0V I:0.2010A P:23.80W PF:0.9780 Freq:60.00Hz Lamp Flux:2936.4x1 lm		
NAME: 4寸筒灯 15度 24W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	595
L_0~180 (75) av	483
L_0~180 (85) av	364
L_90~270 (65) av	605
L_90~270 (75) av	492
L_90~270 (85) av	368
L_45 (65) av	605
L_45 (75) av	492
L_45 (85) av	365

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

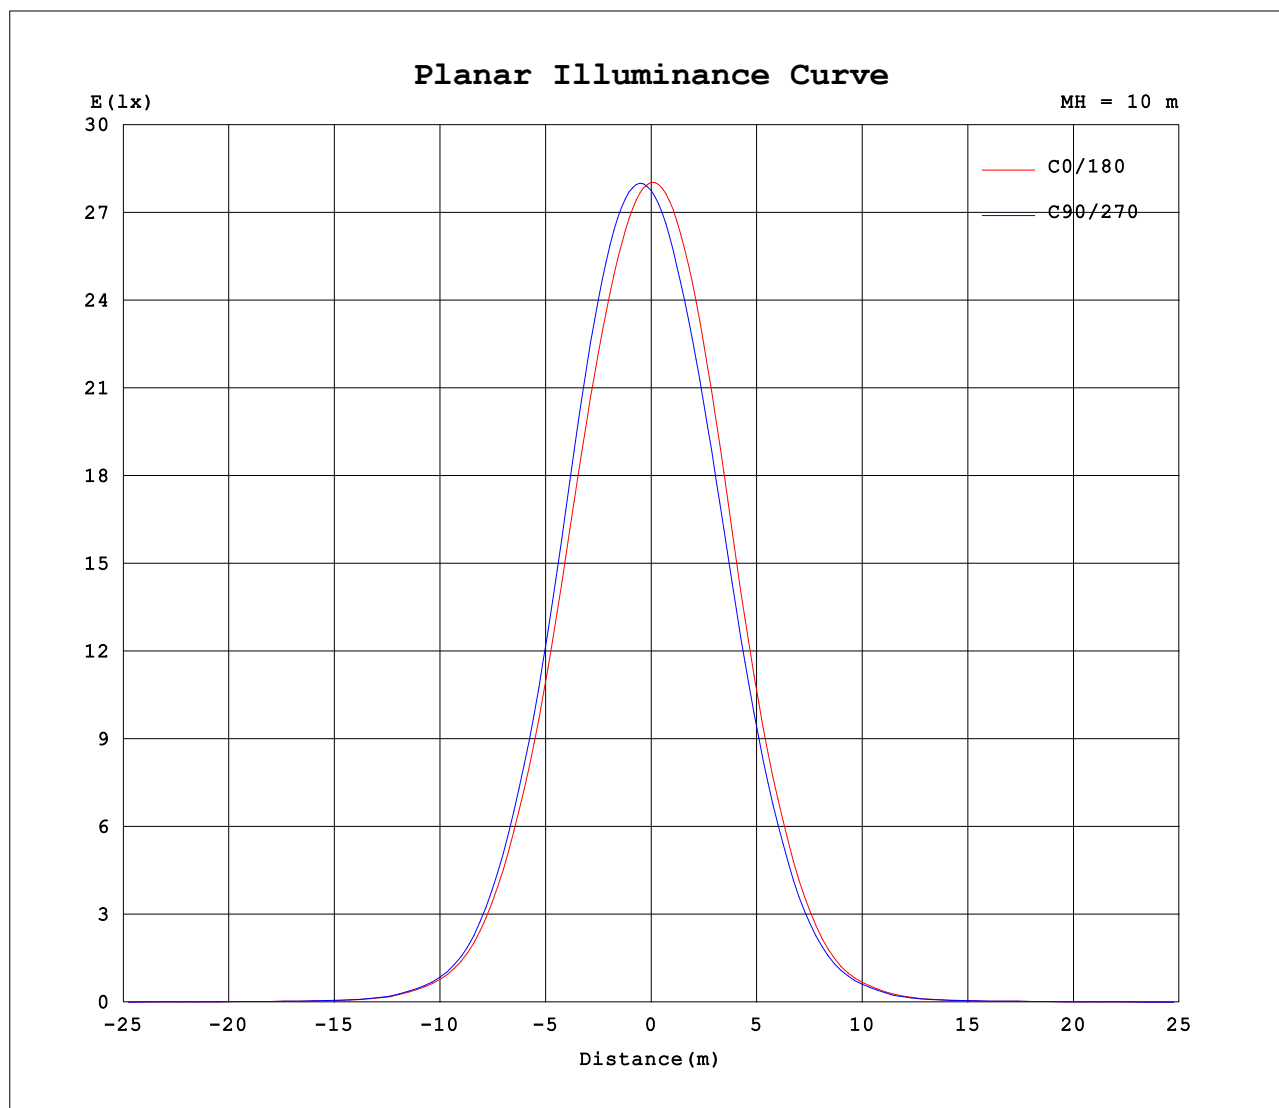

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.0V I:0.2010A P:23.80W PF:0.9780 Freq:60.00Hz Lamp Flux:2936.4x1 lm		
NAME: 4寸筒灯 15度 24W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	2783	2783	2783	2783	2783	2783	2783	2783										
5	2725	2789	2825	2829	2751	2698	2656	2649										
10	2583	2703	2770	2774	2622	2530	2453	2442										
15	2364	2519	2595	2605	2391	2279	2189	2172										
20	2049	2215	2279	2303	2047	1928	1843	1816										
25	1652	1799	1850	1890	1619	1514	1448	1416										
30	1230	1350	1384	1429	1177	1095	1045	1017										
35	820	910	930	979	755	695	660	639										
40	449	502	509	557	399	365	352	331										
45	219	243	243	267	192	177	175	164										
50	99.5	108	111	122	78.7	74.4	71.8	68.4										
55	40.9	42.7	44.1	47.0	35.3	35.3	34.1	33.6										
60	28.4	28.8	28.4	28.3	26.2	26.6	26.6	26.3										
65	22.4	23.0	22.7	22.8	19.9	20.2	20.2	19.9										
70	16.4	16.9	16.8	16.8	14.4	14.6	14.6	14.4										
75	11.3	11.7	11.6	11.7	9.68	9.81	9.82	9.56										
80	6.94	7.13	7.11	7.32	5.62	5.66	5.63	5.37										
85	3.15	3.24	3.34	3.56	2.18	2.14	2.05	1.75										
90	0.03	0.04	0.15	0.42	0.00	0.00	0.00	0.00										
95	0.02	0.03	0.02	0.02	0.00	0.00	0.00	0.00										
100	0.05	0.05	0.04	0.04	0.00	0.00	0.00	0.00										
105	0.06	0.06	0.07	0.07	0.00	0.00	0.00	0.00										
110	0.12	0.10	0.10	0.10	0.00	0.00	0.00	0.01										
115	0.27	0.24	0.22	0.22	0.03	0.04	0.06	0.06										
120	0.61	0.52	0.49	0.51	0.10	0.12	0.15	0.16										
125	1.26	1.07	1.01	1.04	0.20	0.26	0.30	0.31										
130	2.25	1.95	1.85	1.93	0.35	0.43	0.51	0.52										
135	3.45	3.09	2.98	3.11	0.55	0.67	0.77	0.79										
140	4.74	4.36	4.24	4.43	0.81	0.95	1.09	1.10										
145	6.01	5.66	5.58	5.80	1.09	1.28	1.46	1.47										
150	7.10	6.85	6.72	7.11	1.53	1.78	2.01	2.02										
155	7.93	7.84	7.64	8.24	2.41	2.84	3.19	3.17										
160	8.50	8.60	8.56	9.16	3.51	4.18	4.64	4.54										
165	8.84	9.12	9.28	9.70	4.76	5.60	6.10	5.96										
170	8.91	9.42	9.76	9.97	6.00	6.95	7.44	7.32										
175	8.70	9.40	9.89	9.89	7.13	8.15	8.60	8.52										
180	8.07	8.97	9.51	9.42	8.03	8.97	9.45	9.36										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: