


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.3V I:0.2470A P:29.20W PF:0.9840 Freq:60.00Hz Lamp Flux:3873.62x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 102.63 lm/W			
MODEL		I _{max} (cd)	3474	S/MH (C0/180)	0.87
NOMINAL POWER(W)	30W	LOR(%)	77.4	S/MH (C90/270)	0.82
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	2996.9	η UP,DN (C0-180)	0.1,42.0
NOMINAL FLUX(lm)	3873.62	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.0,35.3
LAMPS INSIDE	1	η up (%)	0.1	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120.0	η down (%)	77.3	CIBSE SHR MAX	0.90

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

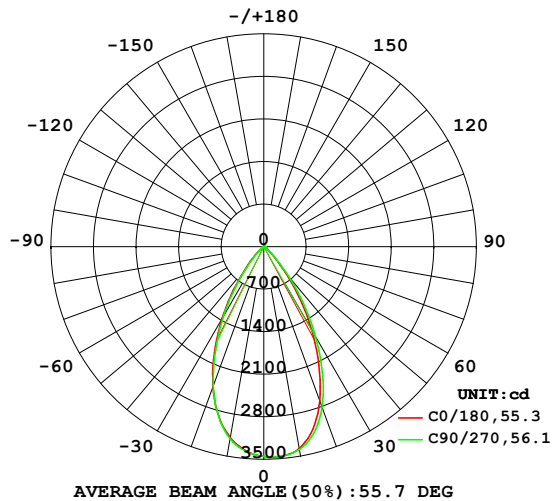

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

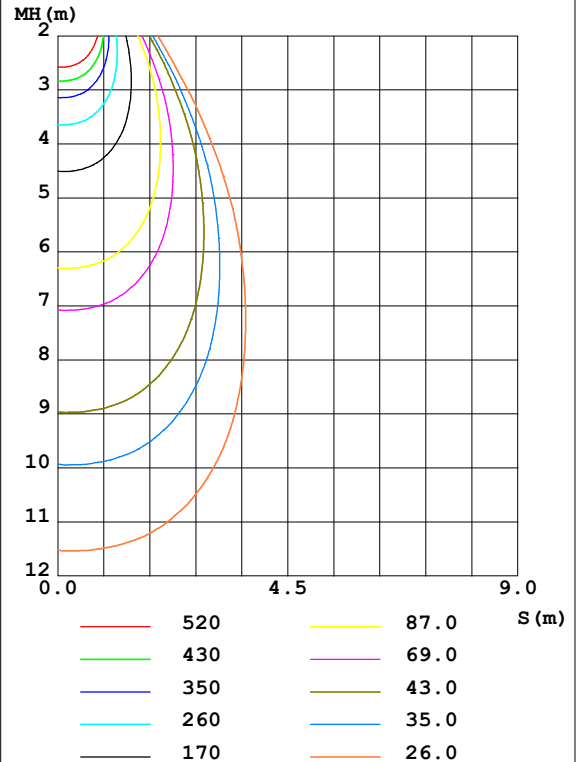

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3368	3400	3390	3331	3189	3157	3208	3248	0- 10	322.2	322.2	10.8,8.32
20	2697	2795	2812	2751	2448	2381	2432	2452	10- 20	837.0	1159	38.7,29.9
30	1570	1683	1702	1699	1391	1322	1333	1322	20- 30	937.2	2096	70,54.1
40	555.0	619.5	630.6	646.7	456.1	413.5	409.3	389.9	30- 40	602.9	2699	90.1,69.7
50	109.4	129.9	128.4	139.7	87.30	79.22	76.93	72.48	40- 50	201.4	2901	96.8,74.9
60	36.29	37.70	38.52	38.39	33.81	32.33	32.05	32.12	50- 60	48.46	2949	98.4,76.1
70	20.17	21.27	21.73	21.99	18.09	17.09	17.01	17.04	60- 70	26.69	2976	99.3,76.8
80	8.069	8.477	8.744	8.909	6.489	6.128	6.047	5.918	70- 80	13.71	2989	99.8,77.2
90	0	0	0.0007	0	0	0	0	0	80- 90	3.168	2993	99.9,77.3
100	0	0	0	0	0	0	0	0	90-100	0.0000	2993	99.9,77.3
110	0.0121	0.0024	0.0073	0	0	0	0.0025	0	100-110	0.0005	2993	99.9,77.3
120	0.1548	0.1157	0.1092	0.0996	0.0632	0.0962	0.1218	0.1162	110-120	0.0399	2993	99.9,77.3
130	0.6559	0.5496	0.5099	0.5097	0.3156	0.4138	0.4724	0.4602	120-130	0.2352	2993	99.9,77.3
140	1.531	1.373	1.327	1.337	0.8345	0.9914	1.085	1.054	130-140	0.6247	2994	99.9,77.3
150	2.486	2.360	2.261	2.352	1.508	1.721	1.837	1.791	140-150	1.004	2995	99.9,77.3
160	3.254	3.222	3.075	3.237	2.308	2.566	2.703	2.661	150-160	1.126	2996	100,77.3
170	3.805	3.872	3.764	3.833	3.241	3.514	3.563	3.587	160-170	0.9179	2997	100,77.4
180	3.914	4.083	4.037	4.065	3.914	4.074	4.034	4.065	170-180	0.3648	2997	100,77.4
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.3V I:0.2470A P:29.20W PF:0.9840 Freq:60.00Hz Lamp Flux:3873.62x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

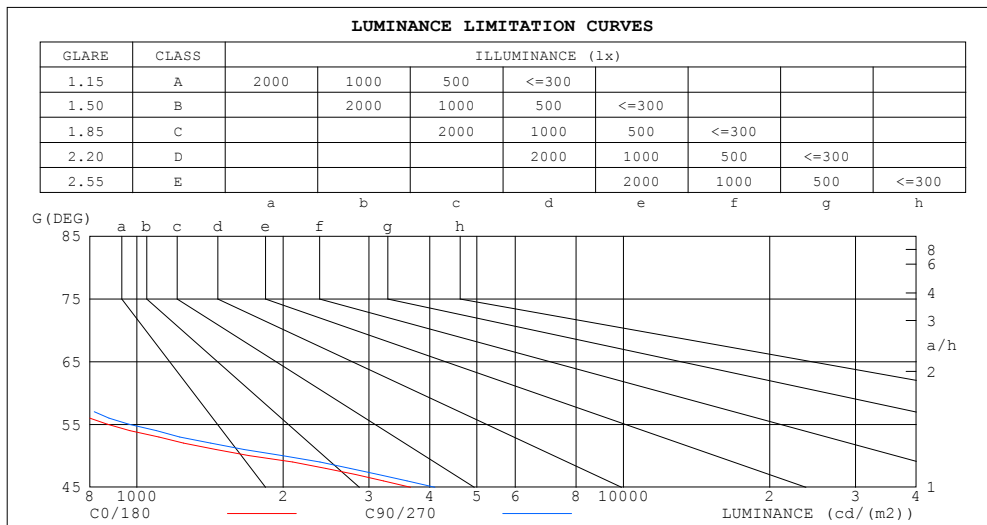


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.3V I:0.2470A P:29.20W PF:0.9840 Freq:60.00Hz Lamp Flux:3873.62x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	.92	.92	.92	.90	.90	.90	.86	.86	.86	.82	.82	.82	.79	.79	.79	.77
1.0	.85	.83	.82	.84	.82	.80	.81	.79	.78	.78	.77	.76	.75	.74	.73	.72
2.0	.79	.76	.73	.78	.75	.73	.75	.73	.71	.73	.71	.69	.71	.69	.68	.67
3.0	.74	.70	.67	.73	.69	.66	.71	.68	.65	.69	.66	.64	.67	.65	.63	.62
4.0	.69	.65	.61	.68	.64	.61	.66	.63	.60	.65	.62	.59	.63	.61	.59	.58
5.0	.64	.60	.57	.64	.59	.56	.62	.59	.56	.61	.58	.55	.60	.57	.55	.54
6.0	.60	.56	.52	.60	.55	.52	.59	.55	.52	.58	.54	.52	.57	.54	.51	.50
7.0	.57	.52	.49	.56	.52	.49	.55	.51	.48	.54	.51	.48	.54	.50	.48	.47
8.0	.54	.49	.46	.53	.49	.46	.52	.48	.45	.51	.48	.45	.51	.47	.45	.44
9.0	.51	.46	.43	.50	.46	.43	.49	.45	.43	.49	.45	.42	.48	.45	.42	.41
10.0	.48	.43	.40	.48	.43	.40	.47	.43	.40	.46	.43	.40	.46	.42	.40	.39

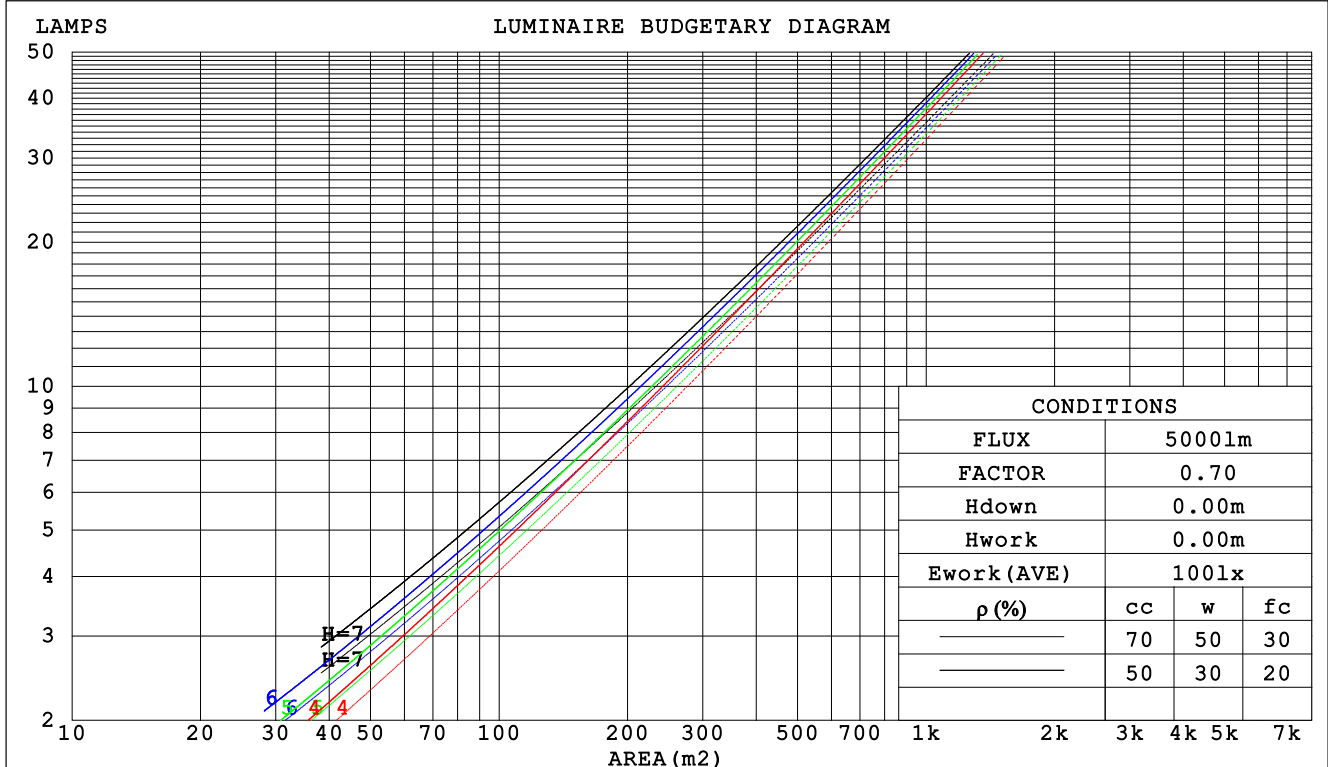

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.3V I:0.2470A P:29.20W PF:0.9840 Freq:60.00Hz Lamp Flux:3873.62x1 lm					
NAME: 4寸B款			TYPE:5000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.141	.080	.025	.136	.078	.025	.126	.073	.023	.117	.068	.022	.109	.063	.020	
2.0	.135	.074	.023	.131	.072	.022	.123	.068	.021	.115	.065	.020	.108	.061	.019	
3.0	.129	.069	.021	.125	.067	.020	.118	.064	.019	.111	.061	.019	.105	.058	.018	
4.0	.122	.064	.019	.119	.062	.018	.113	.060	.018	.107	.058	.017	.102	.055	.017	
5.0	.117	.059	.017	.114	.058	.017	.108	.056	.017	.103	.055	.016	.099	.053	.016	
6.0	.111	.056	.016	.109	.055	.016	.104	.053	.015	.099	.052	.015	.095	.050	.015	
7.0	.106	.052	.015	.104	.052	.015	.100	.050	.015	.096	.049	.014	.092	.048	.014	
8.0	.101	.050	.014	.099	.049	.014	.096	.048	.014	.092	.047	.013	.089	.046	.013	
9.0	.097	.047	.013	.095	.046	.013	.092	.045	.013	.089	.044	.013	.086	.044	.013	
10.0	.093	.045	.012	.091	.044	.012	.088	.043	.012	.086	.042	.012	.083	.042	.012	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.148	.148	.148	.127	.127	.127	.086	.086	.086	.050	.050	.050	.016	.016	.016	
1.0	.134	.123	.113	.114	.105	.097	.078	.072	.067	.045	.042	.039	.014	.013	.013	
2.0	.122	.103	.088	.105	.089	.076	.072	.062	.053	.041	.036	.031	.013	.012	.010	
3.0	.113	.089	.070	.097	.077	.060	.066	.053	.042	.038	.031	.025	.012	.010	.008	
4.0	.105	.077	.056	.090	.067	.049	.062	.047	.035	.036	.027	.020	.012	.009	.007	
5.0	.098	.069	.047	.084	.059	.040	.058	.041	.029	.034	.024	.017	.011	.008	.006	
6.0	.093	.061	.039	.080	.053	.034	.055	.037	.024	.032	.022	.014	.010	.007	.005	
7.0	.088	.056	.033	.075	.048	.029	.052	.034	.020	.030	.020	.012	.010	.007	.004	
8.0	.083	.051	.028	.072	.044	.025	.050	.031	.018	.029	.018	.010	.009	.006	.003	
9.0	.079	.047	.025	.068	.041	.022	.047	.029	.015	.028	.017	.009	.009	.006	.003	
10.0	.076	.043	.022	.065	.038	.019	.045	.027	.014	.026	.016	.008	.009	.005	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.3V I:0.2470A P:29.20W PF:0.9840 Freq:60.00Hz Lamp Flux:3873.62x1 lm										
NAME: 4寸B款					TYPE:5000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.2	14.2	13.5	14.4	14.5	13.6	14.6	13.8	14.8	14.9
3H	13.2	14.1	13.4	14.3	14.5	13.5	14.4	13.8	14.6	14.8
4H	13.1	14.0	13.4	14.2	14.4	13.5	14.4	13.8	14.6	14.8
6H	13.1	13.9	13.4	14.1	14.4	13.5	14.3	13.8	14.5	14.8
8H	13.1	13.8	13.4	14.1	14.3	13.4	14.2	13.7	14.5	14.7
12H	13.0	13.7	13.3	14.0	14.3	13.4	14.1	13.7	14.4	14.7
4H 2H	13.0	13.9	13.3	14.1	14.3	13.4	14.3	13.7	14.5	14.7
3H	13.0	13.7	13.3	14.0	14.3	13.4	14.1	13.7	14.4	14.7
4H	13.0	13.6	13.3	13.9	14.3	13.4	14.0	13.7	14.3	14.6
6H	13.0	13.5	13.3	13.9	14.2	13.3	13.9	13.7	14.3	14.6
8H	12.9	13.5	13.3	13.8	14.2	13.3	13.9	13.7	14.2	14.6
12H	12.9	13.4	13.3	13.8	14.2	13.3	13.8	13.7	14.2	14.6
8H 4H	12.9	13.4	13.3	13.8	14.2	13.3	13.8	13.7	14.2	14.5
6H	12.9	13.3	13.3	13.7	14.2	13.3	13.7	13.7	14.1	14.5
8H	12.9	13.3	13.3	13.7	14.1	13.3	13.6	13.7	14.1	14.5
12H	12.9	13.2	13.3	13.6	14.1	13.2	13.6	13.7	14.0	14.5
12H 4H	12.9	13.3	13.3	13.7	14.1	13.2	13.7	13.6	14.1	14.5
6H	12.9	13.2	13.3	13.7	14.1	13.2	13.6	13.7	14.0	14.5
8H	12.9	13.2	13.3	13.6	14.1	13.2	13.6	13.7	14.0	14.5
Variations with the observer position at spacings:										
S = 1.0H	+ 2.4 / - 5.8					+ 2.7 / - 6.0				
1.5H	+ 4.3 / - 5.7					+ 4.7 / - 5.9				
2.0H	+ 4.6 / - 2.5					+ 5.0 / - 2.6				

CIE Pub.117 Corrected 3874 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.7)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.3V I:0.2470A P:29.20W PF:0.9840 Freq:60.00Hz Lamp Flux:3873.62x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	66	61	58	66	61	58	65	60	58	55
0.80	72	67	64	71	67	64	71	66	64	61
1.00	76	71	68	75	71	68	74	71	68	64
1.25	79	75	72	78	74	72	77	73	71	68
1.50	81	77	75	80	77	74	78	76	73	70
2.00	83	80	78	82	79	77	80	78	76	72
2.50	85	82	79	84	81	79	81	79	77	72
3.00	86	83	81	85	82	80	82	80	79	74
4.00	88	85	84	86	84	83	83	82	80	75
5.00	89	87	85	87	85	84	84	83	82	76
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.3V I:0.2470A P:29.20W PF:0.9840 Freq:60.00Hz Lamp Flux:3873.62x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

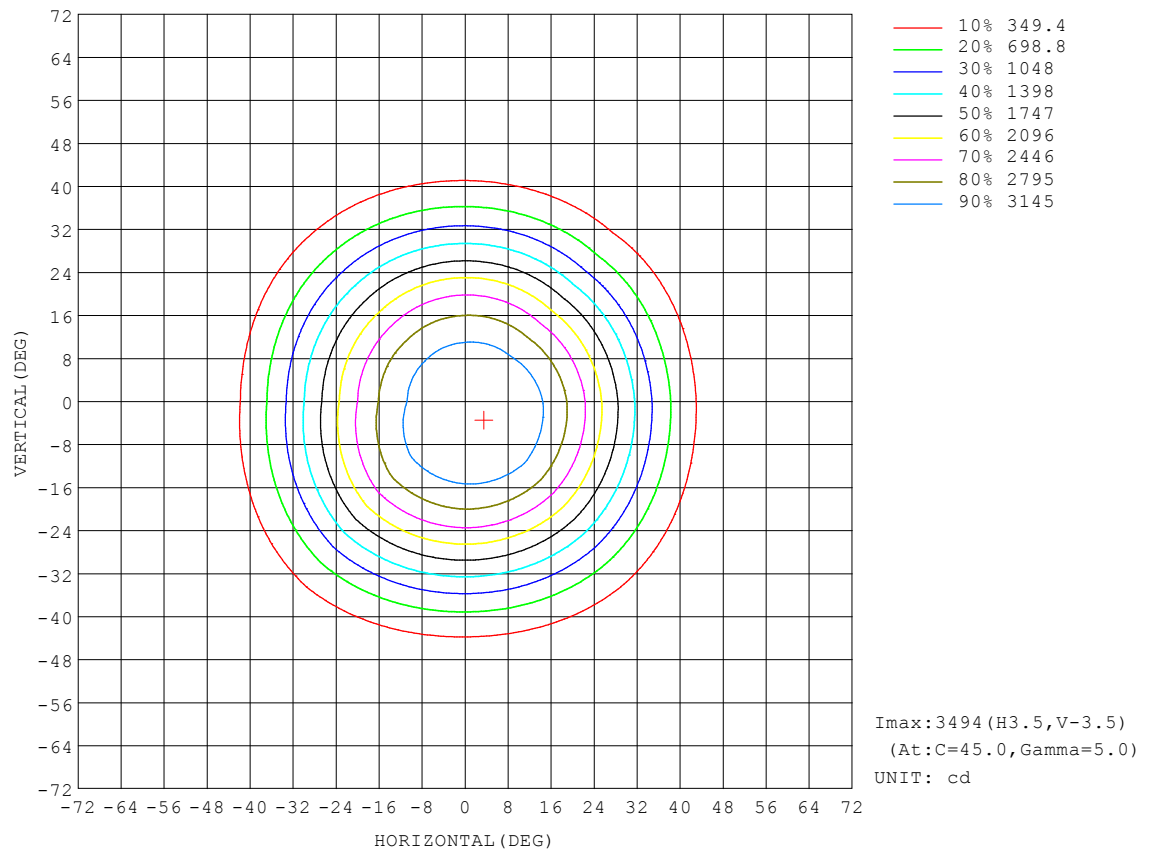


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.3V I:0.2470A P:29.20W PF:0.9840 Freq:60.00Hz Lamp Flux:3873.62x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

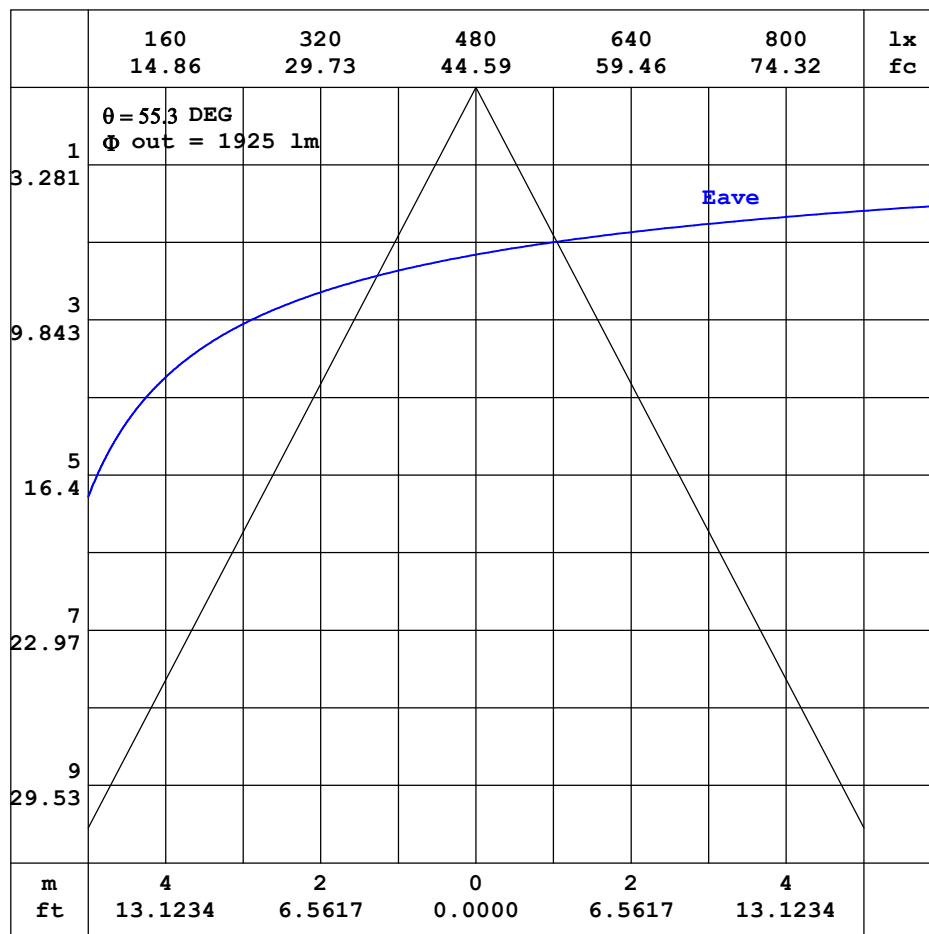


Note: The Curves indicate the illuminated area and the average illuminance when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.3V I:0.2470A P:29.20W PF:0.9840 Freq:60.00Hz Lamp Flux:3873.62x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

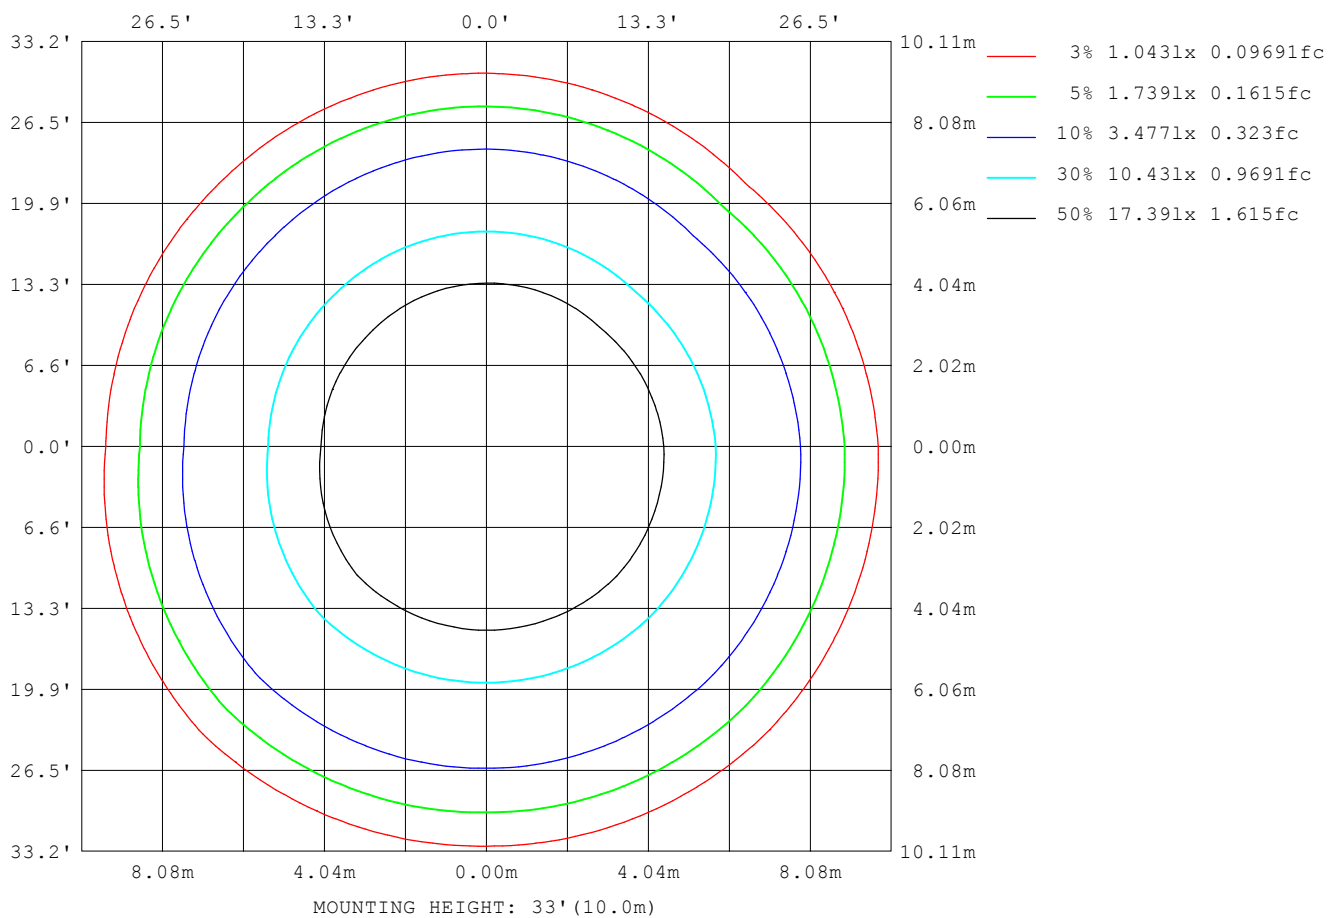

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.3V I:0.2470A P:29.20W PF:0.9840 Freq:60.00Hz Lamp Flux:3873.62x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	630
L_0~180 (75) av	492
L_0~180 (85) av	295
L_90~270 (65) av	638
L_90~270 (75) av	499
L_90~270 (85) av	300
L_45 (65) av	637
L_45 (75) av	499
L_45 (85) av	302

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

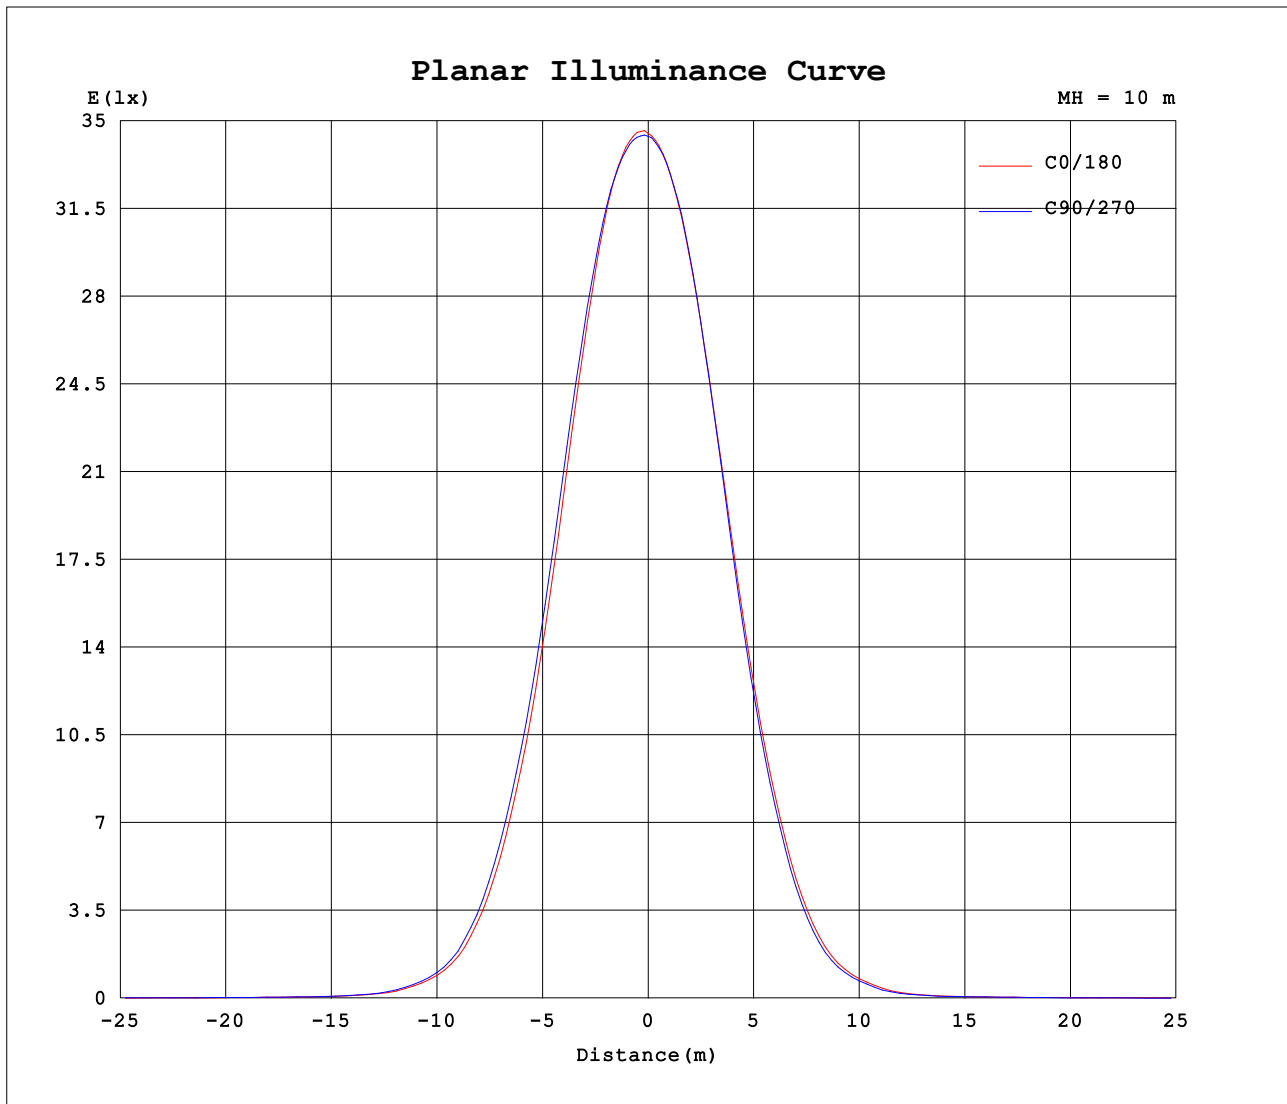

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.3V I:0.2470A P:29.20W PF:0.9840 Freq:60.00Hz Lamp Flux:3873.62x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	3453	3453	3453	3453	3453	3453	3453	3453										
5	3461	3474	3459	3424	3375	3356	3383	3413										
10	3368	3400	3390	3331	3189	3157	3208	3248										
15	3112	3179	3180	3113	2882	2831	2887	2928										
20	2697	2795	2812	2751	2448	2381	2432	2452										
25	2148	2266	2289	2258	1927	1853	1879	1886										
30	1570	1683	1702	1699	1391	1322	1333	1322										
35	1024	1120	1139	1145	873	817	814	793										
40	555	619	631	647	456	413	409	390										
45	259	293	291	309	223	202	199	184										
50	109	130	128	140	87.3	79.2	76.9	72.5										
55	49.9	53.1	55.5	57.0	42.5	40.9	40.3	40.2										
60	36.3	37.7	38.5	38.4	33.8	32.3	32.1	32.1										
65	27.8	29.3	30.0	30.2	25.4	24.1	23.9	24.1										
70	20.2	21.3	21.7	22.0	18.1	17.1	17.0	17.0										
75	13.6	14.4	14.7	15.0	11.8	11.2	11.1	11.1										
80	8.07	8.48	8.74	8.91	6.49	6.13	6.05	5.92										
85	3.15	3.40	3.44	3.75	1.99	1.85	1.80	1.53										
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.01	0.00	0.01	0.00	0.00	0.00	0.00	0.00										
115	0.06	0.04	0.03	0.03	0.01	0.03	0.03	0.04										
120	0.15	0.12	0.11	0.10	0.06	0.10	0.12	0.12										
125	0.35	0.27	0.24	0.24	0.16	0.22	0.26	0.26										
130	0.66	0.55	0.51	0.51	0.32	0.41	0.47	0.46										
135	1.07	0.92	0.88	0.88	0.54	0.67	0.75	0.73										
140	1.53	1.37	1.33	1.34	0.83	0.99	1.09	1.05										
145	2.02	1.88	1.83	1.85	1.16	1.33	1.45	1.41										
150	2.49	2.36	2.26	2.35	1.51	1.72	1.84	1.79										
155	2.89	2.82	2.69	2.82	1.88	2.13	2.25	2.21										
160	3.25	3.22	3.08	3.24	2.31	2.57	2.70	2.66										
165	3.58	3.56	3.45	3.56	2.78	3.06	3.16	3.14										
170	3.80	3.87	3.76	3.83	3.24	3.51	3.56	3.59										
175	3.93	4.06	3.99	4.02	3.63	3.88	3.88	3.91										
180	3.91	4.08	4.04	4.07	3.91	4.07	4.03	4.07										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: