


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.0V I:0.2500A P:29.70W PF:0.9820 Freq:60.00Hz Lamp Flux:1153.74x1 lm		
NAME: 4寸筒灯 15度 30W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 98.87 lm/W			
MODEL		I _{max} (cd)	3426	S/MH(C0/180)	0.86
NOMINAL POWER(W)	30W	LOR(%)	254.5	S/MH(C90/270)	0.79
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	2936.4	η UP,DN(C0-180)	0.7,138.1
NOMINAL FLUX(lm)	1153.74	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.3,115.4
LAMPS INSIDE	1	η up(%)	1.0	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120.0	η down(%)	253.5	CIBSE SHR MAX	0.90

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

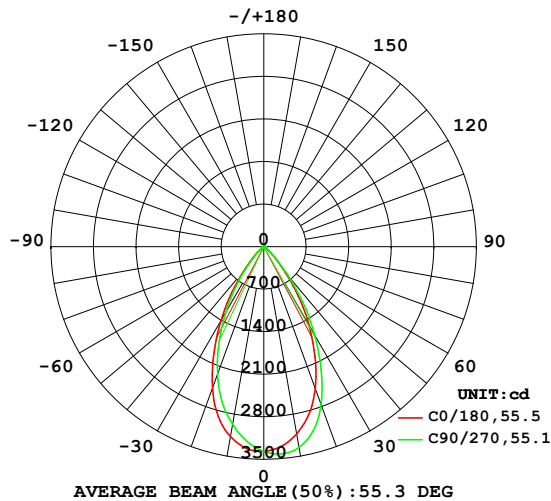

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

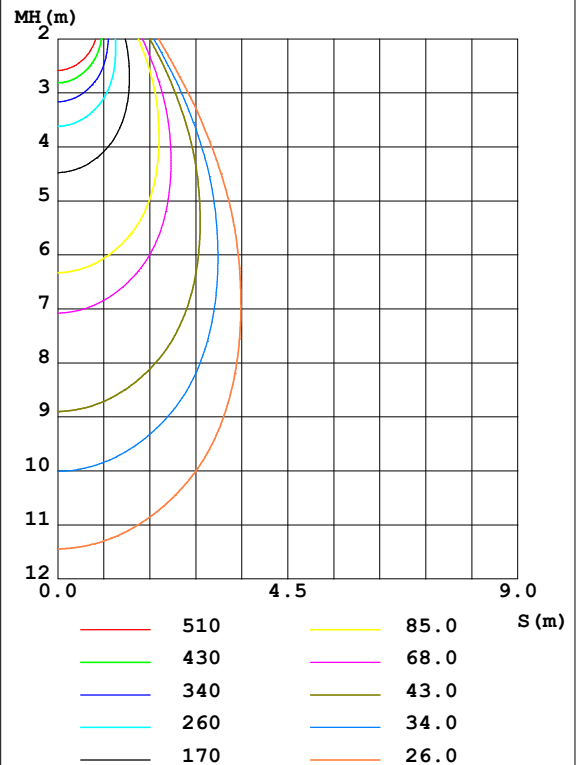

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3128	3269	3353	3362	3173	3060	2970	2957	0- 10	311.6	311.6	10.6,27
20	2483	2679	2761	2790	2475	2332	2229	2197	10- 20	803.2	1115	38,96.6
30	1492	1635	1677	1728	1419	1325	1262	1232	20- 30	906.1	2021	68.8,175
40	554.5	608.2	632.0	674.5	480.0	442.1	424.8	402.2	30- 40	601.6	2622	89.3,227
50	121.7	130.7	135.9	150.3	94.87	90.20	86.25	80.87	40- 50	209.6	2832	96.4,245
60	34.55	34.93	34.54	34.29	31.71	32.26	32.25	31.98	50- 60	49.31	2881	98.1,250
70	19.98	20.55	20.40	20.47	17.40	17.70	17.72	17.41	60- 70	25.76	2907	99,252
80	8.460	8.691	8.693	8.920	6.790	6.867	6.811	6.528	70- 80	13.77	2921	99.5,253
90	0.0471	0.0720	0.2120	0.5367	0	0	0	0	80- 90	3.744	2925	99.6,253
100	0.0646	0.0653	0.0632	0.0588	0	0	0	0	90-100	0.0267	2925	99.6,253
110	0.1434	0.1305	0.1312	0.1250	0.0073	0.0144	0.0171	0.0244	100-110	0.0500	2925	99.6,253
120	0.7408	0.6285	0.5901	0.6126	0.1223	0.1616	0.1852	0.2151	110-120	0.1990	2925	99.6,254
130	2.678	2.335	2.213	2.301	0.4433	0.5283	0.6039	0.6530	120-130	0.7606	2926	99.6,254
140	5.635	5.190	5.040	5.263	0.9846	1.141	1.263	1.363	130-140	1.774	2927	99.7,254
150	8.459	8.162	7.977	8.454	1.878	2.124	2.313	2.456	140-150	2.627	2930	99.8,254
160	10.11	10.22	10.13	10.91	4.252	4.969	5.454	5.490	150-160	2.947	2933	99.9,254
170	10.56	11.19	11.49	11.87	7.205	8.210	8.864	8.818	160-170	2.460	2935	100,254
180	9.581	10.64	11.20	11.18	9.670	10.60	11.31	11.31	170-180	0.9756	2936	100,255
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.0V I:0.2500A P:29.70W PF:0.9820 Freq:60.00Hz Lamp Flux:1153.74x1 lm		
NAME: 4寸筒灯 15度 30W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

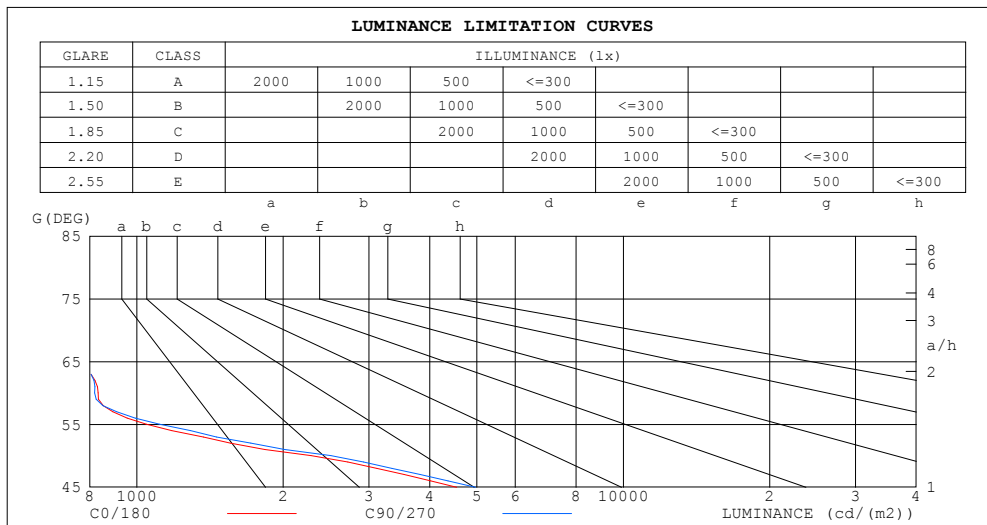


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.0V I:0.2500A P:29.70W PF:0.9820 Freq:60.00Hz Lamp Flux:1153.74x1 lm		
NAME: 4寸筒灯 15度 30W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	3.03	3.03	3.03	2.96	2.96	2.96	2.82	2.82	2.82	2.70	2.70	2.70	2.59	2.59	2.59	2.53
1.0	2.81	2.74	2.68	2.75	2.69	2.64	2.65	2.60	2.56	2.55	2.51	2.48	2.46	2.43	2.41	2.36
2.0	2.61	2.50	2.41	2.56	2.46	2.38	2.48	2.40	2.33	2.40	2.33	2.28	2.33	2.27	2.23	2.19
3.0	2.42	2.29	2.19	2.39	2.27	2.17	2.32	2.22	2.14	2.26	2.17	2.10	2.20	2.13	2.07	2.03
4.0	2.26	2.12	2.01	2.23	2.10	1.99	2.17	2.06	1.97	2.12	2.02	1.94	2.07	1.99	1.92	1.88
5.0	2.11	1.96	1.85	2.09	1.95	1.84	2.04	1.92	1.82	2.00	1.89	1.81	1.96	1.86	1.79	1.75
6.0	1.98	1.83	1.71	1.96	1.81	1.71	1.92	1.79	1.69	1.88	1.77	1.68	1.85	1.75	1.67	1.63
7.0	1.86	1.70	1.60	1.84	1.70	1.59	1.81	1.68	1.58	1.78	1.66	1.57	1.75	1.64	1.56	1.53
8.0	1.75	1.60	1.49	1.74	1.59	1.49	1.71	1.57	1.48	1.68	1.56	1.47	1.65	1.55	1.47	1.43
9.0	1.65	1.50	1.40	1.64	1.49	1.39	1.61	1.48	1.39	1.59	1.47	1.38	1.57	1.46	1.38	1.34
10.0	1.56	1.41	1.31	1.55	1.41	1.31	1.53	1.40	1.31	1.51	1.39	1.30	1.49	1.38	1.30	1.27

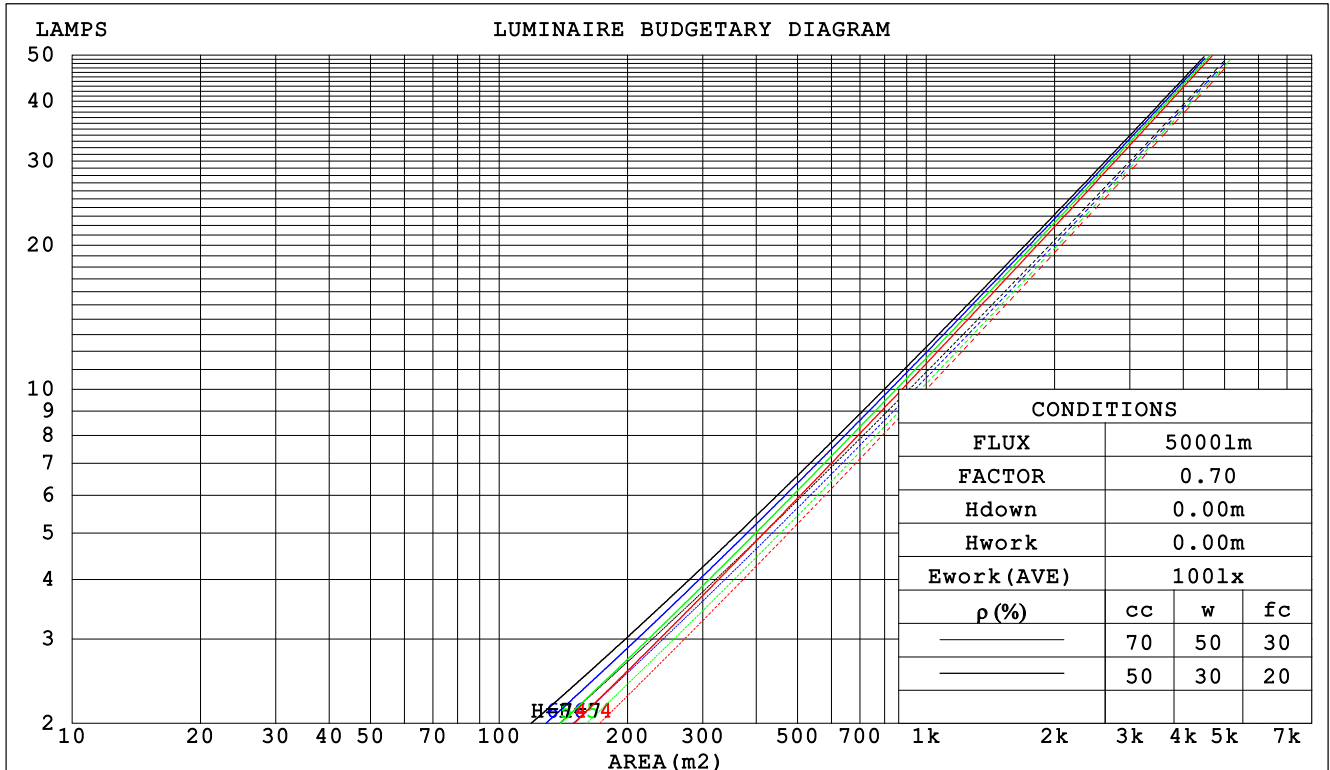

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.0V I:0.2500A P:29.70W PF:0.9820 Freq:60.00Hz Lamp Flux:1153.74x1 lm					
NAME: 4寸筒灯 15度 30W			TYPE:5000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.469	.267	.084	.451	.257	.082	.419	.240	.077	.389	.224	.072	.361	.209	.067		
2.0	.449	.246	.075	.434	.239	.074	.406	.226	.070	.381	.214	.067	.357	.202	.064		
3.0	.427	.227	.068	.414	.222	.067	.391	.212	.064	.369	.202	.062	.348	.193	.060		
4.0	.406	.211	.062	.395	.207	.061	.374	.199	.059	.355	.191	.058	.338	.183	.056		
5.0	.386	.197	.057	.377	.193	.056	.359	.187	.055	.342	.180	.054	.326	.174	.052		
6.0	.368	.184	.053	.360	.182	.052	.344	.176	.051	.329	.171	.050	.315	.166	.049		
7.0	.351	.174	.049	.344	.171	.049	.330	.167	.048	.317	.162	.047	.304	.158	.046		
8.0	.336	.164	.046	.329	.162	.046	.316	.158	.045	.305	.154	.045	.294	.151	.044		
9.0	.321	.155	.043	.315	.154	.043	.304	.150	.043	.293	.147	.042	.283	.144	.042		
10.0	.308	.148	.041	.302	.146	.041	.292	.143	.040	.283	.140	.040	.273	.138	.039		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.493	.493	.493	.421	.421	.421	.287	.287	.287	.165	.165	.165	.053	.053	.053	
1.0	.445	.408	.375	.380	.350	.323	.260	.241	.223	.150	.139	.130	.048	.045	.042	
2.0	.407	.345	.293	.349	.297	.253	.239	.206	.177	.138	.120	.104	.044	.039	.034	
3.0	.376	.297	.234	.323	.256	.203	.222	.178	.142	.128	.104	.084	.041	.034	.027	
4.0	.351	.260	.190	.301	.225	.165	.207	.157	.116	.120	.092	.069	.039	.030	.023	
5.0	.329	.231	.158	.283	.200	.137	.195	.139	.097	.113	.082	.058	.036	.027	.019	
6.0	.311	.207	.133	.267	.179	.116	.184	.126	.082	.107	.074	.049	.034	.024	.016	
7.0	.294	.188	.114	.253	.163	.099	.175	.114	.070	.102	.067	.042	.033	.022	.014	
8.0	.280	.172	.099	.241	.150	.086	.167	.105	.061	.097	.062	.036	.031	.020	.012	
9.0	.267	.159	.087	.230	.138	.076	.159	.097	.054	.093	.057	.032	.030	.019	.011	
10.0	.255	.148	.077	.220	.129	.067	.153	.091	.048	.089	.054	.028	.029	.018	.009	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.0V I:0.2500A P:29.70W PF:0.9820 Freq:60.00Hz Lamp Flux:1153.74x1 lm										
NAME: 4寸筒灯 15度 30W					TYPE:5000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.8	14.8	14.1	15.0	15.2	14.2	15.2	14.5	15.4	15.5
3H	13.8	14.7	14.0	14.9	15.1	14.1	15.0	14.4	15.2	15.5
4H	13.7	14.6	14.0	14.8	15.0	14.1	14.9	14.4	15.2	15.4
6H	13.7	14.5	14.0	14.7	15.0	14.0	14.8	14.4	15.1	15.3
8H	13.7	14.4	14.0	14.7	15.0	14.0	14.8	14.3	15.0	15.3
12H	13.6	14.4	14.0	14.6	14.9	14.0	14.7	14.3	15.0	15.3
4H 2H	13.6	14.5	13.9	14.7	14.9	14.0	14.9	14.3	15.1	15.3
3H	13.6	14.3	13.9	14.6	14.9	14.0	14.7	14.3	15.0	15.2
4H	13.6	14.2	13.9	14.6	14.9	13.9	14.6	14.3	14.9	15.2
6H	13.6	14.2	14.0	14.5	14.8	13.9	14.5	14.3	14.8	15.2
8H	13.6	14.1	14.0	14.5	14.8	13.9	14.4	14.3	14.8	15.2
12H	13.5	14.0	13.9	14.4	14.8	13.9	14.4	14.3	14.7	15.1
8H 4H	13.5	14.0	13.9	14.4	14.8	13.8	14.4	14.2	14.7	15.1
6H	13.5	13.9	13.9	14.3	14.8	13.8	14.3	14.3	14.7	15.1
8H	13.5	13.9	14.0	14.3	14.8	13.8	14.2	14.3	14.7	15.1
12H	13.5	13.8	14.0	14.3	14.8	13.8	14.2	14.3	14.6	15.1
12H 4H	13.4	13.9	13.9	14.3	14.7	13.8	14.3	14.2	14.7	15.1
6H	13.5	13.9	13.9	14.3	14.7	13.8	14.2	14.3	14.6	15.1
8H	13.5	13.8	13.9	14.3	14.7	13.8	14.1	14.3	14.6	15.1
Variations with the observer position at spacings:										
S = 1.0H	+ 2.5 / - 5.8					+ 2.8 / - 6.1				
1.5H	+ 4.3 / - 5.7					+ 4.6 / - 6.0				
2.0H	+ 4.8 / - 2.7					+ 5.1 / - 2.9				

CIE Pub.117 Corrected 1154 lm Total Lamp Luminous Flux.(8log(F/F0) = 0.5)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.0V I:0.2500A P:29.70W PF:0.9820 Freq:60.00Hz Lamp Flux:1153.74x1 lm		
NAME: 4寸筒灯 15度 30W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	216	199	189	215	198	188	212	197	188	178
0.80	236	220	210	234	219	209	231	217	208	198
1.00	248	233	223	246	232	222	242	232	221	210
1.25	259	245	236	256	244	235	251	240	232	221
1.50	266	254	245	263	252	243	257	248	240	228
2.00	274	263	254	270	260	252	263	255	248	234
2.50	279	268	260	274	265	258	266	259	253	237
3.00	283	274	266	278	270	263	269	263	258	241
4.00	288	281	275	283	276	271	273	268	264	245
5.00	291	285	280	286	281	276	276	272	268	248
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:121.0V I:0.2500A P:29.70W PF:0.9820 Freq:60.00Hz Lamp Flux:1153.74x1 lm		
NAME: 4寸筒灯 15度 30W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

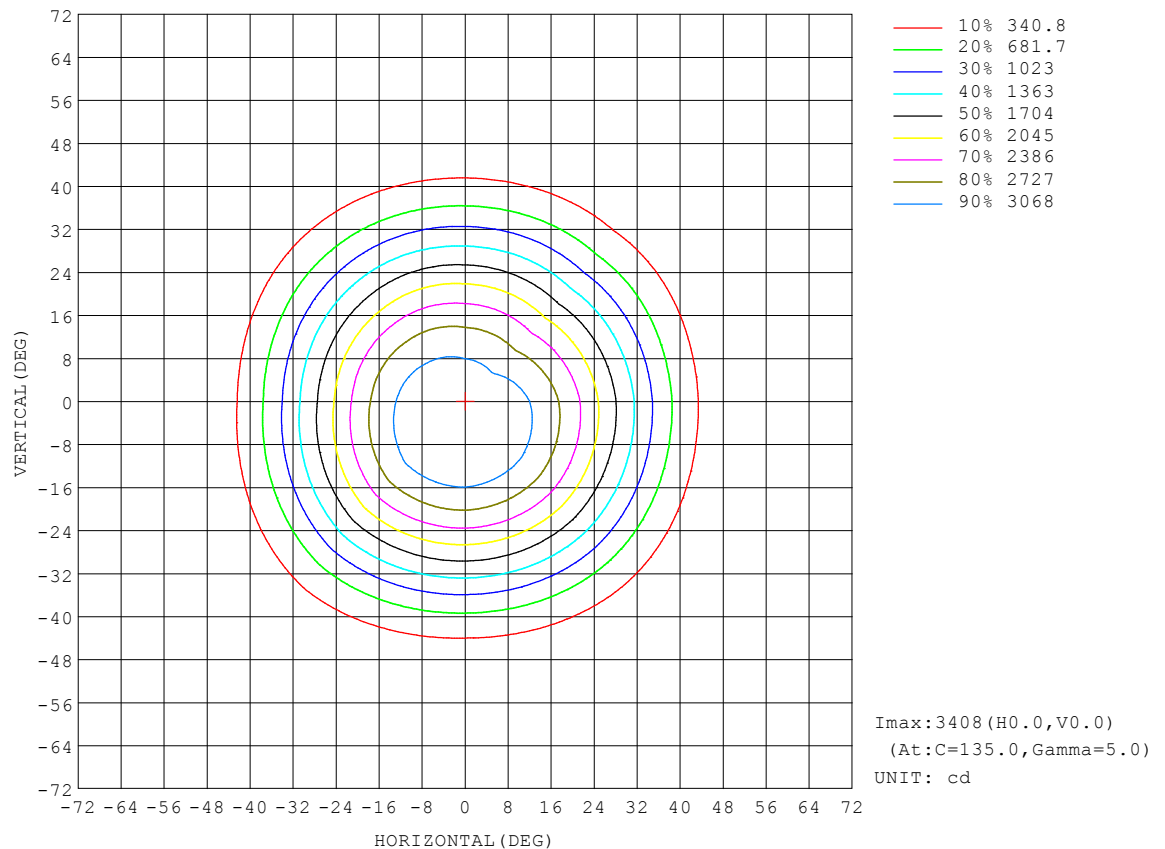


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:121.0V I:0.2500A P:29.70W PF:0.9820 Freq:60.00Hz Lamp Flux:1153.74x1 lm		
NAME: 4寸筒灯 15度 30W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

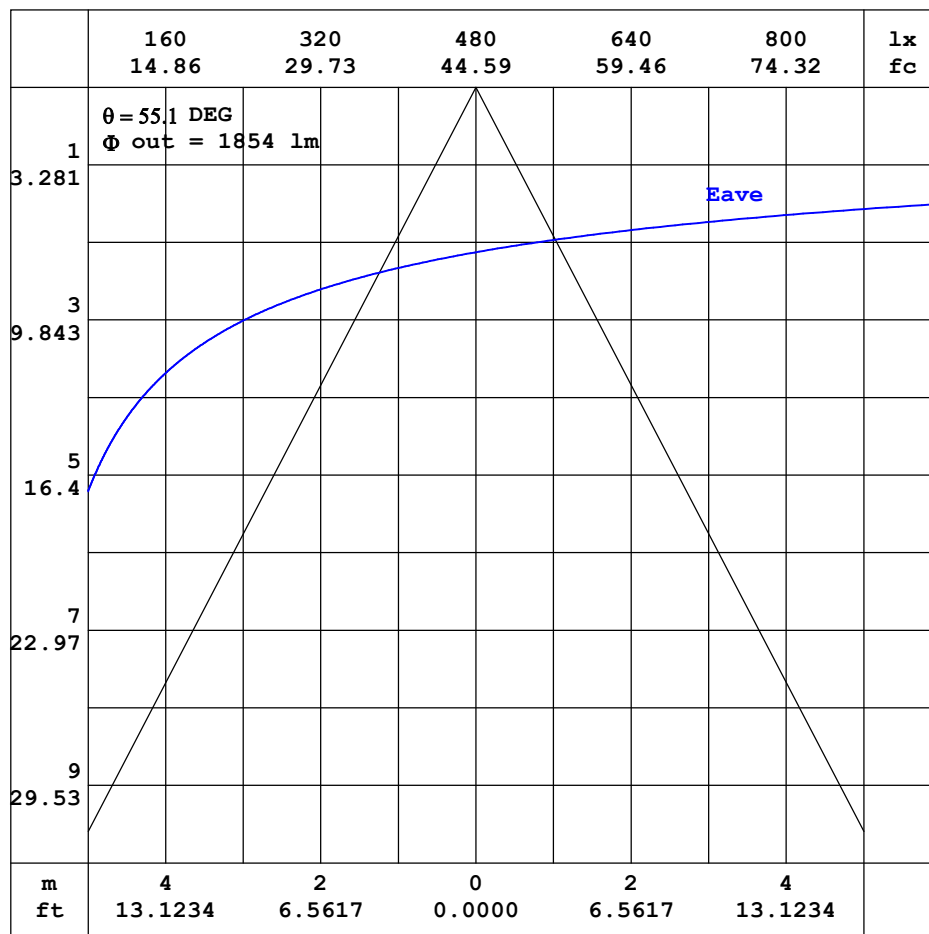


Note: The Curves indicate the illuminated area and the average illuminance when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:121.0V I:0.2500A P:29.70W PF:0.9820 Freq:60.00Hz Lamp Flux:1153.74x1 lm		
NAME: 4寸筒灯 15度 30W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

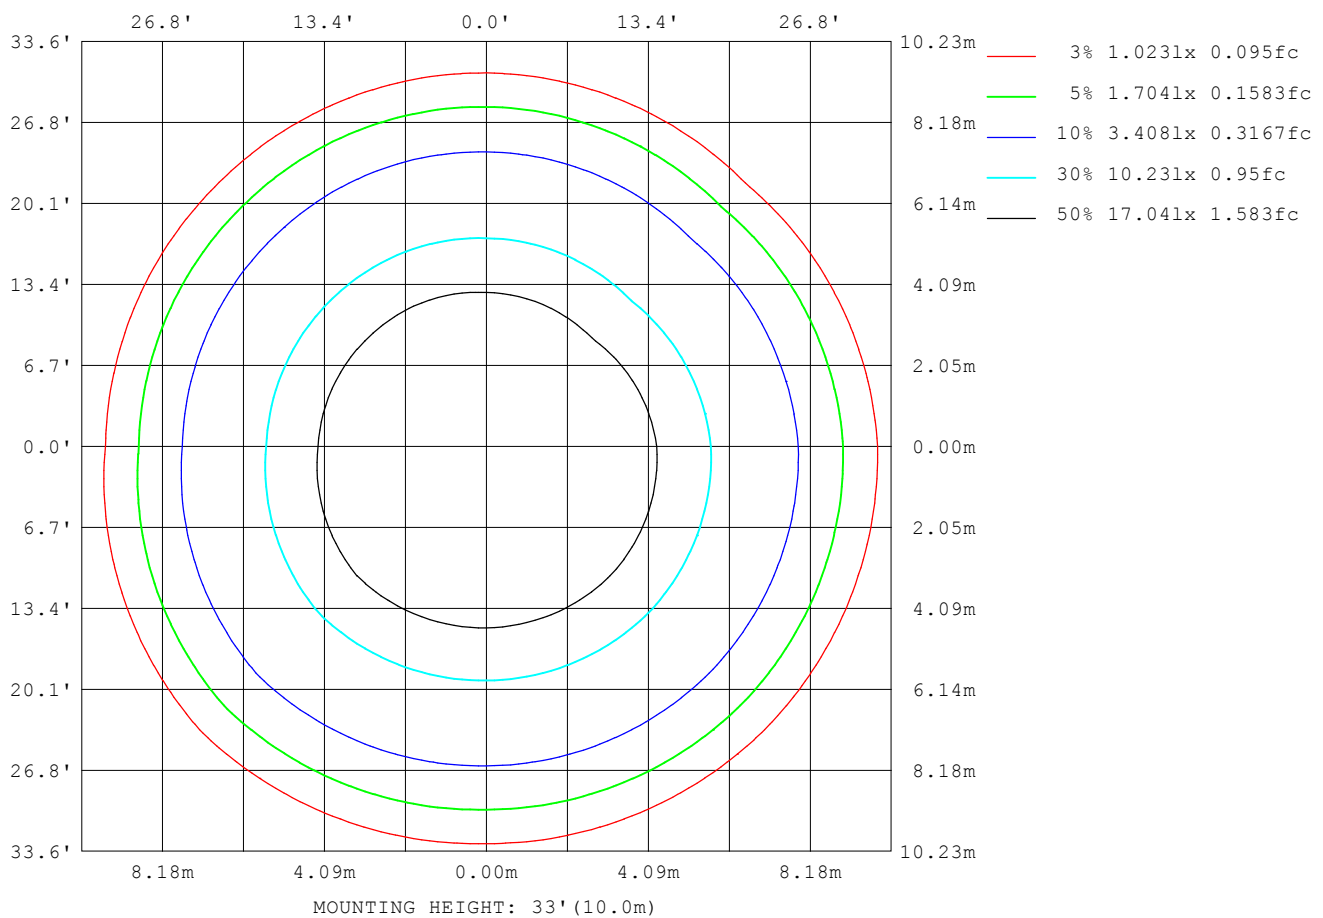

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:121.0V I:0.2500A P:29.70W PF:0.9820 Freq:60.00Hz Lamp Flux:1153.74x1 lm		
NAME: 4寸筒灯 15度 30W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	722
L_0~180 (75) av	587
L_0~180 (85) av	442
L_90~270 (65) av	735
L_90~270 (75) av	599
L_90~270 (85) av	448
L_45 (65) av	734
L_45 (75) av	598
L_45 (85) av	446

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

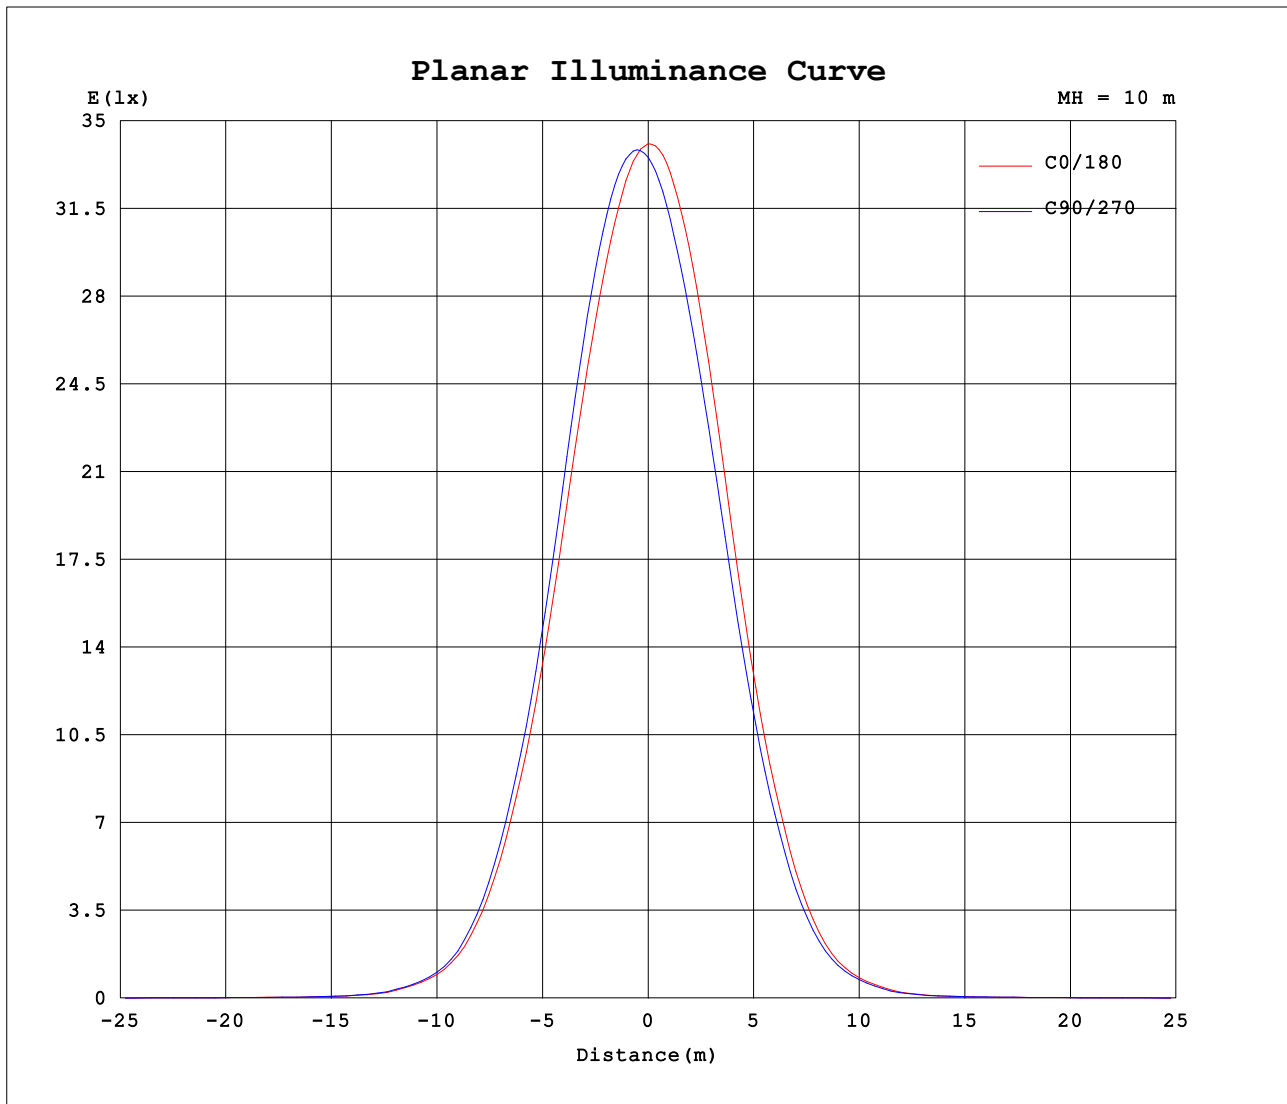

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.0V I:0.2500A P:29.70W PF:0.9820 Freq:60.00Hz Lamp Flux:1153.74x1 lm		
NAME: 4寸筒灯 15度 30W	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	3369	3369	3369	3369	3369	3369	3369	3369										
5	3300	3375	3419	3426	3332	3265	3214	3207										
10	3128	3269	3353	3362	3173	3060	2970	2957										
15	2864	3047	3139	3154	2893	2756	2649	2626										
20	2483	2679	2761	2790	2475	2332	2229	2197										
25	2000	2175	2241	2286	1952	1830	1747	1713										
30	1492	1635	1677	1728	1419	1325	1262	1232										
35	996	1100	1132	1183	911	842	797	772										
40	554	608	632	674	480	442	425	402										
45	267	293	296	325	231	214	211	200										
50	122	131	136	150	94.9	90.2	86.2	80.9										
55	49.9	51.9	53.9	57.1	42.8	42.7	41.2	40.7										
60	34.5	34.9	34.5	34.3	31.7	32.3	32.3	32.0										
65	27.2	27.8	27.7	27.7	24.1	24.5	24.5	24.2										
70	20.0	20.5	20.4	20.5	17.4	17.7	17.7	17.4										
75	13.8	14.2	14.1	14.3	11.7	11.9	11.9	11.6										
80	8.46	8.69	8.69	8.92	6.79	6.87	6.81	6.53										
85	3.85	3.96	4.08	4.36	2.62	2.59	2.47	2.15										
90	0.05	0.07	0.21	0.54	0.00	0.00	0.00	0.00										
95	0.05	0.03	0.04	0.04	0.00	0.00	0.00	0.00										
100	0.06	0.07	0.06	0.06	0.00	0.00	0.00	0.00										
105	0.10	0.09	0.09	0.10	0.00	0.00	0.00	0.00										
110	0.14	0.13	0.13	0.12	0.01	0.01	0.02	0.02										
115	0.34	0.29	0.27	0.27	0.05	0.06	0.09	0.09										
120	0.74	0.63	0.59	0.61	0.12	0.16	0.19	0.22										
125	1.51	1.28	1.20	1.24	0.25	0.30	0.35	0.40										
130	2.68	2.34	2.21	2.30	0.44	0.53	0.60	0.65										
135	4.12	3.68	3.54	3.68	0.69	0.80	0.90	0.98										
140	5.64	5.19	5.04	5.26	0.98	1.14	1.26	1.36										
145	7.16	6.74	6.62	6.89	1.34	1.52	1.68	1.79										
150	8.46	8.16	7.98	8.45	1.88	2.12	2.31	2.46										
155	9.44	9.32	9.06	9.81	2.93	3.40	3.71	3.79										
160	10.1	10.2	10.1	10.9	4.25	4.97	5.45	5.49										
165	10.5	10.9	11.0	11.6	5.73	6.64	7.20	7.18										
170	10.6	11.2	11.5	11.9	7.21	8.21	8.86	8.82										
175	10.3	11.2	11.6	11.8	8.56	9.61	10.3	10.3										
180	9.58	10.6	11.2	11.2	9.67	10.6	11.3	11.3										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: