


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.4V I:0.3290A P:39.10W PF:0.9870 Freq:60.00Hz Lamp Flux:3677.76x1 lm		
NAME: 4寸B款 20度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 90.69 lm/W			
MODEL		I _{max} (cd)	13371	S/MH (C0/180)	0.43
NOMINAL POWER(W)	40W	LOR(%)	96.4	S/MH (C90/270)	0.37
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	3546.1	η UP,DN (C0-180)	0.1,54.2
NOMINAL FLUX(lm)	3677.76	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.1,42.1
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	120.0	η down (%)	96.3	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

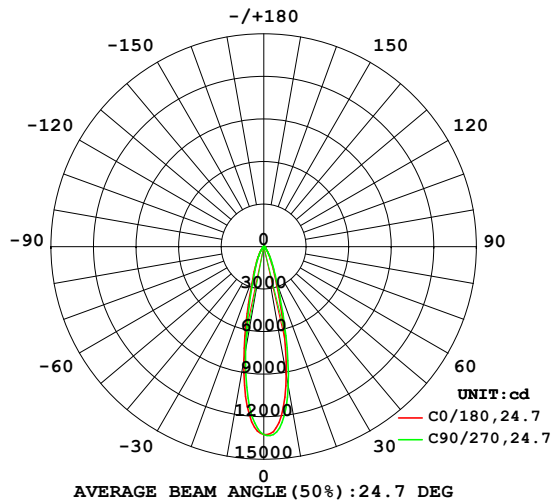

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

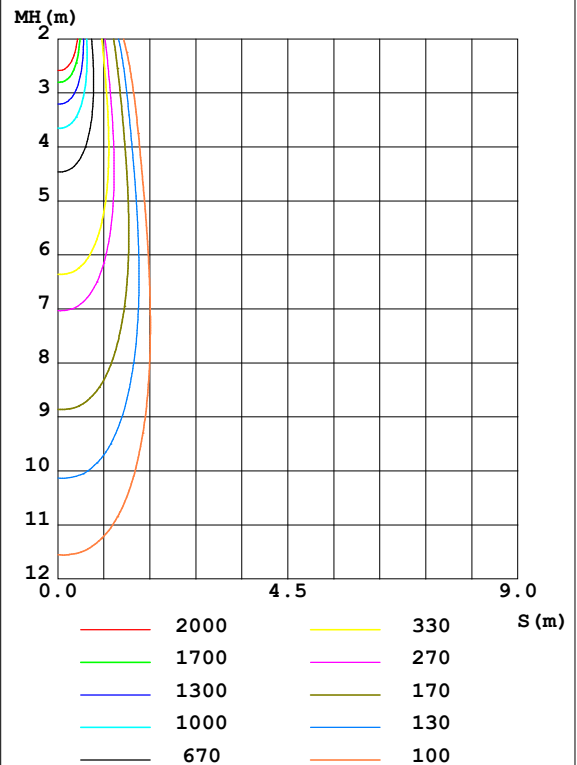

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	913.3	975.4	995.7	1026	818.1	770.1	744.5	727.6	0- 10	1048	1048	29.6,28.5
20	247.1	270.4	278.8	291.0	213.2	198.5	194.8	191.8	10- 20	1320	2368	66.8,64.4
30	87.57	93.84	96.28	100.3	76.24	71.12	71.08	70.63	20- 30	644.4	3012	84.9,81.9
40	28.49	32.05	32.33	33.35	23.57	21.82	21.68	21.21	30- 40	314.6	3327	93.8,90.5
50	8.581	9.250	9.273	9.419	7.331	7.143	6.907	6.907	40- 50	117.4	3444	97.1,93.7
60	4.117	4.285	4.327	4.294	3.717	3.562	3.561	3.615	50- 60	49.14	3493	98.5,95
70	2.192	2.310	2.327	2.351	1.891	1.792	1.799	1.827	60- 70	29.29	3523	99.3,95.8
80	0.8385	0.8765	0.8846	0.8942	0.6376	0.6065	0.6072	0.6069	70- 80	14.32	3537	99.7,96.2
90	0.0001	0	0.0000	0	0	0	0	0	80- 90	3.170	3540	99.8,96.3
100	0	0	0	0	0	0	0	0	90-100	0.0000	3540	99.8,96.3
110	0.0024	0.0017	0.0017	0.0015	0	0	0.0000	0	100-110	0.0033	3540	99.8,96.3
120	0.0103	0.0082	0.0090	0.0081	0.0034	0.0055	0.0071	0.0063	110-120	0.0324	3540	99.8,96.3
130	0.0396	0.0319	0.0306	0.0312	0.0178	0.0241	0.0275	0.0263	120-130	0.1417	3540	99.8,96.3
140	0.1146	0.0950	0.0903	0.0922	0.0578	0.0750	0.0869	0.0845	130-140	0.4041	3541	99.9,96.3
150	0.3708	0.3005	0.2595	0.2731	0.1773	0.2179	0.2407	0.2385	140-150	0.9739	3542	99.9,96.3
160	0.8105	0.7775	0.6836	0.7241	0.3620	0.4028	0.4158	0.4233	150-160	1.890	3544	99.9,96.4
170	0.8120	0.8829	0.8484	0.8492	0.4697	0.4792	0.4874	0.4900	160-170	1.820	3546	100,96.4
180	0.5526	0.5850	0.5908	0.5783	0.5502	0.5905	0.5957	0.5736	170-180	0.6003	3546	100,96.4
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.4V I:0.3290A P:39.10W PF:0.9870 Freq:60.00Hz Lamp Flux:3677.76x1 lm		
NAME: 4寸B款 20度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

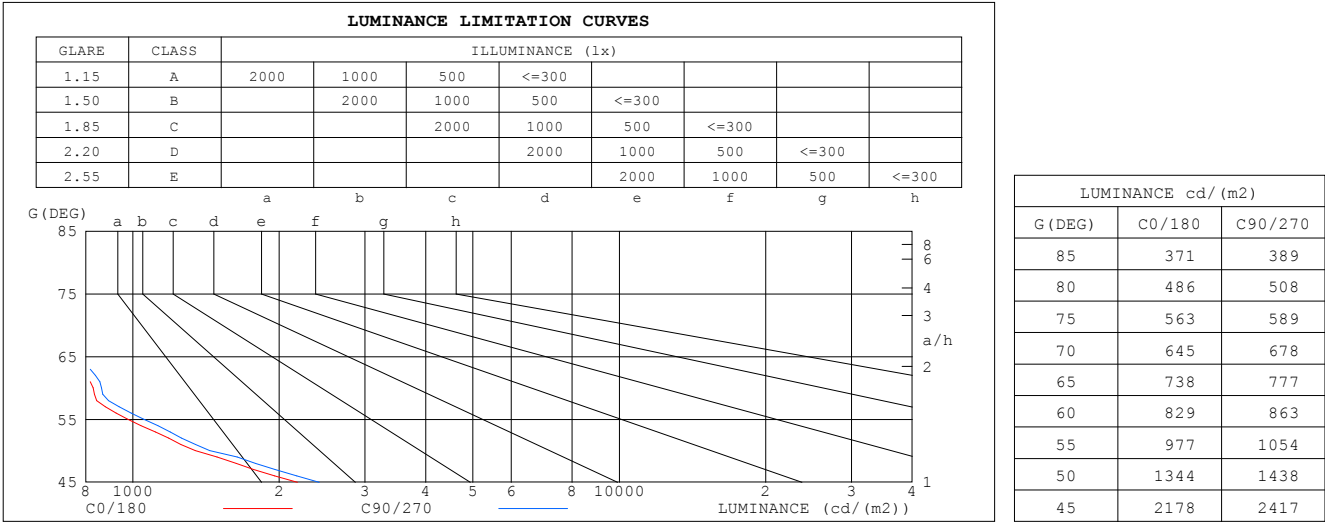


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.4V I:0.3290A P:39.10W PF:0.9870 Freq:60.00Hz Lamp Flux:3677.76x1 lm		
NAME: 4寸B款 20度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.15	1.15	1.15	1.12	1.12	1.12	1.07	1.07	1.07	1.02	1.02	1.02	.98	.98	.98	.96
1.0	1.08	1.06	1.04	1.06	1.04	1.02	1.02	1.00	.99	.98	.97	.96	.95	.94	.93	.92
2.0	1.02	.99	.96	1.00	.97	.95	.97	.95	.93	.94	.92	.91	.92	.90	.89	.87
3.0	.97	.93	.89	.95	.92	.89	.93	.90	.87	.91	.88	.86	.88	.86	.85	.83
4.0	.92	.88	.84	.91	.87	.84	.89	.85	.83	.87	.84	.82	.85	.83	.81	.80
5.0	.88	.83	.80	.87	.83	.80	.85	.82	.79	.84	.81	.78	.82	.80	.78	.76
6.0	.84	.80	.76	.83	.79	.76	.82	.78	.75	.81	.77	.75	.80	.77	.74	.73
7.0	.81	.76	.73	.80	.76	.73	.79	.75	.72	.78	.75	.72	.77	.74	.72	.71
8.0	.78	.73	.70	.77	.73	.70	.76	.72	.70	.75	.72	.69	.75	.71	.69	.68
9.0	.75	.70	.67	.75	.70	.67	.74	.70	.67	.73	.69	.67	.72	.69	.67	.66
10.0	.72	.68	.65	.72	.68	.65	.71	.68	.65	.71	.67	.65	.70	.67	.65	.64

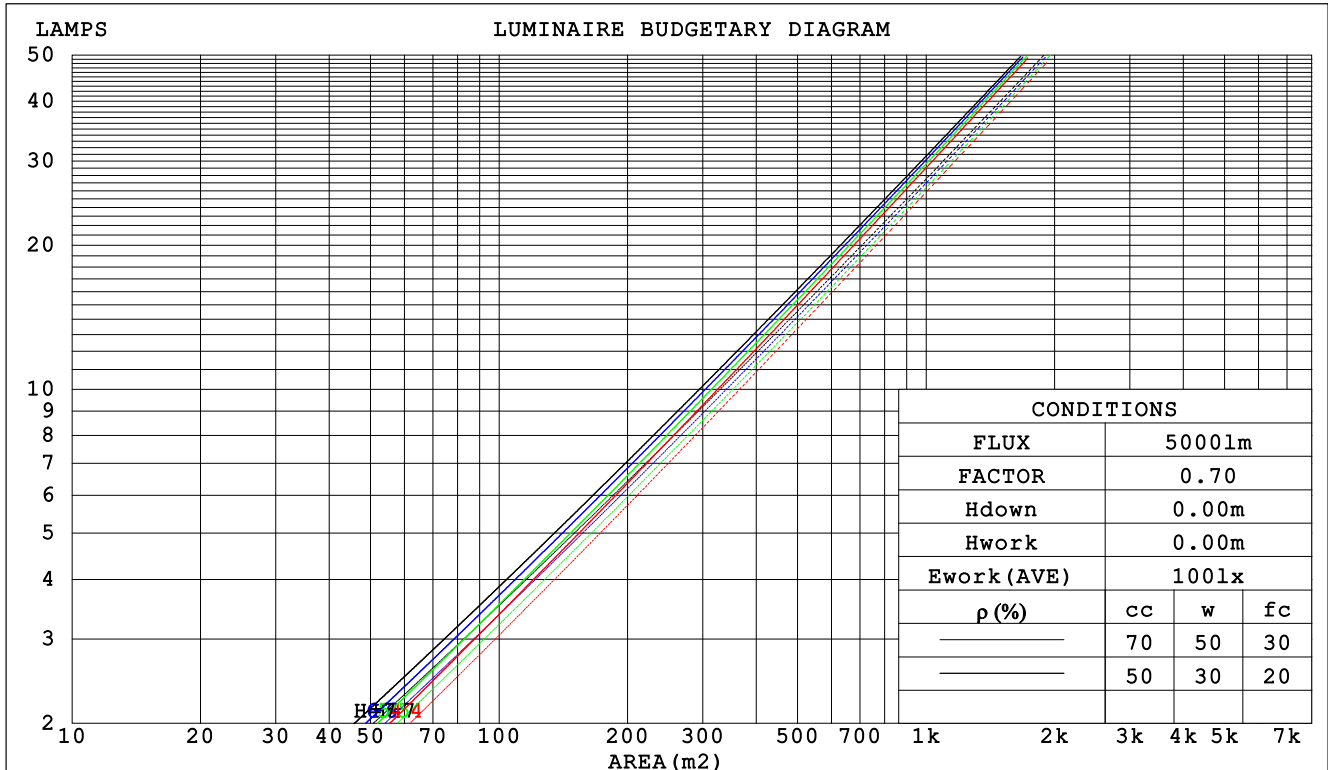

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.4V I:0.3290A P:39.10W PF:0.9870 Freq:60.00Hz Lamp Flux:3677.76x1 lm					
NAME: 4寸B款 20度			TYPE:5000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.149	.085	.027	.143	.081	.026	.131	.075	.024	.120	.069	.022	.109	.063	.020		
2.0	.140	.077	.024	.135	.074	.023	.125	.069	.022	.115	.065	.020	.107	.060	.019		
3.0	.131	.070	.021	.127	.068	.020	.118	.064	.019	.110	.060	.019	.103	.057	.018		
4.0	.123	.064	.019	.120	.063	.018	.112	.060	.018	.106	.057	.017	.099	.054	.016		
5.0	.116	.059	.017	.113	.058	.017	.107	.056	.016	.101	.053	.016	.096	.051	.015		
6.0	.110	.055	.016	.107	.054	.016	.102	.052	.015	.097	.050	.015	.092	.049	.014		
7.0	.105	.052	.015	.102	.051	.015	.097	.049	.014	.093	.048	.014	.089	.046	.014		
8.0	.100	.049	.014	.097	.048	.014	.093	.047	.013	.089	.045	.013	.086	.044	.013		
9.0	.095	.046	.013	.093	.045	.013	.089	.044	.013	.086	.043	.012	.083	.042	.012		
10.0	.091	.044	.012	.089	.043	.012	.086	.042	.012	.083	.041	.012	.080	.040	.012		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.185	.185	.185	.158	.158	.158	.108	.108	.108	.062	.062	.062	.020	.020	.020	
1.0	.165	.153	.143	.141	.131	.123	.096	.090	.085	.055	.052	.049	.018	.017	.016	
2.0	.148	.129	.113	.127	.111	.098	.087	.077	.068	.050	.045	.040	.016	.014	.013	
3.0	.135	.111	.091	.116	.095	.079	.079	.066	.055	.046	.039	.033	.015	.013	.011	
4.0	.124	.096	.075	.106	.083	.065	.073	.058	.046	.042	.034	.027	.014	.011	.009	
5.0	.114	.084	.062	.098	.073	.054	.068	.051	.038	.039	.030	.023	.013	.010	.008	
6.0	.106	.075	.053	.091	.065	.046	.063	.045	.033	.036	.027	.019	.012	.009	.006	
7.0	.099	.067	.045	.085	.058	.039	.059	.041	.028	.034	.024	.017	.011	.008	.005	
8.0	.093	.061	.039	.080	.053	.034	.055	.037	.024	.032	.022	.014	.010	.007	.005	
9.0	.088	.056	.034	.075	.048	.030	.052	.034	.021	.030	.020	.013	.010	.007	.004	
10.0	.083	.051	.030	.071	.044	.026	.050	.031	.019	.029	.018	.011	.009	.006	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.4V I:0.3290A P:39.10W PF:0.9870 Freq:60.00Hz Lamp Flux:3677.76x1 lm										
NAME: 4寸B款 20度					TYPE:5000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	8.9	9.7	9.1	9.8	10.0	9.2	10.0	9.4	10.1	10.3
3H	9.1	9.8	9.3	10.0	10.2	9.4	10.1	9.7	10.3	10.5
4H	9.2	9.9	9.4	10.1	10.3	9.5	10.2	9.8	10.4	10.6
6H	9.2	9.9	9.5	10.1	10.3	9.5	10.2	9.8	10.4	10.7
8H	9.2	9.8	9.5	10.1	10.3	9.5	10.2	9.8	10.4	10.7
12H	9.2	9.8	9.5	10.1	10.3	9.5	10.1	9.8	10.4	10.7
4H 2H	8.9	9.6	9.2	9.8	10.0	9.2	9.9	9.5	10.1	10.3
3H	9.2	9.8	9.5	10.0	10.3	9.5	10.1	9.8	10.3	10.6
4H	9.3	9.9	9.7	10.2	10.5	9.6	10.2	10.0	10.5	10.8
6H	9.4	9.9	9.8	10.2	10.6	9.7	10.2	10.1	10.5	10.9
8H	9.5	9.9	9.9	10.3	10.6	9.8	10.2	10.1	10.5	10.9
12H	9.5	9.9	9.9	10.2	10.6	9.7	10.2	10.2	10.5	10.9
8H 4H	9.3	9.8	9.7	10.1	10.5	9.6	10.0	10.0	10.4	10.8
6H	9.5	9.8	9.9	10.2	10.7	9.8	10.1	10.2	10.5	10.9
8H	9.5	9.9	10.0	10.3	10.7	9.8	10.1	10.3	10.6	11.0
12H	9.6	9.8	10.0	10.3	10.7	9.8	10.1	10.3	10.6	11.0
12H 4H	9.3	9.7	9.7	10.1	10.5	9.6	10.0	10.0	10.3	10.7
6H	9.5	9.8	9.9	10.2	10.6	9.7	10.1	10.2	10.5	10.9
8H	9.5	9.8	10.0	10.2	10.7	9.8	10.1	10.3	10.5	11.0
Variations with the observer position at spacings:										
S = 1.0H	+ 1.6 / - 2.4					+ 1.9 / - 2.5				
1.5H	+ 3.0 / - 2.1					+ 3.3 / - 2.3				
2.0H	+ 2.4 / - 1.1					+ 2.7 / - 1.2				

CIE Pub.117 Corrected 3678 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.5)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.4V I:0.3290A P:39.10W PF:0.9870 Freq:60.00Hz Lamp Flux:3677.76x1 lm		
NAME: 4寸B款 20度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	85	79	75	84	78	75	83	78	75	71
0.80	92	86	83	91	86	82	90	85	82	79
1.00	96	90	87	95	90	87	93	90	86	82
1.25	100	95	91	99	94	91	97	93	90	86
1.50	102	98	94	101	97	94	99	95	93	89
2.00	105	101	98	103	100	97	101	98	95	90
2.50	106	103	100	105	101	99	102	99	97	91
3.00	108	105	102	106	103	101	103	101	99	92
4.00	110	107	105	108	105	104	104	102	101	94
5.00	111	109	107	109	107	105	105	104	102	95
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.4V I:0.3290A P:39.10W PF:0.9870 Freq:60.00Hz Lamp Flux:3677.76x1 lm		
NAME: 4寸B款 20度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

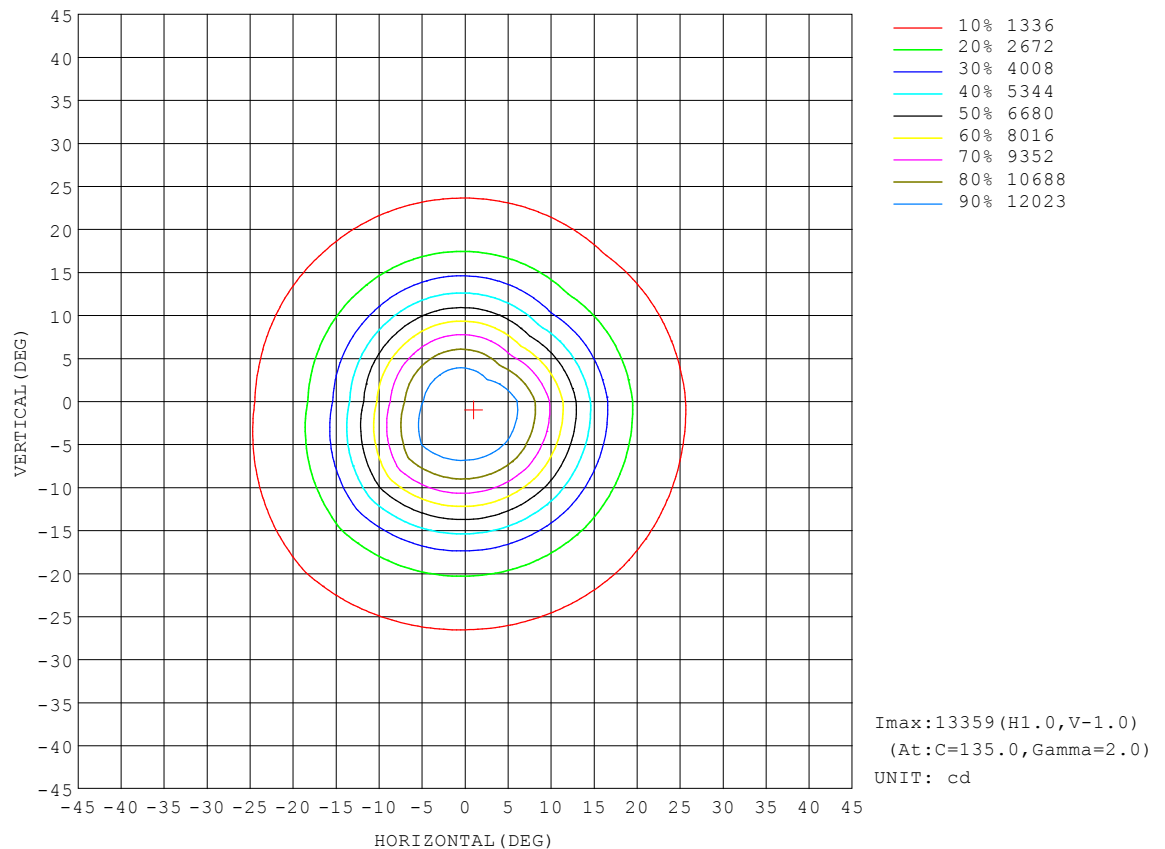


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.4V I:0.3290A P:39.10W PF:0.9870 Freq:60.00Hz Lamp Flux:3677.76x1 lm		
NAME: 4寸B款 20度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

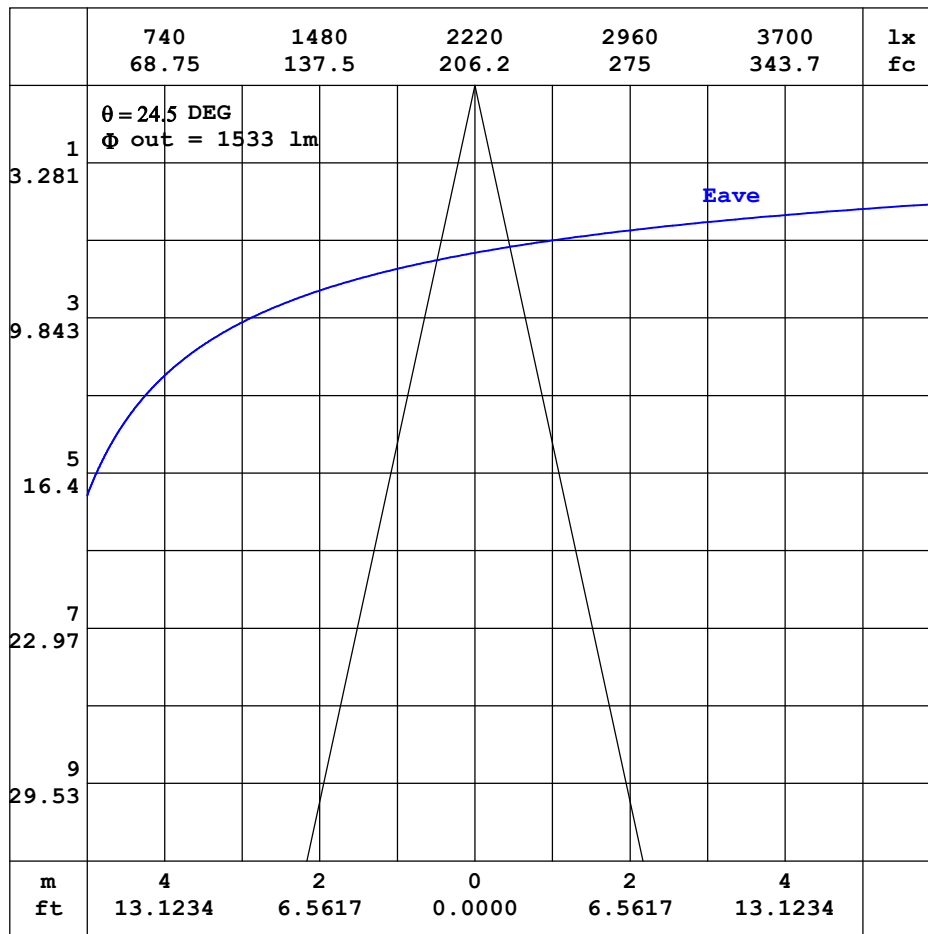


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.4V I:0.3290A P:39.10W PF:0.9870 Freq:60.00Hz Lamp Flux:3677.76x1 lm		
NAME: 4寸B款 20度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

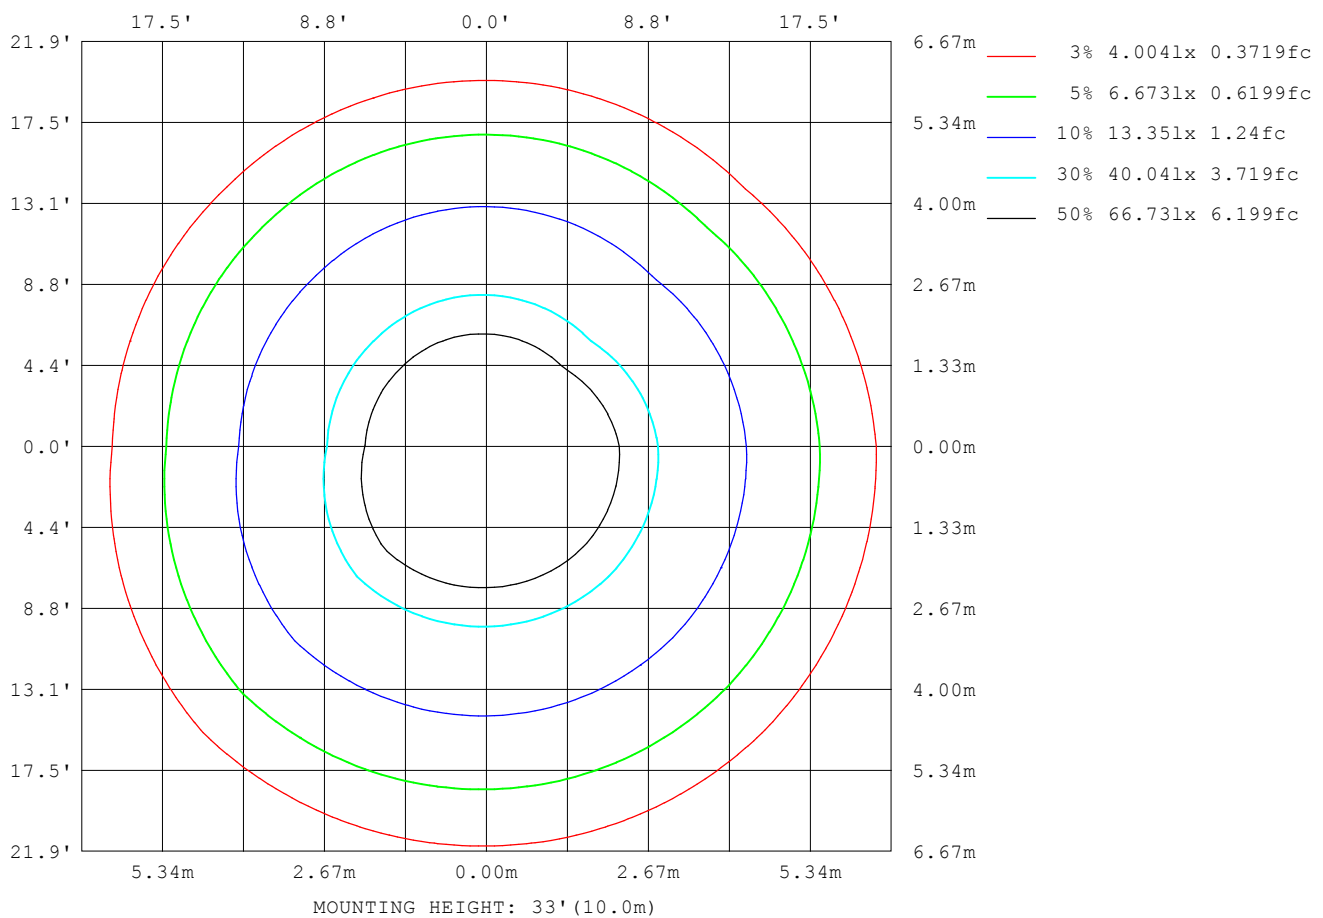

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.4V I:0.3290A P:39.10W PF:0.9870 Freq:60.00Hz Lamp Flux:3677.76x1 lm		
NAME: 4寸B款 20度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	690
L_0~180 (75) av	512
L_0~180 (85) av	290
L_90~270 (65) av	697
L_90~270 (75) av	516
L_90~270 (85) av	297
L_45 (65) av	699
L_45 (75) av	520
L_45 (85) av	301

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

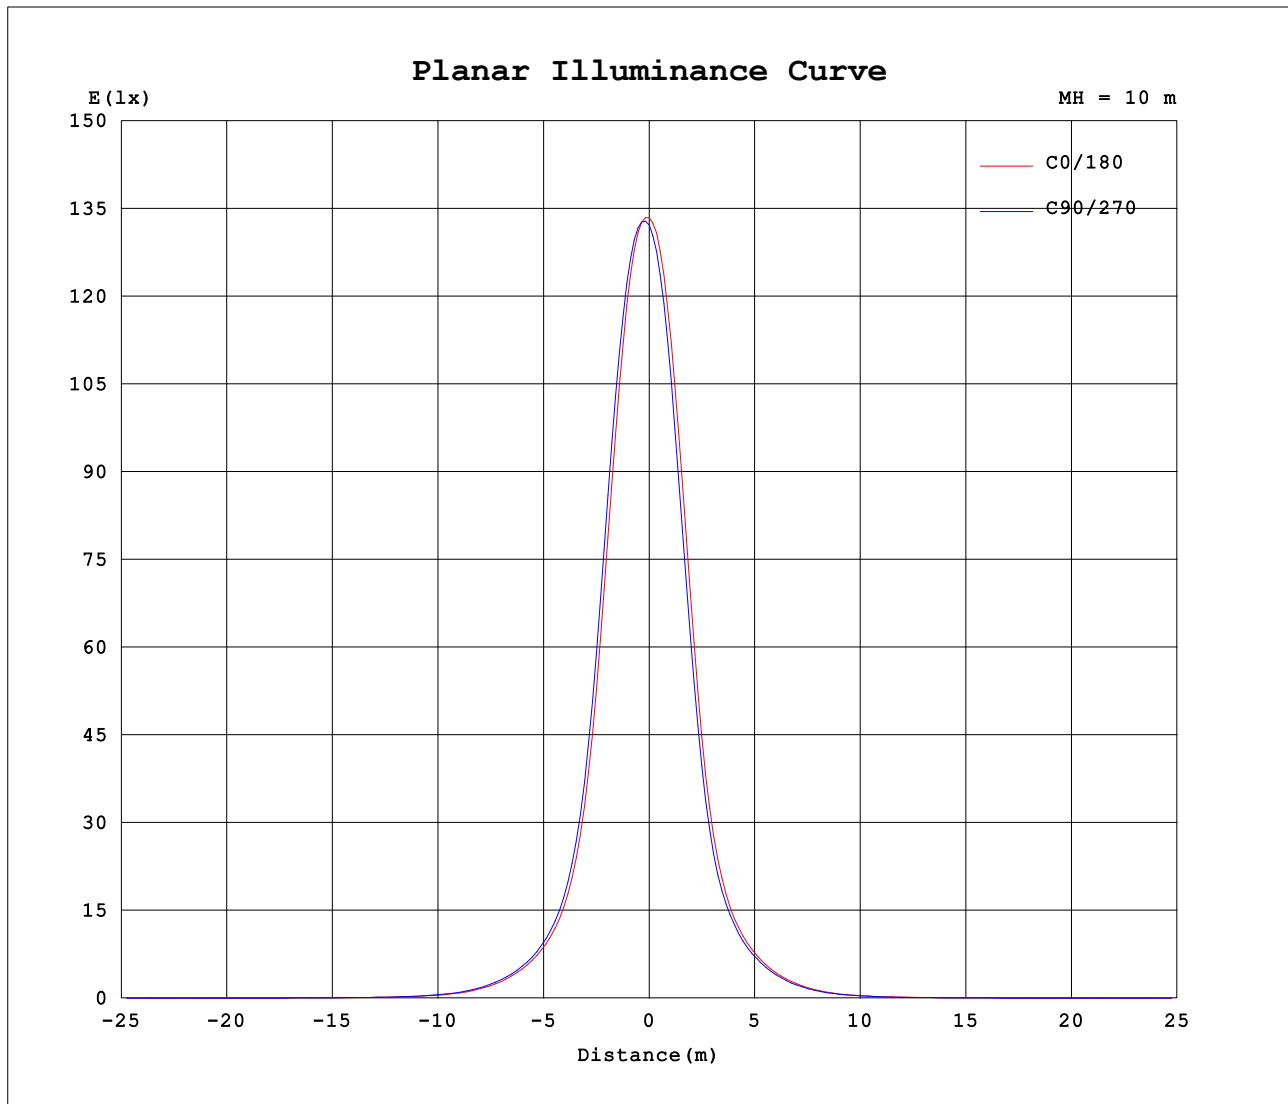

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.3290A P:39.10W PF:0.9870 Freq:60.00Hz Lamp Flux:3677.76x1 lm		
NAME: 4寸B款 20度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1326	1326	1326	1326	1326	1326	1326	1326										
5	1245	1275	1284	1296	1188	1158	1143	1130										
10	913	975	996	1026	818	770	744	728										
15	499	551	566	594	421	389	377	364										
20	247	270	279	291	213	198	195	192										
25	141	153	157	165	125	117	116	115										
30	87.6	93.8	96.3	100	76.2	71.1	71.1	70.6										
35	52.0	56.8	58.4	60.0	44.7	41.0	41.2	40.4										
40	28.5	32.0	32.3	33.3	23.6	21.8	21.7	21.2										
45	15.3	17.1	17.1	17.4	12.7	12.1	11.8	11.6										
50	8.58	9.25	9.27	9.42	7.33	7.14	6.91	6.91										
55	5.57	5.87	6.06	6.01	4.74	4.61	4.57	4.62										
60	4.12	4.29	4.33	4.29	3.72	3.56	3.56	3.62										
65	3.10	3.27	3.30	3.31	2.73	2.60	2.60	2.64										
70	2.19	2.31	2.33	2.35	1.89	1.79	1.80	1.83										
75	1.45	1.53	1.53	1.55	1.20	1.14	1.14	1.16										
80	0.84	0.88	0.88	0.89	0.64	0.61	0.61	0.61										
85	0.32	0.35	0.34	0.37	0.18	0.18	0.18	0.16										
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
115	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
120	0.01	0.01	0.01	0.01	0.00	0.01	0.01	0.01										
125	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01										
130	0.04	0.03	0.03	0.03	0.02	0.02	0.03	0.03										
135	0.07	0.06	0.05	0.05	0.03	0.04	0.05	0.05										
140	0.11	0.09	0.09	0.09	0.06	0.08	0.09	0.08										
145	0.20	0.16	0.15	0.15	0.10	0.13	0.15	0.15										
150	0.37	0.30	0.26	0.27	0.18	0.22	0.24	0.24										
155	0.62	0.54	0.45	0.49	0.27	0.32	0.34	0.34										
160	0.81	0.78	0.68	0.72	0.36	0.40	0.42	0.42										
165	0.88	0.91	0.83	0.85	0.43	0.46	0.47	0.47										
170	0.81	0.88	0.85	0.85	0.47	0.48	0.49	0.49										
175	0.66	0.73	0.73	0.72	0.50	0.51	0.52	0.51										
180	0.55	0.58	0.59	0.58	0.55	0.59	0.60	0.57										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: