


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.4V I:0.3310A P:39.30W PF:0.9870 Freq:60.00Hz Lamp Flux:3674.22x1 lm		
NAME: 4寸B款 30度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 93.58 lm/W			
MODEL		I _{max} (cd)	11052	S/MH (C0/180)	0.50
NOMINAL POWER (W)	40W	LOR (%)	100.1	S/MH (C90/270)	0.45
RATED VOLTAGE (V)	120.0	TOTAL FLUX (lm)	3677.8	η UP, DN (C0-180)	0.1, 55.9
NOMINAL FLUX (lm)	3674.22	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 44.0
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120.0	η down (%)	99.9	CIBSE SHR MAX	0.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

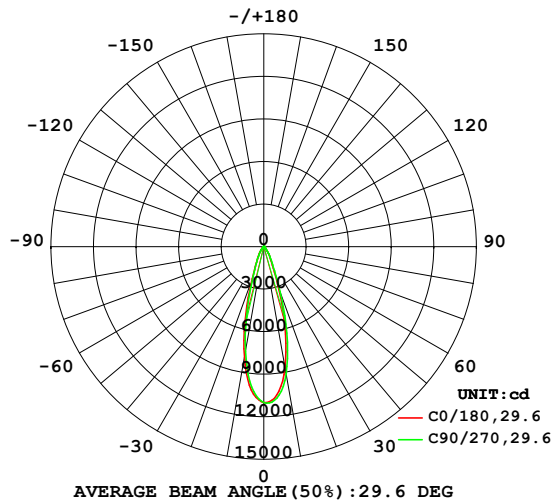

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

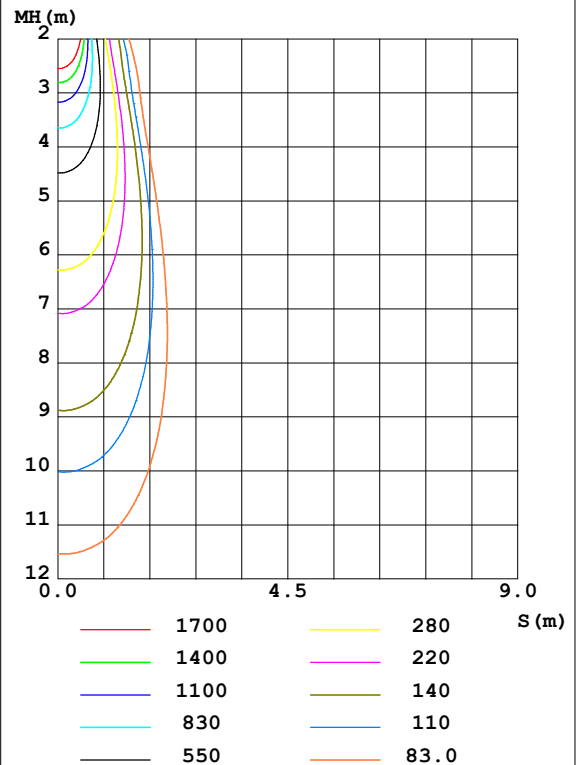

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	866.4	904.6	910.0	919.2	790.8	764.3	749.8	744.2	0- 10	921.8	921.8	25.1,25.1
20	302.4	336.5	340.3	349.7	240.3	225.1	221.5	216.6	10- 20	1461	2383	64.8,64.9
30	93.57	99.50	98.96	100.00	78.97	74.21	75.54	75.50	20- 30	694.2	3077	83.7,83.7
40	34.45	38.08	37.66	38.89	28.89	26.74	27.04	26.64	30- 40	345.8	3423	93.1,93.2
50	9.916	11.43	11.42	11.81	8.008	7.586	7.471	7.395	40- 50	146.5	3569	97.1,97.1
60	4.299	4.472	4.540	4.532	3.952	3.795	3.792	3.811	50- 60	52.38	3622	98.5,98.6
70	2.326	2.451	2.481	2.521	2.047	1.945	1.946	1.955	60- 70	31.11	3653	99.3,99.4
80	0.9058	0.9448	0.9623	0.9779	0.7035	0.6697	0.6681	0.6602	70- 80	15.45	3668	99.7,99.8
90	0.0001	0	0.0001	0	0	0	0	0	80- 90	3.467	3672	99.8,99.9
100	0	0	0	0	0	0	0	0	90-100	0.0000	3672	99.8,99.9
110	0.0026	0.0015	0.0019	0.0015	0	0	0.0003	0	100-110	0.0039	3672	99.8,99.9
120	0.0137	0.0107	0.0109	0.0100	0.0048	0.0070	0.0085	0.0078	110-120	0.0410	3672	99.8,99.9
130	0.0438	0.0369	0.0349	0.0353	0.0205	0.0266	0.0301	0.0286	120-130	0.1693	3672	99.8,99.9
140	0.1206	0.1013	0.0974	0.0968	0.0652	0.0852	0.0974	0.0922	130-140	0.4434	3672	99.9,99.9
150	0.4185	0.3501	0.3001	0.3152	0.1887	0.2290	0.2498	0.2438	140-150	1.081	3673	99.9,100
160	0.7674	0.7439	0.6675	0.6967	0.3636	0.4031	0.4223	0.4209	150-160	1.944	3675	99.9,100
170	0.8119	0.8586	0.8178	0.8125	0.4838	0.4945	0.5049	0.5021	160-170	1.771	3677	100,100
180	0.5968	0.6485	0.6390	0.6192	0.5968	0.6432	0.6475	0.6209	170-180	0.6180	3678	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.4V I:0.3310A P:39.30W PF:0.9870 Freq:60.00Hz Lamp Flux:3674.22x1 lm		
NAME: 4寸B款 30度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

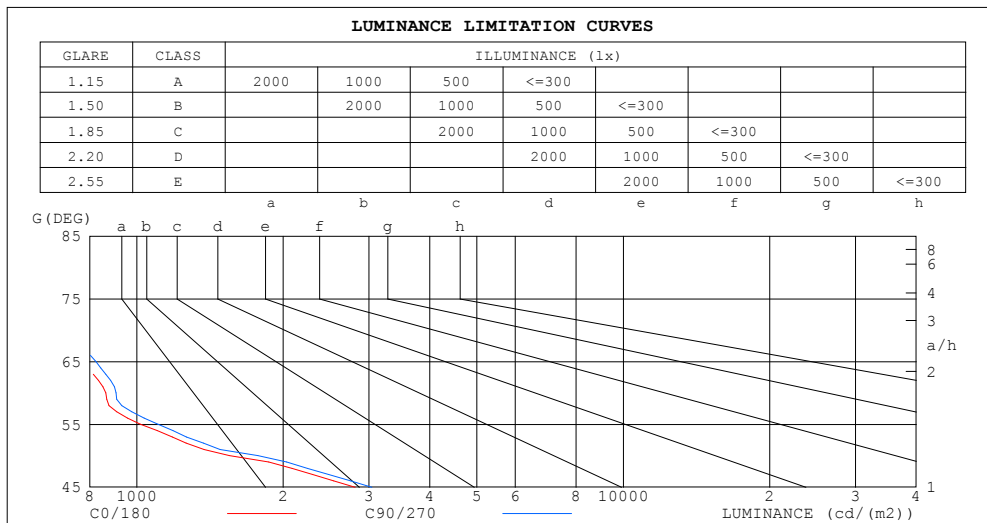


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.4V I:0.3310A P:39.30W PF:0.9870 Freq:60.00Hz Lamp Flux:3674.22x1 lm		
NAME: 4寸B款 30度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.98	.98	.97	.95
2.0	1.05	1.02	.99	1.04	1.00	.98	1.00	.98	.96	.97	.95	.94	.95	.93	.92	.90
3.0	.00	.95	.92	.98	.94	.91	.96	.92	.90	.93	.91	.88	.91	.89	.87	.86
4.0	.95	.90	.86	.94	.89	.86	.91	.88	.85	.89	.86	.84	.88	.85	.83	.82
5.0	.90	.85	.82	.89	.85	.81	.88	.84	.81	.86	.82	.80	.84	.81	.79	.78
6.0	.86	.81	.78	.85	.81	.77	.84	.80	.77	.83	.79	.76	.81	.78	.76	.74
7.0	.82	.77	.74	.82	.77	.74	.81	.76	.73	.79	.76	.73	.78	.75	.73	.71
8.0	.79	.74	.71	.79	.74	.71	.78	.73	.70	.77	.73	.70	.76	.72	.70	.69
9.0	.76	.71	.68	.76	.71	.68	.75	.71	.68	.74	.70	.67	.73	.70	.67	.66
10.0	.73	.69	.65	.73	.68	.65	.72	.68	.65	.71	.68	.65	.71	.67	.65	.64

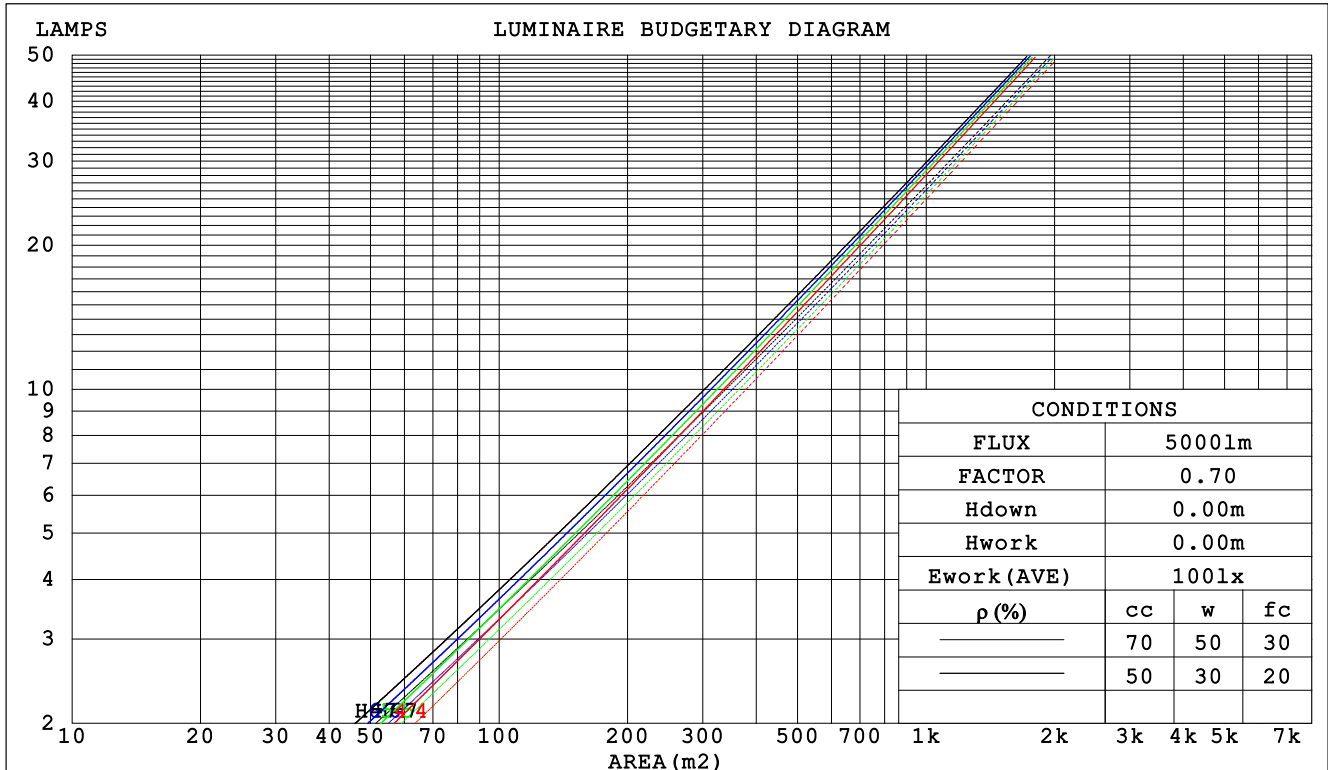

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.4V I:0.3310A P:39.30W PF:0.9870 Freq:60.00Hz Lamp Flux:3674.22x1 lm					
NAME: 4寸B款 30度			TYPE:5000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.159	.090	.029	.152	.087	.028	.140	.080	.026	.128	.074	.024	.117	.068	.022		
2.0	.150	.082	.025	.144	.079	.024	.133	.074	.023	.124	.069	.022	.115	.065	.020		
3.0	.141	.075	.022	.136	.073	.022	.127	.069	.021	.119	.065	.020	.111	.062	.019		
4.0	.132	.069	.020	.128	.067	.020	.121	.064	.019	.114	.061	.018	.107	.058	.018		
5.0	.125	.064	.018	.122	.062	.018	.115	.060	.018	.109	.058	.017	.103	.055	.017		
6.0	.119	.059	.017	.116	.058	.017	.110	.056	.016	.105	.054	.016	.100	.052	.016		
7.0	.113	.056	.016	.110	.055	.016	.105	.053	.015	.100	.051	.015	.096	.050	.015		
8.0	.107	.052	.015	.105	.052	.015	.101	.050	.014	.096	.049	.014	.093	.048	.014		
9.0	.103	.050	.014	.100	.049	.014	.097	.048	.014	.093	.047	.013	.089	.045	.013		
10.0	.098	.047	.013	.096	.047	.013	.093	.045	.013	.089	.044	.013	.086	.043	.012		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.171	.159	.148	.147	.136	.127	.100	.094	.088	.058	.054	.051	.018	.017	.017	
2.0	.155	.134	.117	.132	.115	.101	.091	.080	.070	.052	.046	.041	.017	.015	.013	
3.0	.141	.115	.094	.121	.099	.081	.083	.069	.057	.048	.040	.034	.015	.013	.011	
4.0	.129	.100	.077	.111	.086	.067	.076	.060	.047	.044	.035	.028	.014	.011	.009	
5.0	.120	.088	.064	.103	.076	.056	.071	.053	.039	.041	.031	.023	.013	.010	.008	
6.0	.111	.078	.054	.096	.068	.047	.066	.047	.033	.038	.028	.020	.012	.009	.007	
7.0	.104	.070	.046	.090	.061	.040	.062	.043	.029	.036	.025	.017	.012	.008	.006	
8.0	.098	.064	.040	.084	.055	.035	.058	.039	.025	.034	.023	.015	.011	.007	.005	
9.0	.093	.058	.035	.080	.050	.031	.055	.035	.022	.032	.021	.013	.010	.007	.004	
10.0	.088	.054	.031	.076	.047	.027	.052	.033	.019	.031	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.4V I:0.3310A P:39.30W PF:0.9870 Freq:60.00Hz Lamp Flux:3674.22x1 lm										
NAME: 4寸B款 30度					TYPE:5000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.7	10.5	9.9	10.6	10.8	10.0	10.8	10.2	10.9	11.1
3H	9.8	10.6	10.1	10.8	11.0	10.1	10.9	10.4	11.0	11.2
4H	9.9	10.6	10.2	10.8	11.0	10.2	10.9	10.5	11.1	11.3
6H	9.9	10.6	10.2	10.8	11.1	10.2	10.9	10.5	11.1	11.4
8H	9.9	10.6	10.2	10.8	11.1	10.2	10.8	10.5	11.1	11.4
12H	9.9	10.5	10.2	10.8	11.1	10.2	10.8	10.5	11.1	11.3
4H 2H	9.6	10.3	9.9	10.6	10.8	9.9	10.6	10.2	10.8	11.0
3H	9.9	10.5	10.2	10.8	11.0	10.1	10.8	10.5	11.0	11.3
4H	10.0	10.6	10.4	10.9	11.2	10.3	10.8	10.6	11.1	11.4
6H	10.1	10.6	10.5	10.9	11.3	10.4	10.8	10.7	11.2	11.5
8H	10.1	10.6	10.5	10.9	11.3	10.4	10.8	10.8	11.2	11.5
12H	10.1	10.5	10.5	10.9	11.3	10.4	10.8	10.8	11.2	11.5
8H 4H	10.0	10.4	10.4	10.8	11.2	10.2	10.7	10.6	11.0	11.4
6H	10.1	10.5	10.6	10.9	11.3	10.4	10.7	10.8	11.1	11.6
8H	10.2	10.5	10.6	10.9	11.4	10.4	10.7	10.9	11.2	11.6
12H	10.2	10.5	10.7	10.9	11.4	10.4	10.7	10.9	11.2	11.6
12H 4H	9.9	10.4	10.4	10.7	11.1	10.2	10.6	10.6	11.0	11.4
6H	10.1	10.4	10.5	10.9	11.3	10.3	10.7	10.8	11.1	11.5
8H	10.2	10.4	10.6	10.9	11.4	10.4	10.7	10.9	11.1	11.6
Variations with the observer position at spacings:										
S = 1.0H	+ 1.6 / - 2.8					+ 1.7 / - 2.8				
1.5H	+ 2.9 / - 2.7					+ 3.1 / - 2.8				
2.0H	+ 3.2 / - 1.5					+ 3.4 / - 1.5				

CIE Pub.117 Corrected 3674 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.5)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.4V I:0.3310A P:39.30W PF:0.9870 Freq:60.00Hz Lamp Flux:3674.22x1 lm		
NAME: 4寸B款 30度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	81	77	87	81	77	86	80	77	73
0.80	95	89	85	94	89	85	93	88	85	81
1.00	99	94	90	98	93	90	97	93	89	85
1.25	103	98	94	102	97	94	100	96	93	89
1.50	106	101	98	105	100	97	102	99	96	92
2.00	109	104	101	107	103	100	104	101	99	94
2.50	110	106	103	109	105	102	105	103	101	95
3.00	112	108	106	110	107	104	107	104	102	96
4.00	114	111	109	112	109	107	108	106	105	98
5.00	115	113	111	113	111	109	109	108	106	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.4V I:0.3310A P:39.30W PF:0.9870 Freq:60.00Hz Lamp Flux:3674.22x1 lm		
NAME: 4寸B款 30度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

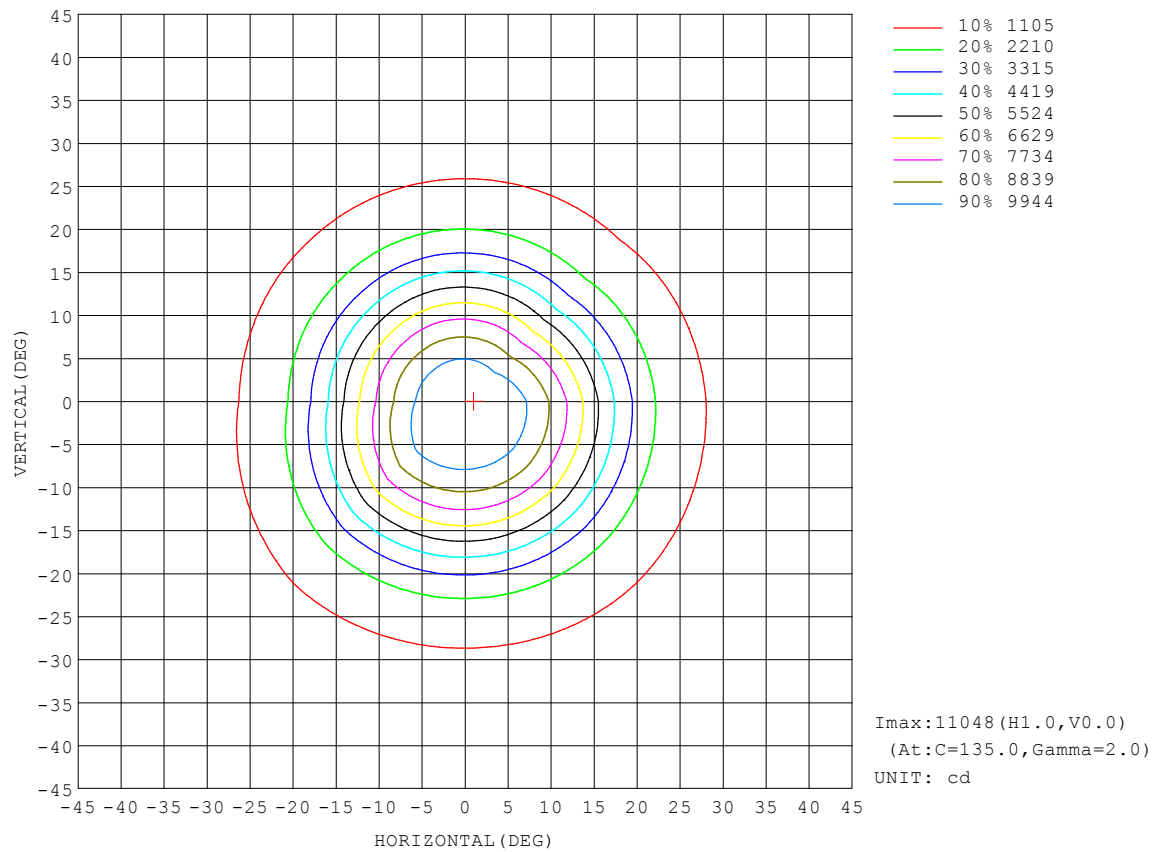


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.4V I:0.3310A P:39.30W PF:0.9870 Freq:60.00Hz Lamp Flux:3674.22x1 lm		
NAME: 4寸B款 30度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

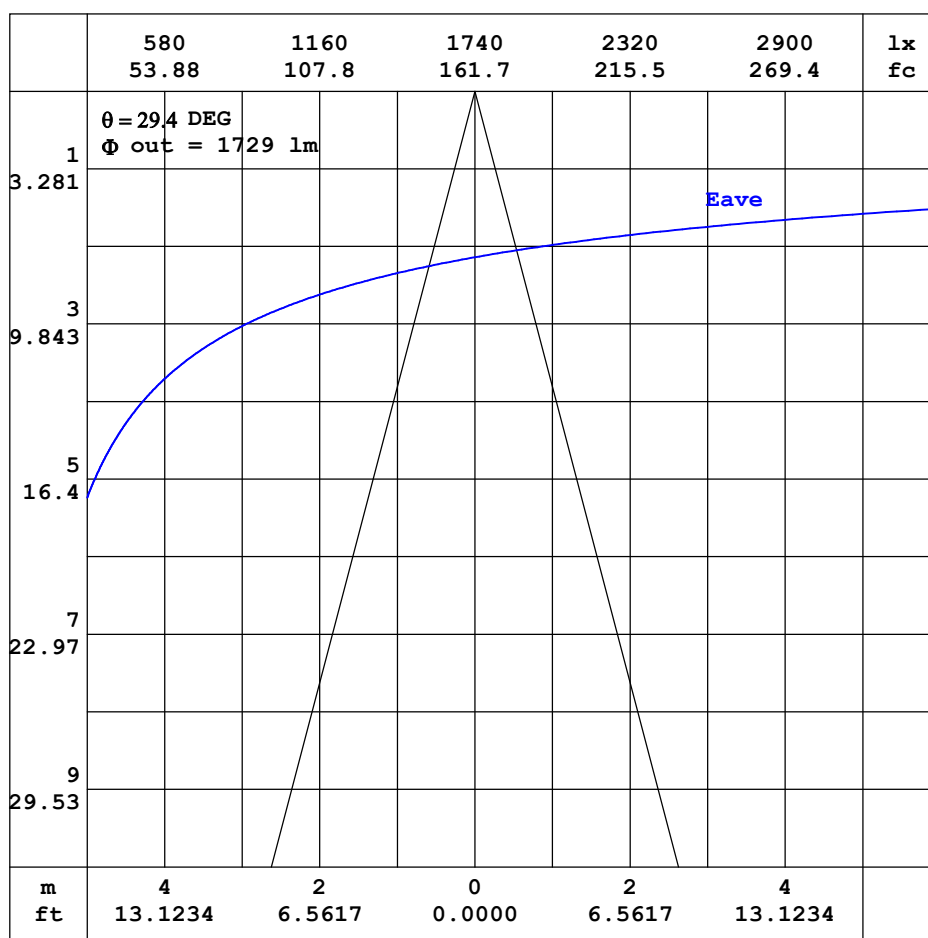


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.4V I:0.3310A P:39.30W PF:0.9870 Freq:60.00Hz Lamp Flux:3674.22x1 lm		
NAME: 4寸B款 30度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

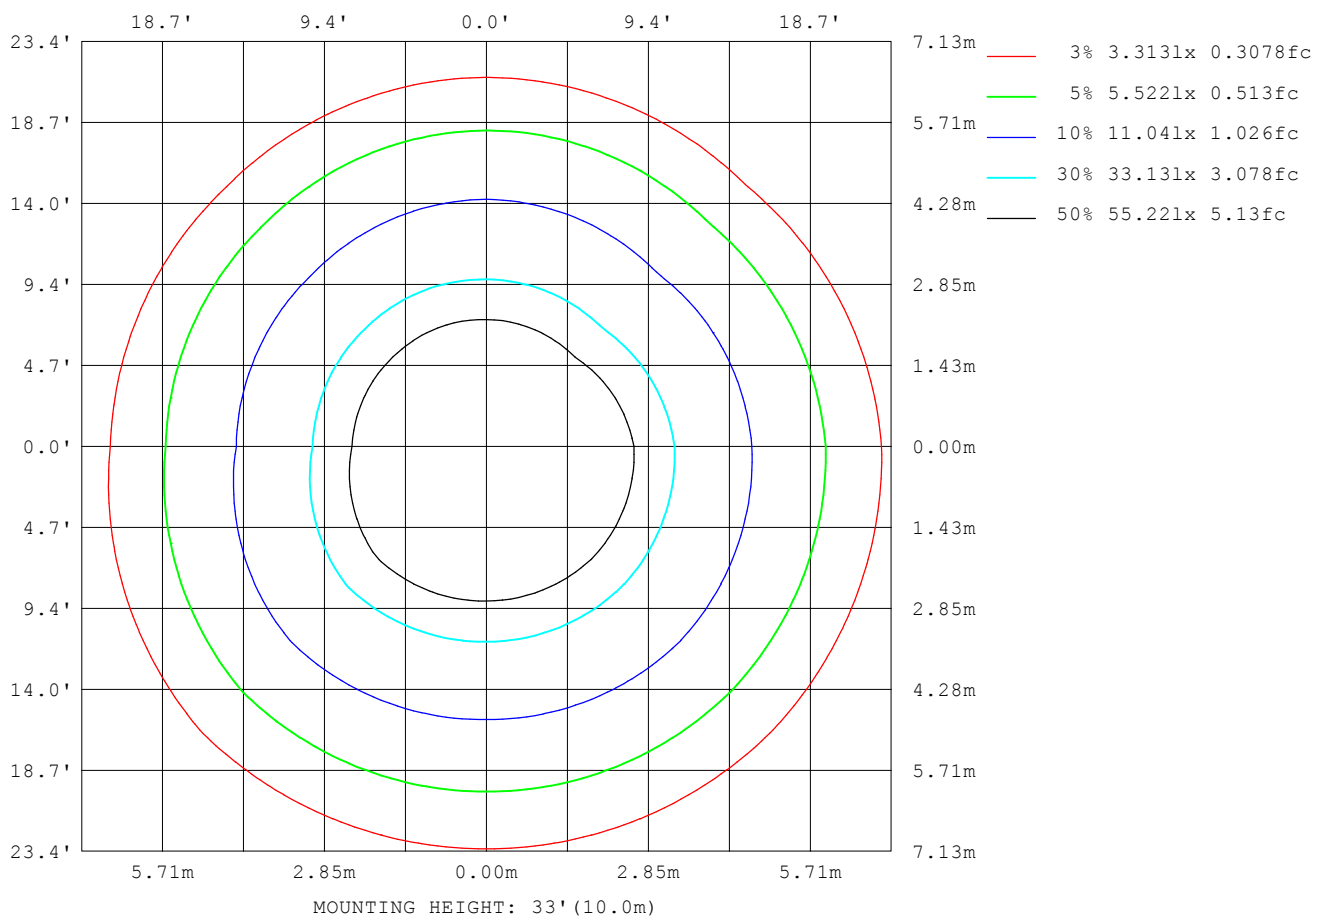

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.4V I:0.3310A P:39.30W PF:0.9870 Freq:60.00Hz Lamp Flux:3674.22x1 lm		
NAME: 4寸B款 30度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	732
L_0~180 (75) av	553
L_0~180 (85) av	319
L_90~270 (65) av	742
L_90~270 (75) av	559
L_90~270 (85) av	324
L_45 (65) av	743
L_45 (75) av	561
L_45 (85) av	329

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

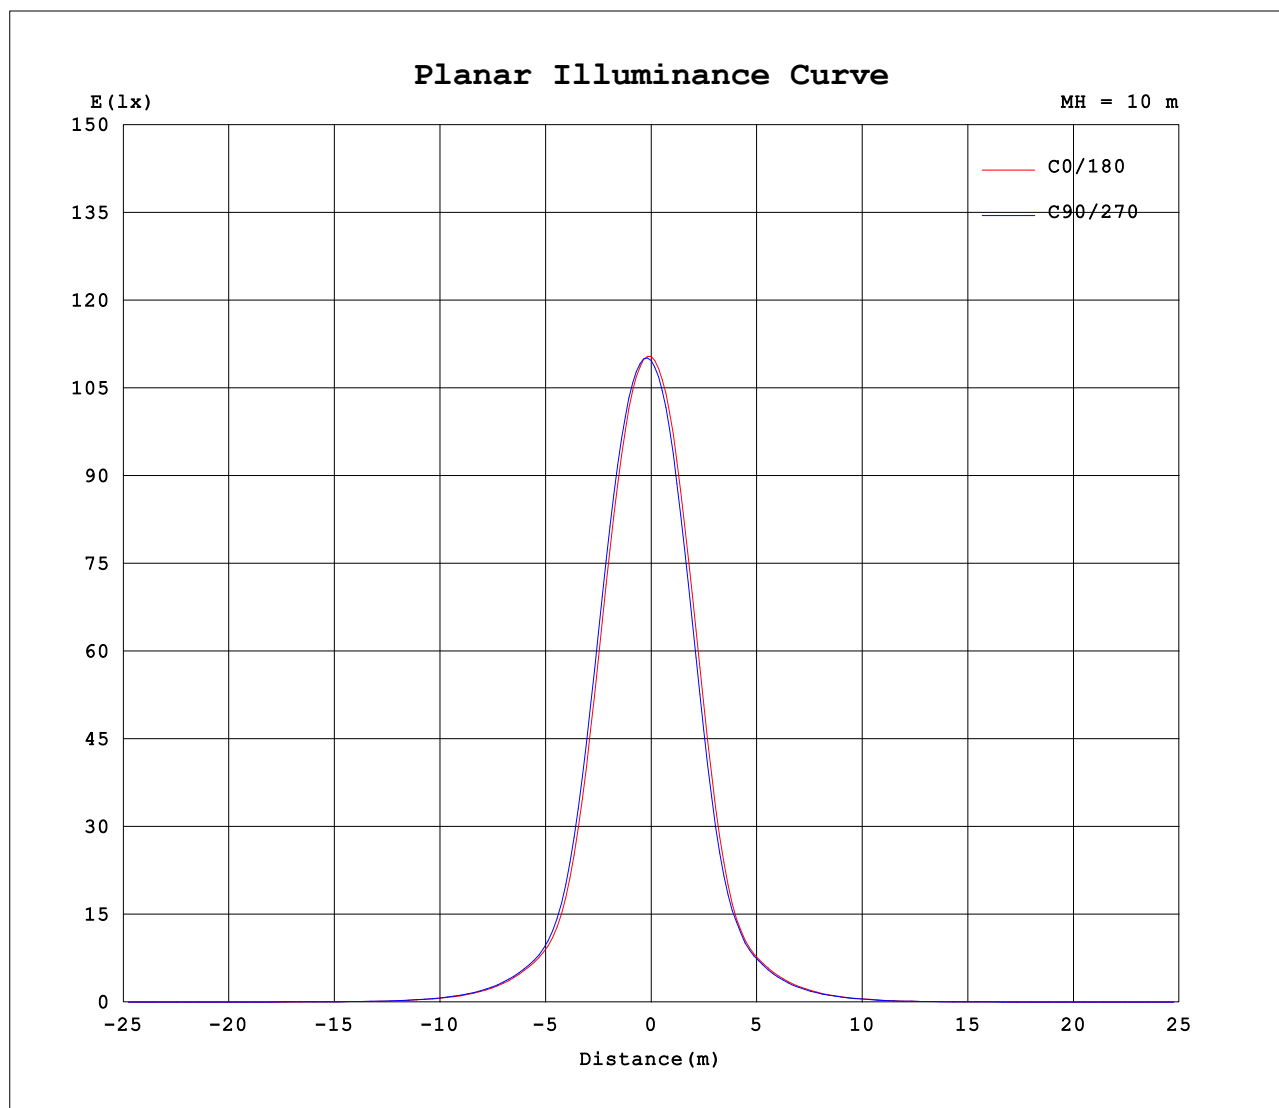

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.3310A P:39.30W PF:0.9870 Freq:60.00Hz Lamp Flux:3674.22x1 lm		
NAME: 4寸B款 30度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1099	1099	1099	1099	1099	1099	1099	1099										
5	1053	1071	1073	1076	1016	1000	993	989										
10	866	905	910	919	791	764	750	744										
15	580	625	632	641	495	463	451	443										
20	302	336	340	350	240	225	222	217										
25	148	167	165	172	125	118	120	118										
30	93.6	99.5	99.0	100.0	79.0	74.2	75.5	75.5										
35	58.7	63.5	63.2	63.7	49.2	45.3	45.9	45.6										
40	34.4	38.1	37.7	38.9	28.9	26.7	27.0	26.6										
45	19.8	21.9	21.6	22.3	16.6	15.5	15.6	15.0										
50	9.92	11.4	11.4	11.8	8.01	7.59	7.47	7.39										
55	5.81	6.15	6.35	6.30	4.99	4.84	4.81	4.83										
60	4.30	4.47	4.54	4.53	3.95	3.79	3.79	3.81										
65	3.26	3.44	3.49	3.53	2.93	2.79	2.79	2.81										
70	2.33	2.45	2.48	2.52	2.05	1.94	1.95	1.96										
75	1.55	1.63	1.65	1.68	1.31	1.25	1.24	1.25										
80	0.91	0.94	0.96	0.98	0.70	0.67	0.67	0.66										
85	0.35	0.37	0.37	0.40	0.21	0.20	0.20	0.17										
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
115	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
120	0.01	0.01	0.01	0.01	0.00	0.01	0.01	0.01										
125	0.03	0.02	0.02	0.02	0.01	0.02	0.02	0.02										
130	0.04	0.04	0.03	0.04	0.02	0.03	0.03	0.03										
135	0.07	0.06	0.06	0.06	0.04	0.05	0.05	0.05										
140	0.12	0.10	0.10	0.10	0.07	0.09	0.10	0.09										
145	0.23	0.19	0.17	0.17	0.12	0.15	0.16	0.16										
150	0.42	0.35	0.30	0.32	0.19	0.23	0.25	0.24										
155	0.62	0.56	0.48	0.51	0.28	0.32	0.34	0.34										
160	0.77	0.74	0.67	0.70	0.36	0.40	0.42	0.42										
165	0.83	0.85	0.78	0.80	0.44	0.46	0.48	0.47										
170	0.81	0.86	0.82	0.81	0.48	0.49	0.50	0.50										
175	0.71	0.78	0.75	0.73	0.52	0.54	0.55	0.53										
180	0.60	0.65	0.64	0.62	0.60	0.64	0.65	0.62										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: