


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.4V I:0.3320A P:39.50W PF:0.9870 Freq:60.00Hz Lamp Flux:2108.33x1 lm		
NAME: 4寸B款 40度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 93.02 lm/W			
MODEL		I _{max} (cd)	7464	S/MH(C0/180)	0.64
NOMINAL POWER(W)	40W	LOR(%)	174.3	S/MH(C90/270)	0.59
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	3674.2	η UP,DN(C0-180)	0.2,94.9
NOMINAL FLUX(lm)	2108.33	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,79.1
LAMPS INSIDE	1	η up(%)	0.3	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120.0	η down(%)	174.0	CIBSE SHR MAX	0.65

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

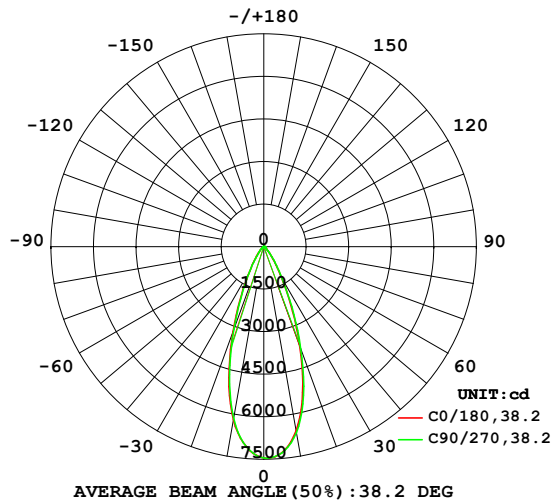

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

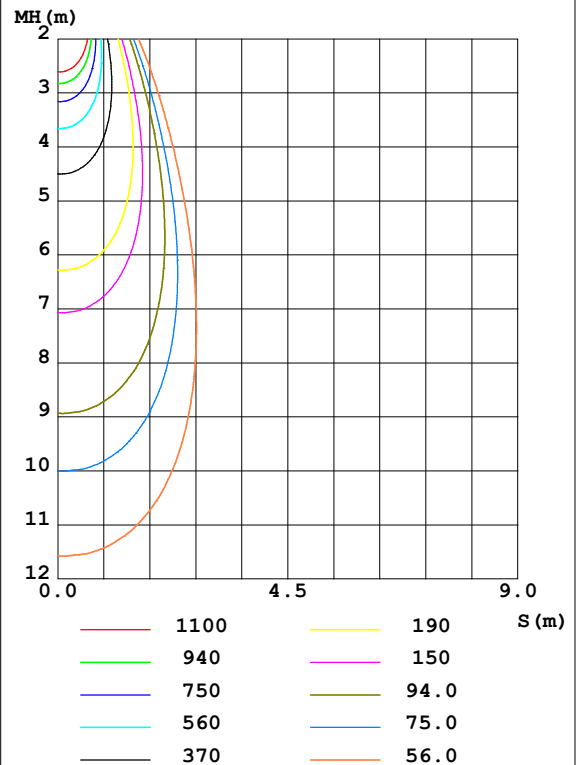

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	6586	6668	6654	6671	6189	6118	6139	6131	0- 10	661.4	661.4	18,31.4
20	3725	3845	3824	3904	3188	3074	3095	3061	10- 20	1375	2036	55.4,96.6
30	1253	1321	1295	1336	1014	961.3	978.4	957.9	20- 30	963.2	2999	81.6,142
40	372.3	410.1	401.0	409.2	306.7	281.6	282.2	274.9	30- 40	407.0	3406	92.7,162
50	102.3	115.7	116.3	123.0	87.92	81.15	80.45	78.95	40- 50	152.7	3559	96.9,169
60	45.86	48.42	49.47	49.01	42.77	40.14	39.46	39.63	50- 60	55.93	3615	98.4,171
70	24.65	26.28	26.87	27.20	22.15	20.63	20.30	20.27	60- 70	33.21	3648	99.3,173
80	9.486	10.11	10.36	10.61	7.671	7.143	6.978	6.798	70- 80	16.48	3665	99.7,174
90	0.0003	0	0.0006	0	0	0	0	0	80- 90	3.698	3668	99.8,174
100	0.0024	0	0	0	0	0	0	0	90-100	0.0001	3668	99.8,174
110	0.0288	0.0171	0.0241	0.0194	0.0001	0.0024	0.0001	0.0048	100-110	0.0049	3668	99.8,174
120	0.1491	0.1095	0.1114	0.1044	0.0650	0.0801	0.0996	0.0824	110-120	0.0457	3668	99.8,174
130	0.5024	0.4185	0.3877	0.4005	0.2533	0.3253	0.3670	0.3535	120-130	0.1877	3669	99.8,174
140	1.659	1.409	1.308	1.337	0.8339	1.005	1.100	1.075	130-140	0.5545	3669	99.9,174
150	3.994	3.706	3.354	3.536	1.935	2.227	2.372	2.360	140-150	1.251	3670	99.9,174
160	6.084	6.013	5.620	5.852	3.312	3.607	3.777	3.782	150-160	1.771	3672	99.9,174
170	6.801	7.057	6.701	6.823	4.624	4.881	4.988	4.985	160-170	1.505	3674	100,174
180	6.057	6.408	6.352	6.340	6.078	6.388	6.357	6.323	170-180	0.5786	3674	100,174
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.4V I:0.3320A P:39.50W PF:0.9870 Freq:60.00Hz Lamp Flux:2108.33x1 lm		
NAME: 4寸B款 40度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

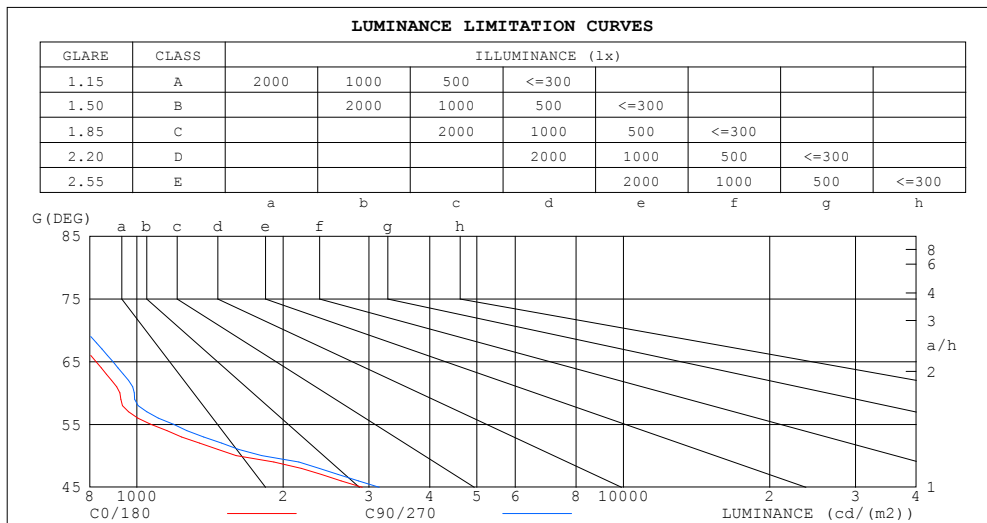


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.4V I:0.3320A P:39.50W PF:0.9870 Freq:60.00Hz Lamp Flux:2108.33x1 lm		
NAME: 4寸B款 40度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	2.07	2.07	2.07	2.03	2.03	2.03	1.93	1.93	1.93	1.85	1.85	1.85	1.78	1.78	1.78	1.74
1.0	1.94	1.90	1.86	1.90	1.87	1.83	1.83	1.80	1.78	1.77	1.74	1.72	1.71	1.69	1.67	1.64
2.0	1.82	1.75	1.70	1.79	1.73	1.68	1.73	1.68	1.64	1.68	1.64	1.61	1.63	1.60	1.57	1.55
3.0	1.71	1.63	1.57	1.69	1.61	1.56	1.64	1.58	1.53	1.60	1.55	1.51	1.56	1.52	1.48	1.46
4.0	1.61	1.53	1.46	1.60	1.51	1.45	1.56	1.49	1.43	1.52	1.47	1.42	1.49	1.44	1.40	1.38
5.0	1.53	1.44	1.37	1.51	1.43	1.36	1.48	1.41	1.35	1.45	1.39	1.34	1.43	1.37	1.33	1.30
6.0	1.45	1.36	1.29	1.44	1.35	1.29	1.41	1.34	1.28	1.39	1.32	1.27	1.37	1.31	1.26	1.24
7.0	1.38	1.29	1.22	1.37	1.28	1.22	1.35	1.27	1.21	1.33	1.26	1.21	1.31	1.25	1.20	1.18
8.0	1.32	1.22	1.16	1.31	1.22	1.16	1.29	1.21	1.15	1.27	1.20	1.15	1.26	1.19	1.14	1.12
9.0	1.26	1.17	1.11	1.25	1.16	1.10	1.23	1.16	1.10	1.22	1.15	1.10	1.21	1.14	1.09	1.07
10.0	1.21	1.12	1.06	1.20	1.11	1.05	1.18	1.11	1.05	1.17	1.10	1.05	1.16	1.09	1.05	1.03

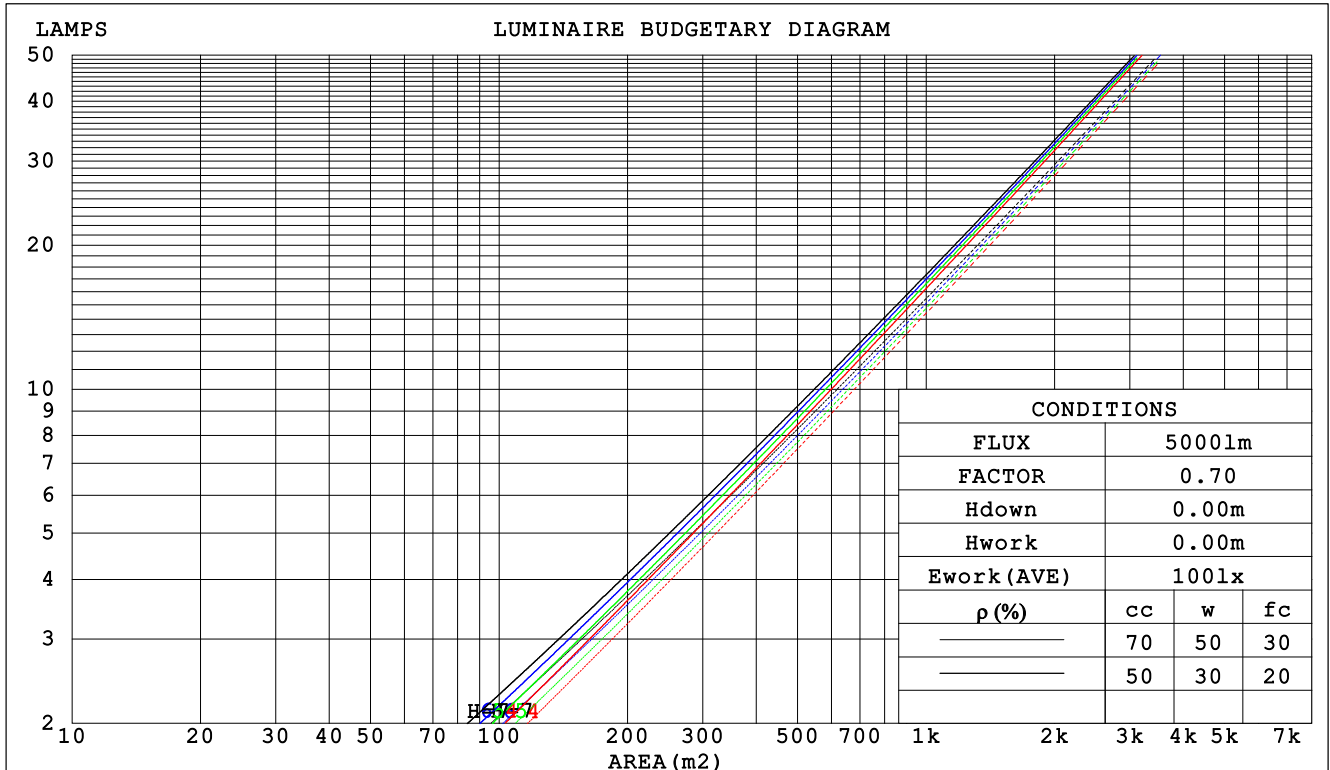

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.4V I:0.3320A P:39.50W PF:0.9870 Freq:60.00Hz Lamp Flux:2108.33x1 lm					
NAME: 4寸B款 40度			TYPE:5000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.292	.166	.053	.280	.160	.051	.258	.148	.047	.238	.137	.044	.219	.127	.041		
2.0	.276	.151	.046	.266	.146	.045	.248	.138	.043	.231	.129	.040	.215	.122	.038		
3.0	.260	.139	.041	.252	.135	.041	.236	.128	.039	.222	.122	.037	.208	.115	.036		
4.0	.246	.128	.038	.239	.125	.037	.225	.120	.036	.213	.114	.035	.201	.109	.033		
5.0	.233	.119	.034	.227	.117	.034	.215	.112	.033	.205	.108	.032	.194	.104	.031		
6.0	.222	.111	.032	.216	.109	.031	.206	.106	.031	.197	.102	.030	.188	.099	.029		
7.0	.211	.104	.030	.206	.103	.029	.197	.100	.029	.189	.097	.028	.181	.094	.028		
8.0	.201	.098	.028	.197	.097	.027	.189	.095	.027	.182	.092	.027	.175	.090	.026		
9.0	.193	.093	.026	.189	.092	.026	.182	.090	.025	.175	.088	.025	.169	.086	.025		
10.0	.185	.089	.025	.181	.088	.024	.175	.086	.024	.169	.084	.024	.163	.082	.024		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.334	.334	.334	.286	.286	.286	.195	.195	.195	.112	.112	.112	.036	.036	.036	
1.0	.299	.276	.256	.256	.237	.220	.175	.163	.152	.101	.094	.089	.032	.030	.029	
2.0	.271	.233	.201	.232	.201	.174	.159	.139	.121	.092	.081	.071	.029	.026	.023	
3.0	.248	.200	.161	.213	.172	.140	.146	.120	.098	.084	.070	.058	.027	.023	.019	
4.0	.229	.174	.132	.197	.150	.115	.135	.105	.081	.078	.061	.048	.025	.020	.016	
5.0	.213	.153	.109	.183	.133	.095	.126	.093	.067	.073	.054	.040	.024	.018	.013	
6.0	.199	.137	.092	.171	.118	.080	.118	.083	.057	.068	.049	.034	.022	.016	.011	
7.0	.187	.123	.079	.161	.107	.068	.111	.075	.049	.065	.044	.029	.021	.014	.010	
8.0	.177	.112	.068	.152	.097	.059	.105	.068	.042	.061	.040	.025	.020	.013	.008	
9.0	.167	.103	.059	.144	.089	.052	.100	.063	.037	.058	.037	.022	.019	.012	.007	
10.0	.159	.095	.052	.137	.082	.046	.095	.058	.032	.056	.034	.019	.018	.011	.006	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.4V I:0.3320A P:39.50W PF:0.9870 Freq:60.00Hz Lamp Flux:2108.33x1 lm										
NAME: 4寸B款 40度					TYPE:5000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	10.5	11.4	10.7	11.5	11.7	10.7	11.6	11.0	11.7	11.9
3H	10.6	11.4	10.9	11.6	11.8	10.9	11.6	11.1	11.8	12.0
4H	10.7	11.4	10.9	11.6	11.8	10.9	11.7	11.2	11.9	12.1
6H	10.7	11.4	11.0	11.6	11.9	10.9	11.6	11.2	11.9	12.1
8H	10.7	11.3	11.0	11.6	11.9	10.9	11.6	11.2	11.9	12.1
12H	10.6	11.3	11.0	11.6	11.8	10.9	11.6	11.2	11.8	12.1
4H 2H	10.4	11.2	10.7	11.4	11.6	10.6	11.4	10.9	11.6	11.8
3H	10.6	11.3	10.9	11.5	11.8	10.9	11.5	11.2	11.8	12.1
4H	10.7	11.3	11.1	11.6	11.9	11.0	11.6	11.3	11.9	12.2
6H	10.8	11.3	11.2	11.7	12.0	11.0	11.6	11.4	11.9	12.2
8H	10.8	11.3	11.2	11.6	12.0	11.1	11.5	11.5	11.9	12.3
12H	10.8	11.2	11.2	11.6	12.0	11.1	11.5	11.5	11.9	12.3
8H 4H	10.7	11.2	11.1	11.5	11.9	10.9	11.4	11.3	11.8	12.1
6H	10.8	11.2	11.2	11.6	12.0	11.1	11.5	11.5	11.8	12.3
8H	10.9	11.2	11.3	11.6	12.1	11.1	11.4	11.5	11.9	12.3
12H	10.9	11.2	11.3	11.6	12.1	11.1	11.4	11.6	11.9	12.3
12H 4H	10.7	11.1	11.1	11.5	11.9	10.9	11.3	11.3	11.7	12.1
6H	10.8	11.1	11.2	11.6	12.0	11.0	11.4	11.5	11.8	12.2
8H	10.8	11.1	11.3	11.6	12.1	11.1	11.4	11.6	11.8	12.3
Variations with the observer position at spacings:										
S = 1.0H	+ 1.8 / - 2.9					+ 2.0 / - 2.9				
1.5H	+ 3.2 / - 2.8					+ 3.4 / - 2.8				
2.0H	+ 3.0 / - 1.5					+ 3.2 / - 1.4				

CIE Pub.117 Corrected 2108 lm Total Lamp Luminous Flux.(8log(F/F0) = 2.6)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.4V I:0.3320A P:39.50W PF:0.9870 Freq:60.00Hz Lamp Flux:2108.33x1 lm		
NAME: 4寸B款 40度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	152	140	134	151	140	134	149	140	133	127
0.80	165	154	148	163	154	148	161	153	147	140
1.00	172	163	156	171	162	156	168	161	155	148
1.25	179	170	164	177	169	163	174	167	162	155
1.50	184	176	170	182	174	169	178	172	167	159
2.00	189	181	176	186	180	174	181	176	172	163
2.50	192	185	180	189	183	178	183	179	175	164
3.00	194	188	184	191	186	182	185	181	178	167
4.00	198	193	189	194	190	187	188	185	182	170
5.00	200	196	193	197	193	190	190	187	185	172
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.4V I:0.3320A P:39.50W PF:0.9870 Freq:60.00Hz Lamp Flux:2108.33x1 lm		
NAME: 4寸B款 40度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

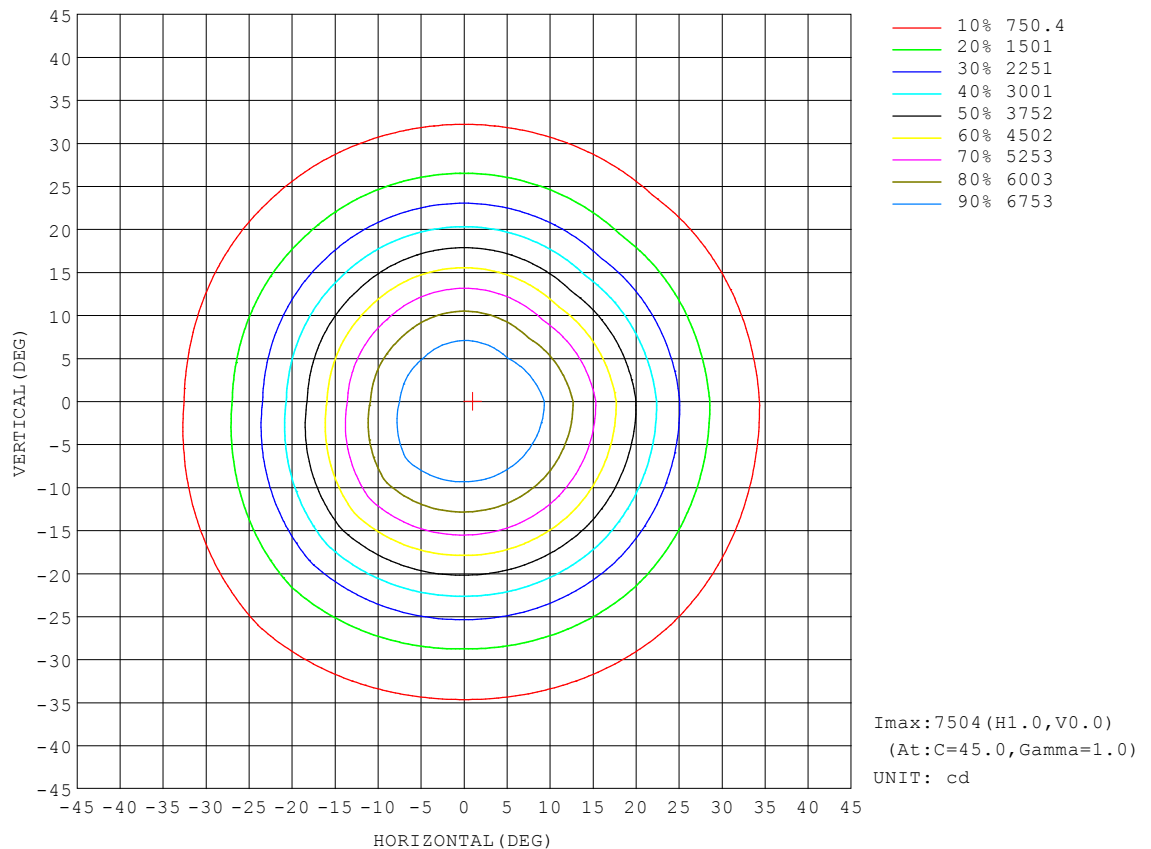


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.4V I:0.3320A P:39.50W PF:0.9870 Freq:60.00Hz Lamp Flux:2108.33x1 lm		
NAME: 4寸B款 40度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

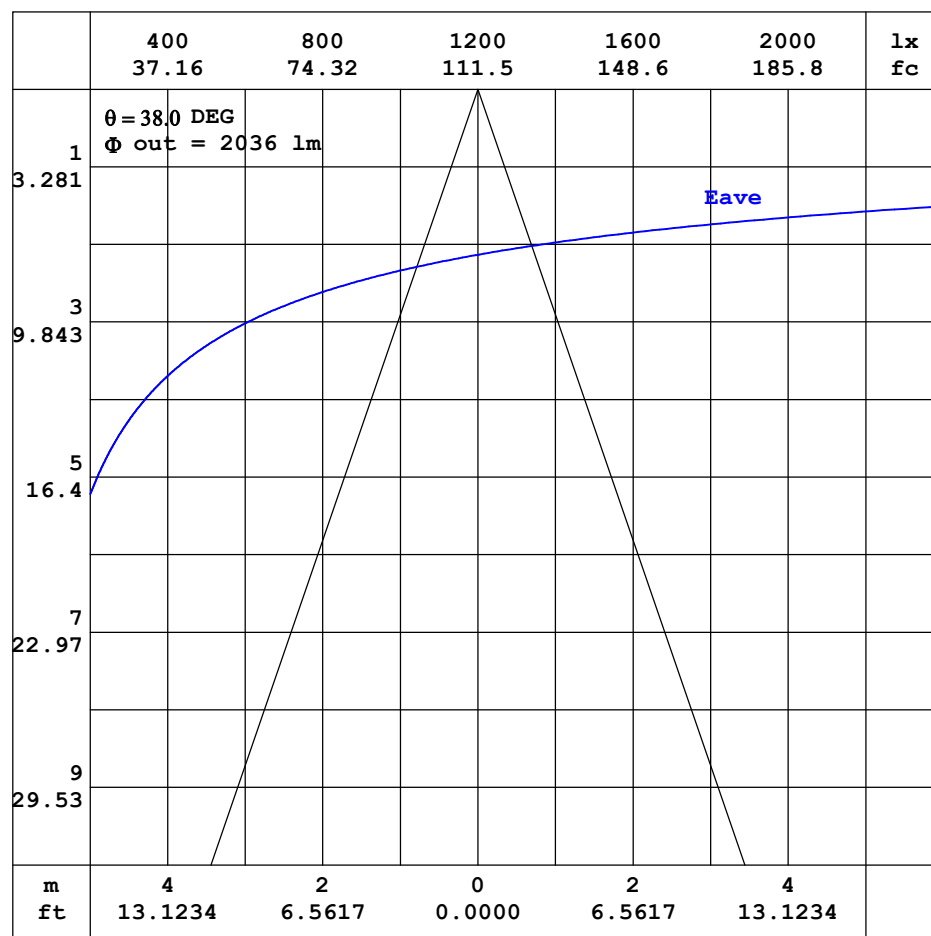


Note: The Curves indicate the illuminated area and the average illuminance when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.4V I:0.3320A P:39.50W PF:0.9870 Freq:60.00Hz Lamp Flux:2108.33x1 lm		
NAME: 4寸B款 40度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

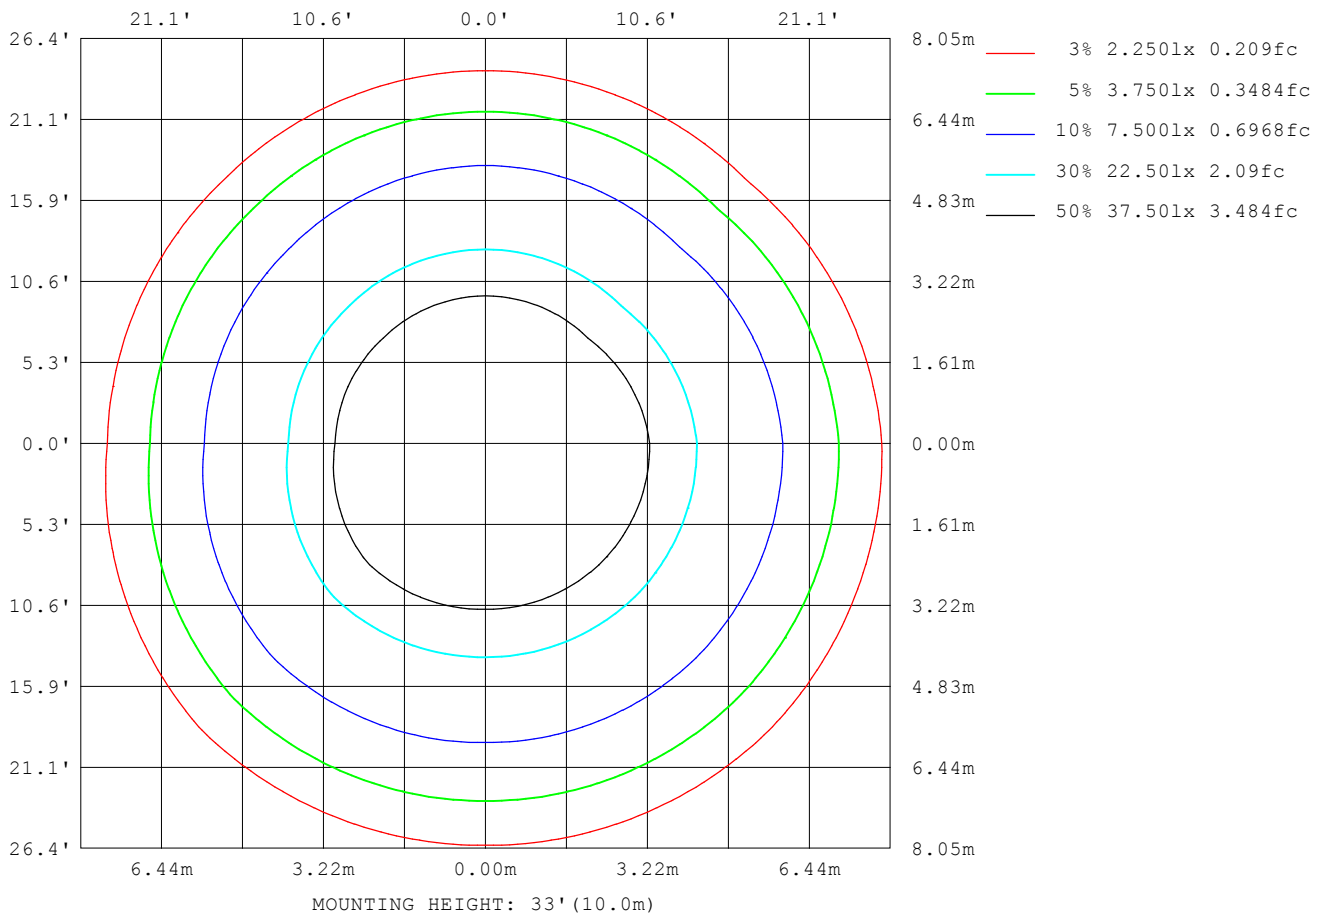

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.4V I:0.3320A P:39.50W PF:0.9870 Freq:60.00Hz Lamp Flux:2108.33x1 lm		
NAME: 4寸B款 40度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	785
L_0~180 (75) av	591
L_0~180 (85) av	341
L_90~270 (65) av	791
L_90~270 (75) av	596
L_90~270 (85) av	349
L_45 (65) av	790
L_45 (75) av	598
L_45 (85) av	352

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

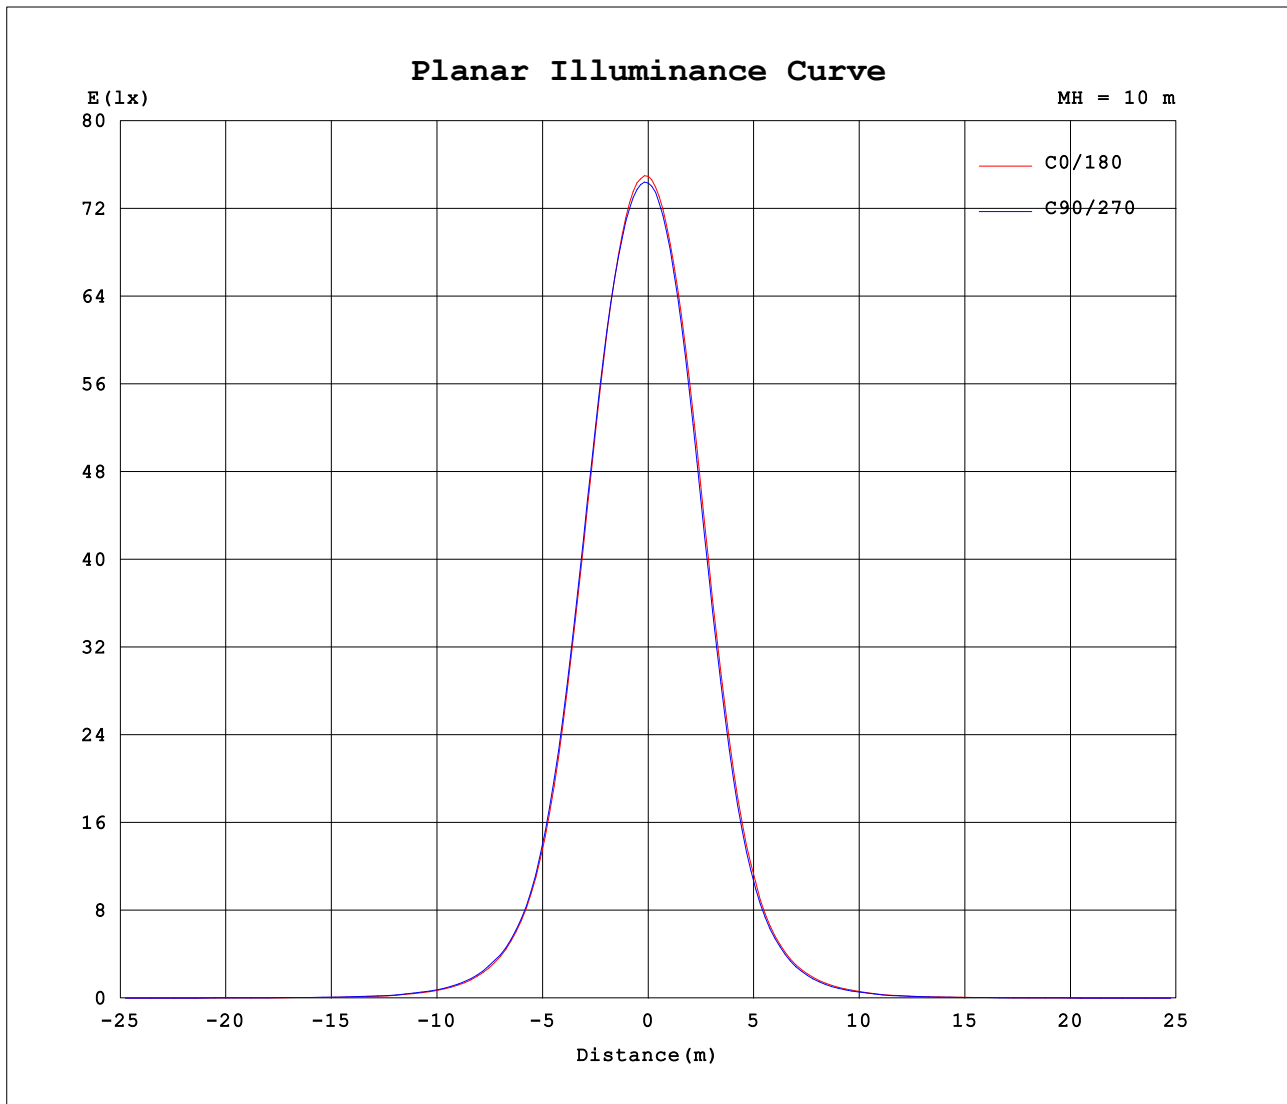

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.3320A P:39.50W PF:0.9870 Freq:60.00Hz Lamp Flux:2108.33x1 lm		
NAME: 4寸B款 40度	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	7447	7447	7447	7447	7447	7447	7447	7447										
5	7297	7320	7302	7310	7087	7062	7086	7079										
10	6586	6668	6654	6671	6189	6118	6139	6131										
15	5316	5428	5423	5468	4779	4663	4681	4659										
20	3725	3845	3824	3904	3188	3074	3095	3061										
25	2257	2363	2352	2409	1861	1775	1793	1753										
30	1253	1321	1295	1336	1014	961	978	958										
35	688	736	723	734	552	516	525	513										
40	372	410	401	409	307	282	282	275										
45	204	226	223	229	177	161	160	155										
50	102	116	116	123	87.9	81.1	80.4	78.9										
55	60.9	66.7	68.3	67.8	53.9	50.4	49.9	50.0										
60	45.9	48.4	49.5	49.0	42.8	40.1	39.5	39.6										
65	34.6	36.9	37.8	38.0	31.7	29.5	29.0	29.2										
70	24.7	26.3	26.9	27.2	22.2	20.6	20.3	20.3										
75	16.3	17.5	17.8	18.2	14.2	13.3	13.0	13.0										
80	9.49	10.1	10.4	10.6	7.67	7.14	6.98	6.80										
85	3.62	3.97	4.04	4.42	2.32	2.13	2.04	1.75										
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.03	0.02	0.02	0.02	0.00	0.00	0.00	0.00										
115	0.07	0.04	0.05	0.04	0.02	0.03	0.04	0.03										
120	0.15	0.11	0.11	0.10	0.07	0.08	0.10	0.08										
125	0.28	0.22	0.22	0.21	0.12	0.17	0.19	0.18										
130	0.50	0.42	0.39	0.40	0.25	0.33	0.37	0.35										
135	0.93	0.77	0.72	0.74	0.47	0.59	0.66	0.63										
140	1.66	1.41	1.31	1.34	0.83	1.01	1.10	1.08										
145	2.75	2.44	2.27	2.30	1.32	1.57	1.68	1.67										
150	3.99	3.71	3.35	3.54	1.93	2.23	2.37	2.36										
155	5.16	4.99	4.51	4.78	2.63	2.93	3.09	3.08										
160	6.08	6.01	5.62	5.85	3.31	3.61	3.78	3.78										
165	6.60	6.74	6.35	6.51	3.98	4.24	4.39	4.39										
170	6.80	7.06	6.70	6.82	4.62	4.88	4.99	4.98										
175	6.58	6.89	6.73	6.74	5.35	5.63	5.68	5.69										
180	6.06	6.41	6.35	6.34	6.08	6.39	6.36	6.32										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: