


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.4V I:0.3390A P:40.30W PF:0.9870 Freq:60.00Hz Lamp Flux:1138.65x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 96.12 lm/W			
MODEL		I _{max} (cd)	4490	S/MH (C0/180)	0.87
NOMINAL POWER (W)	40W	LOR (%)	340.2	S/MH (C90/270)	0.82
RATED VOLTAGE (V)	120.0	TOTAL FLUX (lm)	3873.6	η UP, DN (C0-180)	0.3, 184.1
NOMINAL FLUX (lm)	1138.65	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.2, 155.6
LAMPS INSIDE	1	η up (%)	0.5	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	120.0	η down (%)	339.7	CIBSE SHR MAX	0.90

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

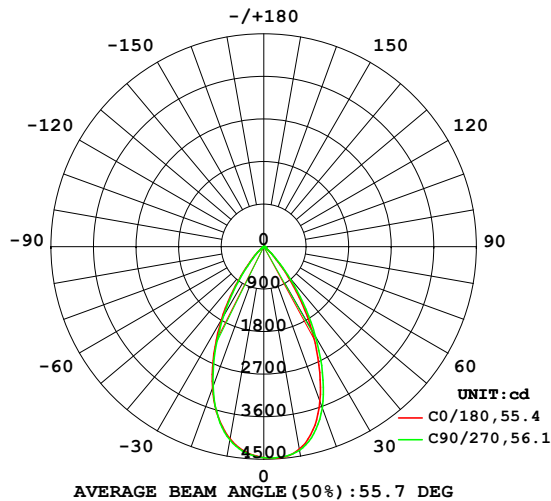

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

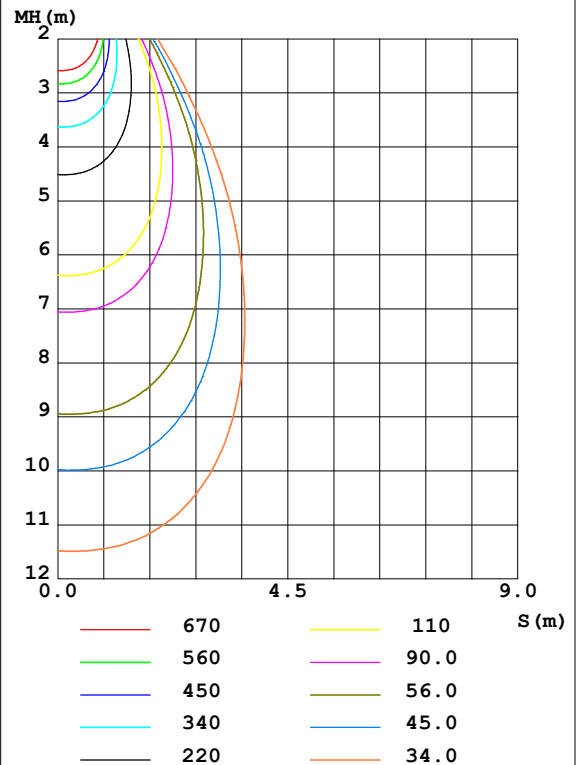

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	4349	4390	4371	4303	4128	4092	4149	4200	0- 10	416.5	416.5	10.8,36.6
20	3477	3604	3622	3551	3175	3086	3143	3174	10- 20	1082	1498	38.7,132
30	2024	2169	2191	2195	1805	1713	1727	1716	20- 30	1211	2709	69.9,238
40	705.8	798.0	801.9	836.6	591.9	548.7	532.2	503.0	30- 40	778.6	3488	90,306
50	140.9	172.9	165.3	183.0	114.1	102.6	99.79	93.95	40- 50	260.8	3749	96.8,329
60	47.07	48.88	49.97	49.81	44.05	41.89	41.66	41.68	50- 60	62.93	3811	98.4,335
70	26.15	27.50	28.16	28.52	23.58	22.17	22.13	22.04	60- 70	34.63	3846	99.3,338
80	10.41	11.04	11.26	11.59	8.490	7.946	7.876	7.662	70- 80	17.79	3864	99.7,339
90	0.0001	0	0.0005	0	0	0	0	0	80- 90	4.121	3868	99.9,340
100	0	0	0	0.0000	0	0	0	0	90-100	0.0000	3868	99.9,340
110	0.0265	0.0146	0.0169	0.0170	0.0048	0.0097	0.0171	0.0218	100-110	0.0041	3868	99.9,340
120	0.2144	0.1601	0.1406	0.1480	0.0968	0.1476	0.1726	0.1670	110-120	0.0664	3868	99.9,340
130	0.8752	0.7228	0.6615	0.6747	0.4280	0.5639	0.6294	0.6126	120-130	0.3195	3868	99.9,340
140	1.985	1.782	1.702	1.746	1.085	1.300	1.421	1.373	130-140	0.8193	3869	99.9,340
150	3.219	3.056	2.904	3.060	1.952	2.238	2.396	2.338	140-150	1.305	3870	99.9,340
160	4.226	4.160	3.981	4.165	2.985	3.332	3.513	3.453	150-160	1.459	3872	100,340
170	4.929	4.993	4.836	4.945	4.211	4.505	4.658	4.641	160-170	1.188	3873	100,340
180	5.028	5.238	5.215	5.248	5.060	5.225	5.218	5.233	170-180	0.4711	3874	100,340
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.4V I:0.3390A P:40.30W PF:0.9870 Freq:60.00Hz Lamp Flux:1138.65x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

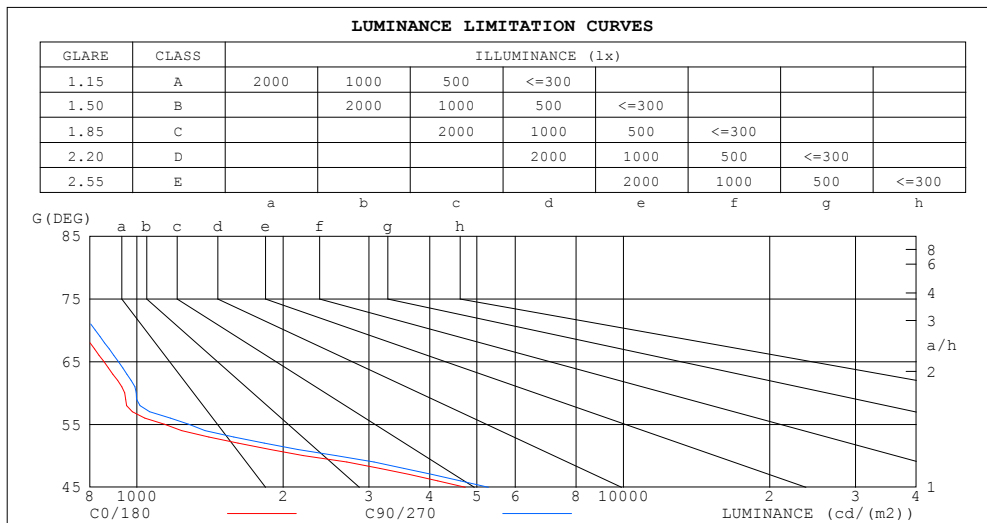


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.4V I:0.3390A P:40.30W PF:0.9870 Freq:60.00Hz Lamp Flux:1138.65x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	4.05	4.05	4.05	3.95	3.95	3.95	3.78	3.78	3.78	3.62	3.62	3.62	3.47	3.47	3.47	3.40
1.0	3.76	3.67	3.59	3.68	3.61	3.54	3.54	3.48	3.43	3.42	3.37	3.32	3.30	3.26	3.23	3.16
2.0	3.49	3.35	3.23	3.43	3.30	3.19	3.32	3.21	3.12	3.22	3.13	3.06	3.12	3.05	2.99	2.93
3.0	3.25	3.08	2.94	3.20	3.04	2.91	3.11	2.98	2.87	3.03	2.91	2.82	2.95	2.86	2.78	2.72
4.0	3.03	2.84	2.69	2.99	2.81	2.68	2.92	2.77	2.64	2.85	2.72	2.61	2.78	2.67	2.58	2.53
5.0	2.84	2.63	2.49	2.80	2.62	2.47	2.74	2.58	2.45	2.68	2.54	2.43	2.63	2.51	2.41	2.36
6.0	2.66	2.45	2.31	2.63	2.44	2.30	2.58	2.41	2.28	2.53	2.38	2.27	2.49	2.35	2.25	2.20
7.0	2.50	2.29	2.15	2.48	2.28	2.14	2.43	2.26	2.13	2.39	2.23	2.12	2.35	2.21	2.11	2.06
8.0	2.36	2.15	2.01	2.34	2.14	2.00	2.30	2.12	2.00	2.26	2.10	1.99	2.23	2.08	1.98	1.93
9.0	2.22	2.02	1.88	2.21	2.01	1.88	2.17	2.00	1.87	2.14	1.98	1.87	2.11	1.97	1.86	1.81
10.0	2.10	1.90	1.77	2.09	1.90	1.77	2.06	1.89	1.76	2.03	1.87	1.76	2.01	1.86	1.75	1.71

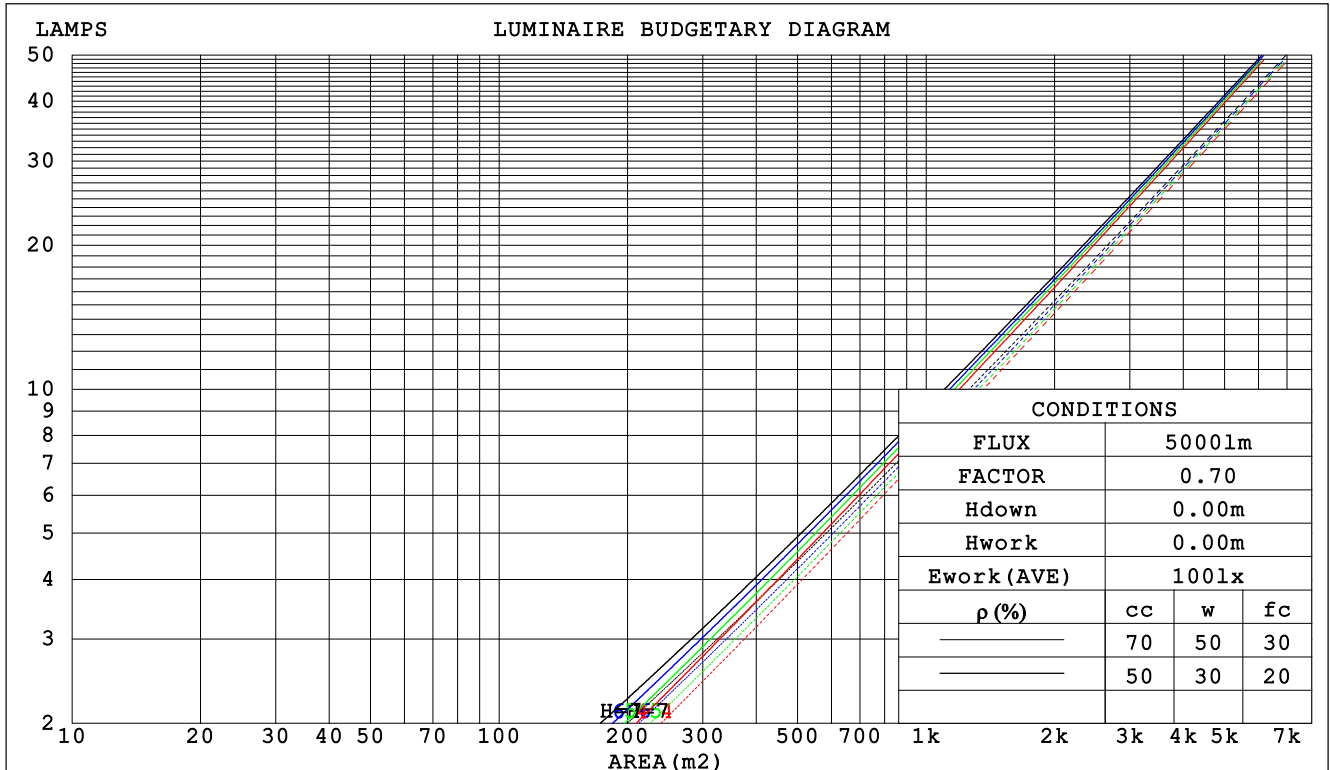

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.4V I:0.3390A P:40.30W PF:0.9870 Freq:60.00Hz Lamp Flux:1138.65x1 lm					
NAME: 4寸B款			TYPE:5000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.622	.354	.112	.599	.342	.109	.556	.319	.102	.516	.298	.096	.480	.278	.090		
2.0	.595	.326	.100	.576	.317	.098	.540	.300	.093	.506	.284	.089	.475	.269	.085		
3.0	.566	.301	.090	.550	.294	.089	.519	.281	.085	.490	.268	.082	.463	.256	.079		
4.0	.539	.280	.082	.524	.274	.081	.497	.264	.079	.472	.254	.076	.449	.244	.074		
5.0	.513	.261	.076	.500	.257	.075	.477	.248	.073	.455	.240	.071	.434	.232	.070		
6.0	.489	.245	.070	.478	.241	.069	.457	.234	.068	.437	.227	.067	.419	.221	.066		
7.0	.466	.231	.065	.457	.228	.065	.438	.222	.064	.421	.216	.063	.405	.210	.062		
8.0	.446	.218	.061	.437	.215	.061	.421	.210	.060	.405	.205	.059	.391	.201	.058		
9.0	.427	.206	.058	.419	.204	.057	.404	.200	.057	.390	.196	.056	.377	.192	.055		
10.0	.409	.196	.054	.402	.194	.054	.389	.190	.054	.376	.187	.053	.364	.183	.053		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.652	.652	.652	.557	.557	.557	.380	.380	.380	.218	.218	.218	.070	.070	.070	
1.0	.587	.539	.495	.503	.462	.426	.344	.318	.295	.198	.184	.171	.063	.059	.055	
2.0	.537	.454	.385	.460	.391	.333	.315	.271	.232	.182	.157	.136	.058	.051	.044	
3.0	.496	.390	.306	.425	.337	.266	.292	.234	.186	.168	.137	.110	.054	.044	.036	
4.0	.461	.341	.248	.396	.294	.216	.272	.205	.152	.157	.120	.090	.051	.039	.030	
5.0	.432	.301	.205	.371	.261	.178	.256	.182	.126	.148	.107	.075	.048	.035	.025	
6.0	.407	.270	.171	.350	.234	.149	.241	.164	.106	.140	.096	.063	.045	.031	.021	
7.0	.385	.244	.146	.331	.212	.127	.229	.148	.090	.133	.087	.053	.043	.029	.018	
8.0	.366	.223	.125	.315	.194	.109	.218	.136	.077	.127	.080	.046	.041	.026	.015	
9.0	.349	.206	.109	.300	.179	.095	.208	.125	.068	.121	.074	.040	.039	.024	.013	
10.0	.333	.191	.096	.287	.166	.084	.199	.117	.060	.116	.069	.036	.038	.023	.012	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.4V I:0.3390A P:40.30W PF:0.9870 Freq:60.00Hz Lamp Flux:1138.65x1 lm										
NAME: 4寸B款					TYPE:5000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.1	15.1	14.3	15.3	15.4	14.5	15.5	14.7	15.6	15.8
3H	14.0	14.9	14.3	15.1	15.3	14.4	15.3	14.7	15.5	15.7
4H	14.0	14.9	14.3	15.1	15.3	14.4	15.2	14.7	15.4	15.7
6H	14.0	14.8	14.3	15.0	15.3	14.3	15.1	14.6	15.4	15.6
8H	13.9	14.7	14.2	15.0	15.2	14.3	15.1	14.6	15.3	15.6
12H	13.9	14.6	14.2	14.9	15.2	14.3	15.0	14.6	15.3	15.6
4H 2H	13.9	14.8	14.2	15.0	15.2	14.3	15.1	14.6	15.3	15.6
3H	13.9	14.6	14.2	14.9	15.2	14.2	15.0	14.6	15.2	15.5
4H	13.9	14.5	14.2	14.8	15.1	14.2	14.9	14.6	15.2	15.5
6H	13.9	14.4	14.2	14.8	15.1	14.2	14.8	14.6	15.1	15.5
8H	13.8	14.4	14.2	14.7	15.1	14.2	14.7	14.6	15.1	15.5
12H	13.8	14.3	14.2	14.7	15.1	14.2	14.7	14.6	15.0	15.4
8H 4H	13.8	14.3	14.2	14.7	15.0	14.1	14.7	14.5	15.0	15.4
6H	13.8	14.2	14.2	14.6	15.0	14.1	14.6	14.6	15.0	15.4
8H	13.8	14.2	14.2	14.6	15.0	14.1	14.5	14.6	14.9	15.4
12H	13.8	14.1	14.2	14.5	15.0	14.1	14.4	14.6	14.9	15.4
12H 4H	13.7	14.2	14.1	14.6	15.0	14.1	14.6	14.5	15.0	15.3
6H	13.7	14.1	14.2	14.6	15.0	14.1	14.5	14.5	14.9	15.3
8H	13.7	14.1	14.2	14.5	15.0	14.1	14.4	14.6	14.9	15.3
Variations with the observer position at spacings:										
S = 1.0H	+ 2.5 / - 5.8					+ 2.7 / - 5.9				
1.5H	+ 4.4 / - 5.6					+ 4.6 / - 5.8				
2.0H	+ 4.6 / - 2.5					+ 5.0 / - 2.6				

CIE Pub.117 Corrected 1139 lm Total Lamp Luminous Flux.(8log(F/F0) = 0.5)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.4V I:0.3390A P:40.30W PF:0.9870 Freq:60.00Hz Lamp Flux:1138.65x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	290	267	254	288	267	254	286	266	253	240
0.80	317	295	282	314	294	282	310	292	280	267
1.00	333	313	300	330	311	299	324	311	297	283
1.25	347	329	316	344	327	315	337	323	312	297
1.50	357	340	328	353	337	326	345	332	323	307
2.00	367	352	341	362	348	338	353	342	333	315
2.50	373	359	349	367	355	346	357	347	339	319
3.00	379	366	357	372	362	353	361	352	345	323
4.00	386	376	368	379	370	363	366	359	354	329
5.00	390	382	375	383	376	370	369	364	359	333
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.4V I:0.3390A P:40.30W PF:0.9870 Freq:60.00Hz Lamp Flux:1138.65x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

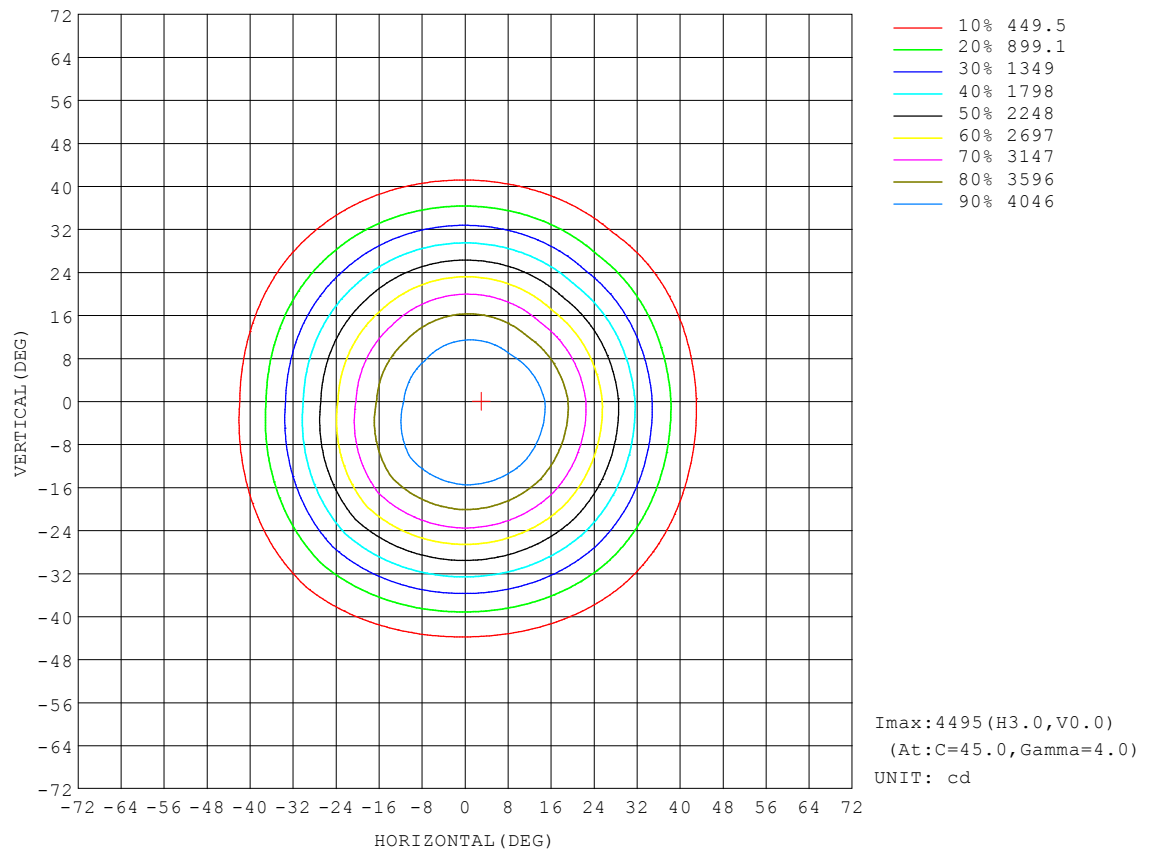


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.4V I:0.3390A P:40.30W PF:0.9870 Freq:60.00Hz Lamp Flux:1138.65x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

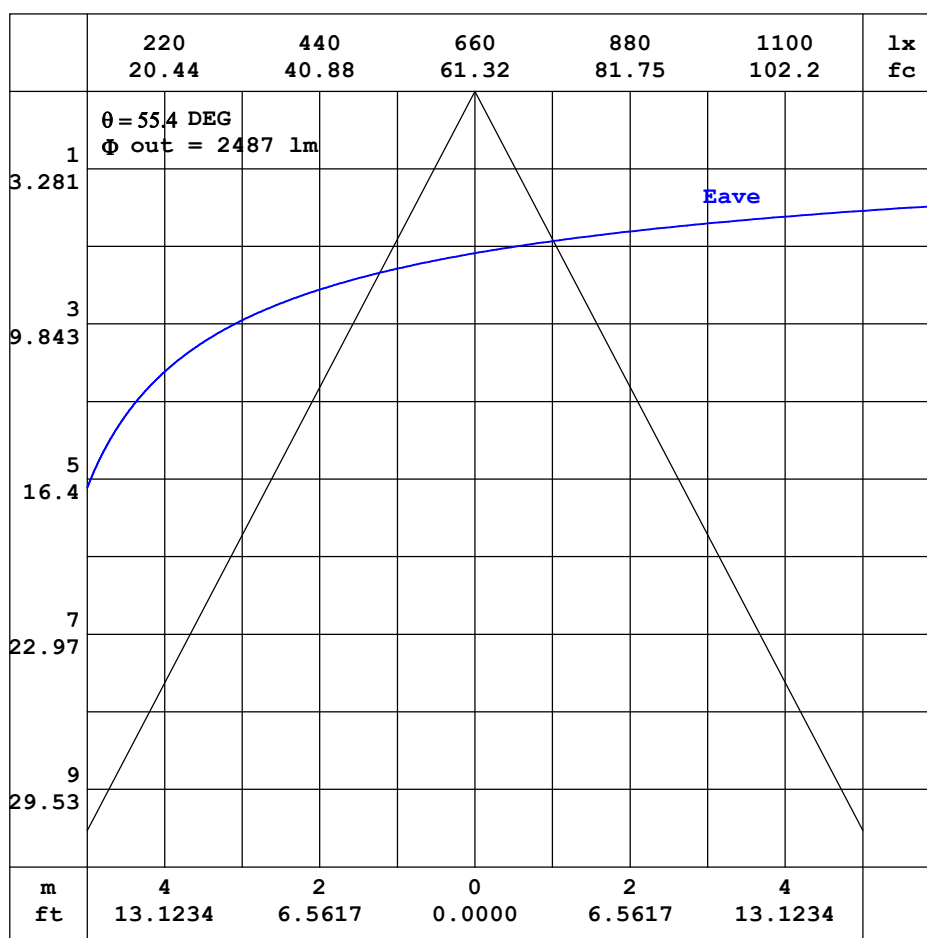


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.4V I:0.3390A P:40.30W PF:0.9870 Freq:60.00Hz Lamp Flux:1138.65x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

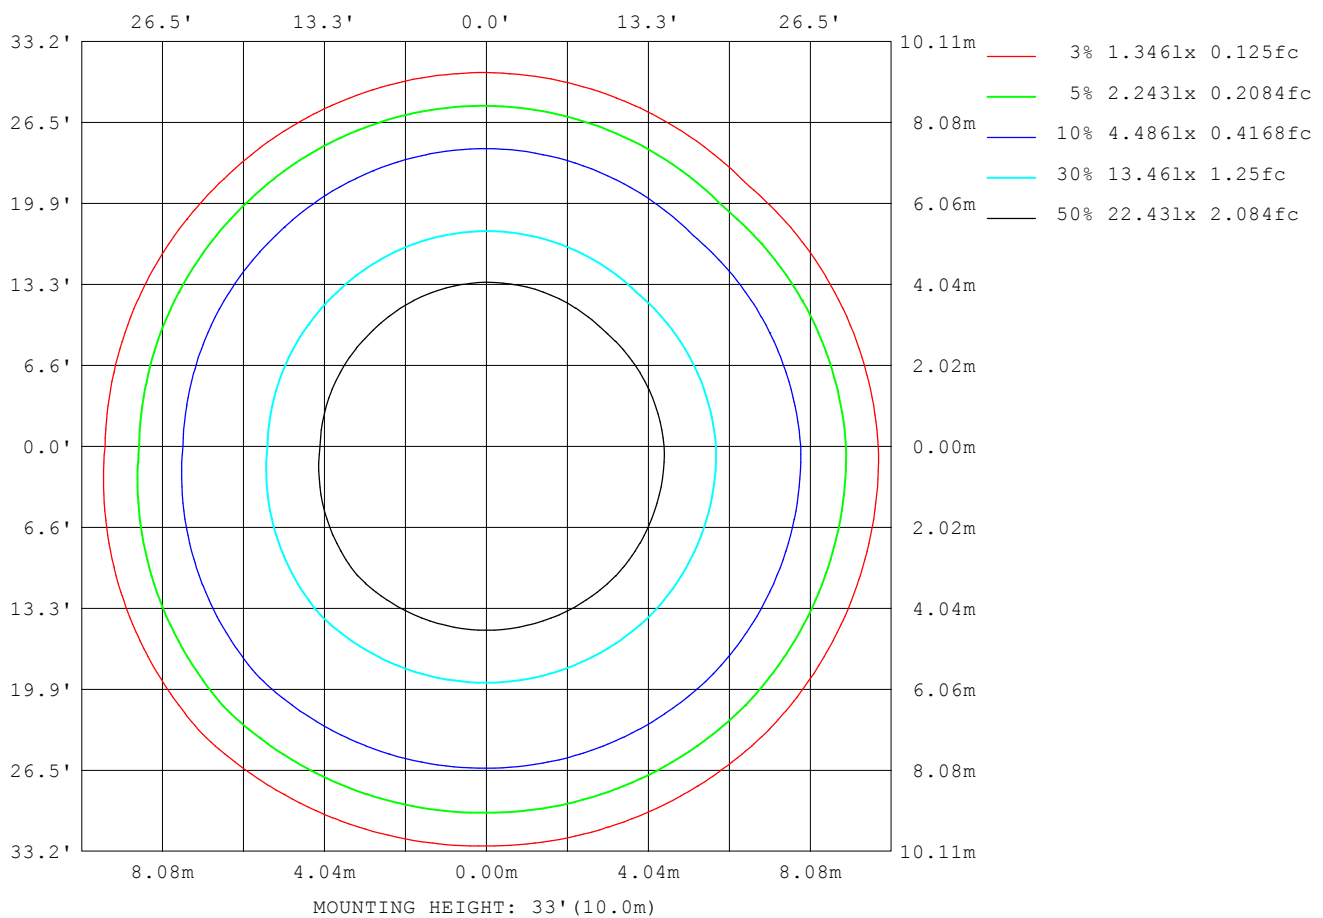

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.4V I:0.3390A P:40.30W PF:0.9870 Freq:60.00Hz Lamp Flux:1138.65x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	818
L_0~180 (75) av	638
L_0~180 (85) av	384
L_90~270 (65) av	827
L_90~270 (75) av	646
L_90~270 (85) av	393
L_45 (65) av	824
L_45 (75) av	647
L_45 (85) av	395

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

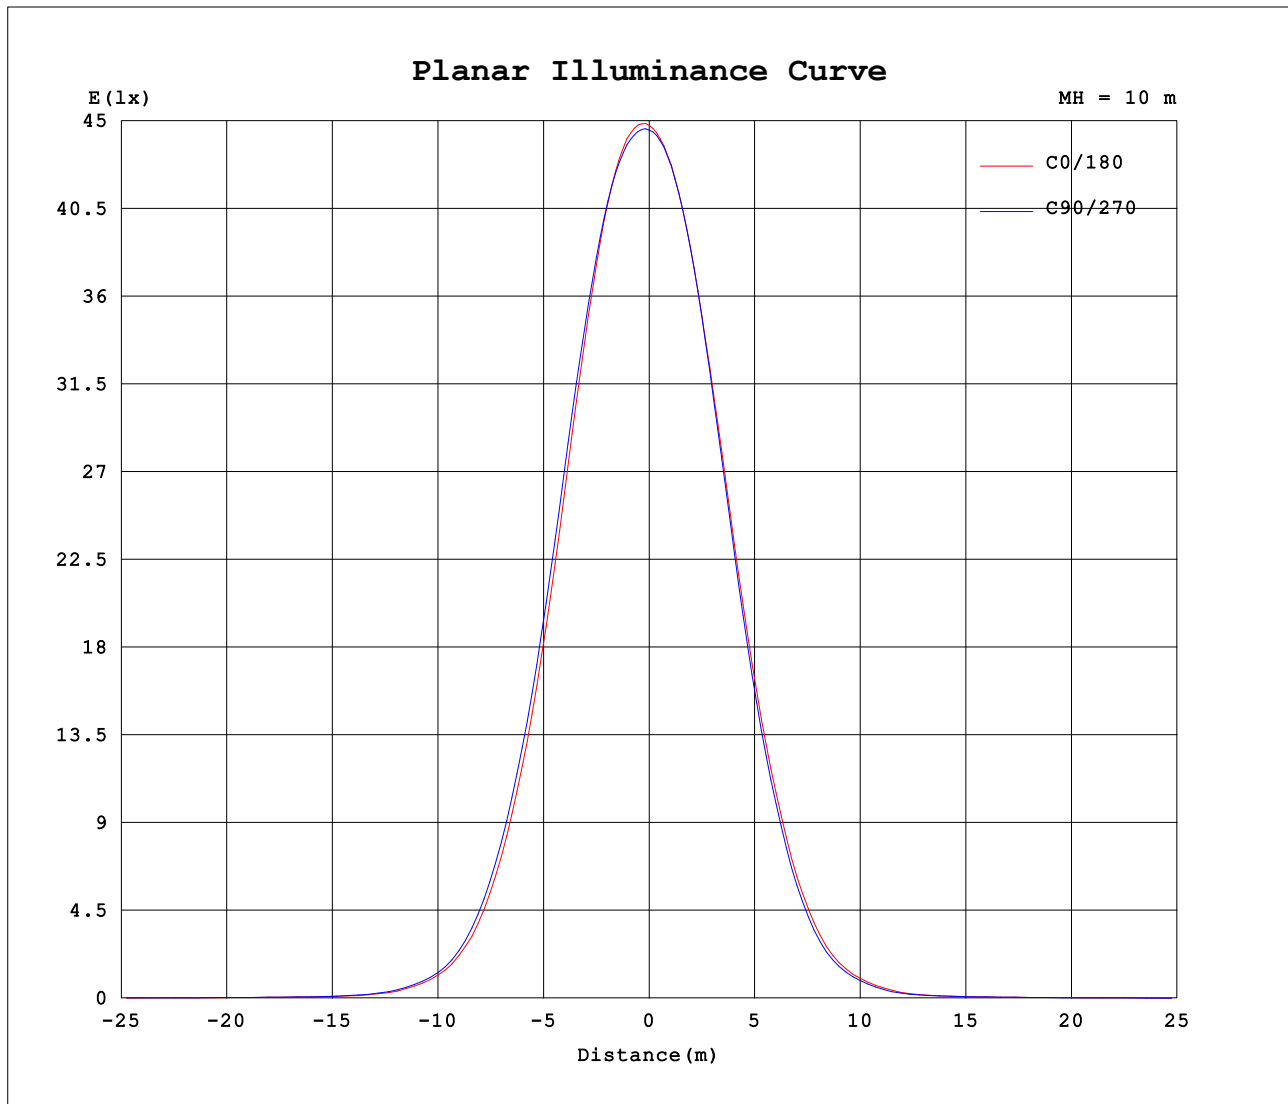

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.3390A P:40.30W PF:0.9870 Freq:60.00Hz Lamp Flux:1138.65x1 lm		
NAME: 4寸B款	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	4462	4462	4462	4462	4462	4462	4462	4462										
5	4473	4486	4466	4430	4360	4344	4377	4411										
10	4349	4390	4371	4303	4128	4092	4149	4200										
15	4021	4101	4098	4017	3730	3668	3738	3785										
20	3477	3604	3622	3551	3175	3086	3143	3174										
25	2767	2917	2946	2914	2501	2404	2437	2441										
30	2024	2169	2191	2195	1805	1713	1727	1716										
35	1319	1445	1458	1482	1131	1060	1057	1028										
40	706	798	802	837	592	549	532	503										
45	334	378	374	400	288	261	257	239										
50	141	173	165	183	114	103	99.8	94.0										
55	65.2	68.8	73.5	73.7	55.5	53.0	52.4	52.1										
60	47.1	48.9	50.0	49.8	44.1	41.9	41.7	41.7										
65	36.0	37.9	38.8	39.1	33.1	31.2	31.1	31.2										
70	26.1	27.5	28.2	28.5	23.6	22.2	22.1	22.0										
75	17.6	18.7	19.0	19.4	15.4	14.5	14.4	14.4										
80	10.4	11.0	11.3	11.6	8.49	7.95	7.88	7.66										
85	4.05	4.41	4.48	4.89	2.63	2.44	2.37	2.03										
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.03	0.01	0.02	0.02	0.00	0.01	0.02	0.02										
115	0.08	0.06	0.05	0.06	0.03	0.06	0.06	0.06										
120	0.21	0.16	0.14	0.15	0.10	0.15	0.17	0.17										
125	0.46	0.36	0.32	0.33	0.22	0.31	0.35	0.34										
130	0.88	0.72	0.66	0.67	0.43	0.56	0.63	0.61										
135	1.39	1.21	1.14	1.16	0.71	0.89	0.99	0.96										
140	1.99	1.78	1.70	1.75	1.08	1.30	1.42	1.37										
145	2.62	2.44	2.37	2.42	1.49	1.74	1.88	1.84										
150	3.22	3.06	2.90	3.06	1.95	2.24	2.40	2.34										
155	3.77	3.64	3.46	3.65	2.43	2.74	2.92	2.86										
160	4.23	4.16	3.98	4.17	2.99	3.33	3.51	3.45										
165	4.63	4.61	4.42	4.60	3.61	3.95	4.13	4.08										
170	4.93	4.99	4.84	4.95	4.21	4.51	4.66	4.64										
175	5.08	5.23	5.12	5.20	4.70	4.96	5.05	5.04										
180	5.03	5.24	5.22	5.25	5.06	5.23	5.22	5.23										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: