


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.2V I:0.3280A P:39.20W PF:0.9920 Freq:50.00Hz Lamp Flux:4537.35x1 lm		
NAME: 6寸明装筒灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 115.75 lm/W			
MODEL	25度	I _{max} (cd)	15415	S/MH(C0/180)	0.40
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	0.37
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	4537.4	η UP,DN(C0-180)	0.1,54.5
NOMINAL FLUX(lm)	4537.35	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,45.4
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	120	η down(%)	99.9	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

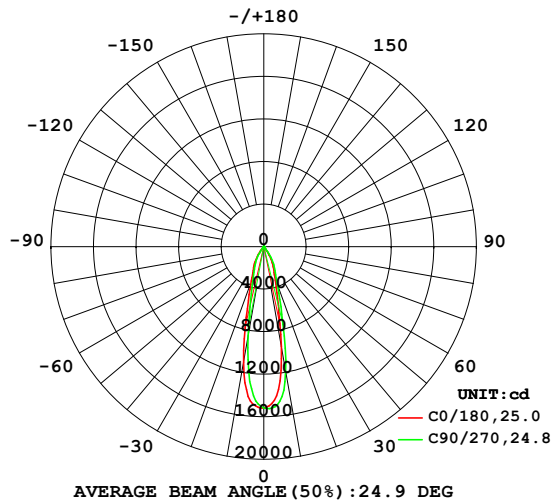

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

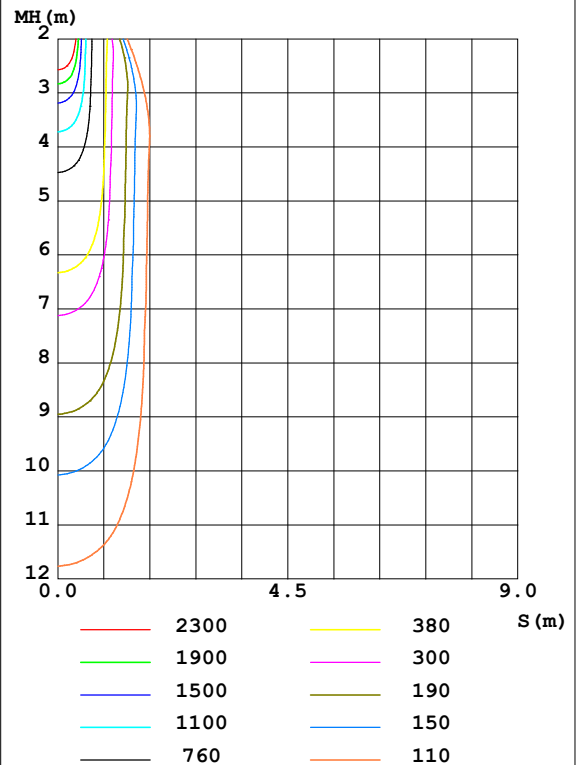

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	954.5	1078	1194	1311	1103	980.0	853.9	742.3	0- 10	1230	1230	27.1,27.1
20	308.9	334.6	376.4	429.9	345.4	309.2	283.9	265.5	10- 20	1622	2852	62.9,62.9
30	140.5	157.0	175.9	199.8	165.4	149.6	133.9	115.0	20- 30	1055	3907	86.1,86.1
40	13.13	23.40	28.35	46.48	27.42	21.09	10.67	6.877	30- 40	500.4	4407	97.1,97.1
50	5.453	5.889	5.683	5.737	5.902	5.760	5.986	6.013	40- 50	62.62	4470	98.5,98.5
60	2.371	3.284	4.087	4.891	3.473	2.973	2.066	1.269	50- 60	47.85	4517	99.6,99.6
70	0.3643	0.3950	0.3733	0.4455	0.4118	0.3784	0.3134	0.2945	60- 70	10.37	4528	99.8,99.8
80	0.1059	0.1232	0.1518	0.1806	0.1340	0.1317	0.1094	0.0778	70- 80	2.634	4530	99.8,99.8
90	0	0	0	0	0	0	0	0	80- 90	0.3494	4531	99.9,99.9
100	0	0	0	0	0	0	0	0	90-100	0	4531	99.9,99.9
110	0.0022	0.0012	0.0007	0.0002	0	0	0	0	100-110	0.0009	4531	99.9,99.9
120	0.0055	0.0034	0.0034	0.0024	0.0000	0.0017	0.0036	0.0049	110-120	0.0141	4531	99.9,99.9
130	0.0628	0.0445	0.0314	0.0252	0.0140	0.0227	0.0308	0.0331	120-130	0.1189	4531	99.9,99.9
140	0.1722	0.1458	0.1305	0.1253	0.0596	0.0811	0.0998	0.1068	130-140	0.5376	4531	99.9,99.9
150	0.4453	0.3553	0.2922	0.2917	0.1687	0.2236	0.2631	0.2761	140-150	1.167	4533	99.9,99.9
160	0.8705	0.8324	0.7159	0.7350	0.3626	0.4338	0.4741	0.4923	150-160	2.031	4535	99.9,99.9
170	0.8214	0.9201	0.9158	0.9497	0.5384	0.5723	0.5925	0.5996	160-170	1.982	4537	100,100
180	0.6082	0.6569	0.6791	0.6872	0.6068	0.6550	0.6784	0.6867	170-180	0.6741	4537	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.2V I:0.3280A P:39.20W PF:0.9920 Freq:50.00Hz Lamp Flux:4537.35x1 lm		
NAME: 6寸明装筒灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

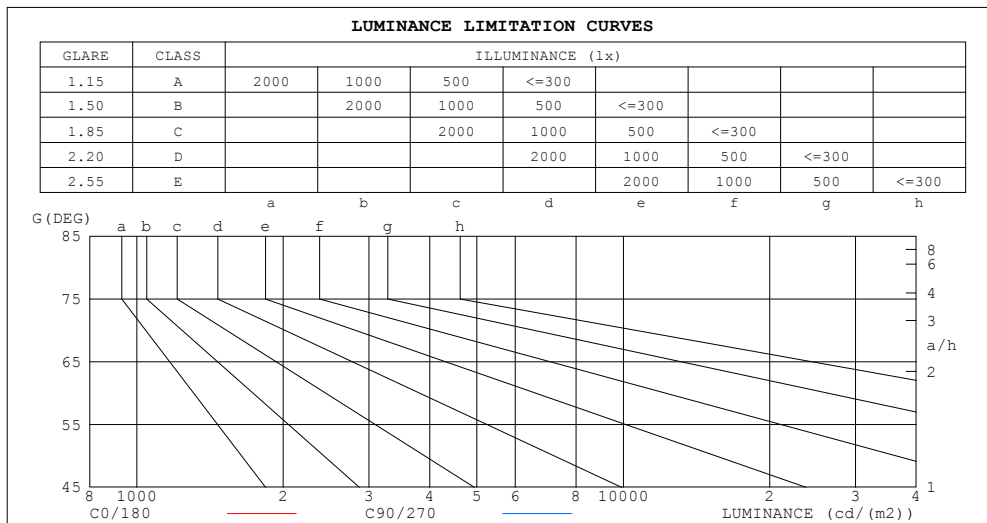

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	5
80	28	40
75	44	47
70	49	50
65	60	83
60	217	372
55	459	510
50	387	402
45	332	375


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.2V I:0.3280A P:39.20W PF:0.9920 Freq:50.00Hz Lamp Flux:4537.35x1 lm		
NAME: 6寸明装筒灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.06	1.03	.00	1.04	1.01	.99	1.01	.99	.96	.98	.96	.94	.95	.94	.92	.91
3.0	1.00	.96	.93	.99	.95	.92	.97	.93	.91	.94	.92	.89	.92	.90	.88	.87
4.0	.96	.91	.88	.94	.90	.87	.92	.89	.86	.90	.87	.85	.89	.86	.84	.83
5.0	.91	.86	.83	.90	.86	.83	.89	.85	.82	.87	.84	.81	.86	.83	.80	.79
6.0	.87	.82	.79	.86	.82	.79	.85	.81	.78	.84	.80	.78	.82	.79	.77	.76
7.0	.84	.79	.75	.83	.78	.75	.82	.78	.75	.81	.77	.74	.80	.76	.74	.73
8.0	.80	.75	.72	.80	.75	.72	.79	.75	.72	.78	.74	.71	.77	.74	.71	.70
9.0	.77	.72	.69	.77	.72	.69	.76	.72	.69	.75	.71	.69	.74	.71	.69	.67
10.0	.74	.70	.67	.74	.70	.67	.73	.69	.66	.73	.69	.66	.72	.69	.66	.65

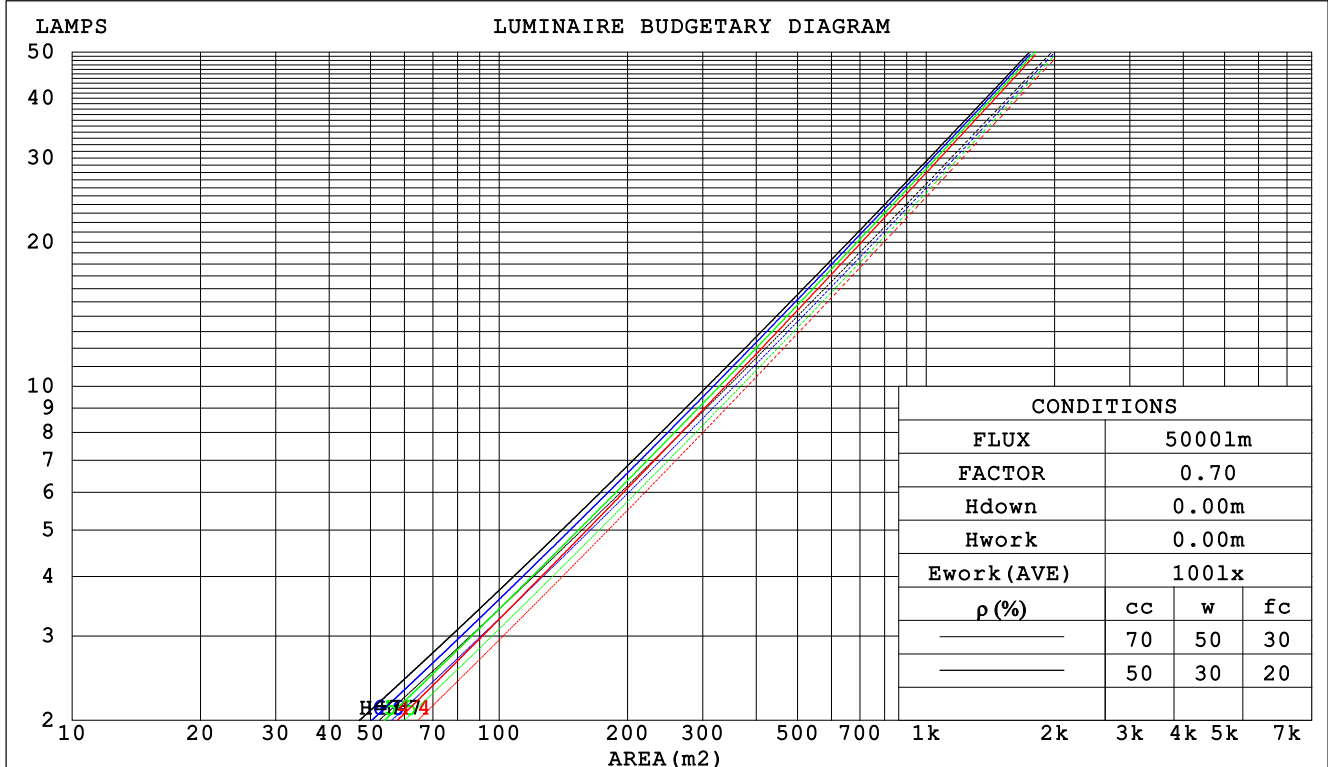

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.2V I:0.3280A P:39.20W PF:0.9920 Freq:50.00Hz Lamp Flux:4537.35x1 lm					
NAME: 6寸明装筒灯			TYPE:5000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:0.128		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.152	.086	.027	.145	.083	.026	.133	.076	.024	.121	.070	.022	.111	.064	.021		
2.0	.143	.078	.024	.138	.076	.023	.127	.071	.022	.117	.066	.021	.109	.061	.019		
3.0	.135	.072	.021	.130	.070	.021	.121	.066	.020	.113	.062	.019	.106	.058	.018		
4.0	.127	.066	.019	.123	.065	.019	.116	.061	.018	.109	.058	.018	.102	.056	.017		
5.0	.121	.061	.018	.117	.060	.018	.111	.058	.017	.105	.055	.016	.099	.053	.016		
6.0	.115	.057	.016	.112	.056	.016	.106	.054	.016	.101	.052	.015	.096	.051	.015		
7.0	.109	.054	.015	.107	.053	.015	.102	.051	.015	.097	.050	.014	.093	.048	.014		
8.0	.104	.051	.014	.102	.050	.014	.098	.049	.014	.094	.047	.014	.090	.046	.013		
9.0	.100	.048	.013	.098	.048	.013	.094	.046	.013	.090	.045	.013	.087	.044	.013		
10.0	.096	.046	.013	.094	.045	.013	.090	.044	.012	.087	.043	.012	.084	.042	.012		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.170	.159	.148	.146	.136	.127	.100	.094	.088	.057	.054	.051	.018	.017	.017	
2.0	.154	.134	.117	.131	.115	.101	.090	.080	.071	.052	.046	.041	.017	.015	.013	
3.0	.140	.115	.095	.120	.099	.082	.082	.069	.057	.047	.040	.034	.015	.013	.011	
4.0	.128	.099	.078	.110	.086	.067	.075	.060	.047	.044	.035	.028	.014	.011	.009	
5.0	.118	.087	.065	.101	.076	.056	.070	.053	.040	.040	.031	.024	.013	.010	.008	
6.0	.110	.078	.055	.094	.067	.047	.065	.047	.034	.038	.028	.020	.012	.009	.007	
7.0	.103	.070	.047	.088	.060	.041	.061	.042	.029	.035	.025	.017	.011	.008	.006	
8.0	.097	.063	.040	.083	.055	.035	.057	.038	.025	.033	.023	.015	.011	.007	.005	
9.0	.091	.058	.035	.079	.050	.031	.054	.035	.022	.032	.021	.013	.010	.007	.004	
10.0	.086	.053	.031	.074	.046	.027	.052	.032	.019	.030	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.2V I:0.3280A P:39.20W PF:0.9920 Freq:50.00Hz Lamp Flux:4537.35x1 lm										
NAME: 6寸明装筒灯					TYPE:5000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:0.128			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	5.9	6.6	6.1	6.8	6.9	7.2	8.0	7.5	8.2	8.3
3H	5.7	6.4	6.0	6.6	6.8	7.1	7.8	7.3	8.0	8.2
4H	5.6	6.3	5.9	6.5	6.7	7.0	7.7	7.3	7.9	8.1
6H	5.6	6.2	5.8	6.4	6.7	6.9	7.6	7.2	7.8	8.0
8H	5.5	6.1	5.8	6.4	6.6	6.9	7.5	7.2	7.7	8.0
12H	5.5	6.1	5.8	6.3	6.6	6.8	7.4	7.1	7.7	8.0
4H 2H	5.7	6.4	6.0	6.6	6.8	7.0	7.7	7.3	7.9	8.1
3H	5.5	6.1	5.8	6.4	6.7	6.9	7.5	7.2	7.7	8.0
4H	5.4	6.0	5.8	6.3	6.6	6.8	7.3	7.1	7.6	7.9
6H	5.3	5.8	5.7	6.1	6.5	6.7	7.2	7.1	7.5	7.8
8H	5.3	5.7	5.7	6.1	6.4	6.6	7.1	7.0	7.4	7.8
12H	5.2	5.6	5.7	6.0	6.4	6.6	7.0	7.0	7.4	7.7
8H 4H	5.3	5.7	5.7	6.1	6.4	6.6	7.1	7.0	7.4	7.8
6H	5.2	5.6	5.6	5.9	6.4	6.5	6.9	7.0	7.3	7.7
8H	5.1	5.5	5.6	5.9	6.3	6.5	6.8	6.9	7.2	7.7
12H	5.1	5.3	5.5	5.8	6.3	6.4	6.7	6.9	7.1	7.6
12H 4H	5.2	5.6	5.6	6.0	6.4	6.6	7.0	7.0	7.4	7.7
6H	5.1	5.5	5.6	5.9	6.3	6.5	6.8	6.9	7.2	7.7
8H	5.1	5.3	5.5	5.8	6.3	6.4	6.7	6.9	7.1	7.6
Variations with the observer position at spacings:										
S = 1.0H	+ 3.5 / - 4.4					+ 4.4 / - 5.9				
1.5H	+ 5.6 / - 5.5					+ 7.0 / - 7.7				
2.0H	+ 1.9 / - 7.8					+ 2.2 / - 7.3				

CIE Pub.117 Corrected 4537 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.3)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.2V I:0.3280A P:39.20W PF:0.9920 Freq:50.00Hz Lamp Flux:4537.35x1 lm		
NAME: 6寸明装筒灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	84	80	89	84	80	88	83	80	77
0.80	97	91	88	96	91	88	95	91	87	84
1.00	101	96	92	100	95	92	98	95	91	88
1.25	105	100	97	104	99	96	102	98	95	91
1.50	107	103	100	106	102	99	104	100	98	94
2.00	109	105	103	108	104	102	105	102	100	95
2.50	111	107	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	106	107	105	103	97
4.00	114	112	110	112	110	108	109	107	106	99
5.00	115	113	112	113	112	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.2V I:0.3280A P:39.20W PF:0.9920 Freq:50.00Hz Lamp Flux:4537.35x1 lm		
NAME: 6寸明装筒灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

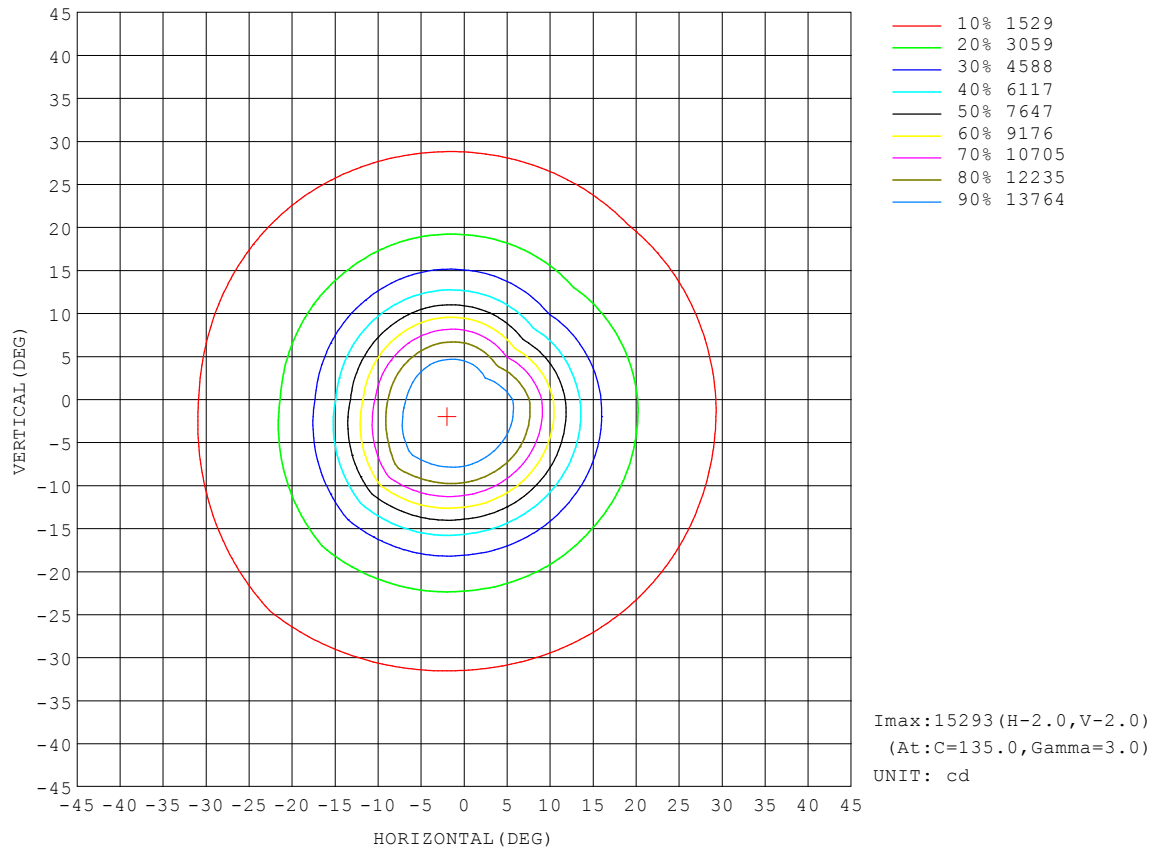


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.2V I:0.3280A P:39.20W PF:0.9920 Freq:50.00Hz Lamp Flux:4537.35x1 lm		
NAME: 6寸明装筒灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

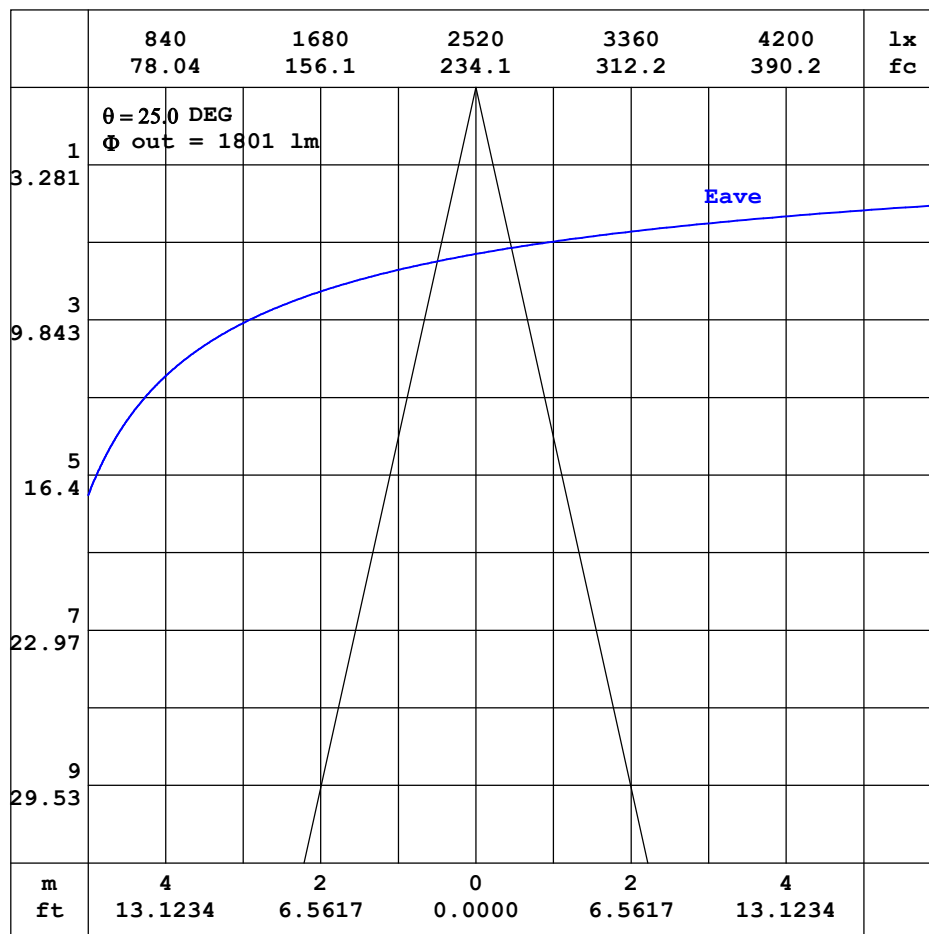


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.2V I:0.3280A P:39.20W PF:0.9920 Freq:50.00Hz Lamp Flux:4537.35x1 lm		
NAME: 6寸明装筒灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

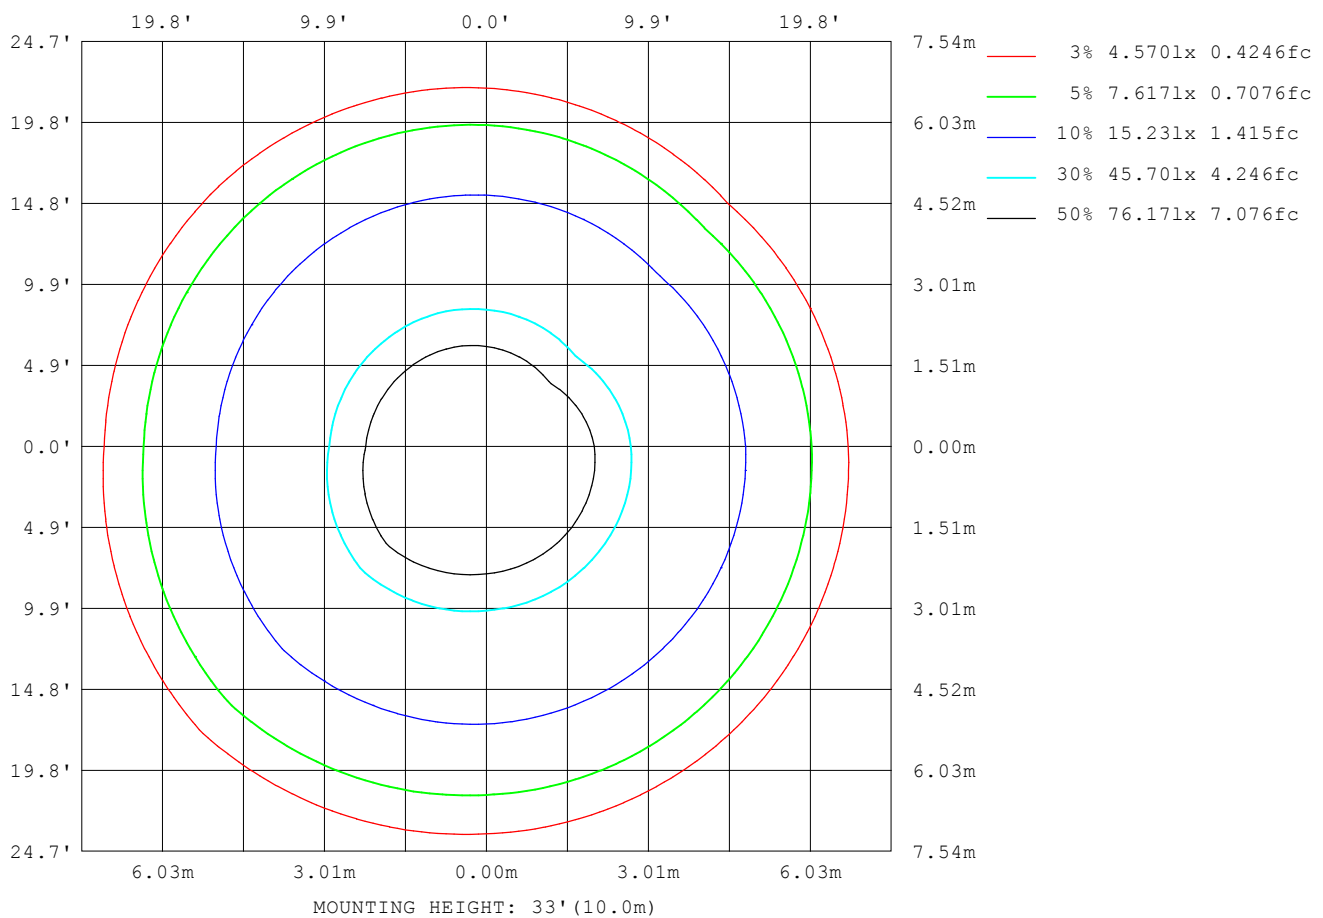

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.2V I:0.3280A P:39.20W PF:0.9920 Freq:50.00Hz Lamp Flux:4537.35x1 lm		
NAME: 6寸明装筒灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	74
L_0~180 (75) av	46
L_0~180 (85) av	0
L_90~270 (65) av	69
L_90~270 (75) av	43
L_90~270 (85) av	2
L_45 (65) av	82
L_45 (75) av	44
L_45 (85) av	8

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

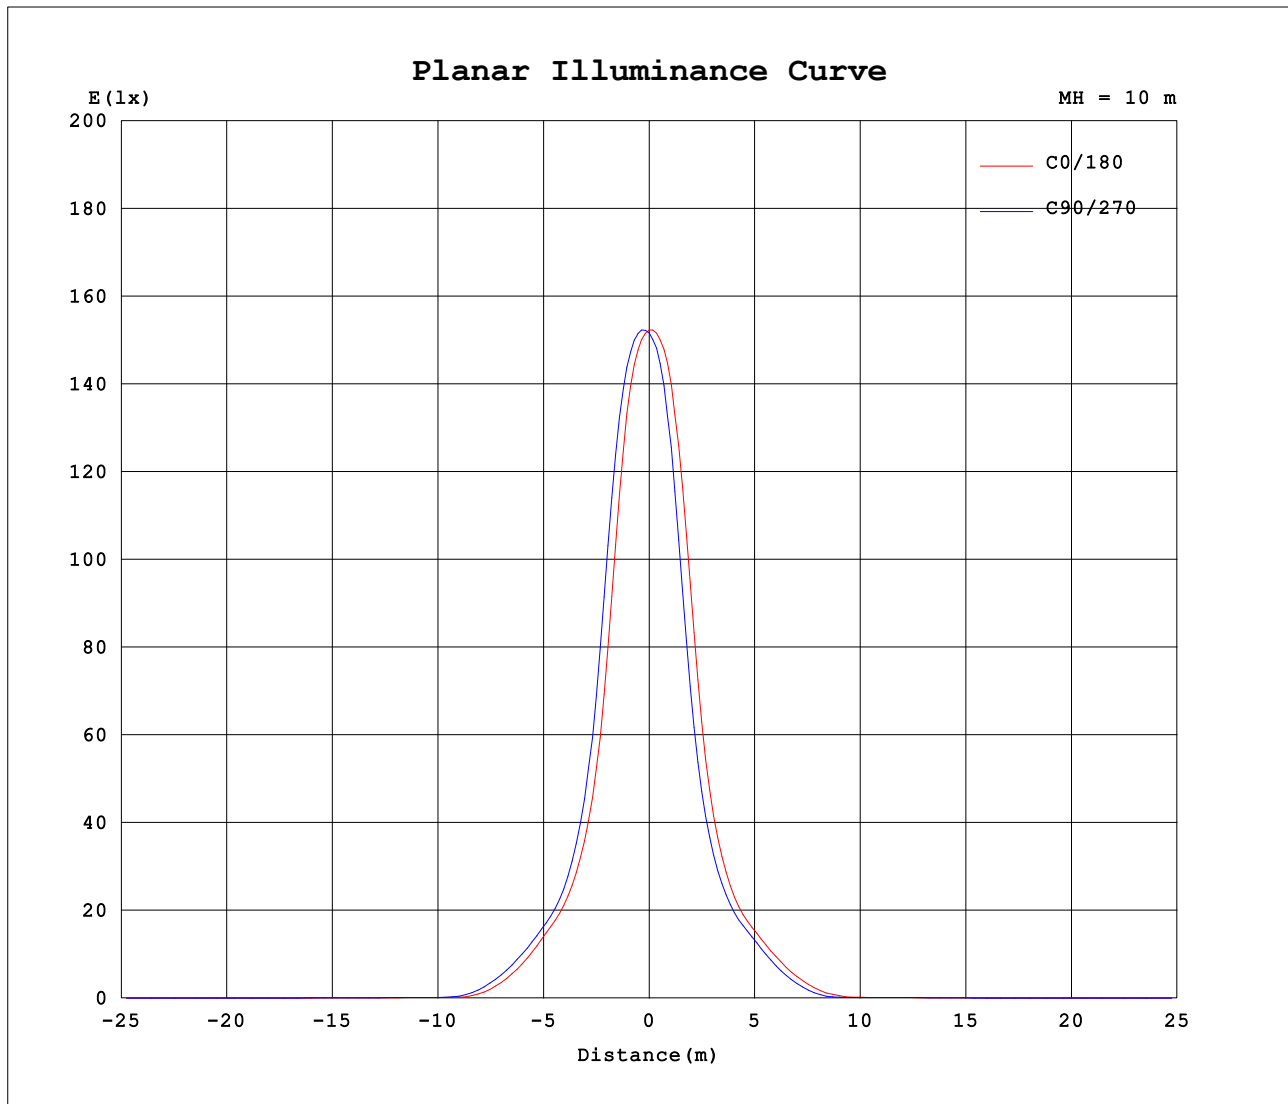

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.3280A P:39.20W PF:0.9920 Freq:50.00Hz Lamp Flux:4537.35x1 lm								
NAME: 6寸明装筒灯					TYPE:5000K			WEIGHT:
SPEC.:					DIM.:			SERIAL No.:
MFR.: EVERFINE					SUR.:0.128			Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1516	1516	1516	1516	1516	1516	1516	1516										
5	1407	1452	1489	1524	1458	1411	1341	1273										
10	954	1078	1194	1311	1103	980	854	742										
15	506	581	659	803	602	524	460	412										
20	309	335	376	430	345	309	284	266										
25	218	233	251	275	235	219	205	194										
30	140	157	176	200	165	150	134	115										
35	65.1	81.6	97.4	120	90.2	79.0	61.6	42.5										
40	13.1	23.4	28.4	46.5	27.4	21.1	10.7	6.88										
45	5.14	5.50	5.82	6.70	6.29	5.66	5.26	5.28										
50	5.45	5.89	5.68	5.74	5.90	5.76	5.99	6.01										
55	5.76	6.45	6.43	6.21	6.06	5.88	5.74	5.05										
60	2.37	3.28	4.09	4.89	3.47	2.97	2.07	1.27										
65	0.56	0.67	0.78	1.24	0.82	0.71	0.50	0.44										
70	0.36	0.40	0.37	0.45	0.41	0.38	0.31	0.29										
75	0.25	0.27	0.27	0.29	0.27	0.26	0.22	0.19										
80	0.11	0.12	0.15	0.18	0.13	0.13	0.11	0.08										
85	0.00	0.00	0.01	0.06	0.00	0.00	0.00	0.00										
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
120	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
125	0.02	0.01	0.01	0.01	0.00	0.01	0.01	0.01										
130	0.06	0.04	0.03	0.03	0.01	0.02	0.03	0.03										
135	0.11	0.09	0.08	0.07	0.03	0.05	0.06	0.06										
140	0.17	0.15	0.13	0.13	0.06	0.08	0.10	0.11										
145	0.27	0.22	0.19	0.19	0.10	0.14	0.17	0.18										
150	0.45	0.36	0.29	0.29	0.17	0.22	0.26	0.28										
155	0.70	0.59	0.47	0.48	0.26	0.33	0.37	0.38										
160	0.87	0.83	0.72	0.73	0.36	0.43	0.47	0.49										
165	0.92	0.95	0.88	0.91	0.47	0.52	0.56	0.57										
170	0.82	0.92	0.92	0.95	0.54	0.57	0.59	0.60										
175	0.68	0.77	0.81	0.84	0.57	0.60	0.61	0.62										
180	0.61	0.66	0.68	0.69	0.61	0.65	0.68	0.69										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: