


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.2V I:0.4360A P:52.10W PF:0.9920 Freq:50.00Hz Lamp Flux:5669.71x1 lm		
NAME: 6寸明装筒灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.07*63.14715	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 108.82 lm/W			
MODEL	60度	I _{max} (cd)	6968	S/MH(C0/180)	0.84
NOMINAL POWER(W)	53	LOR(%)	100.0	S/MH(C90/270)	0.84
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	5669.7	η UP,DN(C0-180)	0.1,51.9
NOMINAL FLUX(lm)	5669.71	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,47.9
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120	η down(%)	99.8	CIBSE SHR MAX	0.90

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

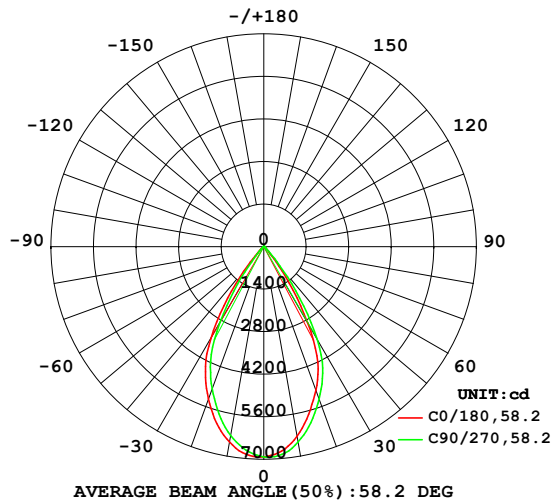

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

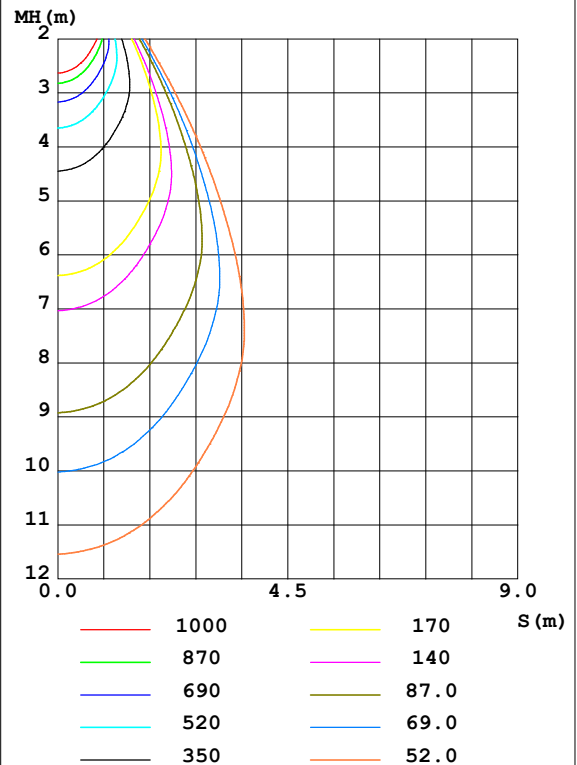

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	6333	6424	6529	6708	6524	6449	6306	6168	0- 10	637.3	637.3	11.2,11.2
20	5027	5190	5328	5569	5325	5172	4981	4779	10- 20	1637	2274	40.1,40.1
30	2900	3174	3525	3984	3490	3203	2885	2467	20- 30	1970	4244	74.8,74.8
40	525.9	659.7	830.9	1195	848.9	723.1	502.6	352.9	30- 40	1132	5376	94.8,94.8
50	83.94	99.82	118.8	157.2	112.1	103.5	82.54	64.94	40- 50	223.3	5599	98.8,98.8
60	18.82	21.45	23.31	27.48	23.10	22.46	18.23	14.94	50- 60	43.39	5643	99.5,99.5
70	6.337	6.792	7.071	8.391	7.440	7.284	6.015	4.905	60- 70	12.31	5655	99.7,99.7
80	1.262	1.463	1.736	2.387	1.770	1.849	1.341	0.7912	70- 80	4.145	5659	99.8,99.8
90	0	0	0	0	0	0	0	0	80- 90	0.4133	5659	99.8,99.8
100	0	0	0	0	0	0	0	0	90-100	0	5659	99.8,99.8
110	0.0434	0.0242	0.0193	0.0170	0	0	0	0.0024	100-110	0.0048	5659	99.8,99.8
120	0.2919	0.2035	0.1523	0.1289	0.0244	0.0676	0.1020	0.1405	110-120	0.0537	5660	99.8,99.8
130	2.119	1.544	1.143	0.9634	0.3368	0.4953	0.6575	0.7565	120-130	0.4036	5660	99.8,99.8
140	5.040	4.532	4.129	3.952	1.138	1.455	1.719	1.885	130-140	1.490	5661	99.9,99.9
150	7.406	7.152	6.597	6.753	2.306	2.728	3.117	3.286	140-150	2.473	5664	99.9,99.9
160	9.000	9.093	8.743	9.000	3.743	4.484	5.169	5.551	150-160	2.681	5667	99.9,99.9
170	9.690	10.08	10.06	10.41	6.689	7.677	8.414	8.710	160-170	2.218	5669	100,100
180	8.963	9.627	9.981	10.21	9.002	9.673	10.00	10.16	170-180	0.8929	5670	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.2V I:0.4360A P:52.10W PF:0.9920 Freq:50.00Hz Lamp Flux:5669.71x1 lm		
NAME: 6寸明装筒灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.07*63.14715	Shielding Angle:

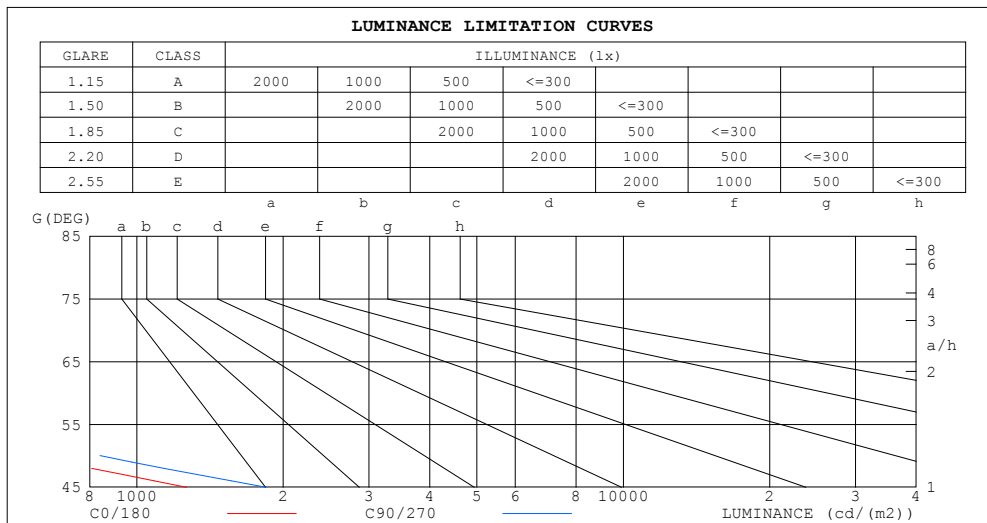


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.2V I:0.4360A P:52.10W PF:0.9920 Freq:50.00Hz Lamp Flux:5669.71x1 lm		
NAME: 6寸明装筒灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.07*63.14715	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.09	1.06	1.09	1.07	1.05	1.05	1.03	1.01	1.01	.00	.98	.97	.96	.95	.94
2.0	1.03	.00	.96	1.02	.98	.95	.99	.96	.93	.96	.93	.91	.93	.91	.89	.87
3.0	.97	.92	.88	.95	.91	.87	.93	.89	.86	.90	.87	.85	.88	.85	.83	.82
4.0	.91	.85	.81	.89	.84	.81	.87	.83	.80	.85	.82	.79	.83	.80	.78	.76
5.0	.85	.79	.75	.84	.79	.75	.82	.78	.74	.81	.77	.74	.79	.76	.73	.71
6.0	.80	.74	.70	.79	.74	.70	.78	.73	.69	.76	.72	.69	.75	.71	.68	.67
7.0	.75	.70	.65	.75	.69	.65	.73	.68	.65	.72	.68	.65	.71	.67	.64	.63
8.0	.71	.65	.61	.71	.65	.61	.69	.64	.61	.68	.64	.61	.67	.63	.60	.59
9.0	.67	.62	.58	.67	.61	.58	.66	.61	.57	.65	.60	.57	.64	.60	.57	.56
10.0	.64	.58	.54	.63	.58	.54	.63	.58	.54	.62	.57	.54	.61	.57	.54	.53

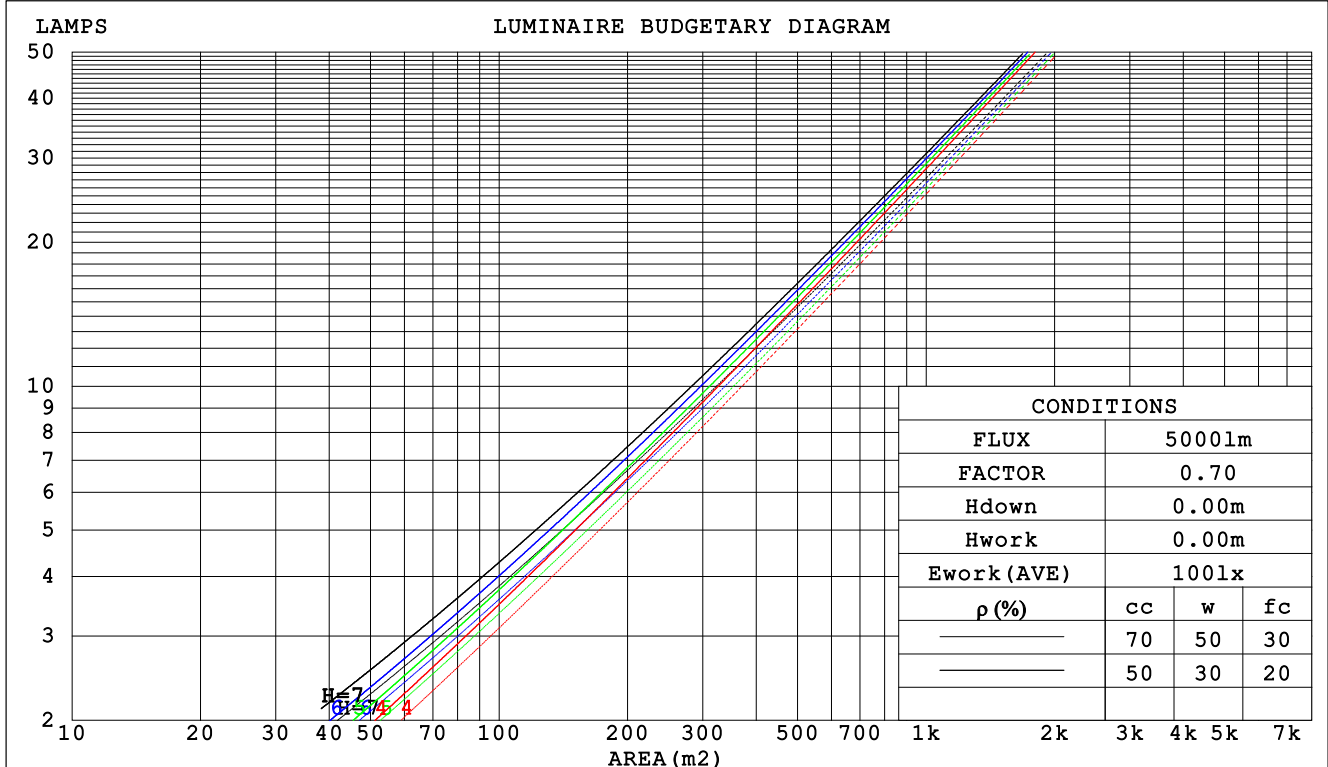

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.2V I:0.4360A P:52.10W PF:0.9920 Freq:50.00Hz Lamp Flux:5669.71x1 lm					
NAME: 6寸明装筒灯			TYPE:5000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:0.07*63.14715		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.174	.099	.031	.167	.095	.030	.154	.089	.028	.143	.082	.026	.132	.076	.025		
2.0	.166	.091	.028	.161	.088	.027	.150	.083	.026	.140	.079	.025	.131	.074	.023		
3.0	.158	.084	.025	.154	.082	.025	.144	.078	.024	.136	.075	.023	.128	.071	.022		
4.0	.151	.078	.023	.147	.077	.023	.139	.074	.022	.132	.071	.021	.125	.068	.021		
5.0	.144	.073	.021	.141	.072	.021	.134	.070	.020	.127	.067	.020	.121	.065	.019		
6.0	.138	.069	.020	.135	.068	.020	.129	.066	.019	.123	.064	.019	.118	.062	.018		
7.0	.132	.065	.018	.129	.064	.018	.124	.063	.018	.119	.061	.018	.114	.059	.017		
8.0	.126	.062	.017	.124	.061	.017	.119	.059	.017	.115	.058	.017	.110	.057	.017		
9.0	.121	.059	.016	.119	.058	.016	.115	.057	.016	.111	.055	.016	.107	.054	.016		
10.0	.116	.056	.016	.114	.055	.015	.111	.054	.015	.107	.053	.015	.103	.052	.015		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.172	.159	.147	.147	.136	.126	.101	.094	.087	.058	.054	.051	.019	.017	.016	
2.0	.157	.134	.115	.134	.115	.099	.092	.080	.069	.053	.046	.041	.017	.015	.013	
3.0	.144	.115	.091	.124	.099	.079	.085	.069	.056	.049	.040	.033	.016	.013	.011	
4.0	.134	.100	.074	.115	.087	.065	.079	.060	.045	.046	.035	.027	.015	.012	.009	
5.0	.125	.089	.061	.108	.077	.053	.074	.054	.038	.043	.031	.022	.014	.010	.007	
6.0	.118	.079	.051	.101	.069	.045	.070	.048	.032	.041	.028	.019	.013	.009	.006	
7.0	.112	.072	.044	.096	.062	.038	.066	.044	.027	.039	.026	.016	.012	.008	.005	
8.0	.106	.065	.038	.091	.057	.033	.063	.040	.023	.037	.024	.014	.012	.008	.005	
9.0	.101	.060	.033	.087	.052	.029	.060	.037	.020	.035	.022	.012	.011	.007	.004	
10.0	.096	.056	.029	.083	.049	.025	.058	.034	.018	.034	.020	.011	.011	.007	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.2V I:0.4360A P:52.10W PF:0.9920 Freq:50.00Hz Lamp Flux:5669.71x1 lm										
NAME: 6寸明装筒灯					TYPE:5000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:0.07*63.14715			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	10.4	11.3	10.6	11.5	11.6	11.7	12.6	11.9	12.8	12.9
3H	10.2	11.1	10.5	11.3	11.5	11.5	12.3	11.8	12.5	12.8
4H	10.1	10.9	10.4	11.1	11.4	11.4	12.2	11.7	12.4	12.7
6H	10.0	10.8	10.3	11.0	11.3	11.3	12.1	11.6	12.3	12.6
8H	10.0	10.7	10.3	11.0	11.2	11.3	12.0	11.6	12.3	12.5
12H	9.9	10.6	10.3	10.9	11.2	11.2	11.9	11.6	12.2	12.5
4H 2H	10.1	10.9	10.4	11.1	11.4	11.4	12.2	11.7	12.4	12.7
3H	9.9	10.6	10.3	10.9	11.2	11.2	11.9	11.6	12.2	12.5
4H	9.9	10.5	10.2	10.8	11.1	11.1	11.8	11.5	12.1	12.4
6H	9.8	10.3	10.1	10.6	11.0	11.1	11.6	11.4	11.9	12.3
8H	9.7	10.2	10.1	10.6	10.9	11.0	11.5	11.4	11.9	12.2
12H	9.7	10.1	10.1	10.5	10.9	10.9	11.4	11.4	11.8	12.2
8H 4H	9.7	10.2	10.1	10.6	10.9	11.0	11.5	11.4	11.9	12.2
6H	9.6	10.0	10.0	10.4	10.8	10.9	11.3	11.3	11.7	12.1
8H	9.6	9.9	10.0	10.3	10.8	10.8	11.2	11.3	11.6	12.1
12H	9.5	9.8	10.0	10.3	10.7	10.8	11.1	11.3	11.5	12.0
12H 4H	9.7	10.1	10.1	10.5	10.9	10.9	11.4	11.4	11.8	12.2
6H	9.6	9.9	10.0	10.3	10.8	10.8	11.2	11.3	11.6	12.1
8H	9.5	9.8	10.0	10.3	10.7	10.8	11.1	11.3	11.5	12.0
Variations with the observer position at spacings:										
S = 1.0H	+ 3.6 / -12.6					+ 4.3 / -13.6				
1.5H	+ 5.9 / -10.1					+ 6.7 / -11.5				
2.0H	+ 5.7 / - 6.5					+ 6.8 / - 7.6				

CIE Pub.117 Corrected 5670 lm Total Lamp Luminous Flux.(8log(F/F0) = 6.0)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.2V I:0.4360A P:52.10W PF:0.9920 Freq:50.00Hz Lamp Flux:5669.71x1 lm		
NAME: 6寸明装筒灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.07*63.14715	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	88	82	78	88	82	78	87	82	78	75
0.80	96	90	86	95	90	86	94	89	86	82
1.00	100	95	91	99	94	91	98	94	90	86
1.25	104	99	96	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	94
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	96
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.2V I:0.4360A P:52.10W PF:0.9920 Freq:50.00Hz Lamp Flux:5669.71x1 lm		
NAME: 6寸明装筒灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.07*63.14715	Shielding Angle:

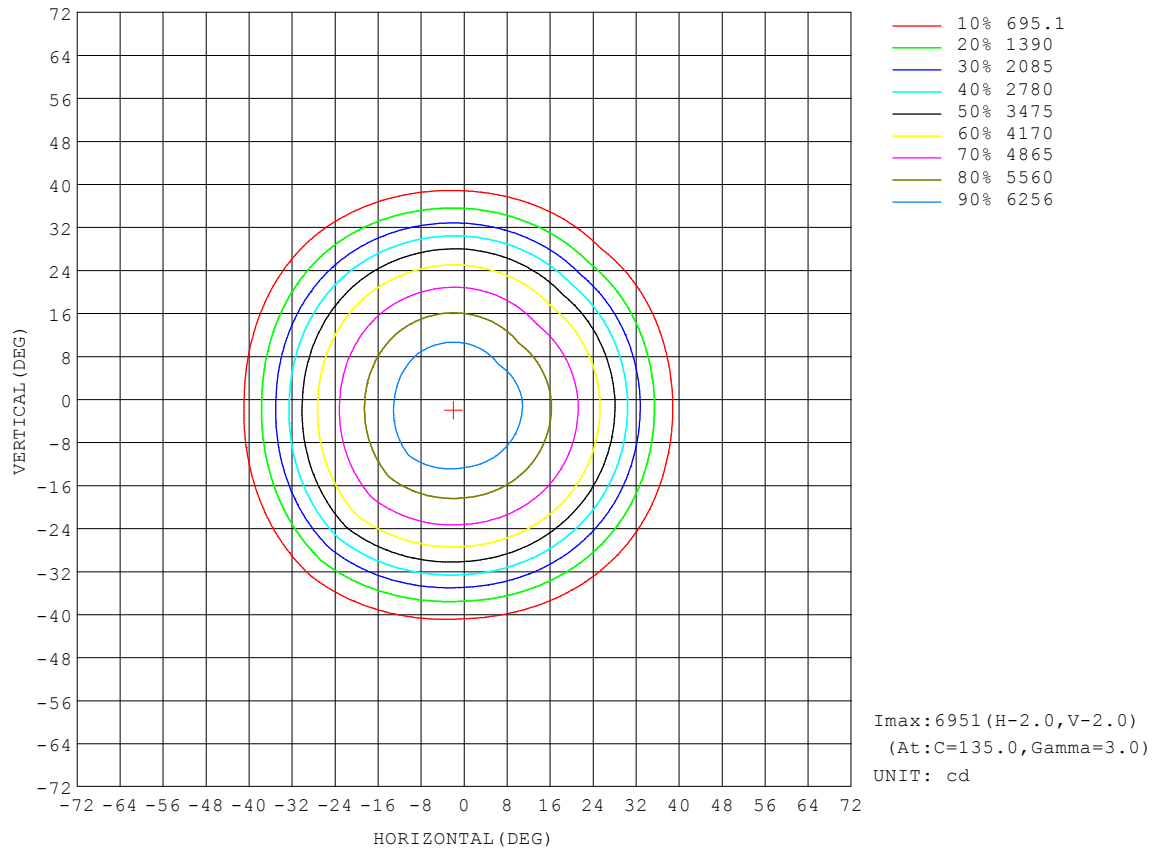


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.2V I:0.4360A P:52.10W PF:0.9920 Freq:50.00Hz Lamp Flux:5669.71x1 lm		
NAME: 6寸明装筒灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.07*63.14715	Shielding Angle:

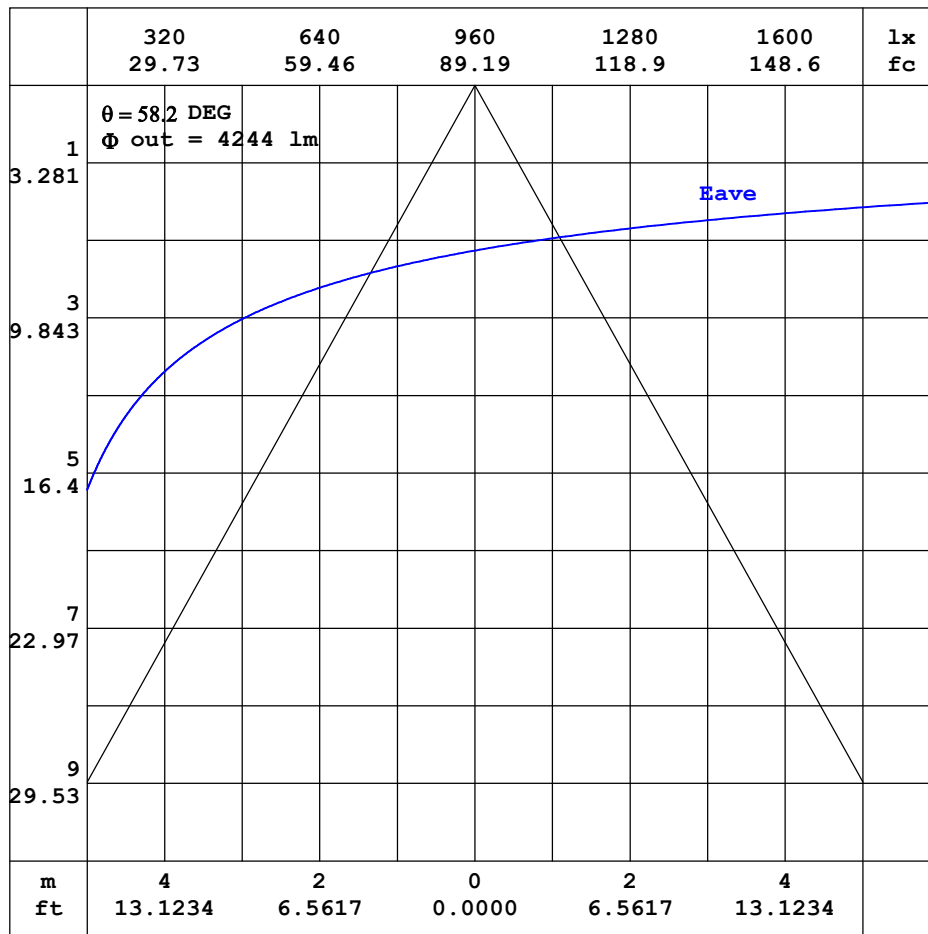


Note: The Curves indicate the illuminated area and the average illuminance when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.2V I:0.4360A P:52.10W PF:0.9920 Freq:50.00Hz Lamp Flux:5669.71x1 lm		
NAME: 6寸明装筒灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.07*63.14715	Shielding Angle:

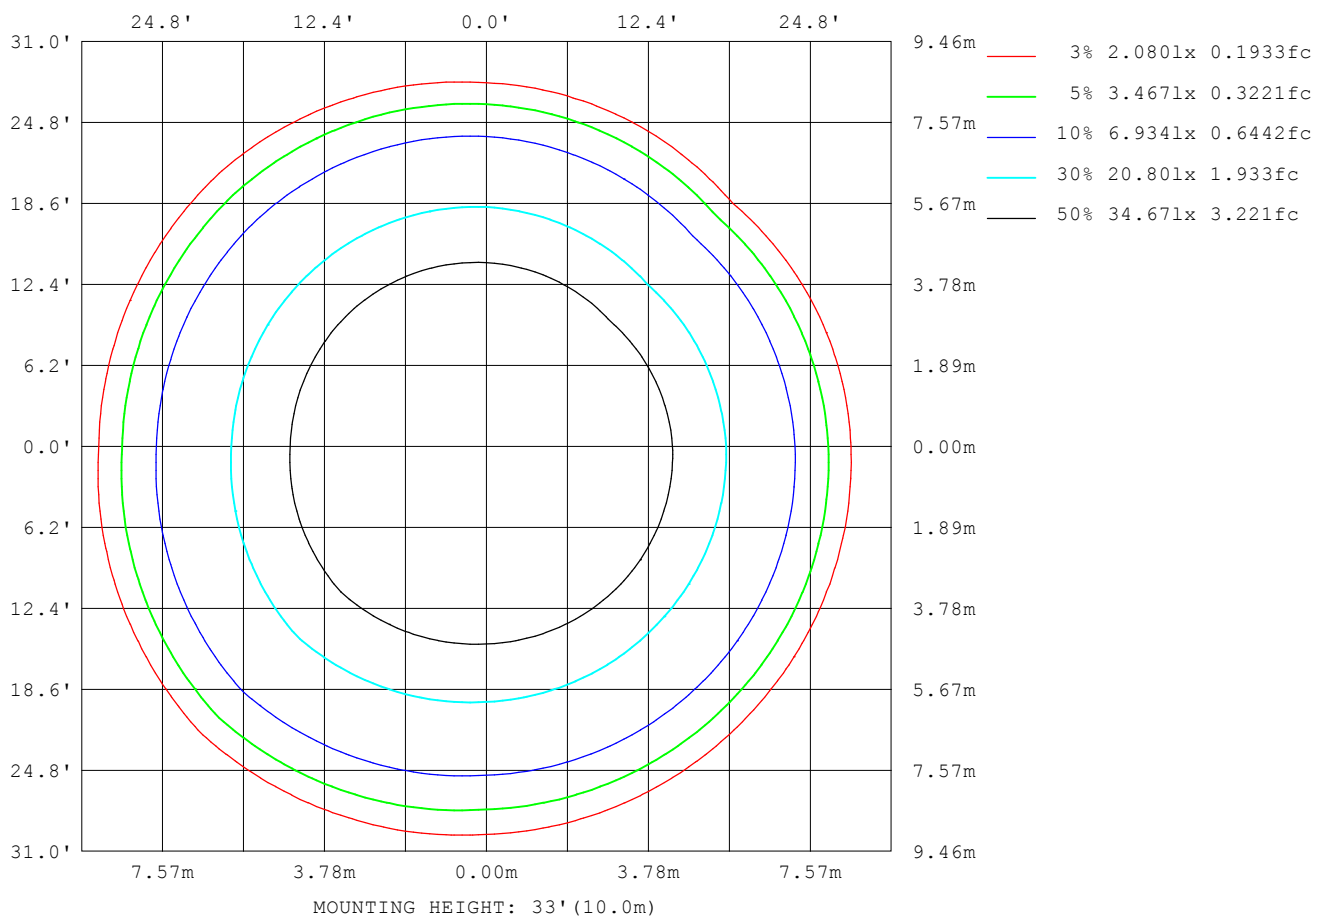

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.2V I:0.4360A P:52.10W PF:0.9920 Freq:50.00Hz Lamp Flux:5669.71x1 lm		
NAME: 6寸明装筒灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.07*63.14715	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	126
L_0~180 (75) av	68
L_0~180 (85) av	3
L_90~270 (65) av	123
L_90~270 (75) av	66
L_90~270 (85) av	1
L_45 (65) av	128
L_45 (75) av	68
L_45 (85) av	9

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

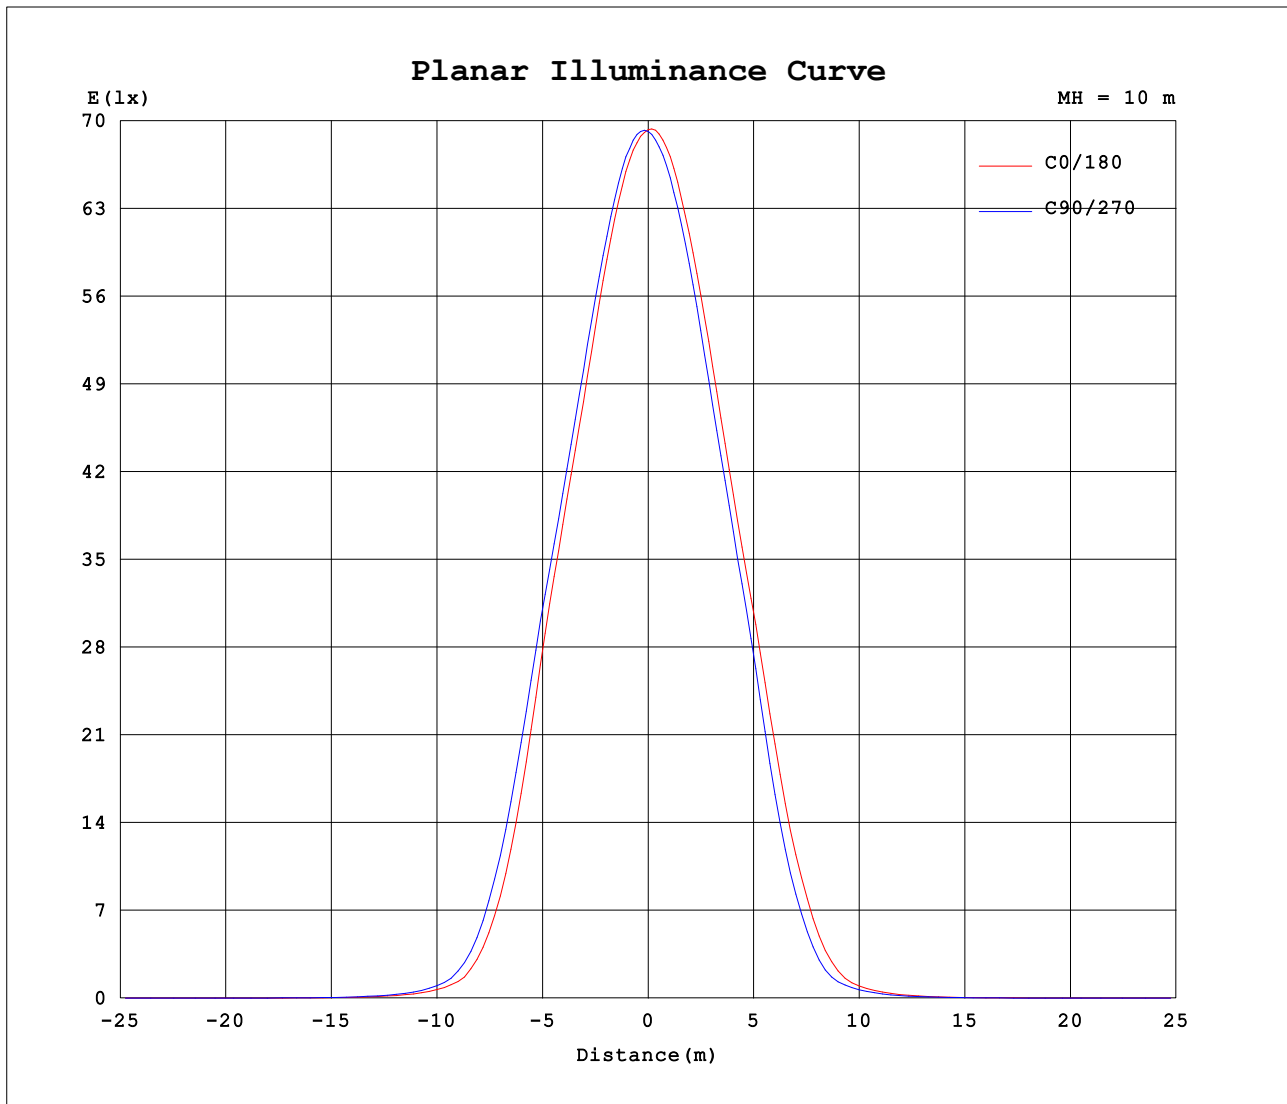

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.4360A P:52.10W PF:0.9920 Freq:50.00Hz Lamp Flux:5669.71x1 lm		
NAME: 6寸明装筒灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.07*63.14715	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	6918	6918	6918	6918	6918	6918	6918	6918										
5	6752	6804	6860	6938	6853	6804	6723	6657										
10	6333	6424	6529	6708	6524	6449	6306	6168										
15	5715	5864	5999	6226	6017	5895	5696	5511										
20	5027	5190	5328	5569	5325	5172	4981	4779										
25	4222	4430	4598	4856	4550	4392	4158	3879										
30	2900	3174	3525	3984	3490	3203	2885	2467										
35	1484	1757	2071	2559	2081	1855	1513	1131										
40	526	660	831	1195	849	723	503	353										
45	196	238	287	377	277	241	193	152										
50	83.9	99.8	119	157	112	103	82.5	64.9										
55	36.1	42.1	48.1	61.1	46.2	43.8	34.8	28.2										
60	18.8	21.5	23.3	27.5	23.1	22.5	18.2	14.9										
65	10.7	11.9	12.6	14.7	12.9	12.6	10.2	8.47										
70	6.34	6.79	7.07	8.39	7.44	7.28	6.02	4.91										
75	3.57	3.80	4.05	4.86	4.22	4.21	3.42	2.59										
80	1.26	1.46	1.74	2.39	1.77	1.85	1.34	0.79										
85	0.00	0.00	0.03	0.66	0.10	0.02	0.00	0.00										
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00										
110	0.04	0.02	0.02	0.02	0.00	0.00	0.00	0.00										
115	0.10	0.08	0.06	0.05	0.00	0.01	0.02	0.03										
120	0.29	0.20	0.15	0.13	0.02	0.07	0.10	0.14										
125	0.88	0.58	0.39	0.32	0.13	0.21	0.31	0.37										
130	2.12	1.54	1.14	0.96	0.34	0.50	0.66	0.76										
135	3.65	2.98	2.52	2.29	0.67	0.93	1.14	1.28										
140	5.04	4.53	4.13	3.95	1.14	1.46	1.72	1.88										
145	6.30	5.91	5.59	5.48	1.69	2.05	2.38	2.54										
150	7.41	7.15	6.60	6.75	2.31	2.73	3.12	3.29										
155	8.33	8.21	7.74	7.97	2.95	3.45	3.91	4.12										
160	9.00	9.09	8.74	9.00	3.74	4.48	5.17	5.55										
165	9.47	9.71	9.49	9.82	5.07	6.01	6.84	7.22										
170	9.69	10.1	10.1	10.4	6.69	7.68	8.41	8.71										
175	9.52	10.1	10.3	10.5	8.10	8.90	9.41	9.61										
180	8.96	9.63	9.98	10.2	9.00	9.67	10.00	10.2										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: