


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.2V I:0.4390A P:52.40W PF:0.9930 Freq:50.00Hz Lamp Flux:5162.19x1 lm		
NAME: 6寸明装筒灯	TYPE:2700K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 98.52 lm/W			
MODEL	25度	I _{max} (cd)	17375	S/MH(C0/180)	0.40
NOMINAL POWER(W)	53	LOR(%)	100.0	S/MH(C90/270)	0.38
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	5162.2	η UP,DN(C0-180)	0.2,54.3
NOMINAL FLUX(lm)	5162.19	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,45.5
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	120	η down(%)	99.8	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

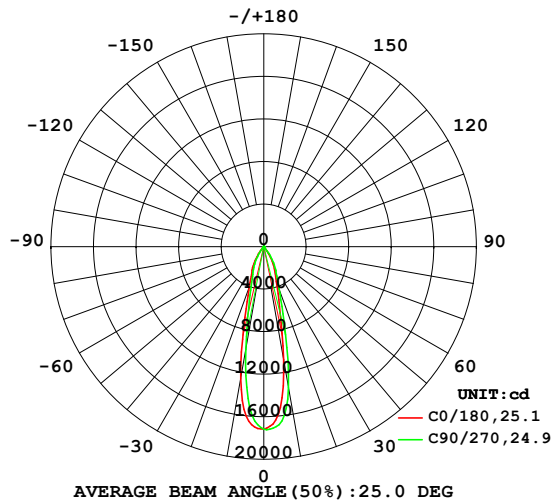

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

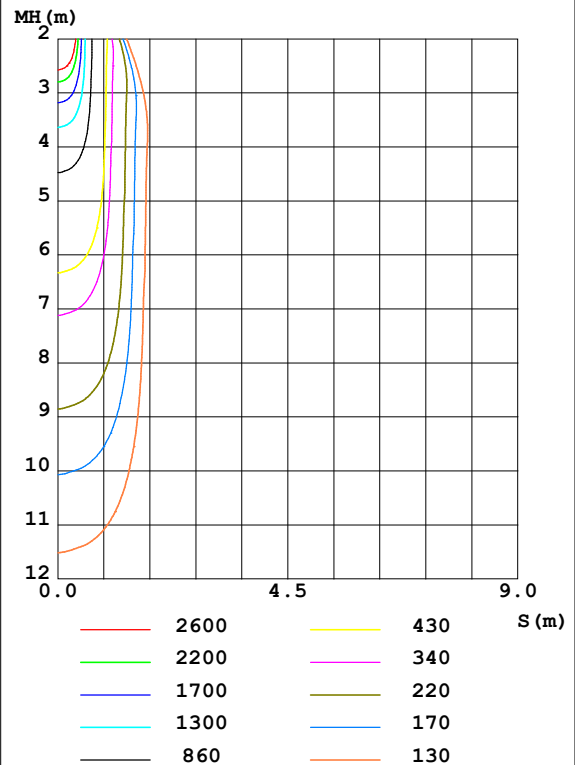

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1076	1229	1346	1493	1264	1120	980.6	840.2	0- 10	1391	1391	26.9,26.9
20	350.7	387.4	425.7	489.6	396.4	357.6	324.6	299.2	10- 20	1846	3237	62.7,62.7
30	159.0	181.3	199.0	224.4	190.5	173.7	152.4	131.8	20- 30	1202	4438	86,86
40	13.82	23.33	32.38	57.34	30.88	20.59	16.39	7.537	30- 40	570.4	5009	97,97
50	6.224	6.713	6.459	6.463	6.701	6.541	6.780	6.805	40- 50	72.39	5081	98.4,98.4
60	2.670	3.684	4.629	5.583	3.968	3.344	2.387	1.455	50- 60	54.31	5135	99.5,99.5
70	0.4127	0.4474	0.4245	0.5128	0.4743	0.4292	0.3606	0.3373	60- 70	11.79	5147	99.7,99.7
80	0.1182	0.1382	0.1724	0.2142	0.1544	0.1468	0.1273	0.0899	70- 80	3.006	5150	99.8,99.8
90	0	0	0	0	0	0	0	0	80- 90	0.4033	5151	99.8,99.8
100	0	0	0	0	0	0	0	0	90-100	0	5151	99.8,99.8
110	0.0077	0.0063	0.0058	0.0049	0	0	0	0	100-110	0.0115	5151	99.8,99.8
120	0.0125	0.0097	0.0094	0.0088	0.0003	0.0022	0.0036	0.0058	110-120	0.0472	5151	99.8,99.8
130	0.1402	0.0947	0.0693	0.0582	0.0169	0.0261	0.0347	0.0400	120-130	0.2072	5151	99.8,99.8
140	0.3798	0.3222	0.2882	0.2810	0.0678	0.0922	0.1139	0.1243	130-140	0.9869	5152	99.8,99.8
150	0.9386	0.7418	0.6119	0.6277	0.1952	0.2527	0.2987	0.3186	140-150	2.042	5154	99.8,99.8
160	1.821	1.745	1.513	1.594	0.4210	0.5033	0.5660	0.6108	150-160	3.554	5158	99.9,99.9
170	1.548	1.818	1.843	1.980	0.7219	0.7859	0.8282	0.8490	160-170	3.531	5161	100,100
180	0.9331	1.056	1.128	1.172	0.9427	1.048	1.136	1.173	170-180	1.152	5162	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.2V I:0.4390A P:52.40W PF:0.9930 Freq:50.00Hz Lamp Flux:5162.19x1 lm		
NAME: 6寸明装筒灯	TYPE:2700K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

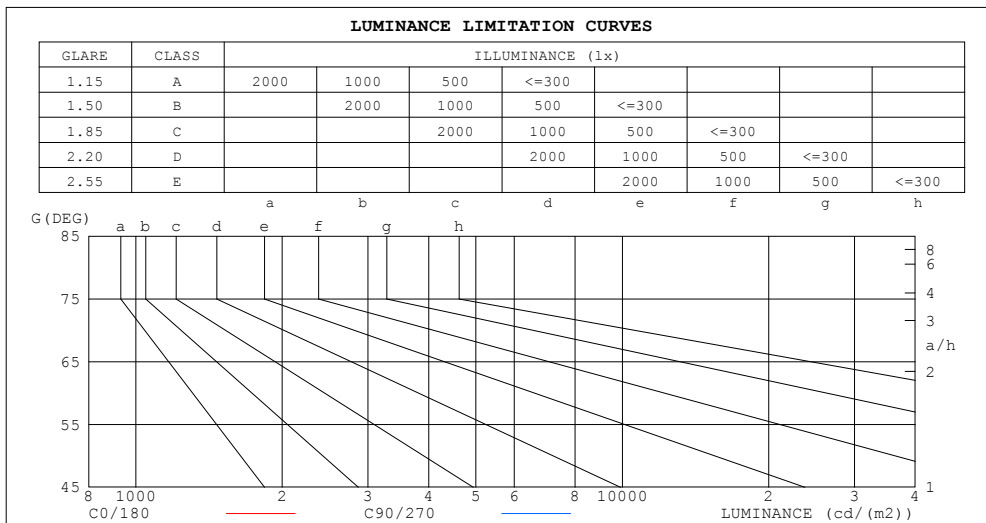

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	5
80	31	45
75	50	54
70	55	56
65	68	94
60	244	421
55	523	581
50	442	457
45	379	428


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.2V I:0.4390A P:52.40W PF:0.9930 Freq:50.00Hz Lamp Flux:5162.19x1 lm		
NAME: 6寸明装筒灯	TYPE:2700K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.06	1.02	.00	1.04	1.01	.99	1.01	.98	.96	.98	.96	.94	.95	.94	.92	.91
3.0	1.00	.96	.93	.99	.95	.92	.96	.93	.91	.94	.92	.89	.92	.90	.88	.87
4.0	.95	.91	.87	.94	.90	.87	.92	.89	.86	.90	.87	.85	.89	.86	.84	.83
5.0	.91	.86	.83	.90	.86	.82	.88	.85	.82	.87	.84	.81	.85	.83	.80	.79
6.0	.87	.82	.79	.86	.82	.79	.85	.81	.78	.84	.80	.77	.82	.79	.77	.76
7.0	.83	.79	.75	.83	.78	.75	.82	.78	.75	.81	.77	.74	.80	.76	.74	.73
8.0	.80	.75	.72	.80	.75	.72	.79	.75	.72	.78	.74	.71	.77	.73	.71	.70
9.0	.77	.72	.69	.77	.72	.69	.76	.72	.69	.75	.71	.69	.74	.71	.68	.67
10.0	.74	.70	.67	.74	.69	.66	.73	.69	.66	.72	.69	.66	.72	.68	.66	.65

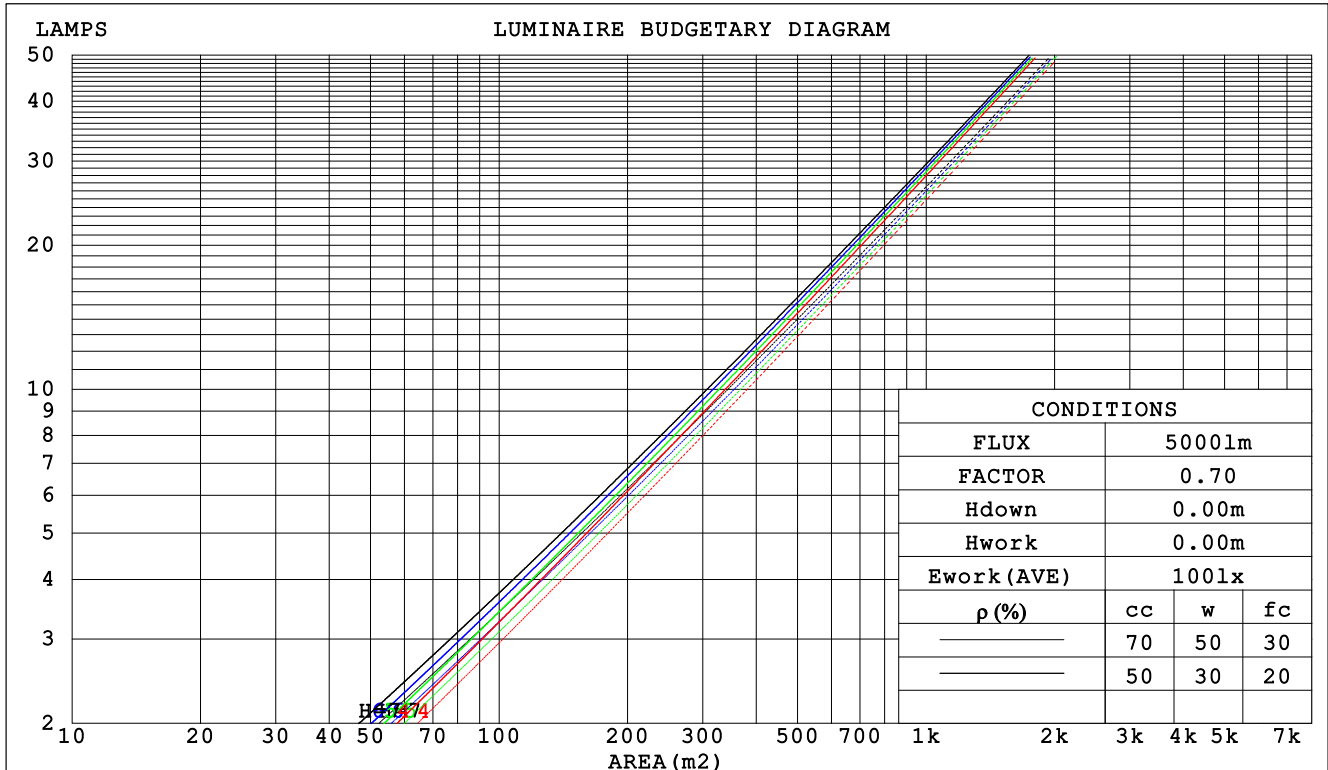

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.2V I:0.4390A P:52.40W PF:0.9930 Freq:50.00Hz Lamp Flux:5162.19x1 lm					
NAME: 6寸明装筒灯			TYPE:2700K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:0.128		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.152	.087	.027	.145	.083	.026	.133	.076	.024	.121	.070	.022	.111	.064	.021		
2.0	.143	.079	.024	.138	.076	.023	.127	.071	.022	.118	.066	.021	.109	.061	.019		
3.0	.135	.072	.022	.130	.070	.021	.121	.066	.020	.113	.062	.019	.106	.059	.018		
4.0	.128	.066	.019	.124	.065	.019	.116	.062	.018	.109	.059	.018	.103	.056	.017		
5.0	.121	.062	.018	.117	.060	.018	.111	.058	.017	.105	.055	.016	.099	.053	.016		
6.0	.115	.058	.016	.112	.057	.016	.106	.054	.016	.101	.052	.015	.096	.051	.015		
7.0	.109	.054	.015	.107	.053	.015	.102	.052	.015	.097	.050	.015	.093	.048	.014		
8.0	.104	.051	.014	.102	.050	.014	.098	.049	.014	.094	.047	.014	.090	.046	.013		
9.0	.100	.048	.014	.098	.048	.013	.094	.047	.013	.090	.045	.013	.087	.044	.013		
10.0	.096	.046	.013	.094	.045	.013	.091	.044	.012	.087	.043	.012	.084	.042	.012		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.171	.159	.149	.146	.137	.128	.100	.094	.088	.058	.054	.051	.018	.018	.017	
2.0	.154	.134	.118	.132	.116	.102	.090	.080	.071	.052	.047	.042	.017	.015	.014	
3.0	.140	.115	.095	.120	.099	.082	.083	.069	.058	.048	.040	.034	.015	.013	.011	
4.0	.129	.100	.078	.110	.086	.068	.076	.060	.048	.044	.035	.028	.014	.011	.009	
5.0	.119	.088	.065	.102	.076	.057	.070	.053	.040	.041	.031	.024	.013	.010	.008	
6.0	.111	.078	.055	.095	.068	.048	.066	.047	.034	.038	.028	.020	.012	.009	.007	
7.0	.103	.070	.047	.089	.061	.041	.061	.043	.029	.036	.025	.017	.012	.008	.006	
8.0	.097	.064	.041	.084	.055	.036	.058	.039	.025	.034	.023	.015	.011	.008	.005	
9.0	.092	.058	.036	.079	.051	.031	.055	.036	.022	.032	.021	.013	.010	.007	.004	
10.0	.087	.054	.032	.075	.047	.028	.052	.033	.020	.030	.019	.012	.010	.006	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.2V I:0.4390A P:52.40W PF:0.9930 Freq:50.00Hz Lamp Flux:5162.19x1 lm											
NAME: 6寸明装筒灯					TYPE:2700K			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: EVERFINE					SUR.:0.128			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	6.2	7.0	6.4	7.1	7.3	7.6	8.4	7.9	8.6	8.7
	3H	6.1	6.8	6.3	7.0	7.2	7.5	8.2	7.7	8.4	8.6
	4H	6.0	6.7	6.3	6.9	7.1	7.4	8.1	7.7	8.3	8.5
	6H	5.9	6.5	6.2	6.8	7.0	7.3	8.0	7.6	8.2	8.4
	8H	5.9	6.5	6.2	6.7	7.0	7.3	7.9	7.6	8.1	8.4
	12H	5.8	6.4	6.1	6.7	6.9	7.2	7.8	7.6	8.1	8.4
4H	2H	6.1	6.7	6.3	6.9	7.2	7.4	8.1	7.7	8.3	8.6
	3H	5.9	6.5	6.2	6.7	7.0	7.3	7.9	7.6	8.1	8.4
	4H	5.8	6.3	6.1	6.6	6.9	7.2	7.7	7.5	8.0	8.3
	6H	5.7	6.2	6.1	6.5	6.9	7.1	7.6	7.5	7.9	8.2
	8H	5.7	6.1	6.0	6.4	6.8	7.0	7.5	7.4	7.8	8.2
	12H	5.6	6.0	6.0	6.4	6.8	7.0	7.4	7.4	7.8	8.2
8H	4H	5.7	6.1	6.0	6.4	6.8	7.0	7.5	7.4	7.8	8.2
	6H	5.5	5.9	6.0	6.3	6.7	6.9	7.3	7.4	7.7	8.1
	8H	5.5	5.8	5.9	6.2	6.7	6.9	7.2	7.3	7.6	8.1
	12H	5.4	5.7	5.9	6.1	6.6	6.8	7.1	7.3	7.5	8.0
12H	4H	5.6	6.0	6.0	6.4	6.8	7.0	7.4	7.4	7.8	8.2
	6H	5.5	5.8	5.9	6.2	6.7	6.9	7.2	7.3	7.6	8.1
	8H	5.4	5.7	5.9	6.1	6.6	6.8	7.1	7.3	7.5	8.0
Variations with the observer position at spacings:											
S = 1.0H		+ 3.8 / - 4.4					+ 4.4 / - 6.0				
1.5H		+ 5.9 / - 5.3					+ 7.0 / - 7.6				
2.0H		+ 1.9 / - 7.9					+ 2.3 / - 7.4				

CIE Pub.117 Corrected 5162 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.7)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.2V I:0.4390A P:52.40W PF:0.9930 Freq:50.00Hz Lamp Flux:5162.19x1 lm		
NAME: 6寸明装筒灯	TYPE:2700K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	84	80	89	84	80	88	83	80	77
0.80	97	91	88	96	91	88	95	90	87	84
1.00	101	96	92	100	95	92	98	95	91	88
1.25	104	100	96	103	99	96	102	98	95	91
1.50	107	103	100	106	102	99	104	100	98	94
2.00	109	105	102	108	104	102	105	102	100	95
2.50	111	107	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	105	107	105	103	97
4.00	114	112	110	112	110	108	109	107	105	98
5.00	115	113	112	113	112	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.2V I:0.4390A P:52.40W PF:0.9930 Freq:50.00Hz Lamp Flux:5162.19x1 lm		
NAME: 6寸明装筒灯	TYPE:2700K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

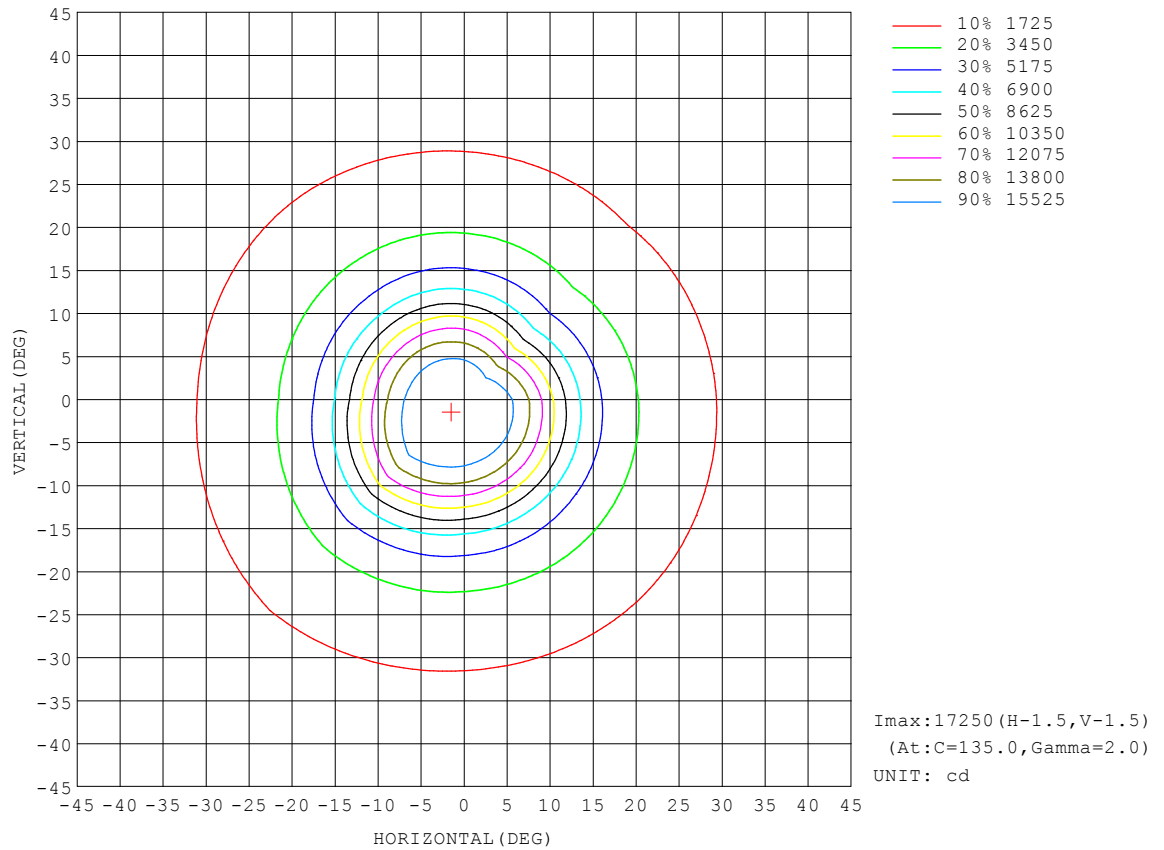


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.2V I:0.4390A P:52.40W PF:0.9930 Freq:50.00Hz Lamp Flux:5162.19x1 lm		
NAME: 6寸明装筒灯	TYPE:2700K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

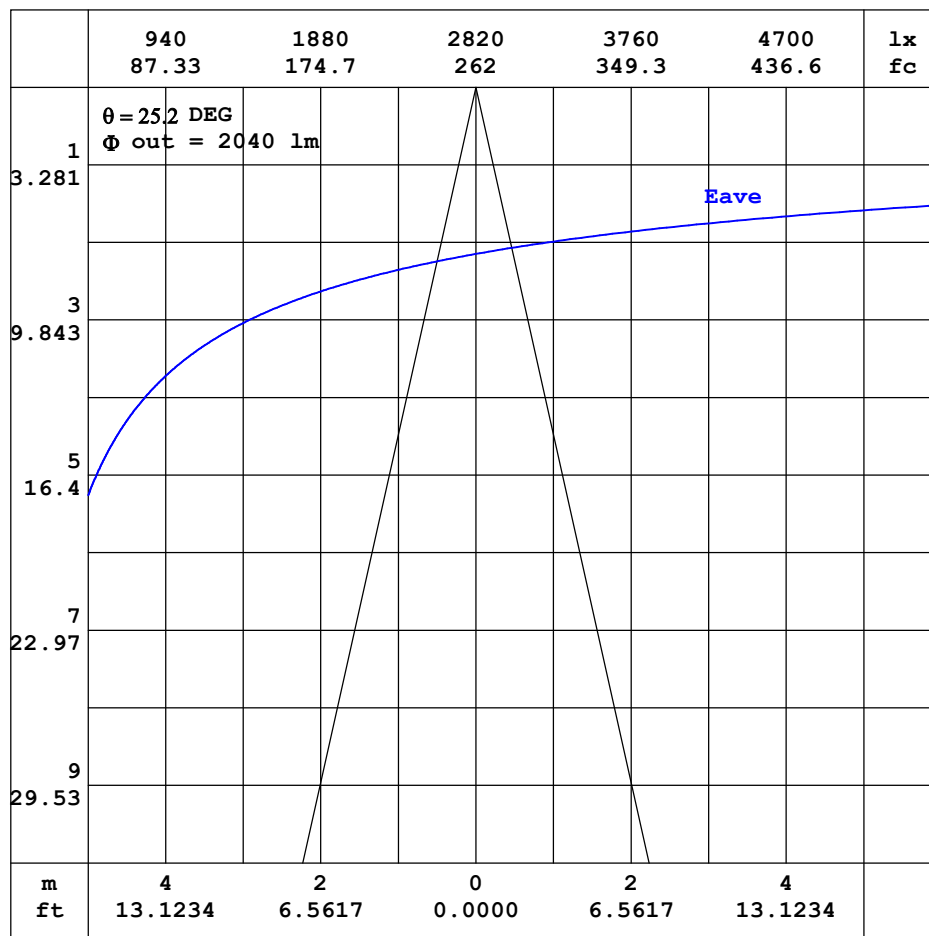


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.2V I:0.4390A P:52.40W PF:0.9930 Freq:50.00Hz Lamp Flux:5162.19x1 lm		
NAME: 6寸明装筒灯	TYPE:2700K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

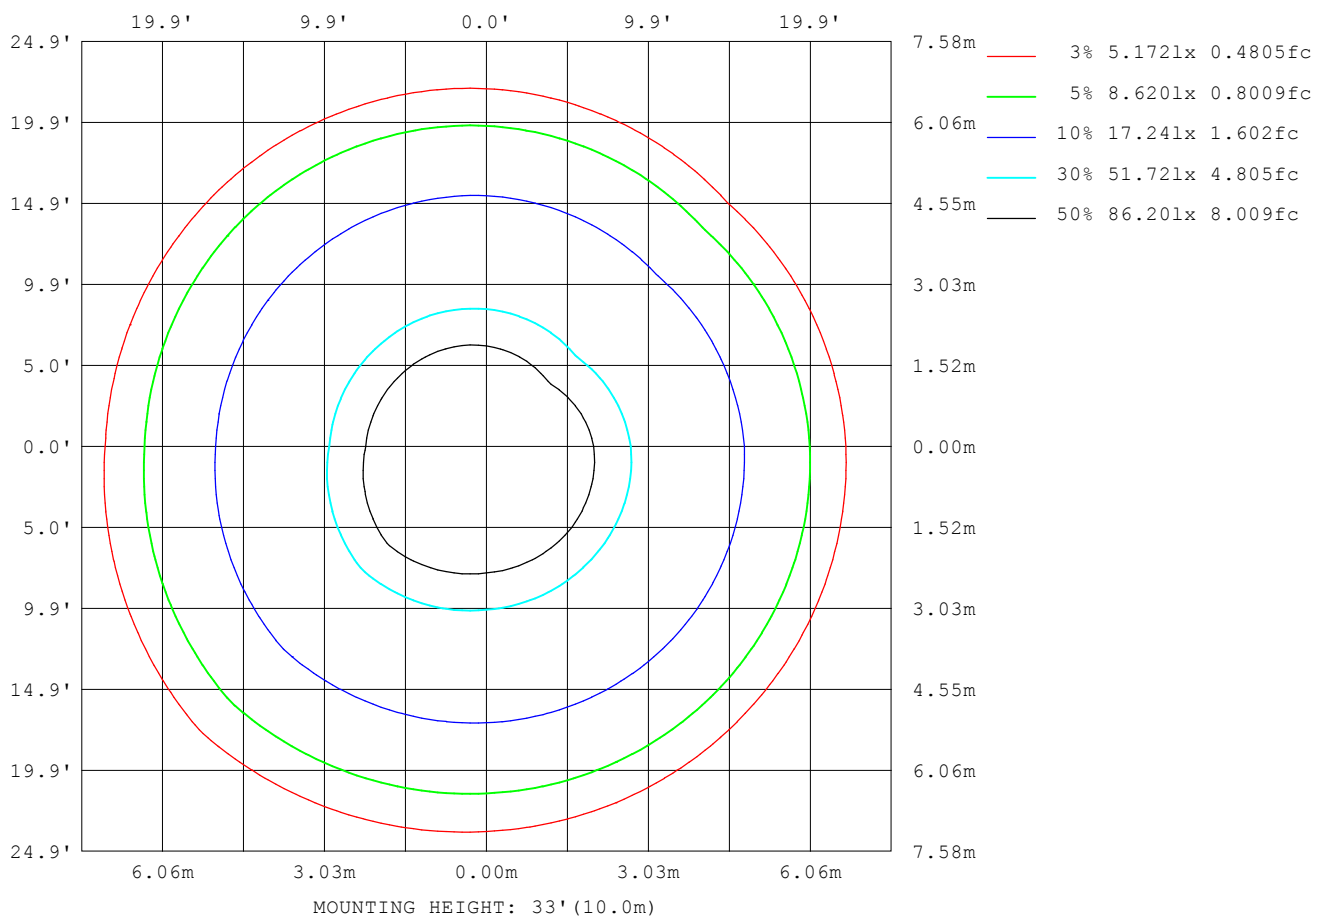

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.2V I:0.4390A P:52.40W PF:0.9930 Freq:50.00Hz Lamp Flux:5162.19x1 lm		
NAME: 6寸明装筒灯	TYPE:2700K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	84
L_0~180 (75) av	52
L_0~180 (85) av	1
L_90~270 (65) av	78
L_90~270 (75) av	50
L_90~270 (85) av	3
L_45 (65) av	94
L_45 (75) av	50
L_45 (85) av	9

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

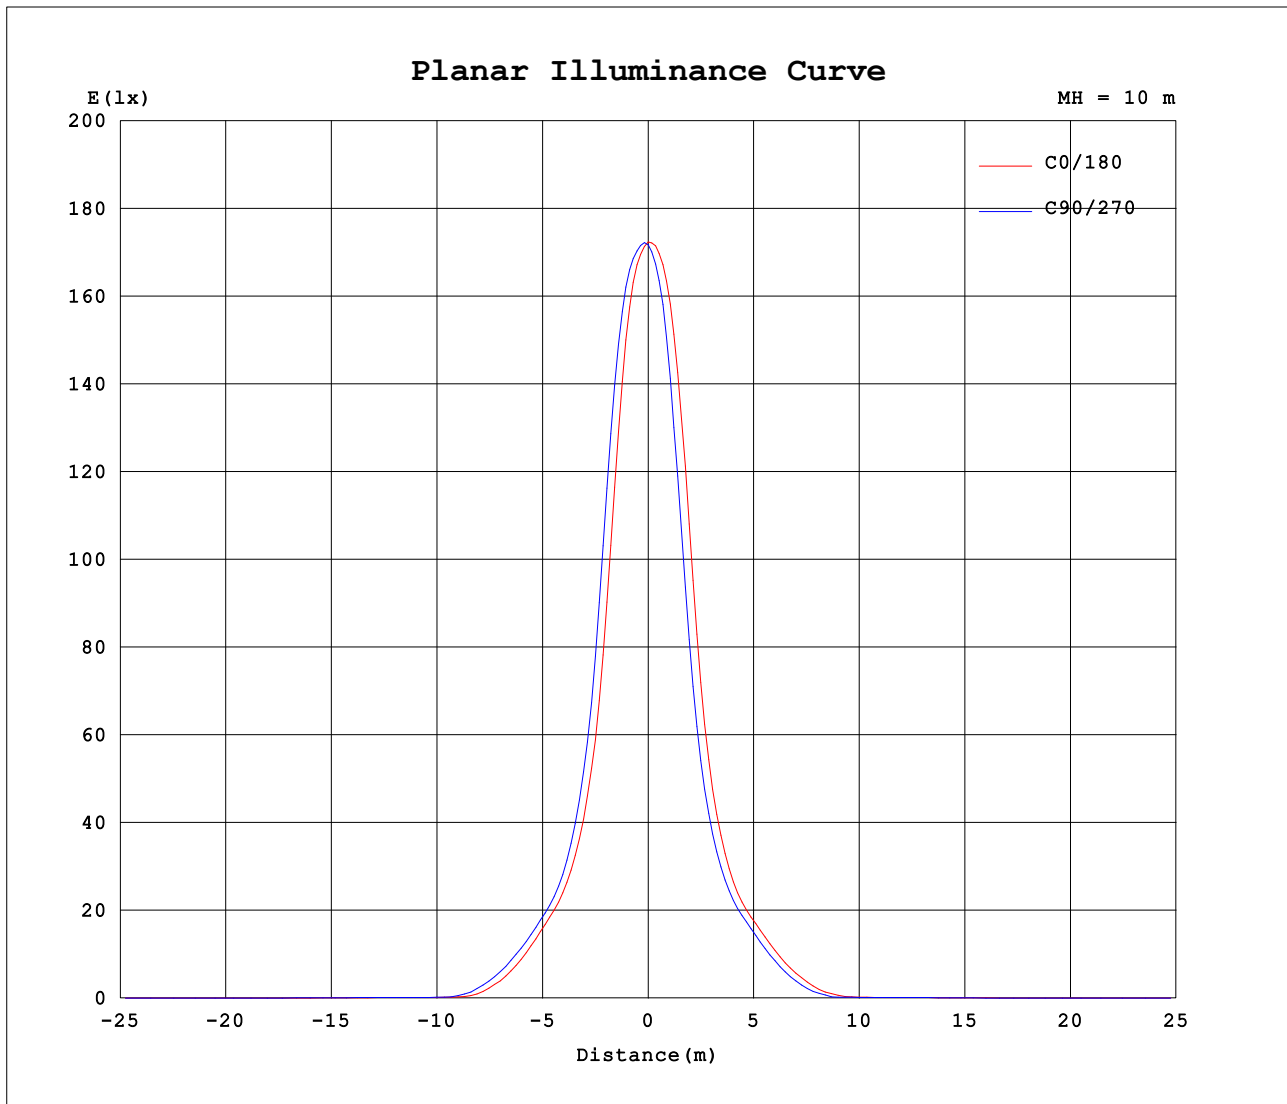

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.4390A P:52.40W PF:0.9930 Freq:50.00Hz Lamp Flux:5162.19x1 lm								
NAME: 6寸明装筒灯					TYPE:2700K			WEIGHT:
SPEC.:					DIM.:			SERIAL No.:
MFR.: EVERFINE					SUR.:0.128			Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1716	1716	1716	1716	1716	1716	1716	1716										
5	1587	1641	1679	1725	1646	1595	1523	1438										
10	1076	1229	1346	1493	1264	1120	981	840										
15	579	660	747	910	690	601	529	469										
20	351	387	426	490	396	358	325	299										
25	248	265	285	310	269	250	234	218										
30	159	181	199	224	190	174	152	132										
35	72.7	90.4	110	138	103	88.2	71.7	53.3										
40	13.8	23.3	32.4	57.3	30.9	20.6	16.4	7.54										
45	5.86	6.23	6.66	8.27	7.19	6.69	5.96	5.95										
50	6.22	6.71	6.46	6.46	6.70	6.54	6.78	6.80										
55	6.57	7.31	7.32	7.04	6.87	6.62	6.55	5.78										
60	2.67	3.68	4.63	5.58	3.97	3.34	2.39	1.45										
65	0.63	0.76	0.88	1.44	0.93	0.80	0.58	0.50										
70	0.41	0.45	0.42	0.51	0.47	0.43	0.36	0.34										
75	0.28	0.31	0.31	0.33	0.31	0.29	0.26	0.22										
80	0.12	0.14	0.17	0.21	0.15	0.15	0.13	0.09										
85	0.00	0.00	0.01	0.07	0.00	0.00	0.00	0.00										
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00										
115	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00										
120	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01										
125	0.05	0.02	0.01	0.01	0.01	0.01	0.01	0.02										
130	0.14	0.09	0.07	0.06	0.02	0.03	0.03	0.04										
135	0.26	0.21	0.17	0.16	0.04	0.05	0.07	0.07										
140	0.38	0.32	0.29	0.28	0.07	0.09	0.11	0.12										
145	0.58	0.47	0.42	0.41	0.12	0.16	0.19	0.21										
150	0.94	0.74	0.61	0.63	0.20	0.25	0.30	0.32										
155	1.48	1.24	0.99	1.02	0.30	0.37	0.41	0.44										
160	1.82	1.74	1.51	1.59	0.42	0.50	0.57	0.61										
165	1.85	1.95	1.83	1.96	0.58	0.66	0.72	0.75										
170	1.55	1.82	1.84	1.98	0.72	0.79	0.83	0.85										
175	1.15	1.39	1.51	1.62	0.82	0.88	0.92	0.95										
180	0.93	1.06	1.13	1.17	0.94	1.05	1.14	1.17										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: