


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.2V I:0.4380A P:52.30W PF:0.9920 Freq:50.00Hz Lamp Flux:5313.9x1 lm		
NAME: 6寸明装筒灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 101.60 lm/W			
MODEL	25度	I _{max} (cd)	17931	S/MH(C0/180)	0.40
NOMINAL POWER(W)	53	LOR(%)	100.0	S/MH(C90/270)	0.38
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	5313.9	η UP,DN(C0-180)	0.2,54.3
NOMINAL FLUX(lm)	5313.9	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,45.5
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	120	η down(%)	99.8	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

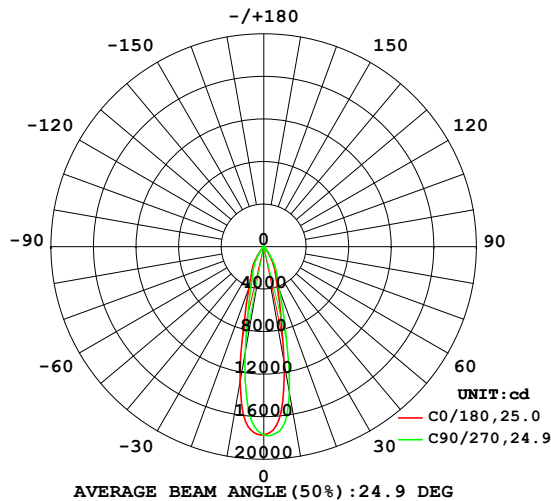

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

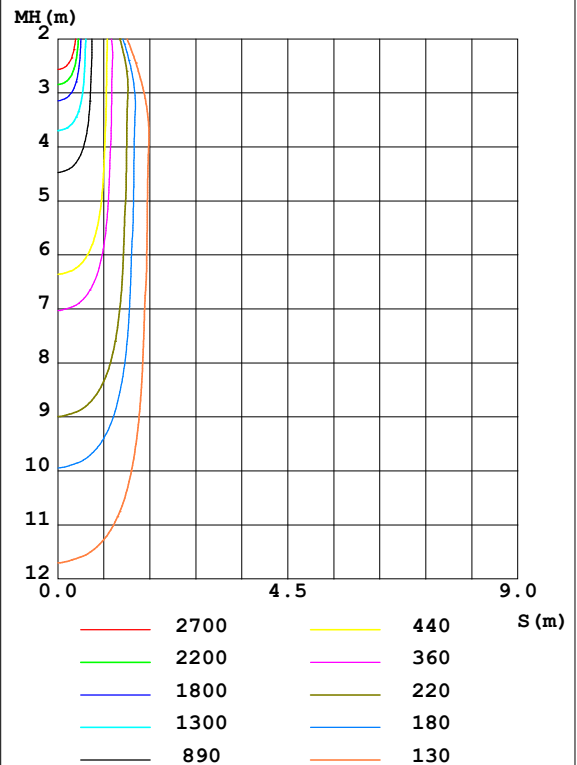

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1099	1262	1390	1539	1283	1153	1011	866.2	0- 10	1434	1434	27,27
20	362.4	396.9	439.4	504.4	407.7	366.6	333.5	308.6	10- 20	1898	3332	62.7,62.7
30	162.9	185.7	205.1	231.9	195.3	178.2	156.5	135.4	20- 30	1237	4569	86,86
40	14.62	24.60	33.62	58.28	31.84	22.15	16.72	7.687	30- 40	587.9	5157	97,97
50	6.403	6.916	6.652	6.674	6.916	6.747	6.990	7.026	40- 50	74.25	5231	98.4,98.4
60	2.759	3.797	4.771	5.742	4.079	3.446	2.472	1.501	50- 60	55.94	5287	99.5,99.5
70	0.4289	0.4657	0.4400	0.5309	0.4924	0.4470	0.3732	0.3499	60- 70	12.17	5299	99.7,99.7
80	0.1230	0.1433	0.1780	0.2199	0.1591	0.1521	0.1307	0.0924	70- 80	3.111	5302	99.8,99.8
90	0	0	0	0	0	0	0	0	80- 90	0.4160	5302	99.8,99.8
100	0	0	0	0	0	0	0	0	90-100	0	5302	99.8,99.8
110	0.0072	0.0070	0.0055	0.0044	0	0	0	0.0002	100-110	0.0102	5303	99.8,99.8
120	0.0116	0.0092	0.0087	0.0088	0.0014	0.0029	0.0046	0.0063	110-120	0.0449	5303	99.8,99.8
130	0.1356	0.0937	0.0678	0.0548	0.0176	0.0278	0.0359	0.0427	120-130	0.2093	5303	99.8,99.8
140	0.3647	0.3110	0.2793	0.2702	0.0709	0.0975	0.1173	0.1331	130-140	0.9741	5304	99.8,99.8
150	0.9097	0.7217	0.5938	0.6009	0.2024	0.2686	0.3104	0.3408	140-150	2.019	5306	99.8,99.8
160	1.761	1.708	1.480	1.525	0.4311	0.5363	0.5898	0.6321	150-160	3.520	5309	99.9,99.9
170	1.510	1.783	1.798	1.922	0.7242	0.8126	0.8486	0.8614	160-170	3.488	5313	100,100
180	0.9311	1.054	1.120	1.153	0.9244	1.048	1.127	1.169	170-180	1.141	5314	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.2V I:0.4380A P:52.30W PF:0.9920 Freq:50.00Hz Lamp Flux:5313.9x1 lm		
NAME: 6寸明装筒灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

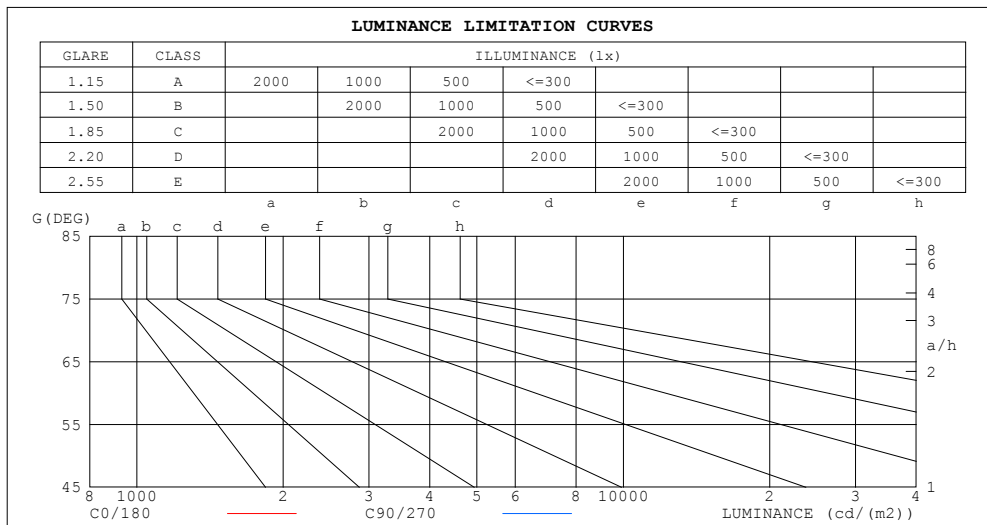


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.2V I:0.4380A P:52.30W PF:0.9920 Freq:50.00Hz Lamp Flux:5313.9x1 lm		
NAME: 6寸明装筒灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.06	1.02	.00	1.04	1.01	.99	1.01	.98	.96	.98	.96	.94	.95	.94	.92	.91
3.0	1.00	.96	.93	.99	.95	.92	.96	.93	.91	.94	.92	.89	.92	.90	.88	.87
4.0	.95	.91	.87	.94	.90	.87	.92	.89	.86	.90	.87	.85	.89	.86	.84	.83
5.0	.91	.86	.83	.90	.86	.82	.88	.85	.82	.87	.84	.81	.85	.83	.80	.79
6.0	.87	.82	.79	.86	.82	.79	.85	.81	.78	.84	.80	.77	.82	.79	.77	.76
7.0	.83	.79	.75	.83	.78	.75	.82	.78	.75	.81	.77	.74	.80	.76	.74	.73
8.0	.80	.75	.72	.80	.75	.72	.79	.75	.72	.78	.74	.71	.77	.74	.71	.70
9.0	.77	.72	.69	.77	.72	.69	.76	.72	.69	.75	.71	.69	.74	.71	.68	.67
10.0	.74	.70	.67	.74	.70	.67	.73	.69	.66	.73	.69	.66	.72	.68	.66	.65

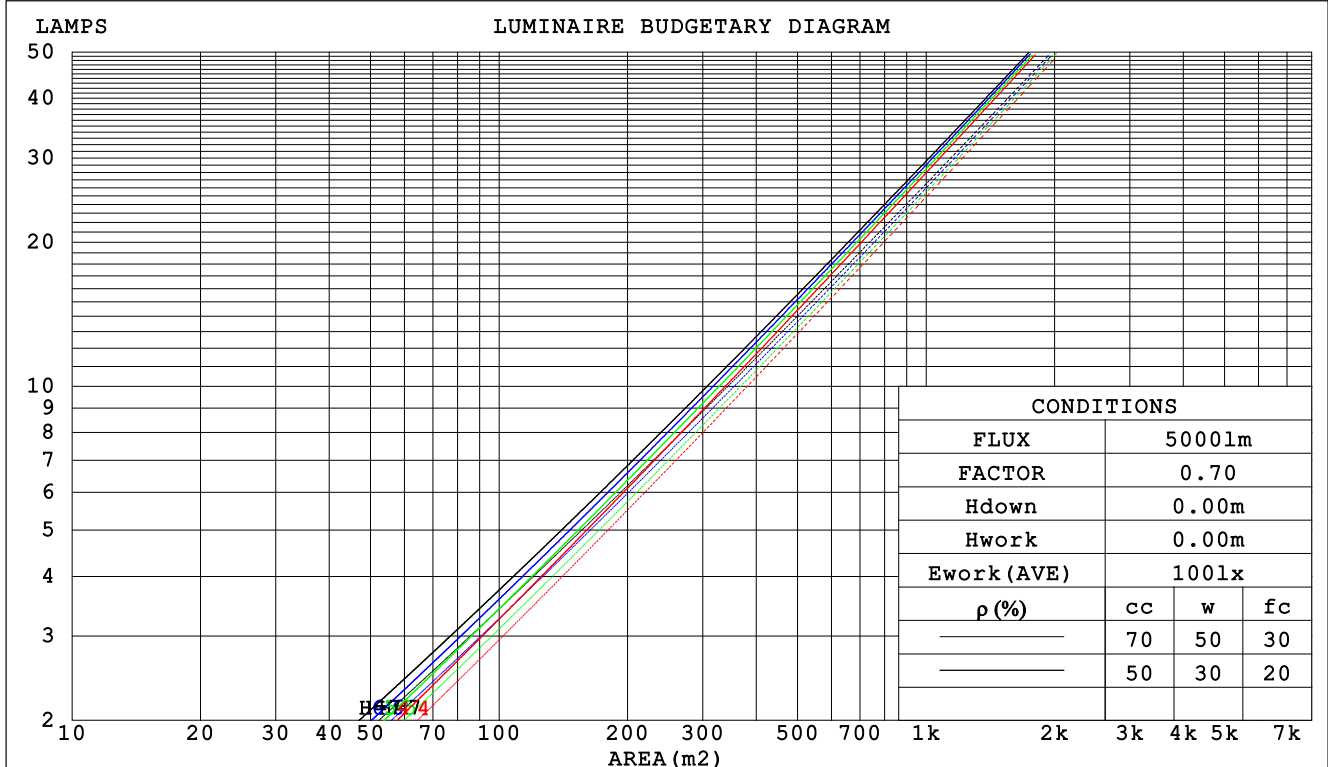

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.2V I:0.4380A P:52.30W PF:0.9920 Freq:50.00Hz Lamp Flux:5313.9x1 lm					
NAME: 6寸明装筒灯			TYPE:3000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:0.128		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.152	.087	.027	.145	.083	.026	.133	.076	.024	.121	.070	.022	.111	.064	.021		
2.0	.143	.079	.024	.138	.076	.023	.127	.071	.022	.118	.066	.021	.109	.061	.019		
3.0	.135	.072	.022	.130	.070	.021	.121	.066	.020	.113	.062	.019	.106	.059	.018		
4.0	.127	.066	.019	.124	.065	.019	.116	.062	.018	.109	.059	.018	.103	.056	.017		
5.0	.121	.062	.018	.117	.060	.018	.111	.058	.017	.105	.055	.016	.099	.053	.016		
6.0	.115	.058	.016	.112	.056	.016	.106	.054	.016	.101	.052	.015	.096	.051	.015		
7.0	.109	.054	.015	.107	.053	.015	.102	.051	.015	.097	.050	.015	.093	.048	.014		
8.0	.104	.051	.014	.102	.050	.014	.098	.049	.014	.094	.047	.014	.090	.046	.013		
9.0	.100	.048	.014	.098	.048	.013	.094	.047	.013	.090	.045	.013	.087	.044	.013		
10.0	.096	.046	.013	.094	.045	.013	.091	.044	.012	.087	.043	.012	.084	.042	.012		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.171	.159	.148	.146	.137	.128	.100	.094	.088	.058	.054	.051	.018	.018	.017	
2.0	.154	.134	.118	.132	.116	.102	.090	.080	.071	.052	.047	.042	.017	.015	.014	
3.0	.140	.115	.095	.120	.099	.082	.082	.069	.058	.048	.040	.034	.015	.013	.011	
4.0	.129	.100	.078	.110	.086	.068	.076	.060	.048	.044	.035	.028	.014	.011	.009	
5.0	.119	.088	.065	.102	.076	.057	.070	.053	.040	.041	.031	.024	.013	.010	.008	
6.0	.110	.078	.055	.095	.068	.048	.066	.047	.034	.038	.028	.020	.012	.009	.007	
7.0	.103	.070	.047	.089	.061	.041	.061	.043	.029	.036	.025	.017	.012	.008	.006	
8.0	.097	.064	.041	.084	.055	.036	.058	.039	.025	.034	.023	.015	.011	.008	.005	
9.0	.092	.058	.036	.079	.051	.031	.055	.036	.022	.032	.021	.013	.010	.007	.004	
10.0	.087	.054	.031	.075	.047	.027	.052	.033	.020	.030	.019	.012	.010	.006	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.2V I:0.4380A P:52.30W PF:0.9920 Freq:50.00Hz Lamp Flux:5313.9x1 lm										
NAME: 6寸明装筒灯					TYPE:3000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:0.128			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.4	7.2	6.6	7.3	7.5	7.8	8.5	8.0	8.7	8.8
3H	6.2	6.9	6.5	7.1	7.3	7.6	8.3	7.9	8.5	8.7
4H	6.2	6.8	6.4	7.0	7.3	7.5	8.2	7.8	8.4	8.6
6H	6.1	6.7	6.4	6.9	7.2	7.4	8.1	7.7	8.3	8.6
8H	6.0	6.6	6.3	6.9	7.2	7.4	8.0	7.7	8.3	8.5
12H	6.0	6.6	6.3	6.8	7.1	7.4	7.9	7.7	8.2	8.5
4H 2H	6.2	6.9	6.5	7.1	7.3	7.6	8.2	7.8	8.4	8.7
3H	6.1	6.6	6.4	6.9	7.2	7.4	8.0	7.7	8.2	8.5
4H	6.0	6.5	6.3	6.8	7.1	7.3	7.8	7.6	8.1	8.4
6H	5.9	6.3	6.2	6.7	7.0	7.2	7.7	7.6	8.0	8.4
8H	5.8	6.3	6.2	6.6	7.0	7.2	7.6	7.5	7.9	8.3
12H	5.8	6.2	6.2	6.5	6.9	7.1	7.5	7.5	7.9	8.3
8H 4H	5.8	6.3	6.2	6.6	7.0	7.2	7.6	7.5	7.9	8.3
6H	5.7	6.1	6.1	6.5	6.9	7.0	7.4	7.5	7.8	8.2
8H	5.7	6.0	6.1	6.4	6.8	7.0	7.3	7.4	7.7	8.2
12H	5.6	5.9	6.1	6.3	6.8	6.9	7.2	7.4	7.7	8.1
12H 4H	5.8	6.2	6.2	6.5	6.9	7.1	7.5	7.5	7.9	8.3
6H	5.7	6.0	6.1	6.4	6.8	7.0	7.3	7.4	7.7	8.2
8H	5.6	5.9	6.1	6.3	6.8	6.9	7.2	7.4	7.7	8.1
Variations with the observer position at spacings:										
S = 1.0H	+ 3.9 / - 4.5					+ 4.4 / - 5.9				
1.5H	+ 6.0 / - 5.4					+ 7.0 / - 7.6				
2.0H	+ 1.9 / - 7.8					+ 2.2 / - 7.3				

CIE Pub.117 Corrected 5314 lm Total Lamp Luminous Flux. (8log(F/F0) = 5.8)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.2V I:0.4380A P:52.30W PF:0.9920 Freq:50.00Hz Lamp Flux:5313.9x1 lm		
NAME: 6寸明装筒灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	84	80	89	84	80	88	83	80	77
0.80	97	91	88	96	91	88	95	90	87	84
1.00	101	96	92	100	95	92	98	95	91	88
1.25	104	100	96	103	99	96	102	98	95	91
1.50	107	103	100	106	102	99	104	100	98	94
2.00	109	105	103	108	104	102	105	102	100	95
2.50	111	107	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	105	107	105	103	97
4.00	114	112	110	112	110	108	109	107	105	98
5.00	115	113	112	113	112	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.2V I:0.4380A P:52.30W PF:0.9920 Freq:50.00Hz Lamp Flux:5313.9x1 lm		
NAME: 6寸明装筒灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

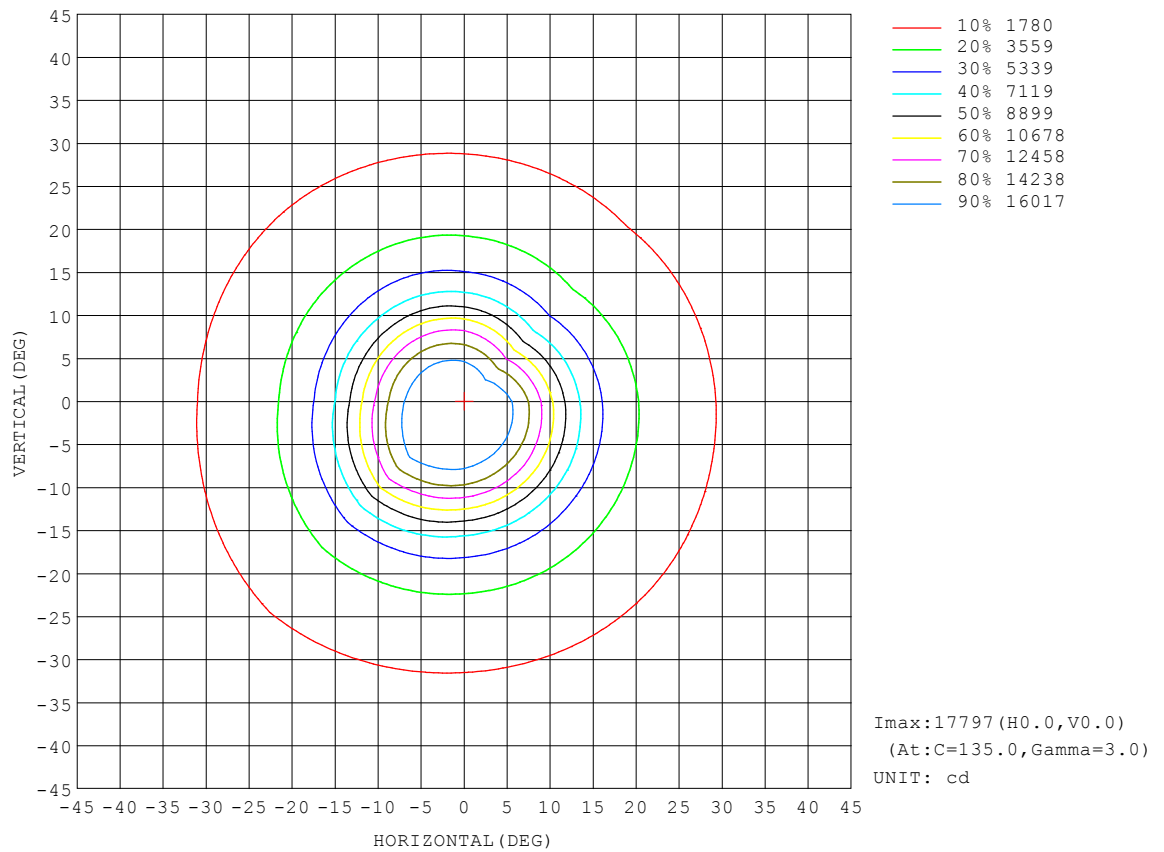


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.2V I:0.4380A P:52.30W PF:0.9920 Freq:50.00Hz Lamp Flux:5313.9x1 lm		
NAME: 6寸明装筒灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

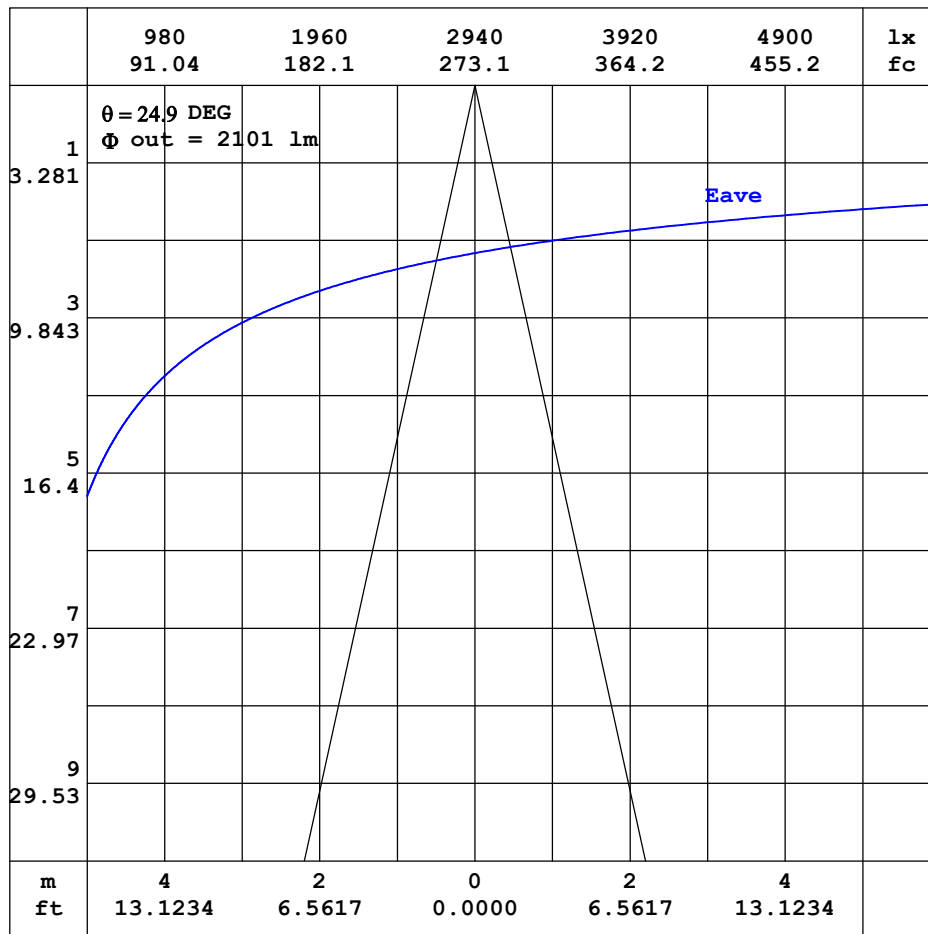


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.2V I:0.4380A P:52.30W PF:0.9920 Freq:50.00Hz Lamp Flux:5313.9x1 lm		
NAME: 6寸明装筒灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

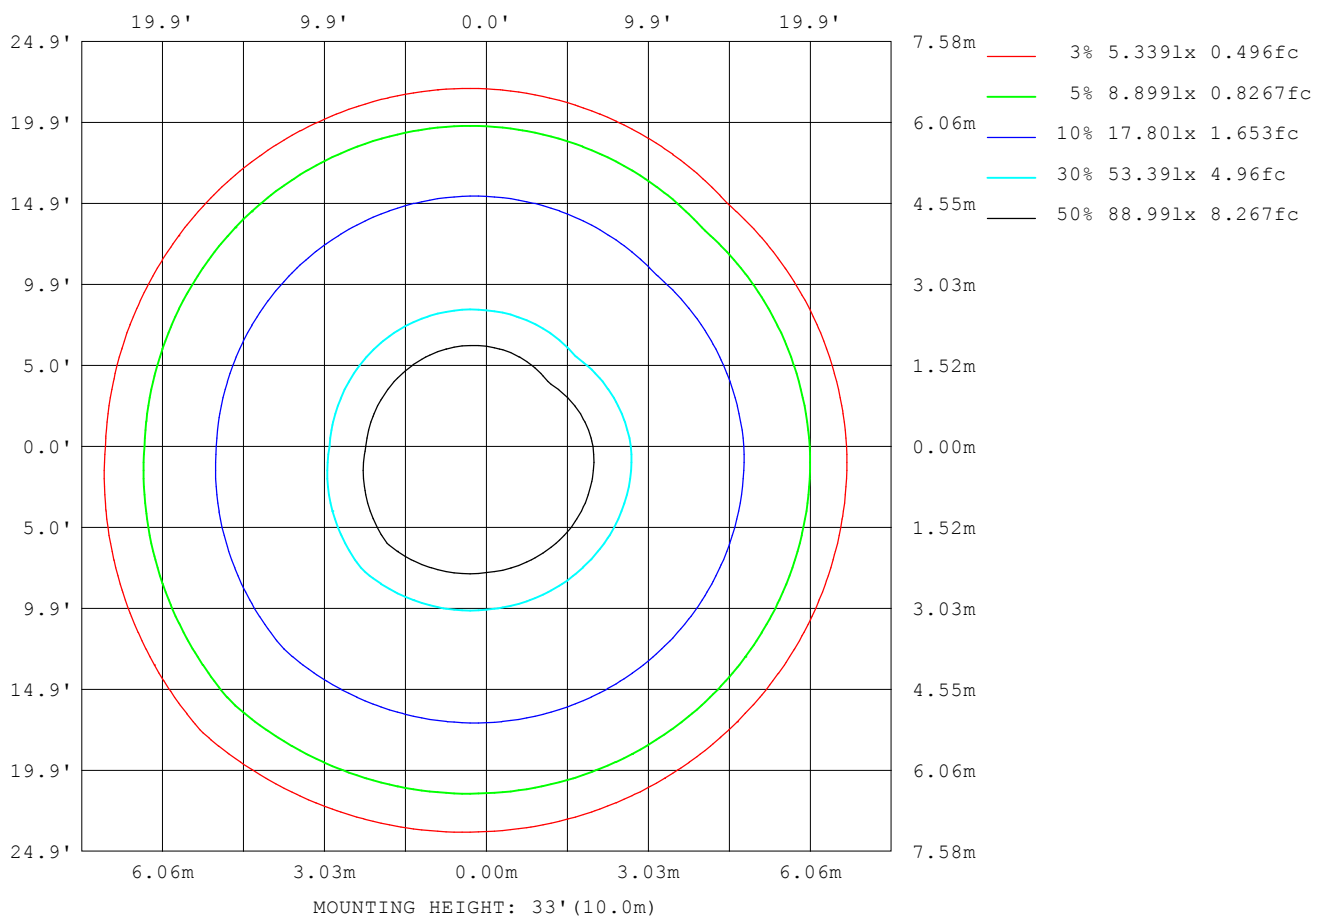

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.2V I:0.4380A P:52.30W PF:0.9920 Freq:50.00Hz Lamp Flux:5313.9x1 lm		
NAME: 6寸明装筒灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	87
L_0~180 (75) av	54
L_0~180 (85) av	1
L_90~270 (65) av	81
L_90~270 (75) av	51
L_90~270 (85) av	3
L_45 (65) av	97
L_45 (75) av	52
L_45 (85) av	9

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

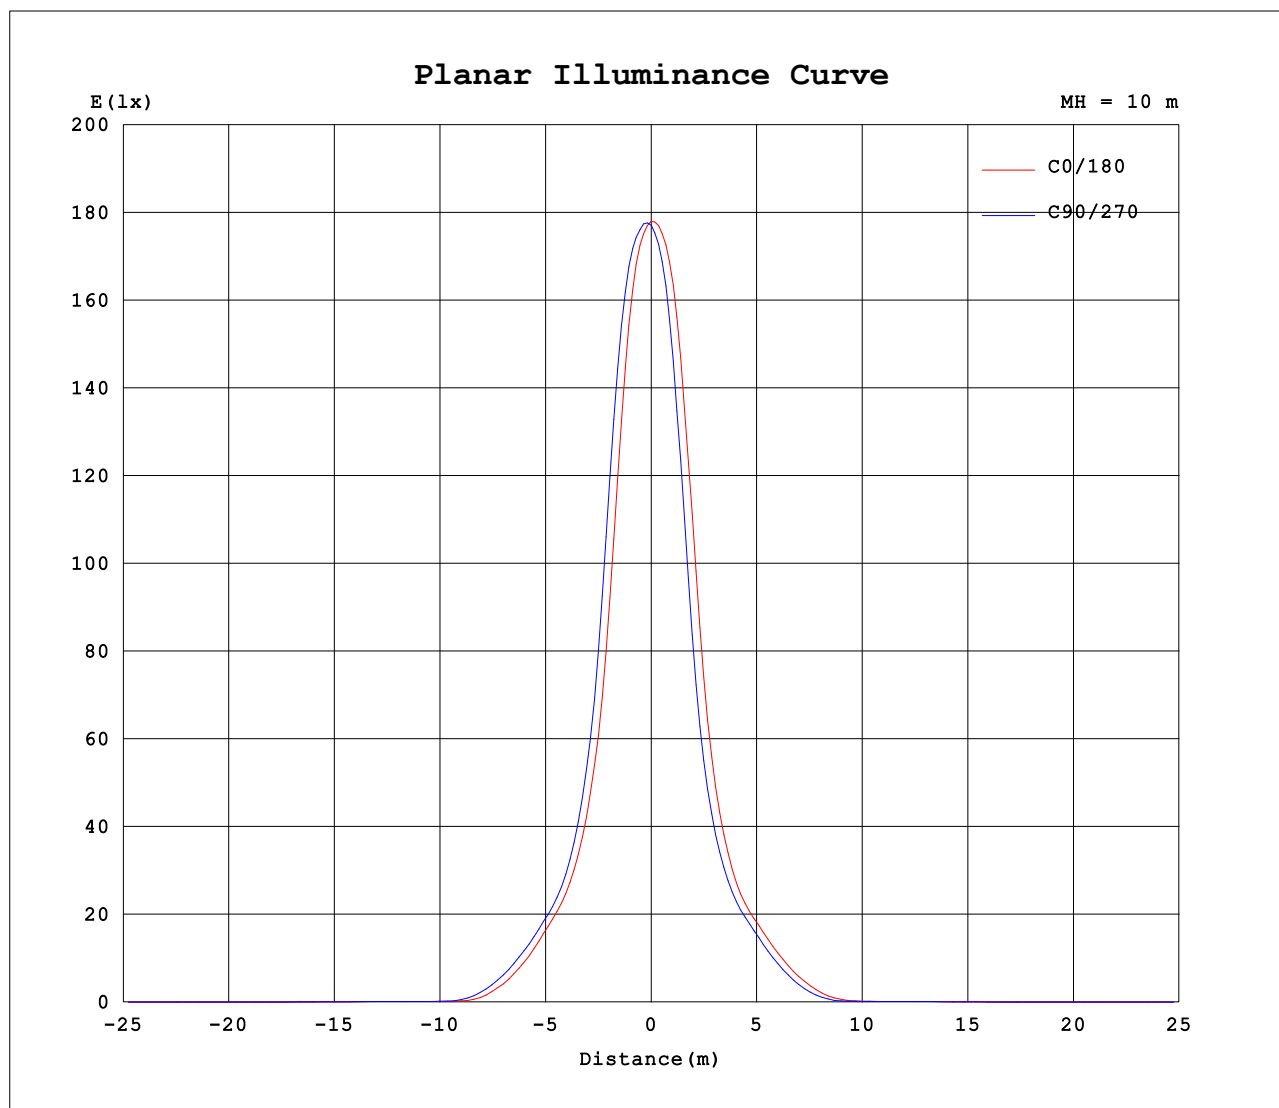

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.4380A P:52.30W PF:0.9920 Freq:50.00Hz Lamp Flux:5313.9x1 lm		
NAME: 6寸明装筒灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1770	1770	1770	1770	1770	1770	1770	1770										
5	1634	1691	1737	1779	1698	1647	1574	1482										
10	1099	1262	1390	1539	1283	1153	1011	866										
15	598	679	768	938	709	625	538	482										
20	362	397	439	504	408	367	334	309										
25	254	273	294	319	277	257	240	225										
30	163	186	205	232	195	178	156	135										
35	76.4	93.3	114	141	106	91.3	73.4	54.1										
40	14.6	24.6	33.6	58.3	31.8	22.1	16.7	7.69										
45	6.04	6.43	6.86	8.41	7.43	6.81	6.15	6.15										
50	6.40	6.92	6.65	6.67	6.92	6.75	6.99	7.03										
55	6.75	7.52	7.53	7.24	7.08	6.84	6.74	5.94										
60	2.76	3.80	4.77	5.74	4.08	3.45	2.47	1.50										
65	0.66	0.79	0.90	1.48	0.97	0.83	0.60	0.52										
70	0.43	0.47	0.44	0.53	0.49	0.45	0.37	0.35										
75	0.29	0.32	0.32	0.34	0.32	0.30	0.27	0.23										
80	0.12	0.14	0.18	0.22	0.16	0.15	0.13	0.09										
85	0.00	0.00	0.01	0.07	0.00	0.00	0.00	0.00										
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00										
115	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00										
120	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01										
125	0.04	0.02	0.01	0.01	0.01	0.01	0.02	0.02										
130	0.14	0.09	0.07	0.05	0.02	0.03	0.04	0.04										
135	0.25	0.20	0.17	0.15	0.04	0.06	0.07	0.08										
140	0.36	0.31	0.28	0.27	0.07	0.10	0.12	0.13										
145	0.55	0.46	0.41	0.40	0.12	0.17	0.20	0.22										
150	0.91	0.72	0.59	0.60	0.20	0.27	0.31	0.34										
155	1.44	1.22	0.96	0.98	0.31	0.39	0.43	0.47										
160	1.76	1.71	1.48	1.53	0.43	0.54	0.59	0.63										
165	1.81	1.90	1.79	1.90	0.59	0.69	0.74	0.77										
170	1.51	1.78	1.80	1.92	0.72	0.81	0.85	0.86										
175	1.13	1.37	1.49	1.57	0.81	0.90	0.93	0.95										
180	0.93	1.05	1.12	1.15	0.92	1.05	1.13	1.17										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: