


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.2V I:0.4380A P:52.30W PF:0.9920 Freq:50.00Hz Lamp Flux:5501.68x1 lm		
NAME: 6寸明装筒灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 105.19 lm/W			
MODEL	25度	I _{max} (cd)	18627	S/MH(C0/180)	0.40
NOMINAL POWER(W)	53	LOR(%)	100.0	S/MH(C90/270)	0.38
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	5501.7	η UP,DN(C0-180)	0.1,54.3
NOMINAL FLUX(lm)	5501.68	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,45.5
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	120	η down(%)	99.8	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

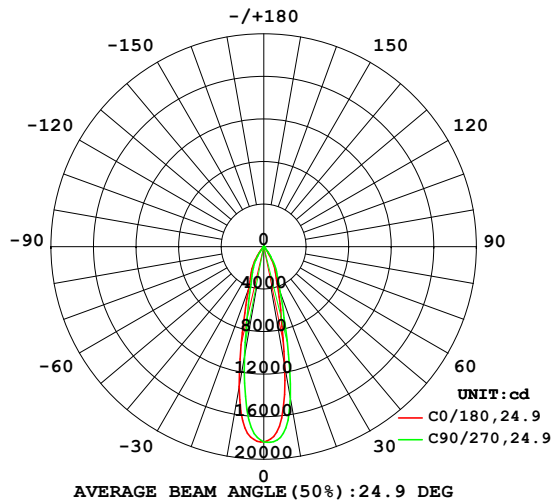

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

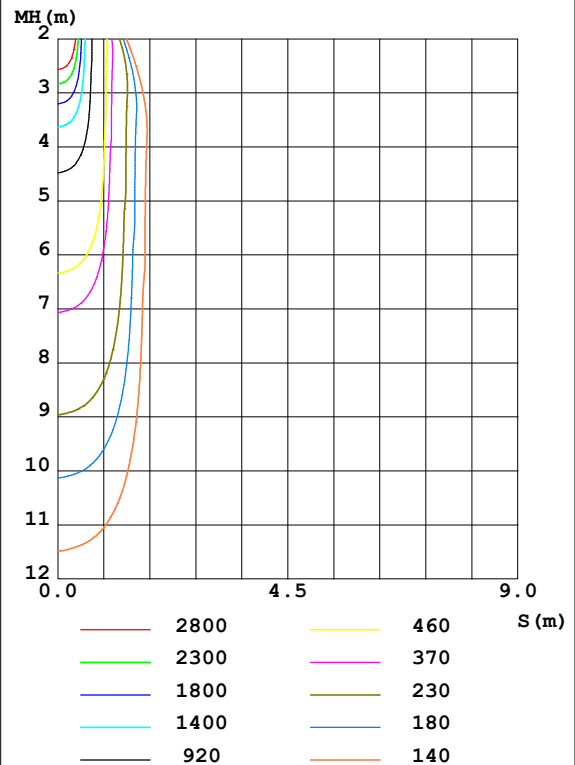

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1139	1291	1444	1599	1335	1195	1043	894.5	0- 10	1486	1486	27,27
20	372.8	408.1	454.2	523.4	421.8	378.7	346.5	319.8	10- 20	1967	3453	62.8,62.8
30	168.8	191.1	212.7	241.5	202.2	183.7	162.8	139.6	20- 30	1280	4733	86,86
40	15.07	23.71	33.88	59.32	33.46	24.27	16.02	7.790	30- 40	606.9	5340	97.1,97.1
50	6.632	7.168	6.914	6.954	7.180	6.990	7.245	7.279	40- 50	76.90	5417	98.5,98.5
60	2.833	3.937	4.889	5.969	4.248	3.611	2.578	1.540	50- 60	57.96	5475	99.5,99.5
70	0.4486	0.4869	0.4594	0.5556	0.5168	0.4685	0.3903	0.3637	60- 70	12.68	5487	99.7,99.7
80	0.1270	0.1484	0.1837	0.2268	0.1664	0.1608	0.1358	0.0943	70- 80	3.245	5491	99.8,99.8
90	0	0	0	0	0	0	0	0	80- 90	0.4305	5491	99.8,99.8
100	0.0002	0	0	0	0	0	0	0	90-100	0.0000	5491	99.8,99.8
110	0.0067	0.0060	0.0046	0.0034	0	0	0	0	100-110	0.0087	5491	99.8,99.8
120	0.0113	0.0089	0.0085	0.0076	0.0000	0.0036	0.0041	0.0063	110-120	0.0423	5491	99.8,99.8
130	0.1230	0.0842	0.0611	0.0490	0.0171	0.0275	0.0369	0.0427	120-130	0.1969	5491	99.8,99.8
140	0.3353	0.2836	0.2543	0.2488	0.0711	0.0965	0.1203	0.1338	130-140	0.9074	5492	99.8,99.8
150	0.8295	0.6589	0.5452	0.5560	0.2005	0.2678	0.3168	0.3403	140-150	1.900	5494	99.9,99.9
160	1.601	1.537	1.339	1.403	0.4317	0.5361	0.5910	0.6345	150-160	3.293	5497	99.9,99.9
170	1.404	1.623	1.644	1.782	0.7136	0.7902	0.8298	0.8507	160-170	3.257	5501	100,100
180	0.9016	1.001	1.061	1.103	0.9083	0.9987	1.060	1.110	170-180	1.079	5502	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.2V I:0.4380A P:52.30W PF:0.9920 Freq:50.00Hz Lamp Flux:5501.68x1 lm		
NAME: 6寸明装筒灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

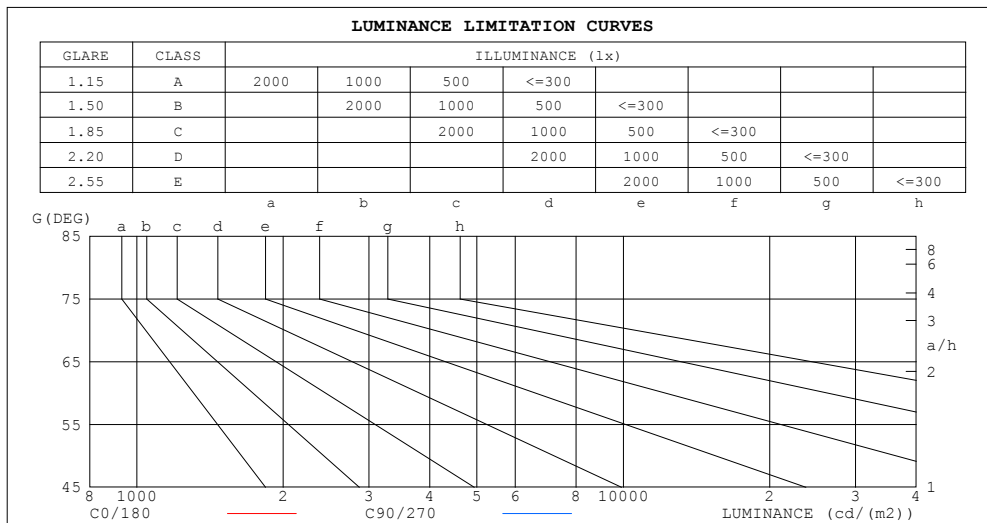

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	5
80	33	48
75	54	58
70	60	61
65	74	101
60	259	444
55	556	618
50	472	489
45	406	467


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.2V I:0.4380A P:52.30W PF:0.9920 Freq:50.00Hz Lamp Flux:5501.68x1 lm		
NAME: 6寸明装筒灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.06	1.02	.00	1.04	1.01	.99	1.01	.99	.96	.98	.96	.94	.95	.94	.92	.91
3.0	1.00	.96	.93	.99	.95	.92	.96	.93	.91	.94	.92	.89	.92	.90	.88	.87
4.0	.95	.91	.88	.94	.90	.87	.92	.89	.86	.90	.87	.85	.89	.86	.84	.83
5.0	.91	.86	.83	.90	.86	.82	.89	.85	.82	.87	.84	.81	.85	.83	.80	.79
6.0	.87	.82	.79	.86	.82	.79	.85	.81	.78	.84	.80	.78	.82	.79	.77	.76
7.0	.84	.79	.75	.83	.78	.75	.82	.78	.75	.81	.77	.74	.80	.76	.74	.73
8.0	.80	.75	.72	.80	.75	.72	.79	.75	.72	.78	.74	.71	.77	.74	.71	.70
9.0	.77	.72	.69	.77	.72	.69	.76	.72	.69	.75	.71	.69	.74	.71	.68	.67
10.0	.74	.70	.67	.74	.70	.67	.73	.69	.66	.73	.69	.66	.72	.68	.66	.65

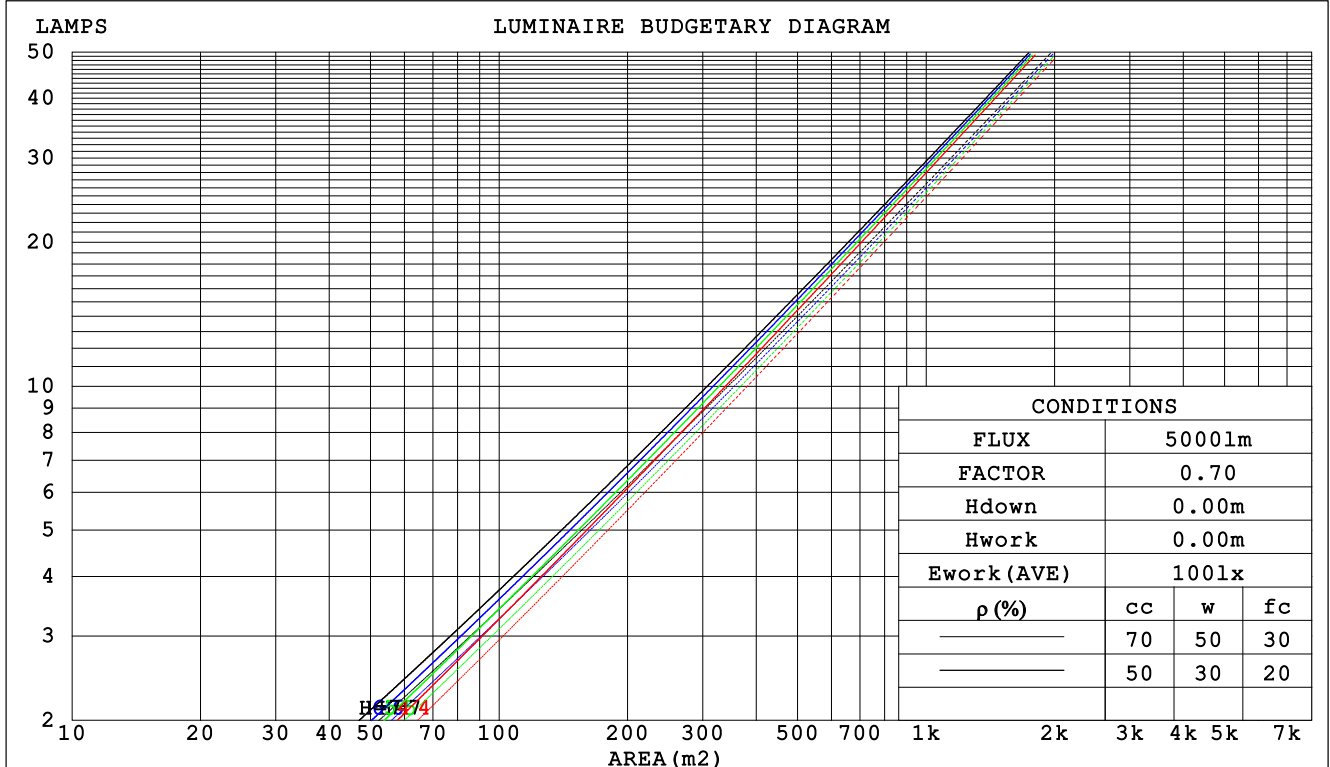

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.2V I:0.4380A P:52.30W PF:0.9920 Freq:50.00Hz Lamp Flux:5501.68x1 lm					
NAME: 6寸明装筒灯			TYPE:3500K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:0.128		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.152	.086	.027	.145	.083	.026	.133	.076	.024	.121	.070	.022	.111	.064	.021		
2.0	.143	.078	.024	.138	.076	.023	.127	.071	.022	.118	.066	.021	.109	.061	.019		
3.0	.135	.072	.022	.130	.070	.021	.121	.066	.020	.113	.062	.019	.106	.059	.018		
4.0	.127	.066	.019	.123	.065	.019	.116	.061	.018	.109	.059	.018	.102	.056	.017		
5.0	.121	.062	.018	.117	.060	.018	.111	.058	.017	.105	.055	.016	.099	.053	.016		
6.0	.115	.058	.016	.112	.056	.016	.106	.054	.016	.101	.052	.015	.096	.051	.015		
7.0	.109	.054	.015	.107	.053	.015	.102	.051	.015	.097	.050	.014	.093	.048	.014		
8.0	.104	.051	.014	.102	.050	.014	.098	.049	.014	.094	.047	.014	.090	.046	.013		
9.0	.100	.048	.013	.098	.048	.013	.094	.046	.013	.090	.045	.013	.087	.044	.013		
10.0	.096	.046	.013	.094	.045	.013	.091	.044	.012	.087	.043	.012	.084	.042	.012		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.171	.159	.148	.146	.136	.128	.100	.094	.088	.058	.054	.051	.018	.017	.017	
2.0	.154	.134	.117	.132	.115	.102	.090	.080	.071	.052	.046	.042	.017	.015	.014	
3.0	.140	.115	.095	.120	.099	.082	.082	.069	.058	.048	.040	.034	.015	.013	.011	
4.0	.128	.100	.078	.110	.086	.068	.076	.060	.048	.044	.035	.028	.014	.011	.009	
5.0	.119	.088	.065	.102	.076	.057	.070	.053	.040	.041	.031	.024	.013	.010	.008	
6.0	.110	.078	.055	.095	.068	.048	.065	.047	.034	.038	.028	.020	.012	.009	.007	
7.0	.103	.070	.047	.089	.061	.041	.061	.043	.029	.036	.025	.017	.012	.008	.006	
8.0	.097	.064	.041	.083	.055	.035	.058	.039	.025	.034	.023	.015	.011	.007	.005	
9.0	.092	.058	.035	.079	.050	.031	.055	.035	.022	.032	.021	.013	.010	.007	.004	
10.0	.087	.053	.031	.075	.046	.027	.052	.033	.019	.030	.019	.012	.010	.006	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.2V I:0.4380A P:52.30W PF:0.9920 Freq:50.00Hz Lamp Flux:5501.68x1 lm										
NAME: 6寸明装筒灯					TYPE:3500K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:0.128			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.5	7.2	6.7	7.4	7.6	7.8	8.6	8.0	8.7	8.9
3H	6.3	7.0	6.6	7.2	7.4	7.7	8.4	7.9	8.6	8.8
4H	6.3	6.9	6.5	7.1	7.4	7.6	8.3	7.9	8.5	8.7
6H	6.2	6.8	6.5	7.0	7.3	7.5	8.1	7.8	8.4	8.6
8H	6.1	6.7	6.4	7.0	7.2	7.5	8.1	7.8	8.3	8.6
12H	6.1	6.7	6.4	6.9	7.2	7.4	8.0	7.7	8.3	8.5
4H 2H	6.3	7.0	6.6	7.2	7.4	7.6	8.3	7.9	8.5	8.7
3H	6.1	6.7	6.5	7.0	7.3	7.5	8.0	7.8	8.3	8.6
4H	6.1	6.6	6.4	6.9	7.2	7.4	7.9	7.7	8.2	8.5
6H	6.0	6.4	6.3	6.8	7.1	7.3	7.7	7.6	8.1	8.4
8H	5.9	6.3	6.3	6.7	7.1	7.2	7.7	7.6	8.0	8.4
12H	5.9	6.3	6.3	6.6	7.0	7.2	7.6	7.6	7.9	8.3
8H 4H	5.9	6.3	6.3	6.7	7.1	7.2	7.7	7.6	8.0	8.4
6H	5.8	6.2	6.2	6.6	7.0	7.1	7.5	7.5	7.9	8.3
8H	5.8	6.1	6.2	6.5	6.9	7.1	7.4	7.5	7.8	8.2
12H	5.7	6.0	6.2	6.4	6.9	7.0	7.3	7.5	7.7	8.2
12H 4H	5.9	6.3	6.3	6.6	7.0	7.2	7.6	7.6	7.9	8.3
6H	5.8	6.1	6.2	6.5	6.9	7.1	7.4	7.5	7.8	8.2
8H	5.7	6.0	6.2	6.4	6.9	7.0	7.3	7.5	7.7	8.2
Variations with the observer position at spacings:										
S = 1.0H	+ 3.7 / - 4.4					+ 4.3 / - 5.9				
1.5H	+ 5.8 / - 5.4					+ 6.9 / - 7.6				
2.0H	+ 1.9 / - 7.8					+ 2.2 / - 7.3				

CIE Pub.117 Corrected 5502 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.9)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.2V I:0.4380A P:52.30W PF:0.9920 Freq:50.00Hz Lamp Flux:5501.68x1 lm		
NAME: 6寸明装筒灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	84	80	89	84	80	88	83	80	77
0.80	97	91	88	96	91	88	95	90	87	84
1.00	101	96	92	100	95	92	98	95	91	88
1.25	104	100	96	103	99	96	102	98	95	91
1.50	107	103	100	106	102	99	104	100	98	94
2.00	109	105	103	108	104	102	105	102	100	95
2.50	111	107	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	105	107	105	103	97
4.00	114	112	110	112	110	108	109	107	105	98
5.00	115	113	112	113	112	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.2V I:0.4380A P:52.30W PF:0.9920 Freq:50.00Hz Lamp Flux:5501.68x1 lm		
NAME: 6寸明装筒灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

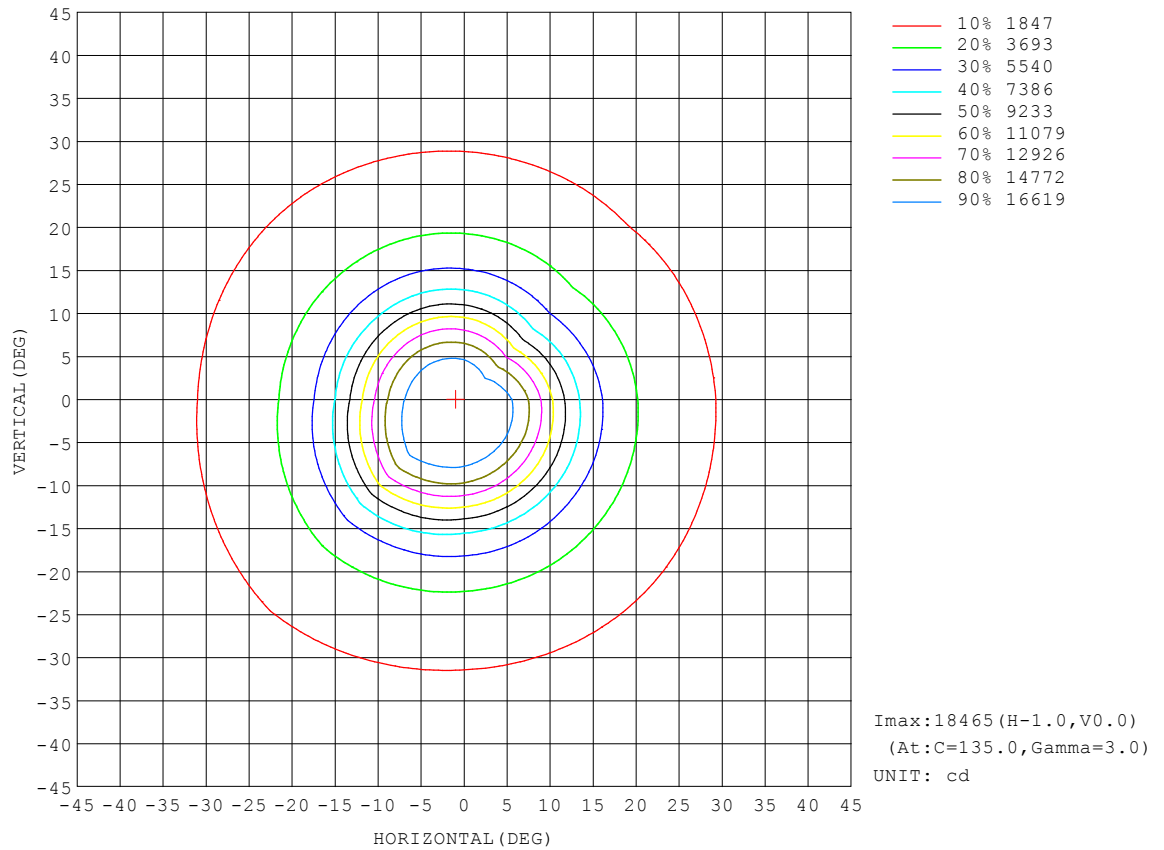


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.2V I:0.4380A P:52.30W PF:0.9920 Freq:50.00Hz Lamp Flux:5501.68x1 lm		
NAME: 6寸明装筒灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

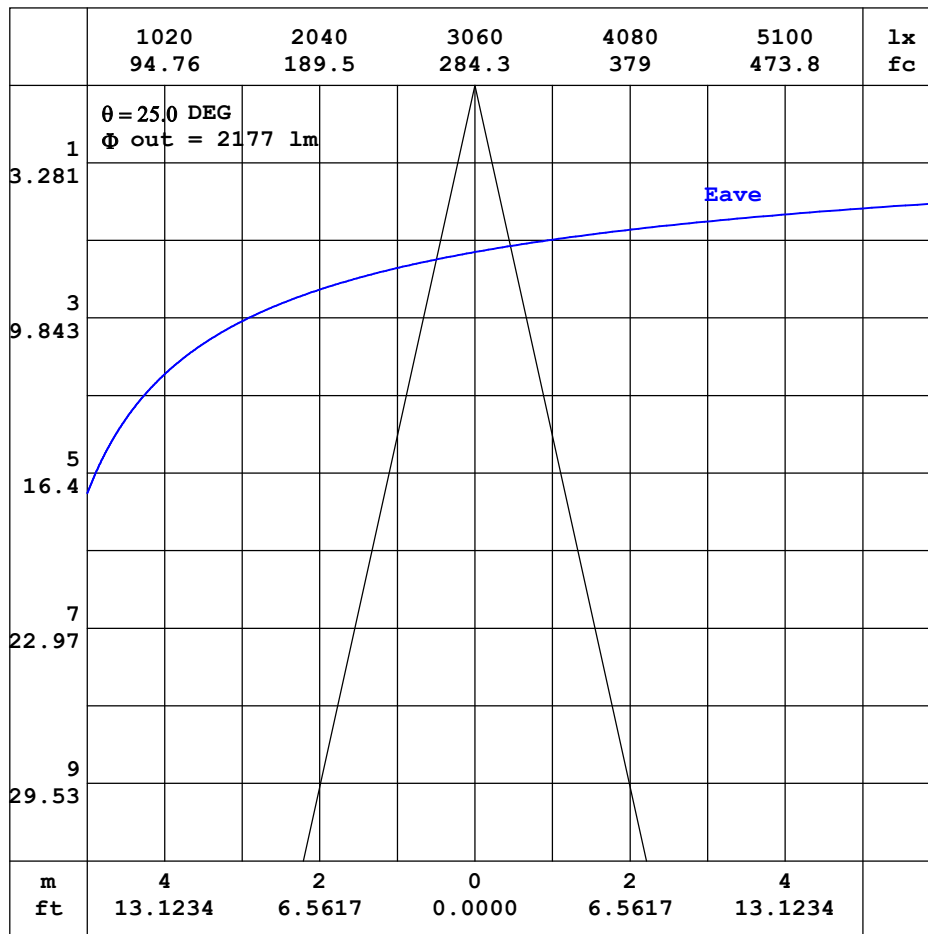


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.2V I:0.4380A P:52.30W PF:0.9920 Freq:50.00Hz Lamp Flux:5501.68x1 lm		
NAME: 6寸明装筒灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

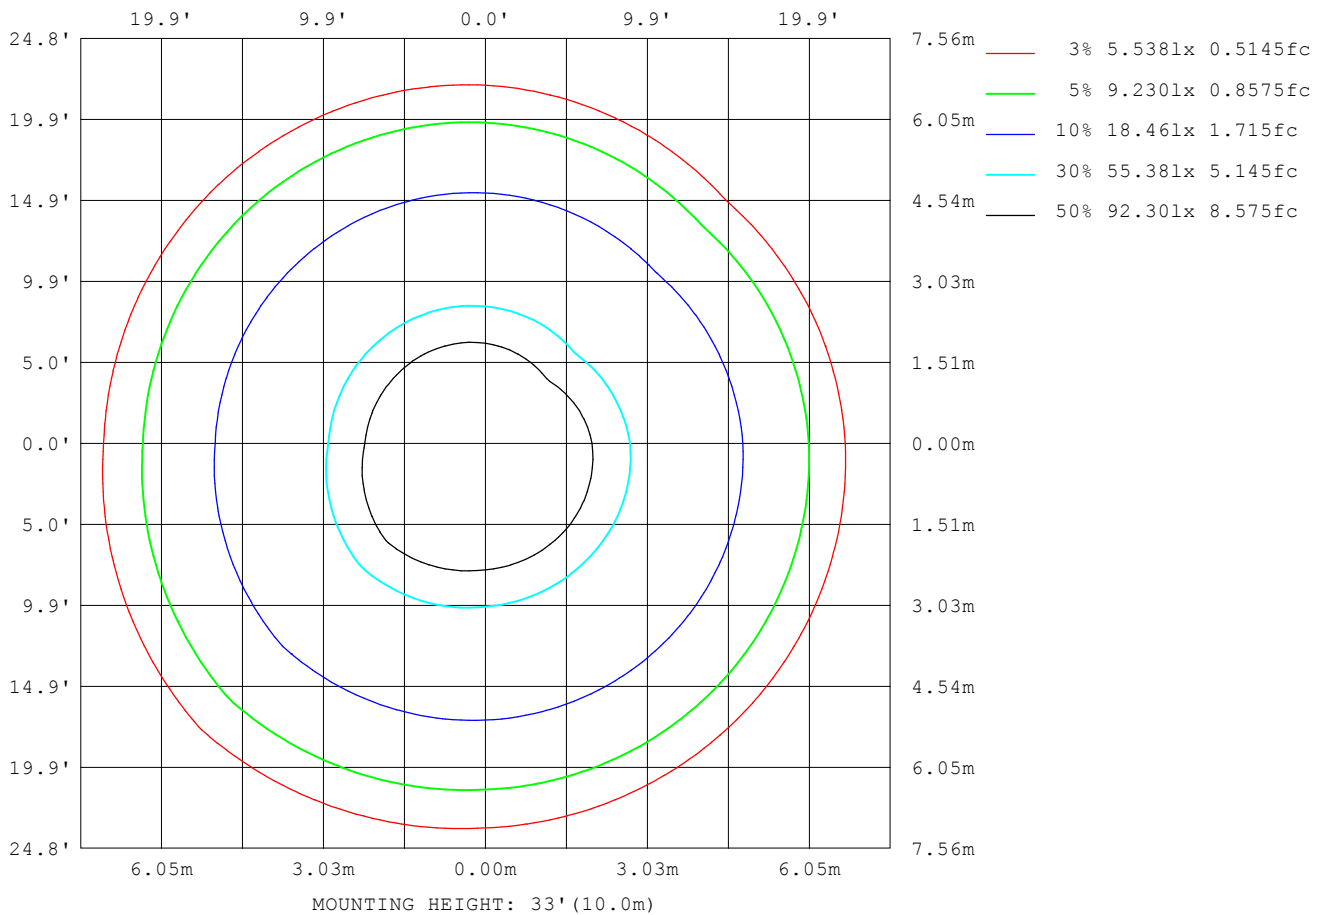

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.2V I:0.4380A P:52.30W PF:0.9920 Freq:50.00Hz Lamp Flux:5501.68x1 lm		
NAME: 6寸明装筒灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	92
L_0~180 (75) av	56
L_0~180 (85) av	1
L_90~270 (65) av	84
L_90~270 (75) av	53
L_90~270 (85) av	2
L_45 (65) av	102
L_45 (75) av	54
L_45 (85) av	10

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

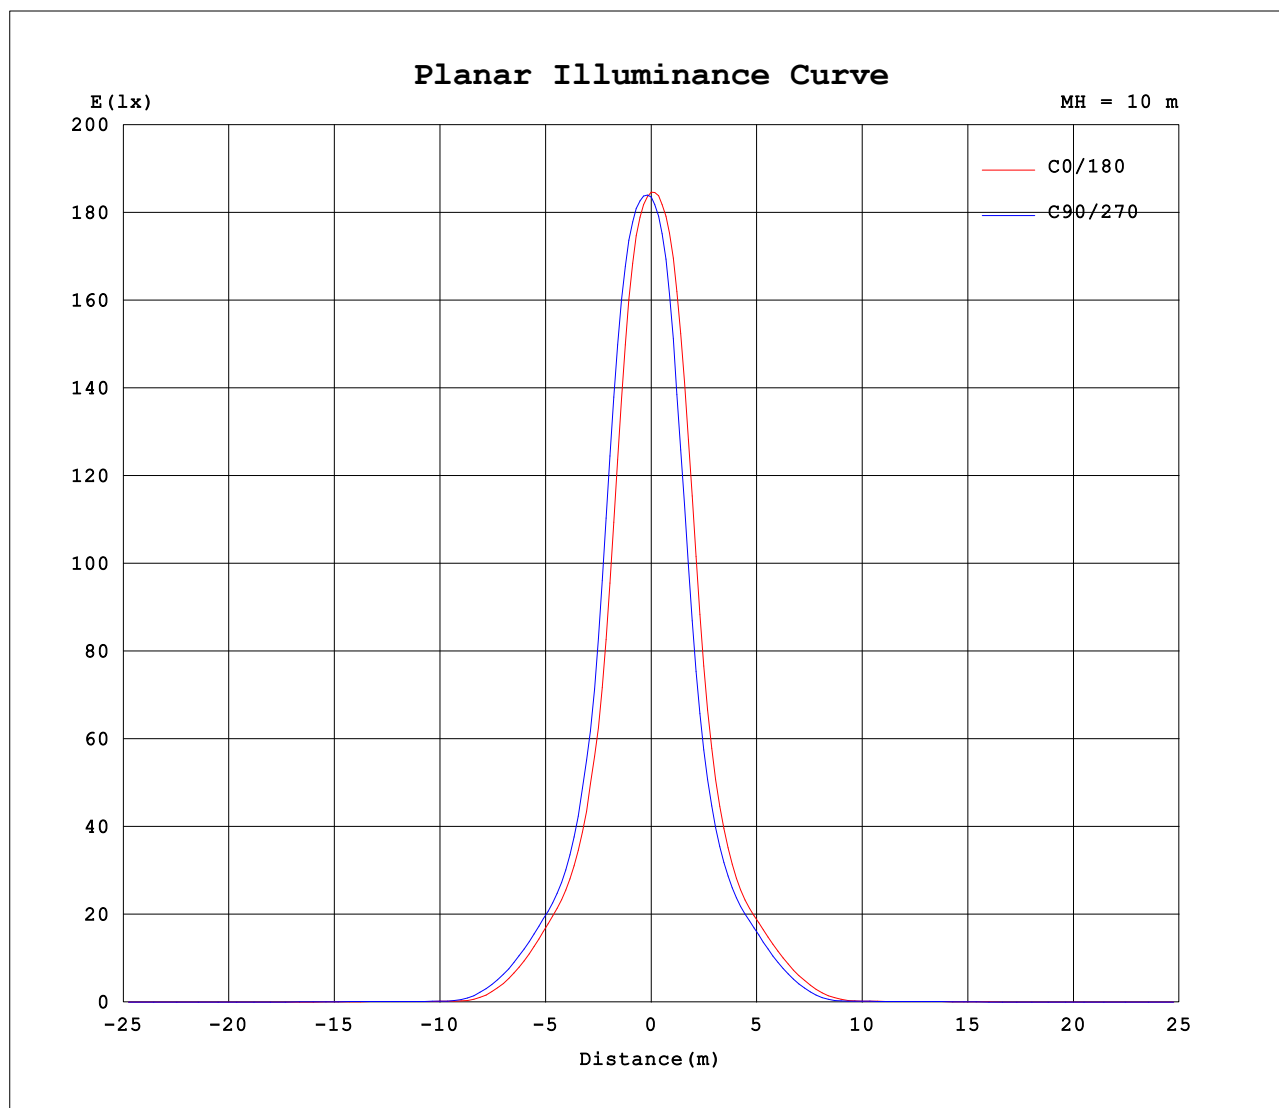

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.4380A P:52.30W PF:0.9920 Freq:50.00Hz Lamp Flux:5501.68x1 lm		
NAME: 6寸明装筒灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1835	1835	1835	1835	1835	1835	1835	1835										
5	1694	1753	1799	1846	1763	1707	1632	1535										
10	1139	1291	1444	1599	1335	1195	1043	894										
15	619	702	793	976	735	642	563	498										
20	373	408	454	523	422	379	347	320										
25	263	282	304	333	286	266	249	233										
30	169	191	213	241	202	184	163	140										
35	77.6	97.2	116	147	110	95.6	76.4	54.5										
40	15.1	23.7	33.9	59.3	33.5	24.3	16.0	7.79										
45	6.27	6.69	7.27	8.60	7.78	7.31	6.37	6.40										
50	6.63	7.17	6.91	6.95	7.18	6.99	7.25	7.28										
55	6.97	7.79	7.80	7.52	7.34	7.10	7.00	6.11										
60	2.83	3.94	4.89	5.97	4.25	3.61	2.58	1.54										
65	0.69	0.82	0.94	1.55	1.02	0.87	0.63	0.54										
70	0.45	0.49	0.46	0.56	0.52	0.47	0.39	0.36										
75	0.30	0.33	0.33	0.36	0.34	0.32	0.28	0.23										
80	0.13	0.15	0.18	0.23	0.17	0.16	0.14	0.09										
85	0.00	0.00	0.01	0.08	0.00	0.00	0.00	0.00										
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00										
115	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00										
120	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01										
125	0.04	0.02	0.01	0.01	0.01	0.01	0.02	0.02										
130	0.12	0.08	0.06	0.05	0.02	0.03	0.04	0.04										
135	0.23	0.18	0.15	0.14	0.04	0.06	0.07	0.08										
140	0.34	0.28	0.25	0.25	0.07	0.10	0.12	0.13										
145	0.51	0.42	0.37	0.36	0.12	0.16	0.20	0.22										
150	0.83	0.66	0.55	0.56	0.20	0.27	0.32	0.34										
155	1.30	1.09	0.89	0.91	0.31	0.39	0.44	0.47										
160	1.60	1.54	1.34	1.40	0.43	0.54	0.59	0.63										
165	1.66	1.73	1.63	1.74	0.58	0.68	0.74	0.77										
170	1.40	1.62	1.64	1.78	0.71	0.79	0.83	0.85										
175	1.08	1.27	1.37	1.47	0.80	0.87	0.90	0.92										
180	0.90	1.00	1.06	1.10	0.91	1.00	1.06	1.11										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: