


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.2V I:0.4400A P:52.50W PF:0.9920 Freq:50.00Hz Lamp Flux:5639.01x1 lm		
NAME: 6寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 107.41 lm/W			
MODEL	25度	I _{max} (cd)	19137	S/MH(C0/180)	0.40
NOMINAL POWER(W)	53	LOR(%)	100.0	S/MH(C90/270)	0.39
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	5639.0	η UP,DN(C0-180)	0.1,53.4
NOMINAL FLUX(lm)	5639.01	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,46.4
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	120	η down(%)	99.8	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

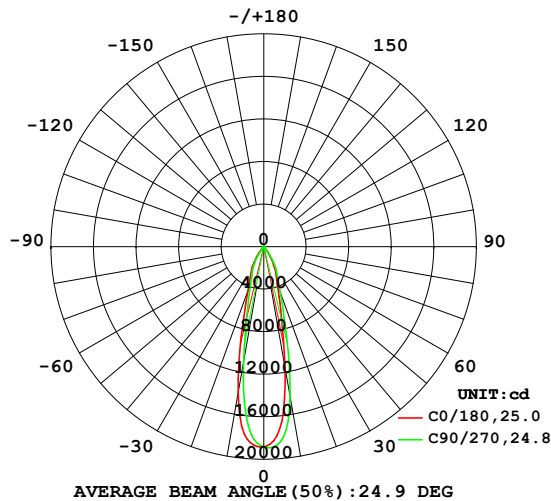

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

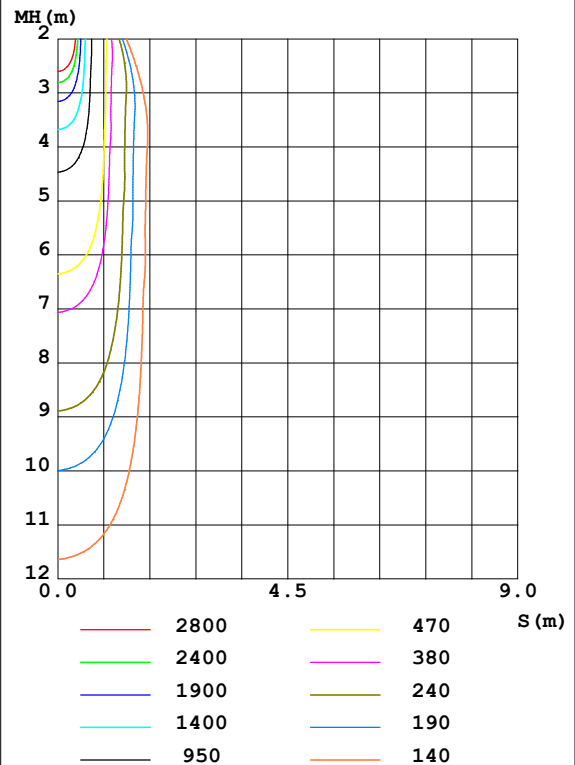

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1150	1279	1436	1642	1388	1270	1106	917.2	0- 10	1526	1526	27.1,27.1
20	375.3	403.6	452.2	537.2	439.6	399.1	362.8	328.6	10- 20	2014	3540	62.8,62.8
30	169.9	188.6	213.2	248.3	210.8	193.9	172.0	142.6	20- 30	1310	4850	86,86
40	14.40	25.04	31.48	59.73	36.77	29.33	17.75	7.893	30- 40	621.9	5472	97,97
50	6.817	7.391	7.197	7.153	7.351	7.171	7.395	7.475	40- 50	79.18	5551	98.4,98.4
60	2.744	3.678	4.733	6.106	4.496	3.981	2.888	1.583	50- 60	59.49	5611	99.5,99.5
70	0.4610	0.4945	0.4653	0.5752	0.5442	0.5039	0.4115	0.3759	60- 70	13.05	5624	99.7,99.7
80	0.1261	0.1424	0.1809	0.2314	0.1778	0.1784	0.1466	0.0965	70- 80	3.356	5627	99.8,99.8
90	0	0	0	0	0	0	0	0	80- 90	0.4414	5628	99.8,99.8
100	0.0007	0	0	0	0	0	0	0	90-100	0.0001	5628	99.8,99.8
110	0.0082	0.0058	0.0056	0.0042	0	0	0	0	100-110	0.0121	5628	99.8,99.8
120	0.0125	0.0094	0.0092	0.0083	0.0005	0.0031	0.0044	0.0061	110-120	0.0450	5628	99.8,99.8
130	0.1390	0.0996	0.0708	0.0518	0.0183	0.0270	0.0364	0.0442	120-130	0.2158	5628	99.8,99.8
140	0.3634	0.3116	0.2787	0.2663	0.0717	0.0955	0.1199	0.1351	130-140	0.9756	5629	99.8,99.8
150	0.9132	0.7381	0.5948	0.5914	0.2048	0.2651	0.3190	0.3486	140-150	2.023	5631	99.9,99.9
160	1.748	1.695	1.462	1.497	0.4420	0.5358	0.6029	0.6493	150-160	3.529	5634	99.9,99.9
170	1.493	1.721	1.754	1.885	0.7400	0.8121	0.8593	0.8779	160-170	3.460	5638	100,100
180	0.9326	1.037	1.107	1.154	0.9273	1.035	1.112	1.157	170-180	1.128	5639	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.2V I:0.4400A P:52.50W PF:0.9920 Freq:50.00Hz Lamp Flux:5639.01x1 lm		
NAME: 6寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

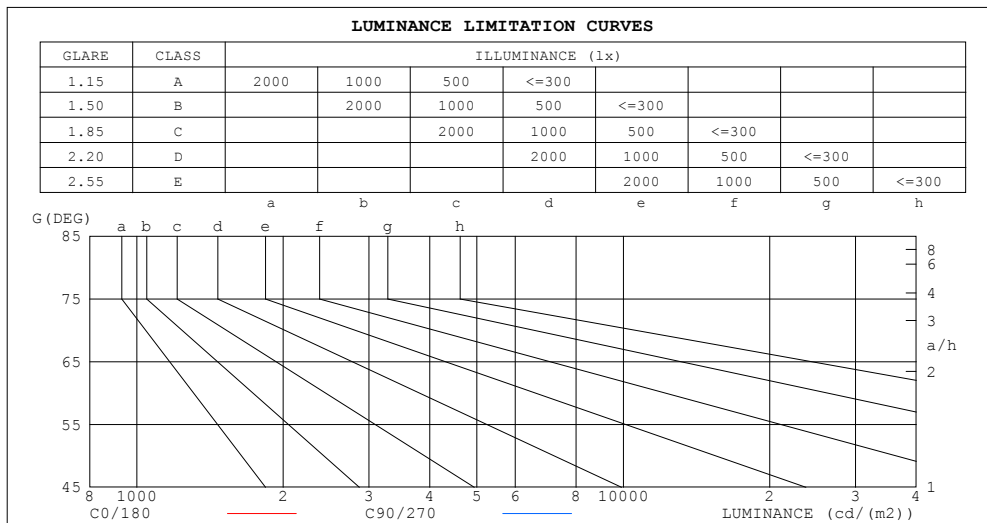

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	2
80	33	47
75	55	59
70	62	62
65	76	98
60	251	430
55	565	635
50	486	508
45	419	475


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.2V I:0.4400A P:52.50W PF:0.9920 Freq:50.00Hz Lamp Flux:5639.01x1 lm		
NAME: 6寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.06	1.02	.00	1.04	1.01	.99	1.01	.99	.96	.98	.96	.94	.95	.94	.92	.91
3.0	1.00	.96	.93	.99	.95	.92	.96	.93	.91	.94	.92	.89	.92	.90	.88	.87
4.0	.96	.91	.88	.94	.90	.87	.92	.89	.86	.90	.87	.85	.89	.86	.84	.83
5.0	.91	.86	.83	.90	.86	.82	.89	.85	.82	.87	.84	.81	.85	.83	.80	.79
6.0	.87	.82	.79	.86	.82	.79	.85	.81	.78	.84	.80	.78	.82	.79	.77	.76
7.0	.84	.79	.75	.83	.78	.75	.82	.78	.75	.81	.77	.74	.80	.76	.74	.73
8.0	.80	.75	.72	.80	.75	.72	.79	.75	.72	.78	.74	.71	.77	.74	.71	.70
9.0	.77	.72	.69	.77	.72	.69	.76	.72	.69	.75	.71	.69	.74	.71	.68	.67
10.0	.74	.70	.67	.74	.70	.67	.73	.69	.66	.73	.69	.66	.72	.68	.66	.65

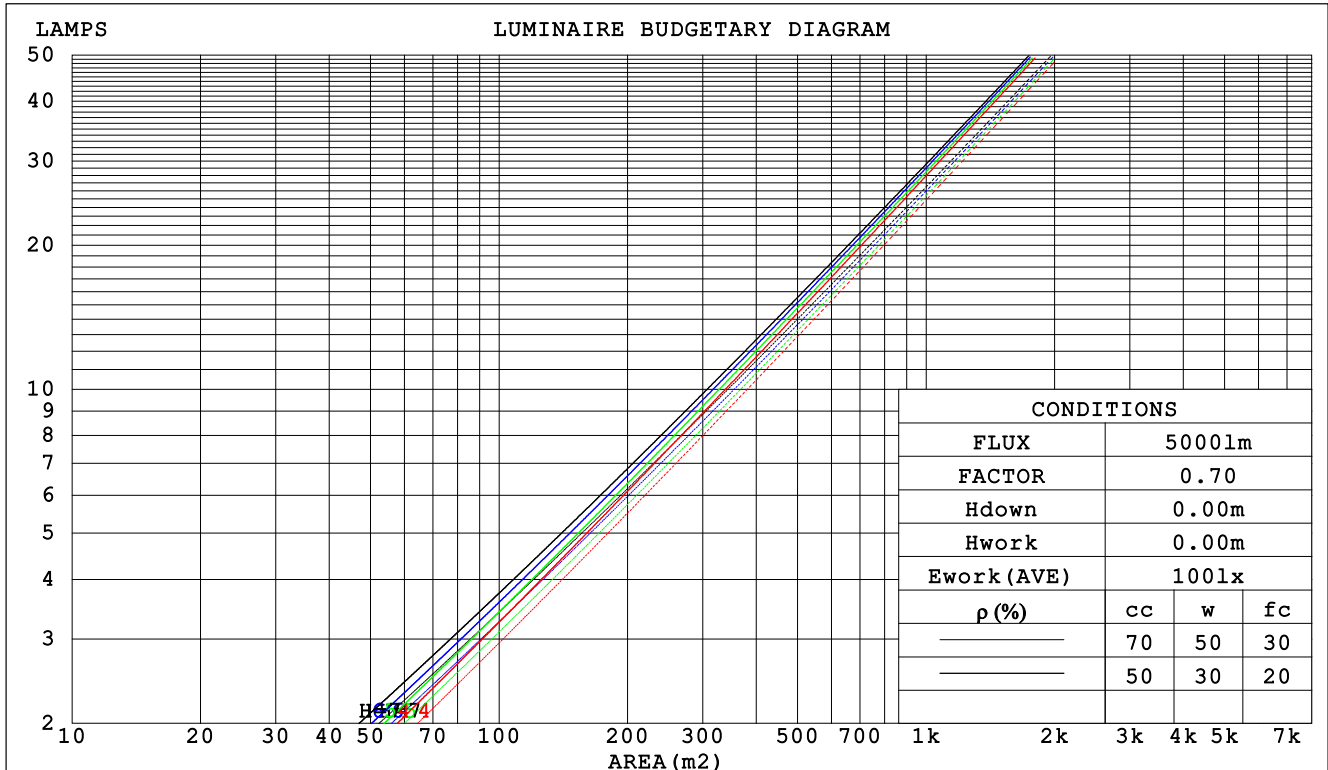

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.2V I:0.4400A P:52.50W PF:0.9920 Freq:50.00Hz Lamp Flux:5639.01x1 lm					
NAME: 6寸明装筒灯			TYPE:4000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:0.128		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.152	.086	.027	.145	.083	.026	.133	.076	.024	.121	.070	.022	.111	.064	.021		
2.0	.143	.078	.024	.138	.076	.023	.127	.071	.022	.118	.066	.021	.109	.061	.019		
3.0	.135	.072	.022	.130	.070	.021	.121	.066	.020	.113	.062	.019	.106	.059	.018		
4.0	.127	.066	.019	.123	.065	.019	.116	.061	.018	.109	.059	.018	.102	.056	.017		
5.0	.121	.062	.018	.117	.060	.018	.111	.058	.017	.105	.055	.016	.099	.053	.016		
6.0	.115	.058	.016	.112	.056	.016	.106	.054	.016	.101	.052	.015	.096	.051	.015		
7.0	.109	.054	.015	.107	.053	.015	.102	.051	.015	.097	.050	.014	.093	.048	.014		
8.0	.104	.051	.014	.102	.050	.014	.098	.049	.014	.094	.047	.014	.090	.046	.013		
9.0	.100	.048	.013	.098	.048	.013	.094	.046	.013	.090	.045	.013	.087	.044	.013		
10.0	.096	.046	.013	.094	.045	.013	.091	.044	.012	.087	.043	.012	.084	.042	.012		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.171	.159	.148	.146	.137	.128	.100	.094	.088	.058	.054	.051	.018	.017	.017	
2.0	.154	.134	.118	.132	.116	.102	.090	.080	.071	.052	.046	.042	.017	.015	.014	
3.0	.140	.115	.095	.120	.099	.082	.082	.069	.058	.048	.040	.034	.015	.013	.011	
4.0	.128	.100	.078	.110	.086	.068	.076	.060	.048	.044	.035	.028	.014	.011	.009	
5.0	.119	.088	.065	.102	.076	.057	.070	.053	.040	.041	.031	.024	.013	.010	.008	
6.0	.110	.078	.055	.095	.068	.048	.065	.047	.034	.038	.028	.020	.012	.009	.007	
7.0	.103	.070	.047	.089	.061	.041	.061	.043	.029	.036	.025	.017	.012	.008	.006	
8.0	.097	.064	.041	.084	.055	.035	.058	.039	.025	.034	.023	.015	.011	.007	.005	
9.0	.092	.058	.036	.079	.050	.031	.055	.035	.022	.032	.021	.013	.010	.007	.004	
10.0	.087	.054	.031	.075	.046	.027	.052	.033	.019	.030	.019	.012	.010	.006	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.2V I:0.4400A P:52.50W PF:0.9920 Freq:50.00Hz Lamp Flux:5639.01x1 lm										
NAME: 6寸明装筒灯					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:0.128			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.3	7.1	6.5	7.3	7.4	7.7	8.4	7.9	8.6	8.7
3H	6.2	6.9	6.4	7.1	7.3	7.5	8.2	7.8	8.4	8.6
4H	6.1	6.8	6.4	7.0	7.2	7.4	8.1	7.7	8.3	8.5
6H	6.0	6.7	6.3	6.9	7.1	7.4	8.0	7.6	8.2	8.5
8H	6.0	6.6	6.3	6.8	7.1	7.3	7.9	7.6	8.2	8.4
12H	5.9	6.5	6.2	6.8	7.1	7.3	7.8	7.6	8.1	8.4
4H 2H	6.2	6.8	6.4	7.0	7.3	7.5	8.1	7.7	8.3	8.6
3H	6.0	6.6	6.3	6.8	7.1	7.3	7.9	7.6	8.1	8.4
4H	5.9	6.4	6.2	6.7	7.0	7.2	7.7	7.6	8.0	8.3
6H	5.8	6.3	6.2	6.6	7.0	7.1	7.6	7.5	7.9	8.3
8H	5.8	6.2	6.1	6.5	6.9	7.1	7.5	7.5	7.9	8.2
12H	5.7	6.1	6.1	6.5	6.9	7.0	7.4	7.4	7.8	8.2
8H 4H	5.8	6.2	6.1	6.5	6.9	7.1	7.5	7.5	7.8	8.2
6H	5.7	6.0	6.1	6.4	6.8	7.0	7.3	7.4	7.7	8.1
8H	5.6	5.9	6.0	6.3	6.8	6.9	7.2	7.3	7.6	8.1
12H	5.5	5.8	6.0	6.3	6.7	6.8	7.1	7.3	7.6	8.0
12H 4H	5.7	6.1	6.1	6.5	6.9	7.0	7.4	7.4	7.8	8.2
6H	5.6	5.9	6.0	6.3	6.8	6.9	7.2	7.3	7.6	8.1
8H	5.5	5.8	6.0	6.3	6.7	6.8	7.1	7.3	7.6	8.0
Variations with the observer position at spacings:										
S = 1.0H	+ 3.8 / - 4.2					+ 4.3 / - 5.8				
1.5H	+ 5.8 / - 5.0					+ 6.9 / - 7.2				
2.0H	+ 2.1 / - 8.0					+ 2.3 / - 7.7				

CIE Pub.117 Corrected 5639 lm Total Lamp Luminous Flux.(8log(F/F0) = 6.0)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.2V I:0.4400A P:52.50W PF:0.9920 Freq:50.00Hz Lamp Flux:5639.01x1 lm		
NAME: 6寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	84	80	89	84	80	88	83	80	77
0.80	97	91	88	96	91	88	95	90	87	84
1.00	101	96	92	100	95	92	98	95	91	88
1.25	104	100	96	103	99	96	102	98	95	91
1.50	107	103	100	106	102	99	104	100	98	94
2.00	109	105	103	108	104	102	105	102	100	95
2.50	111	107	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	105	107	105	103	97
4.00	114	112	110	112	110	108	109	107	105	98
5.00	115	113	112	113	112	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.2V I:0.4400A P:52.50W PF:0.9920 Freq:50.00Hz Lamp Flux:5639.01x1 lm		
NAME: 6寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

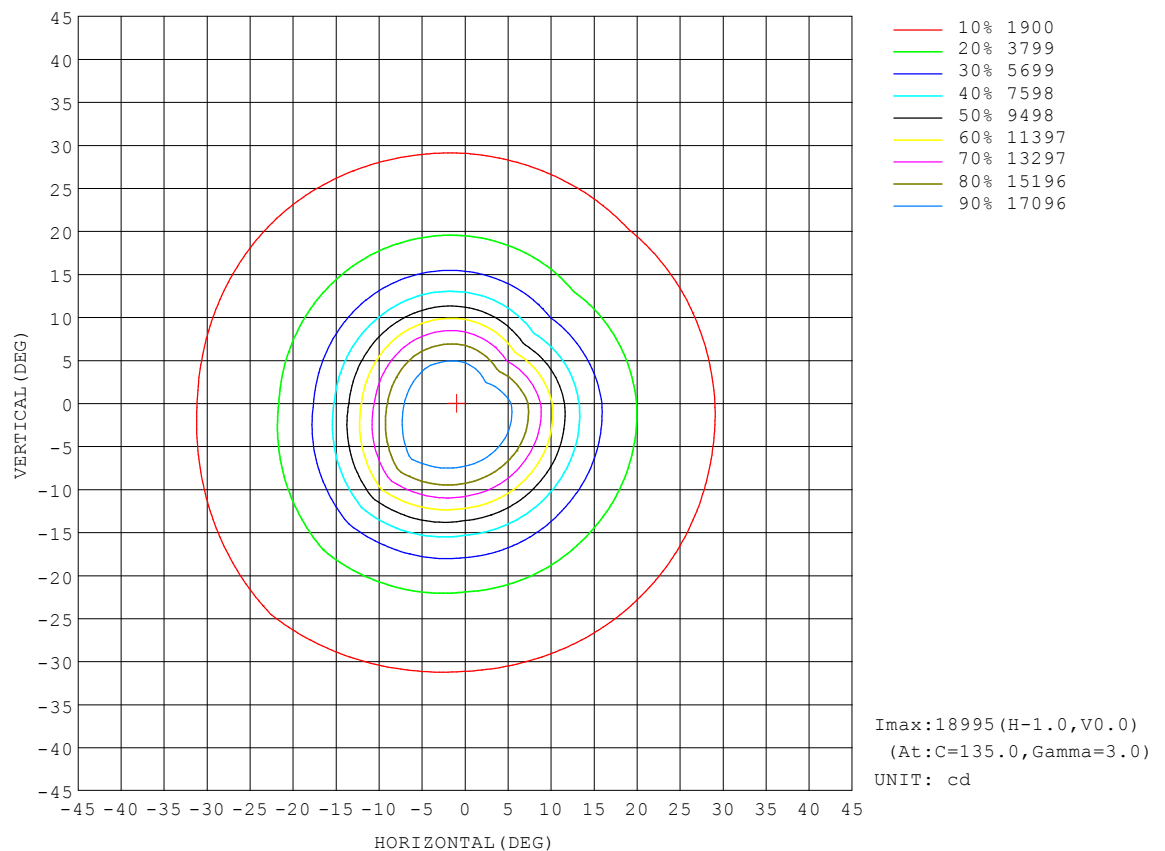


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.2V I:0.4400A P:52.50W PF:0.9920 Freq:50.00Hz Lamp Flux:5639.01x1 lm		
NAME: 6寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

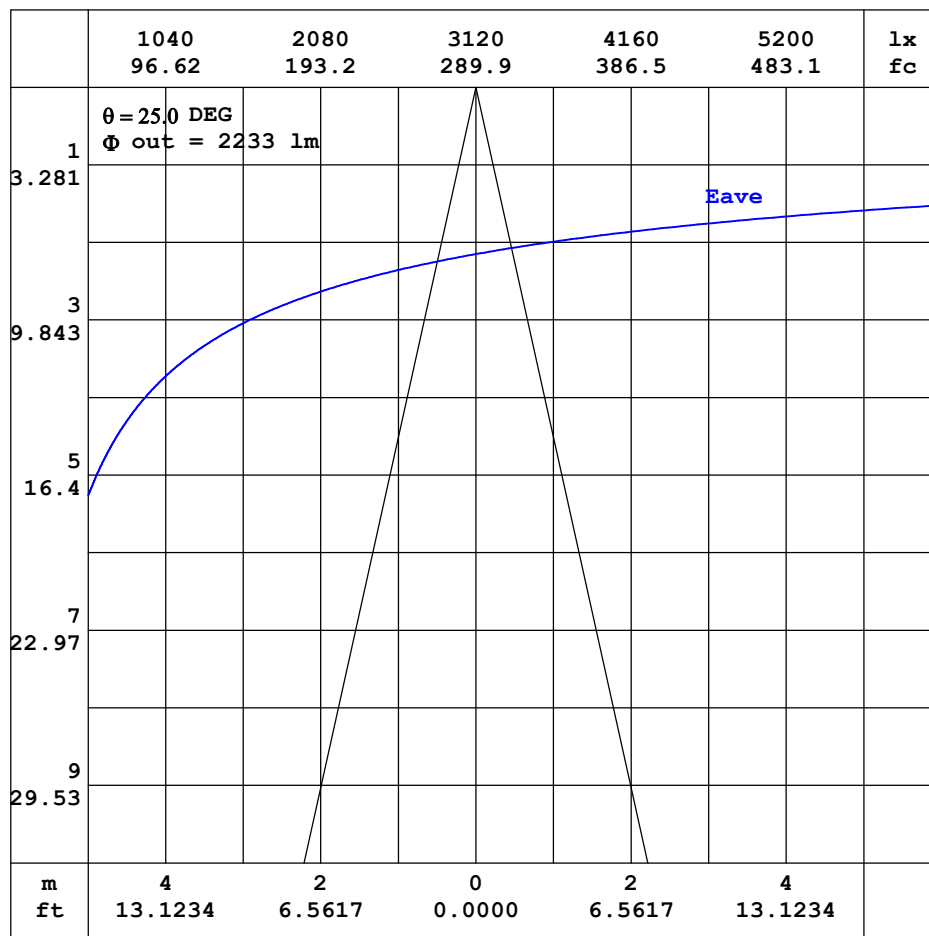


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.2V I:0.4400A P:52.50W PF:0.9920 Freq:50.00Hz Lamp Flux:5639.01x1 lm		
NAME: 6寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

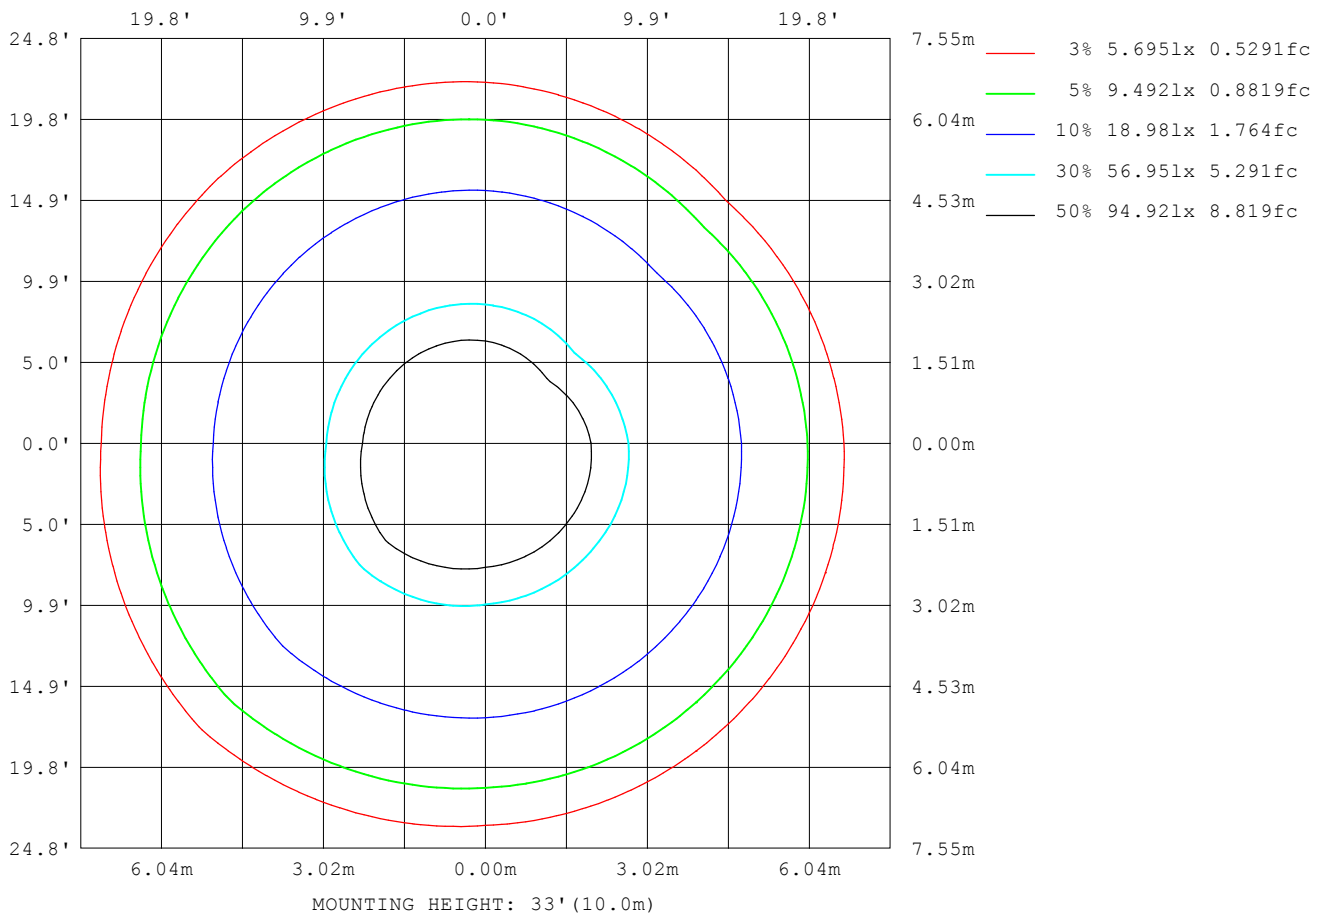

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.2V I:0.4400A P:52.50W PF:0.9920 Freq:50.00Hz Lamp Flux:5639.01x1 lm		
NAME: 6寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	96
L_0~180 (75) av	58
L_0~180 (85) av	3
L_90~270 (65) av	85
L_90~270 (75) av	55
L_90~270 (85) av	1
L_45 (65) av	106
L_45 (75) av	56
L_45 (85) av	10

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

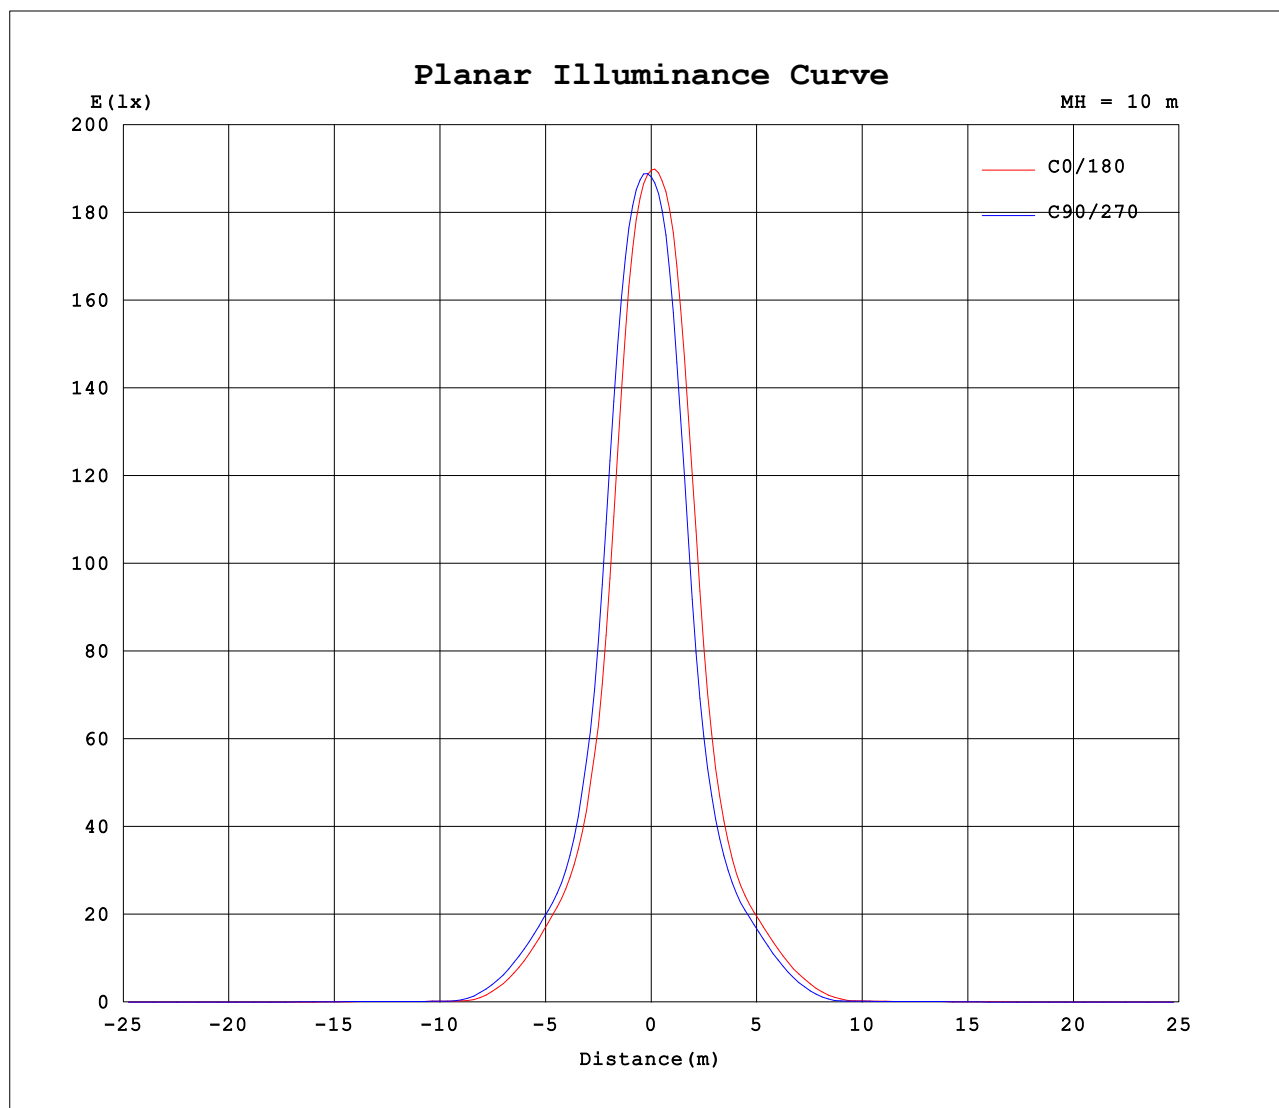

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.4400A P:52.50W PF:0.9920 Freq:50.00Hz Lamp Flux:5639.01x1 lm		
NAME: 6寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.128	Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1883	1883	1883	1883	1883	1883	1883	1883										
5	1725	1784	1838	1894	1816	1771	1691	1576										
10	1150	1279	1436	1642	1388	1270	1106	917										
15	622	691	792	1002	775	675	592	510										
20	375	404	452	537	440	399	363	329										
25	266	283	306	342	297	278	260	240										
30	170	189	213	248	211	194	172	143										
35	76.9	94.6	114	150	116	104	82.2	54.8										
40	14.4	25.0	31.5	59.7	36.8	29.3	17.7	7.89										
45	6.47	6.83	7.39	8.69	8.20	7.33	6.52	6.59										
50	6.82	7.39	7.20	7.15	7.35	7.17	7.39	7.47										
55	7.07	7.93	8.02	7.70	7.57	7.39	7.31	6.25										
60	2.74	3.68	4.73	6.11	4.50	3.98	2.89	1.58										
65	0.70	0.81	0.91	1.59	1.09	0.96	0.68	0.56										
70	0.46	0.49	0.47	0.58	0.54	0.50	0.41	0.38										
75	0.31	0.33	0.33	0.37	0.35	0.34	0.29	0.24										
80	0.13	0.14	0.18	0.23	0.18	0.18	0.15	0.10										
85	0.00	0.00	0.00	0.08	0.01	0.00	0.00	0.00										
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00										
115	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00										
120	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01										
125	0.05	0.03	0.02	0.01	0.01	0.01	0.02	0.02										
130	0.14	0.10	0.07	0.05	0.02	0.03	0.04	0.04										
135	0.25	0.20	0.17	0.15	0.04	0.05	0.07	0.08										
140	0.36	0.31	0.28	0.27	0.07	0.10	0.12	0.14										
145	0.55	0.46	0.41	0.39	0.12	0.16	0.20	0.23										
150	0.91	0.74	0.59	0.59	0.20	0.27	0.32	0.35										
155	1.43	1.22	0.98	0.96	0.31	0.39	0.45	0.48										
160	1.75	1.70	1.46	1.50	0.44	0.54	0.60	0.65										
165	1.77	1.86	1.76	1.87	0.60	0.69	0.76	0.79										
170	1.49	1.72	1.75	1.88	0.74	0.81	0.86	0.88										
175	1.12	1.32	1.44	1.57	0.83	0.89	0.94	0.96										
180	0.93	1.04	1.11	1.15	0.93	1.04	1.11	1.16										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: