


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.0V I:0.6480A P:77.40W PF:0.9930 Freq:50.00Hz Lamp Flux:7530.94x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*3.14715	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 97.30 lm/W			
MODEL	25度	I _{max} (cd)	32266	S/MH (C0/180)	0.35
NOMINAL POWER (W)	80	LOR (%)	100.0	S/MH (C90/270)	0.33
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	7530.9	η UP, DN (C0-180)	0.1, 55.5
NOMINAL FLUX (lm)	7530.94	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 44.4
LAMPS INSIDE	1	η up (%)	0.1	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	120	η down (%)	99.9	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

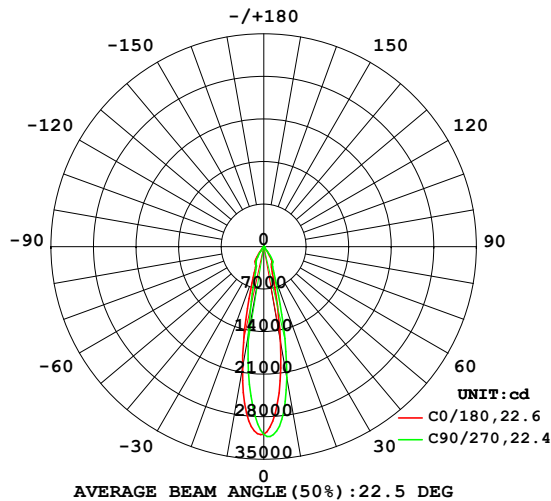

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

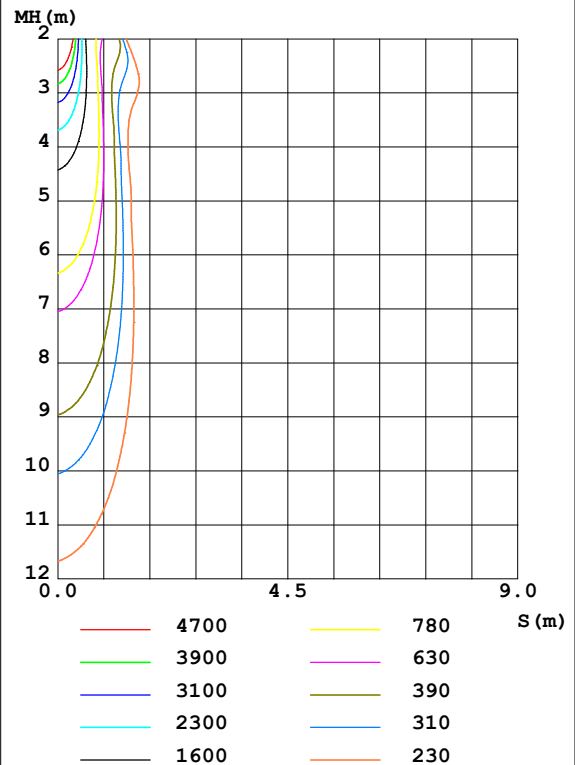

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1590	1897	2186	2576	2025	1689	1463	1226	0- 10	2310	2310	30.7,30.7
20	388.4	457.8	549.8	680.6	462.9	401.4	372.3	348.1	10- 20	2642	4951	65.7,65.7
30	266.4	261.8	297.2	297.9	285.3	272.9	234.3	211.4	20- 30	1535	6486	86.1,86.1
40	10.34	20.41	39.14	90.91	30.41	13.76	16.45	9.783	30- 40	891.7	7378	98,98
50	4.605	5.361	5.534	6.241	5.210	5.050	4.931	4.603	40- 50	75.00	7453	99,99
60	2.877	3.176	3.387	3.657	3.178	3.132	3.040	2.830	50- 60	36.14	7489	99.4,99.4
70	1.097	1.286	1.561	1.928	1.533	1.385	1.141	0.9250	60- 70	22.82	7512	99.7,99.7
80	0.1476	0.2017	0.2757	0.4368	0.3013	0.2498	0.1726	0.0814	70- 80	7.377	7519	99.8,99.8
90	0.0000	0	0	0	0	0	0	0	80- 90	0.5926	7520	99.9,99.9
100	0.0007	0.0005	0.0007	0.0000	0	0	0	0	90-100	0.0005	7520	99.9,99.9
110	0.0029	0.0017	0.0024	0.0012	0	0.0000	0	0	100-110	0.0064	7520	99.9,99.9
120	0.0071	0.0046	0.0055	0.0042	0.0010	0.0033	0.0061	0.0085	110-120	0.0224	7520	99.9,99.9
130	0.1155	0.0642	0.0400	0.0323	0.0246	0.0416	0.0540	0.0617	120-130	0.1877	7520	99.9,99.9
140	0.2432	0.2136	0.1982	0.1950	0.0894	0.1283	0.1606	0.1777	130-140	0.8698	7521	99.9,99.9
150	0.7428	0.4972	0.3944	0.3917	0.2549	0.3795	0.4604	0.4966	140-150	1.740	7523	99.9,99.9
160	1.711	1.550	1.274	1.270	0.6218	0.7900	0.8553	0.9112	150-160	3.492	7526	99.9,99.9
170	1.432	1.720	1.718	1.752	0.9282	0.9790	0.9808	0.9881	160-170	3.656	7530	100,100
180	0.9175	1.012	1.068	1.080	0.9158	1.015	1.067	1.081	170-180	1.137	7531	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.0V I:0.6480A P:77.40W PF:0.9930 Freq:50.00Hz Lamp Flux:7530.94x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*3.14715	Shielding Angle:

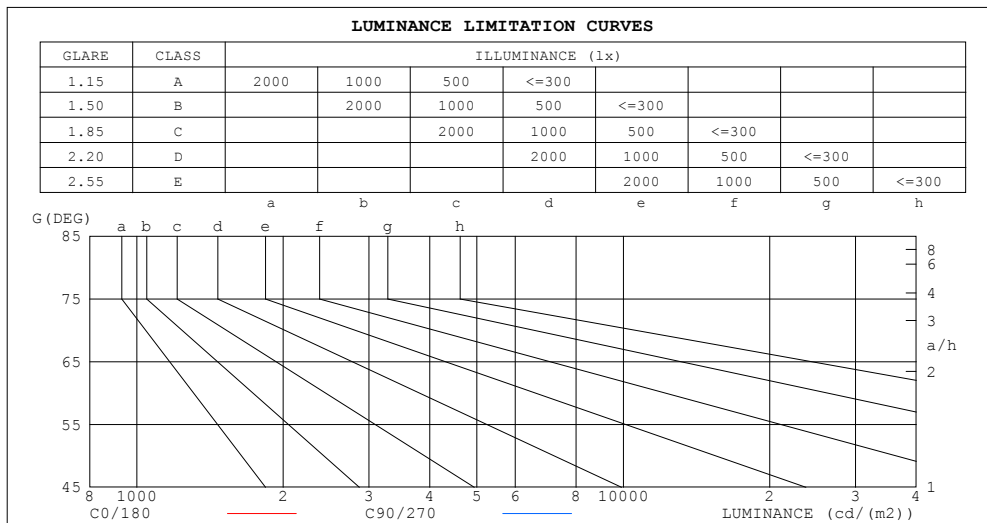

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	7
80	28	51
75	66	93
70	105	148
65	161	196
60	188	219
55	206	237
50	235	278
45	286	359


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.0V I:0.6480A P:77.40W PF:0.9930 Freq:50.00Hz Lamp Flux:7530.94x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*3.14715	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.07	1.06	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96
2.0	1.06	1.03	1.00	1.05	1.02	.99	1.01	.99	.97	.98	.97	.95	.96	.94	.93	.91
3.0	1.01	.97	.94	.90	.96	.93	.97	.94	.92	.95	.92	.90	.93	.91	.89	.87
4.0	.96	.92	.89	.95	.91	.88	.93	.90	.87	.91	.88	.86	.90	.87	.85	.84
5.0	.92	.88	.84	.91	.87	.84	.90	.86	.83	.88	.85	.82	.87	.84	.82	.80
6.0	.88	.84	.80	.88	.83	.80	.86	.82	.79	.85	.82	.79	.84	.81	.78	.77
7.0	.85	.80	.77	.84	.80	.77	.83	.79	.76	.82	.78	.76	.81	.78	.76	.74
8.0	.82	.77	.74	.81	.77	.74	.80	.76	.73	.79	.76	.73	.78	.75	.73	.72
9.0	.79	.74	.71	.78	.74	.71	.77	.74	.71	.77	.73	.71	.76	.73	.70	.69
10.0	.76	.72	.69	.76	.71	.69	.75	.71	.68	.74	.71	.68	.74	.70	.68	.67

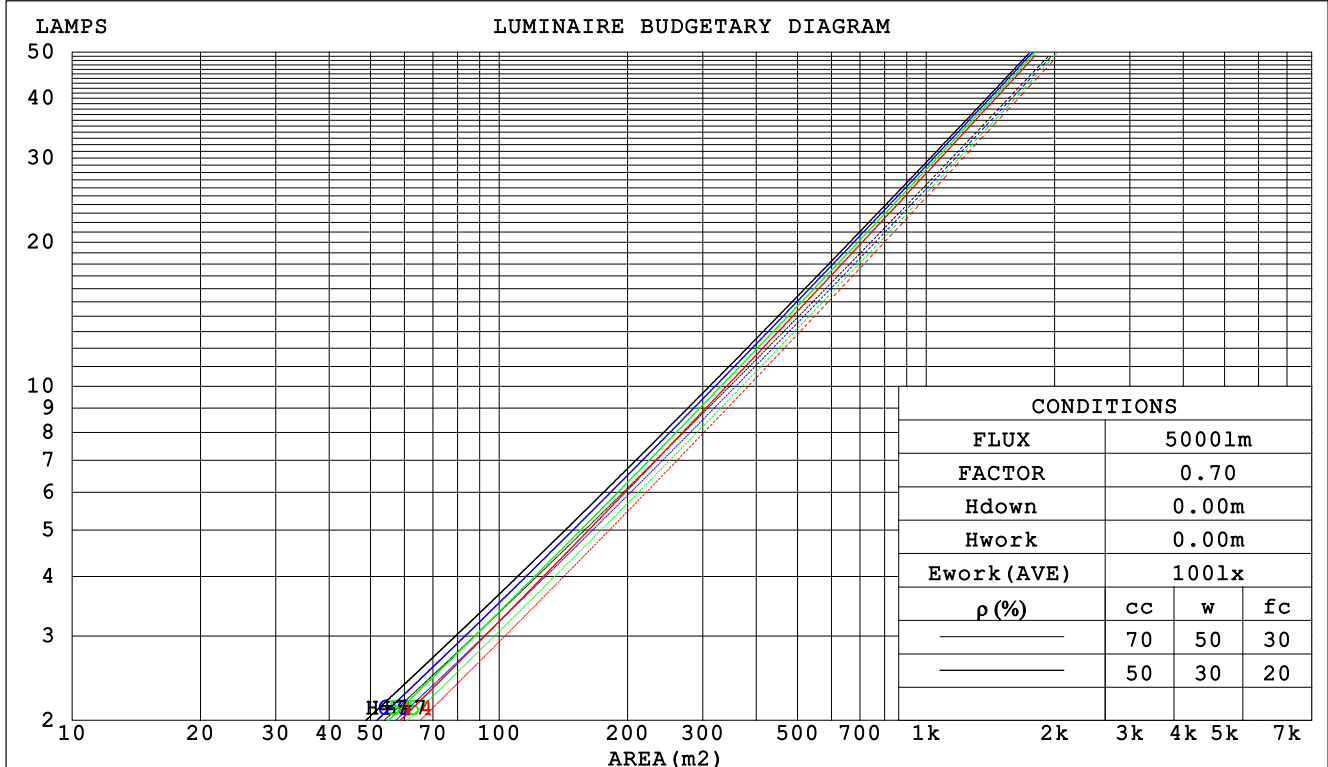

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.0V I:0.6480A P:77.40W PF:0.9930 Freq:50.00Hz Lamp Flux:7530.94x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*3.14715	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.149	.085	.027	.142	.081	.026	.129	.074	.024	.118	.068	.022	.107	.062	.020		
2.0	.139	.076	.023	.134	.074	.023	.124	.069	.021	.114	.064	.020	.105	.059	.019		
3.0	.131	.070	.021	.126	.068	.020	.118	.064	.019	.110	.060	.018	.102	.057	.017		
4.0	.124	.064	.019	.120	.063	.019	.112	.060	.018	.105	.057	.017	.099	.054	.016		
5.0	.117	.060	.017	.114	.058	.017	.107	.056	.016	.101	.053	.016	.096	.051	.015		
6.0	.111	.056	.016	.108	.055	.016	.103	.053	.015	.097	.051	.015	.093	.049	.014		
7.0	.106	.052	.015	.103	.051	.015	.098	.050	.014	.094	.048	.014	.090	.047	.014		
8.0	.101	.049	.014	.099	.049	.014	.094	.047	.013	.090	.046	.013	.087	.044	.013		
9.0	.097	.047	.013	.095	.046	.013	.091	.045	.013	.087	.044	.013	.084	.043	.012		
10.0	.093	.044	.012	.091	.044	.012	.087	.043	.012	.084	.042	.012	.081	.041	.012		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.170	.159	.148	.146	.136	.128	.100	.094	.088	.057	.054	.051	.018	.017	.017	
2.0	.153	.134	.118	.131	.115	.102	.090	.080	.071	.052	.046	.042	.017	.015	.014	
3.0	.139	.115	.095	.119	.099	.082	.082	.069	.058	.047	.040	.034	.015	.013	.011	
4.0	.127	.099	.078	.109	.086	.068	.075	.060	.048	.043	.035	.028	.014	.011	.009	
5.0	.117	.087	.065	.101	.075	.057	.069	.053	.040	.040	.031	.024	.013	.010	.008	
6.0	.109	.077	.055	.093	.067	.048	.064	.047	.034	.037	.028	.020	.012	.009	.007	
7.0	.101	.069	.047	.087	.060	.041	.060	.042	.029	.035	.025	.017	.011	.008	.006	
8.0	.095	.063	.041	.082	.055	.035	.057	.038	.025	.033	.023	.015	.011	.007	.005	
9.0	.090	.057	.036	.077	.050	.031	.054	.035	.022	.031	.021	.013	.010	.007	.004	
10.0	.085	.053	.031	.073	.046	.027	.051	.032	.019	.030	.019	.012	.010	.006	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.0V I:0.6480A P:77.40W PF:0.9930 Freq:50.00Hz Lamp Flux:7530.94x1 lm										
NAME: 8寸明装筒灯					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:0.091*3.14715			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	7.0	7.7	7.2	7.9	8.1	8.6	9.3	8.8	9.5	9.6
3H	6.9	7.6	7.1	7.8	8.0	8.5	9.1	8.7	9.3	9.5
4H	6.8	7.5	7.1	7.7	7.9	8.4	9.0	8.6	9.2	9.5
6H	6.7	7.3	7.0	7.6	7.8	8.3	8.9	8.6	9.1	9.4
8H	6.7	7.3	7.0	7.5	7.8	8.3	8.8	8.6	9.1	9.4
12H	6.6	7.2	7.0	7.5	7.7	8.2	8.8	8.5	9.0	9.3
4H 2H	6.8	7.5	7.1	7.7	7.9	8.4	9.0	8.6	9.2	9.4
3H	6.7	7.2	7.0	7.5	7.8	8.2	8.8	8.5	9.1	9.3
4H	6.6	7.1	6.9	7.4	7.7	8.1	8.7	8.5	9.0	9.3
6H	6.5	7.0	6.9	7.3	7.6	8.0	8.5	8.4	8.8	9.2
8H	6.4	6.9	6.8	7.2	7.6	8.0	8.4	8.4	8.8	9.1
12H	6.4	6.8	6.8	7.2	7.5	7.9	8.3	8.3	8.7	9.1
8H 4H	6.5	6.9	6.8	7.2	7.6	8.0	8.4	8.4	8.8	9.1
6H	6.3	6.7	6.8	7.1	7.5	7.9	8.2	8.3	8.6	9.1
8H	6.3	6.6	6.7	7.0	7.5	7.8	8.1	8.3	8.6	9.0
12H	6.2	6.5	6.7	6.9	7.4	7.8	8.0	8.2	8.5	9.0
12H 4H	6.4	6.8	6.8	7.2	7.5	7.9	8.3	8.3	8.7	9.1
6H	6.3	6.6	6.7	7.0	7.5	7.8	8.1	8.3	8.6	9.0
8H	6.2	6.5	6.7	6.9	7.4	7.8	8.0	8.2	8.5	9.0
Variations with the observer position at spacings:										
S = 1.0H	+ 4.3 / - 4.7					+ 5.3 / - 8.8				
1.5H	+ 6.7 / - 4.1					+ 8.1 / - 8.0				
2.0H	+ 1.0 / - 0.9					+ 1.4 / - 1.0				

CIE Pub.117 Corrected 7531 lm Total Lamp Luminous Flux.(8log(F/F0) = 7.0)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.0V I:0.6480A P:77.40W PF:0.9930 Freq:50.00Hz Lamp Flux:7530.94x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*3.14715	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	84	81	90	84	81	89	84	81	78
0.80	97	92	89	97	92	89	96	91	88	85
1.00	101	96	93	100	96	92	99	95	92	88
1.25	105	100	97	104	99	96	102	98	96	92
1.50	107	103	100	106	102	99	104	101	98	94
2.00	110	106	103	108	105	102	105	103	100	95
2.50	111	108	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	106	107	105	103	97
4.00	114	112	110	112	110	108	109	107	106	99
5.00	116	113	112	113	112	110	109	108	107	100
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.0V I:0.6480A P:77.40W PF:0.9930 Freq:50.00Hz Lamp Flux:7530.94x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*3.14715	Shielding Angle:

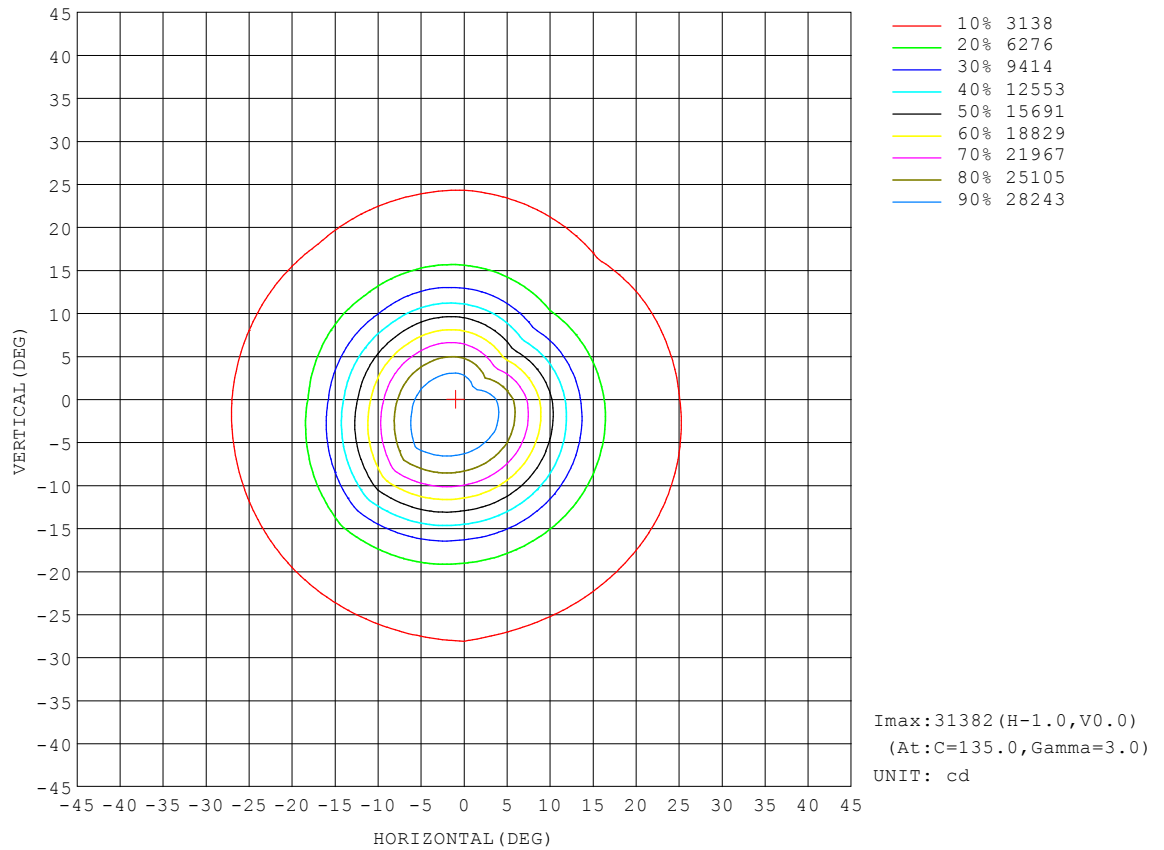


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.0V I:0.6480A P:77.40W PF:0.9930 Freq:50.00Hz Lamp Flux:7530.94x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*3.14715	Shielding Angle:

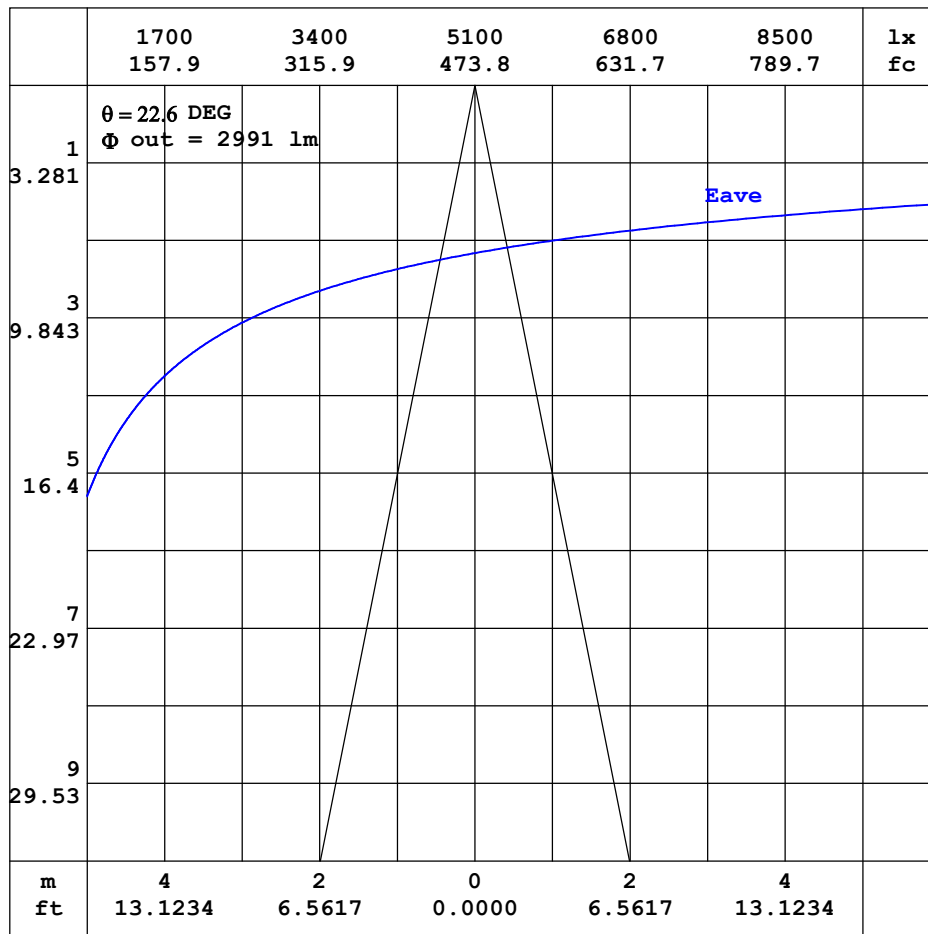


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.0V I:0.6480A P:77.40W PF:0.9930 Freq:50.00Hz Lamp Flux:7530.94x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*3.14715	Shielding Angle:

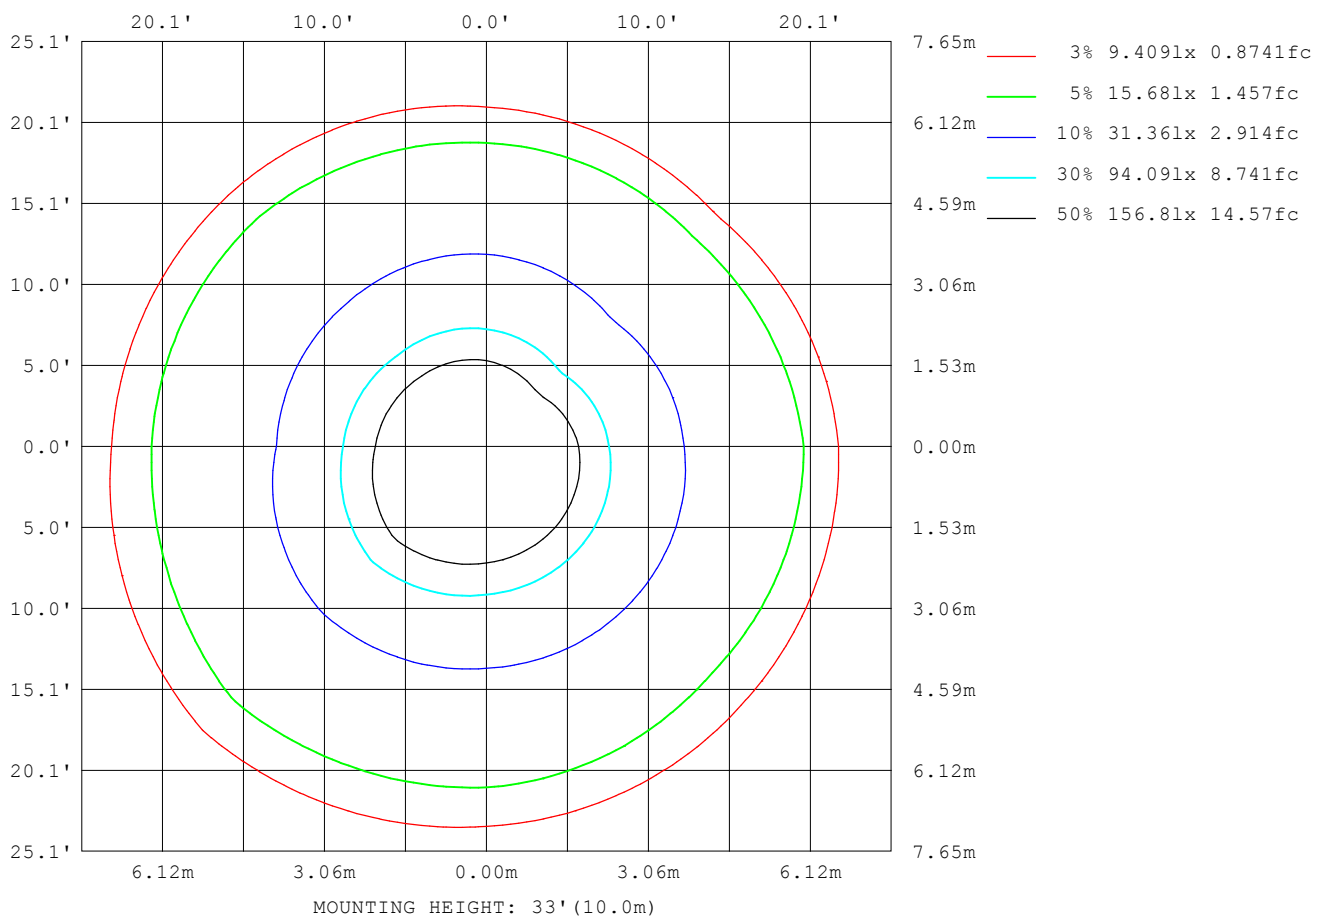

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.0V I:0.6480A P:77.40W PF:0.9930 Freq:50.00Hz Lamp Flux:7530.94x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*3.14715	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	172
L_0~180 (75) av	80
L_0~180 (85) av	6
L_90~270 (65) av	182
L_90~270 (75) av	81
L_90~270 (85) av	4
L_45 (65) av	181
L_45 (75) av	84
L_45 (85) av	10

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

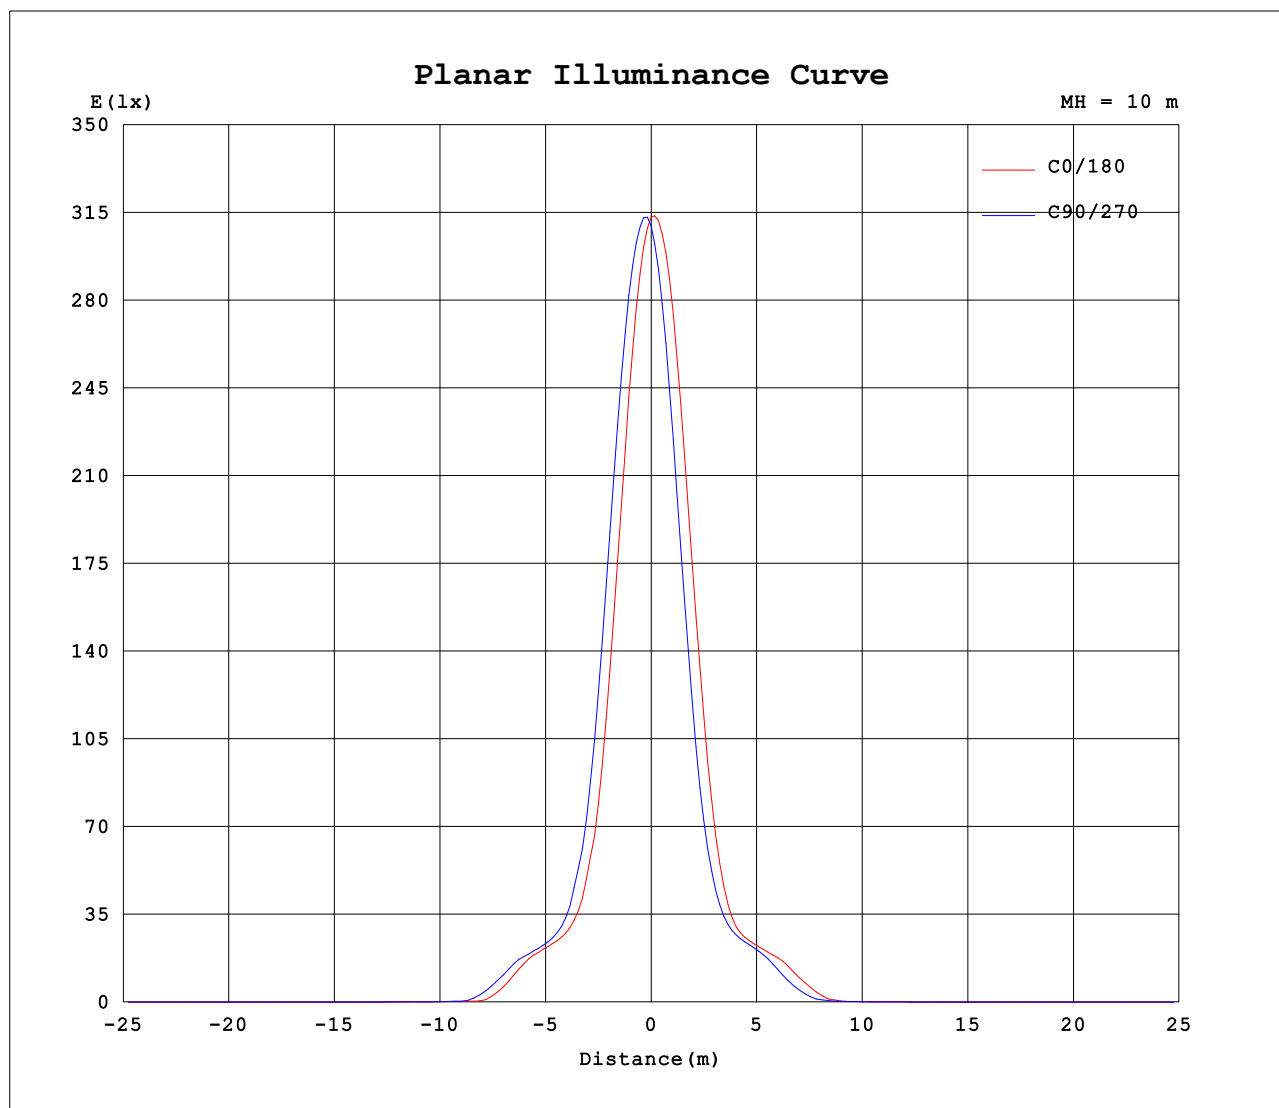

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-03-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.0V I:0.6480A P:77.40W PF:0.9930 Freq:50.00Hz Lamp Flux:7530.94x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*3.14715	Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	3087	3087	3087	3087	3087	3087	3087	3087										
5	2594	2810	2965	3179	2875	2637	2465	2284										
10	1590	1897	2186	2576	2025	1689	1463	1226										
15	726	951	1158	1517	1054	790	680	584										
20	388	458	550	681	463	401	372	348										
25	310	332	345	380	325	307	307	306										
30	266	262	297	298	285	273	234	211										
35	111	149	197	264	180	135	91.2	59.8										
40	10.3	20.4	39.1	90.9	30.4	13.8	16.5	9.78										
45	6.17	8.16	7.85	9.80	7.55	7.06	7.07	6.21										
50	4.61	5.36	5.53	6.24	5.21	5.05	4.93	4.60										
55	3.61	4.03	4.20	4.67	3.99	3.94	3.81	3.62										
60	2.88	3.18	3.39	3.66	3.18	3.13	3.04	2.83										
65	2.08	2.33	2.57	2.89	2.42	2.36	2.21	1.90										
70	1.10	1.29	1.56	1.93	1.53	1.38	1.14	0.92										
75	0.52	0.63	0.75	0.99	0.76	0.67	0.55	0.41										
80	0.15	0.20	0.28	0.44	0.30	0.25	0.17	0.08										
85	0.00	0.00	0.02	0.09	0.03	0.02	0.00	0.00										
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
120	0.01	0.00	0.01	0.00	0.00	0.00	0.01	0.01										
125	0.03	0.01	0.01	0.01	0.01	0.02	0.02	0.03										
130	0.12	0.06	0.04	0.03	0.02	0.04	0.05	0.06										
135	0.19	0.15	0.12	0.11	0.05	0.08	0.10	0.11										
140	0.24	0.21	0.20	0.19	0.09	0.13	0.16	0.18										
145	0.38	0.28	0.26	0.26	0.15	0.22	0.28	0.30										
150	0.74	0.50	0.39	0.39	0.25	0.38	0.46	0.50										
155	1.30	0.99	0.75	0.74	0.42	0.59	0.66	0.71										
160	1.71	1.55	1.27	1.27	0.62	0.79	0.86	0.91										
165	1.75	1.85	1.68	1.69	0.82	0.95	0.99	1.02										
170	1.43	1.72	1.72	1.75	0.93	0.98	0.98	0.99										
175	1.06	1.32	1.41	1.44	0.91	0.94	0.95	0.96										
180	0.92	1.01	1.07	1.08	0.92	1.02	1.07	1.08										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: