


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.0V I:0.6500A P:77.60W PF:0.9930 Freq:50.00Hz Lamp Flux:7448.13x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*0.091	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 95.98 lm/W			
MODEL	36度	I _{max} (cd)	16358	S/MH(C0/180)	0.73
NOMINAL POWER(W)	80	LOR(%)	100.0	S/MH(C90/270)	0.57
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	7448.1	η UP,DN(C0-180)	0.1,56.7
NOMINAL FLUX(lm)	7448.13	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,43.1
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120	η down(%)	99.8	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

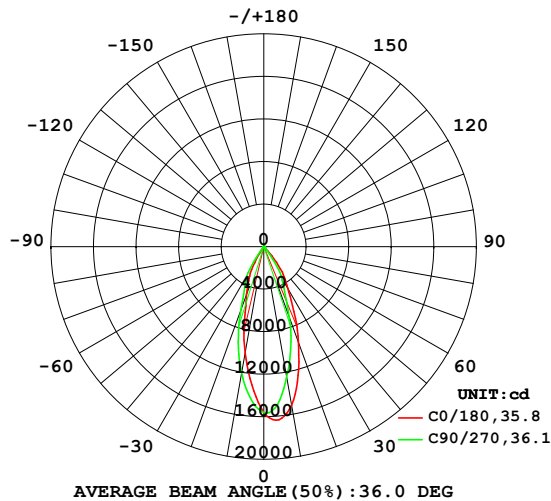

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

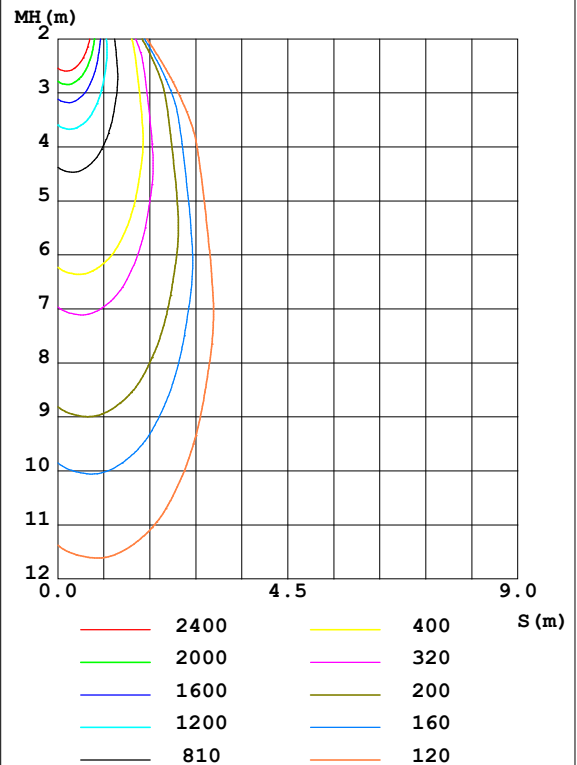

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-03-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1513	1436	1246	1131	1018	1074	1205	1308	0- 10	1326	1326	17.8,17.8
20	953.7	903.2	697.9	566.8	475.1	502.9	625.5	783.5	10- 20	2653	3979	53.4,53.4
30	453.8	432.0	338.8	278.8	174.4	208.6	319.7	380.3	20- 30	2201	6180	83,83
40	153.9	103.9	25.52	14.91	9.838	11.48	18.51	53.00	30- 40	1043	7223	97,97
50	9.820	8.690	6.922	5.975	5.062	5.503	6.123	7.091	40- 50	125.2	7348	98.7,98.7
60	4.997	4.765	4.081	3.514	2.908	3.183	3.671	4.037	50- 60	46.23	7395	99.3,99.3
70	2.802	2.624	1.805	1.211	0.8072	0.9667	1.408	2.003	60- 70	27.61	7422	99.7,99.7
80	0.7595	0.6202	0.3238	0.1417	0.0132	0.0447	0.1994	0.4131	70- 80	9.417	7432	99.8,99.8
90	0.0080	0.0002	0.0000	0.0005	0	0	0	0	80- 90	1.048	7433	99.8,99.8
100	0.0015	0.0012	0.0027	0.0038	0	0	0	0	90-100	0.0057	7433	99.8,99.8
110	0.0051	0.0051	0.0068	0.0074	0.0005	0.0002	0	0	100-110	0.0218	7433	99.8,99.8
120	0.0104	0.0110	0.0143	0.0196	0.0132	0.0088	0.0027	0.0017	110-120	0.0545	7433	99.8,99.8
130	0.0455	0.0696	0.1895	0.2975	0.0803	0.0660	0.0398	0.0238	120-130	0.3477	7433	99.8,99.8
140	0.4127	0.4623	0.5712	0.7148	0.2404	0.1990	0.1410	0.1027	130-140	1.700	7435	99.8,99.8
150	0.9386	1.038	1.200	1.437	0.4986	0.4275	0.3340	0.2676	140-150	3.385	7438	99.9,99.9
160	1.699	1.724	1.746	1.930	0.8625	0.7323	0.5763	0.5098	150-160	4.563	7443	99.9,99.9
170	2.043	1.951	1.759	1.777	1.266	1.163	1.007	0.9527	160-170	3.889	7447	100,100
180	1.743	1.590	1.361	1.277	1.743	1.600	1.365	1.297	170-180	1.427	7448	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.0V I:0.6500A P:77.60W PF:0.9930 Freq:50.00Hz Lamp Flux:7448.13x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*0.091	Shielding Angle:

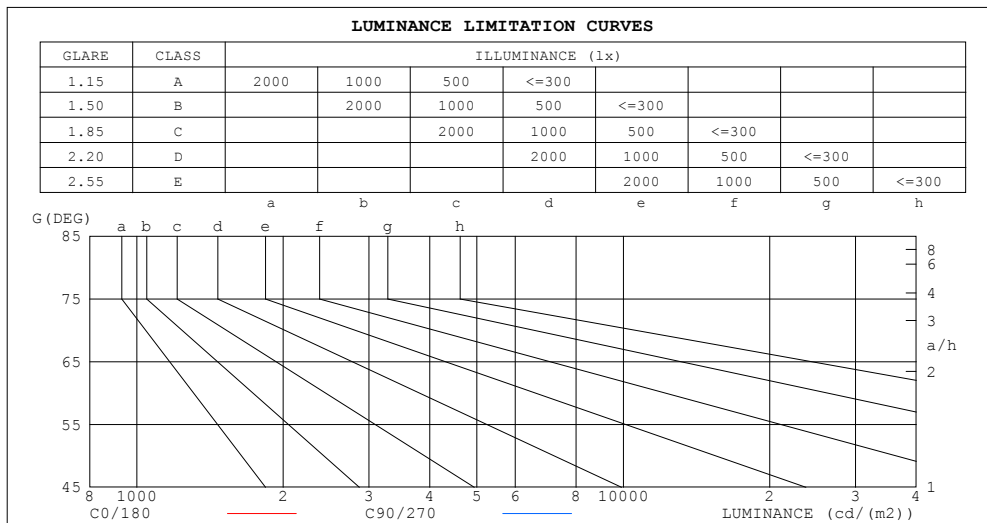

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	94	12
80	141	60
75	194	106
70	263	170
65	292	231
60	321	263
55	368	292
50	491	347
45	973	466


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.0V I:0.6500A P:77.60W PF:0.9930 Freq:50.00Hz Lamp Flux:7448.13x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*0.091	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.09	1.07	1.09	1.07	1.06	1.05	1.04	1.02	1.02	1.00	.99	.98	.97	.96	.95
2.0	1.05	1.01	.98	1.03	.90	.97	.90	.97	.95	.97	.95	.93	.94	.92	.91	.89
3.0	.99	.94	.91	.97	.93	.90	.95	.91	.89	.92	.90	.87	.90	.88	.86	.84
4.0	.93	.88	.85	.92	.88	.84	.90	.86	.83	.88	.85	.82	.86	.84	.81	.80
5.0	.88	.83	.80	.88	.83	.79	.86	.82	.78	.84	.81	.78	.83	.80	.77	.76
6.0	.84	.79	.75	.83	.78	.75	.82	.77	.74	.80	.77	.74	.79	.76	.73	.72
7.0	.80	.75	.71	.79	.74	.71	.78	.74	.70	.77	.73	.70	.76	.72	.70	.68
8.0	.76	.71	.67	.76	.71	.67	.75	.70	.67	.74	.70	.67	.73	.69	.66	.65
9.0	.73	.68	.64	.72	.67	.64	.71	.67	.64	.71	.66	.64	.70	.66	.63	.62
10.0	.70	.64	.61	.69	.64	.61	.68	.64	.61	.68	.64	.61	.67	.63	.61	.59

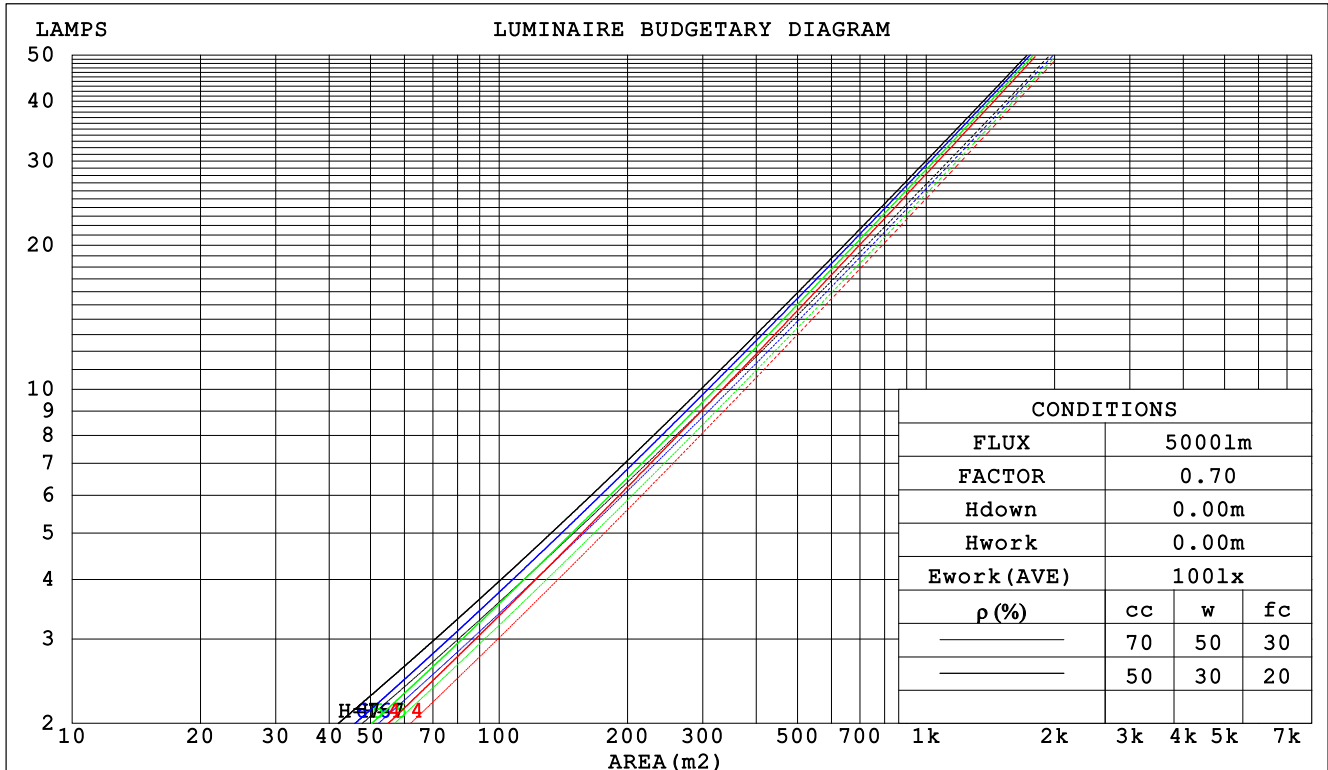

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.0V I:0.6500A P:77.60W PF:0.9930 Freq:50.00Hz Lamp Flux:7448.13x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*0.091	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.162	.092	.029	.155	.089	.028	.143	.082	.026	.131	.076	.024	.120	.070	.022		
2.0	.153	.084	.026	.148	.081	.025	.137	.076	.024	.127	.072	.022	.118	.067	.021		
3.0	.145	.077	.023	.140	.075	.023	.131	.071	.022	.123	.068	.021	.116	.064	.020		
4.0	.138	.072	.021	.134	.070	.021	.126	.067	.020	.119	.064	.019	.112	.061	.019		
5.0	.131	.067	.019	.127	.065	.019	.121	.063	.019	.115	.060	.018	.109	.058	.017		
6.0	.125	.063	.018	.122	.061	.018	.116	.059	.017	.111	.057	.017	.105	.056	.016		
7.0	.119	.059	.017	.117	.058	.017	.111	.056	.016	.107	.055	.016	.102	.053	.016		
8.0	.114	.056	.016	.112	.055	.016	.107	.054	.015	.103	.052	.015	.099	.051	.015		
9.0	.109	.053	.015	.107	.052	.015	.103	.051	.014	.099	.050	.014	.096	.049	.014		
10.0	.105	.050	.014	.103	.050	.014	.100	.049	.014	.096	.048	.014	.093	.047	.013		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.172	.159	.148	.147	.136	.127	.100	.094	.088	.058	.054	.051	.019	.017	.017	
2.0	.155	.134	.116	.133	.116	.101	.091	.080	.070	.053	.046	.041	.017	.015	.013	
3.0	.142	.115	.094	.122	.099	.081	.084	.069	.057	.048	.040	.034	.016	.013	.011	
4.0	.131	.100	.077	.112	.087	.066	.077	.060	.047	.045	.035	.028	.014	.011	.009	
5.0	.122	.088	.064	.105	.076	.055	.072	.053	.039	.042	.031	.023	.013	.010	.008	
6.0	.114	.079	.054	.098	.068	.047	.067	.048	.033	.039	.028	.020	.013	.009	.006	
7.0	.107	.071	.046	.092	.061	.040	.064	.043	.028	.037	.025	.017	.012	.008	.006	
8.0	.101	.065	.039	.087	.056	.034	.060	.039	.024	.035	.023	.015	.011	.008	.005	
9.0	.096	.059	.034	.083	.051	.030	.057	.036	.021	.033	.021	.013	.011	.007	.004	
10.0	.091	.055	.030	.079	.048	.027	.055	.033	.019	.032	.020	.011	.010	.006	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-03-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.0V I:0.6500A P:77.60W PF:0.9930 Freq:50.00Hz Lamp Flux:7448.13x1 lm										
NAME: 8寸明装筒灯					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:0.091*0.091			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	12.1	12.9	12.3	13.1	13.2	10.3	11.1	10.5	11.3	11.5
3H	12.0	12.7	12.2	12.9	13.1	10.2	10.9	10.4	11.1	11.3
4H	11.9	12.6	12.2	12.8	13.1	10.1	10.8	10.4	11.0	11.3
6H	11.8	12.5	12.1	12.7	13.0	10.0	10.7	10.3	10.9	11.2
8H	11.8	12.4	12.1	12.7	12.9	10.0	10.6	10.3	10.9	11.1
12H	11.7	12.3	12.0	12.6	12.9	9.9	10.6	10.2	10.8	11.1
4H 2H	11.9	12.6	12.1	12.8	13.0	10.1	10.8	10.4	11.0	11.3
3H	11.7	12.4	12.0	12.6	12.9	10.0	10.6	10.3	10.9	11.1
4H	11.6	12.2	12.0	12.5	12.8	9.9	10.5	10.2	10.8	11.1
6H	11.6	12.1	11.9	12.4	12.7	9.8	10.3	10.2	10.6	11.0
8H	11.5	12.0	11.9	12.3	12.7	9.7	10.2	10.1	10.6	10.9
12H	11.5	11.9	11.9	12.3	12.7	9.7	10.1	10.1	10.5	10.9
8H 4H	11.5	12.0	11.9	12.3	12.7	9.7	10.2	10.1	10.6	10.9
6H	11.4	11.8	11.8	12.2	12.6	9.6	10.0	10.1	10.4	10.8
8H	11.4	11.7	11.8	12.1	12.6	9.6	9.9	10.0	10.4	10.8
12H	11.3	11.6	11.8	12.0	12.5	9.5	9.8	10.0	10.3	10.7
12H 4H	11.5	11.9	11.9	12.3	12.6	9.7	10.1	10.1	10.5	10.9
6H	11.4	11.7	11.8	12.1	12.6	9.6	9.9	10.0	10.4	10.8
8H	11.3	11.6	11.8	12.0	12.5	9.5	9.8	10.0	10.3	10.7
Variations with the observer position at spacings:										
S = 1.0H	+ 4.2 / -10.9					+ 3.1 / - 7.7				
1.5H	+ 6.9 / -10.2					+ 5.6 / - 7.2				
2.0H	+ 3.8 / - 1.3					+ 1.8 / - 1.0				

CIE Pub.117 Corrected 7448 lm Total Lamp Luminous Flux.(8log(F/F0) = 7.0)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-03-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.0V I:0.6500A P:77.60W PF:0.9930 Freq:50.00Hz Lamp Flux:7448.13x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*0.091	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	84	80	89	84	80	88	83	80	77
0.80	97	91	88	96	91	88	95	90	87	84
1.00	101	96	92	100	95	92	98	95	91	88
1.25	104	100	96	103	99	96	101	98	95	91
1.50	107	103	99	106	102	99	104	100	98	94
2.00	109	105	102	108	104	102	105	102	100	95
2.50	111	107	105	109	106	104	106	104	102	96
3.00	112	109	107	110	108	105	107	105	103	97
4.00	114	112	110	112	110	108	109	107	105	98
5.00	115	113	112	113	112	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.0V I:0.6500A P:77.60W PF:0.9930 Freq:50.00Hz Lamp Flux:7448.13x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*0.091	Shielding Angle:

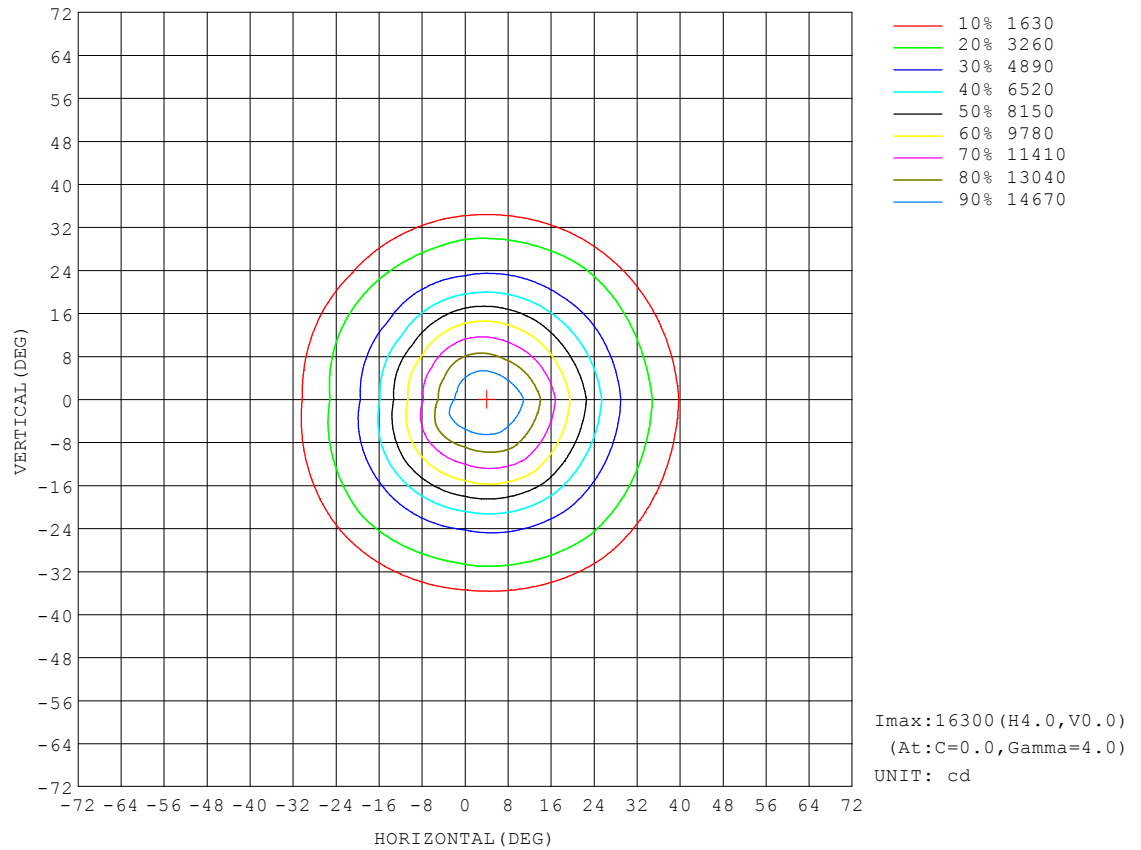


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.0V I:0.6500A P:77.60W PF:0.9930 Freq:50.00Hz Lamp Flux:7448.13x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*0.091	Shielding Angle:

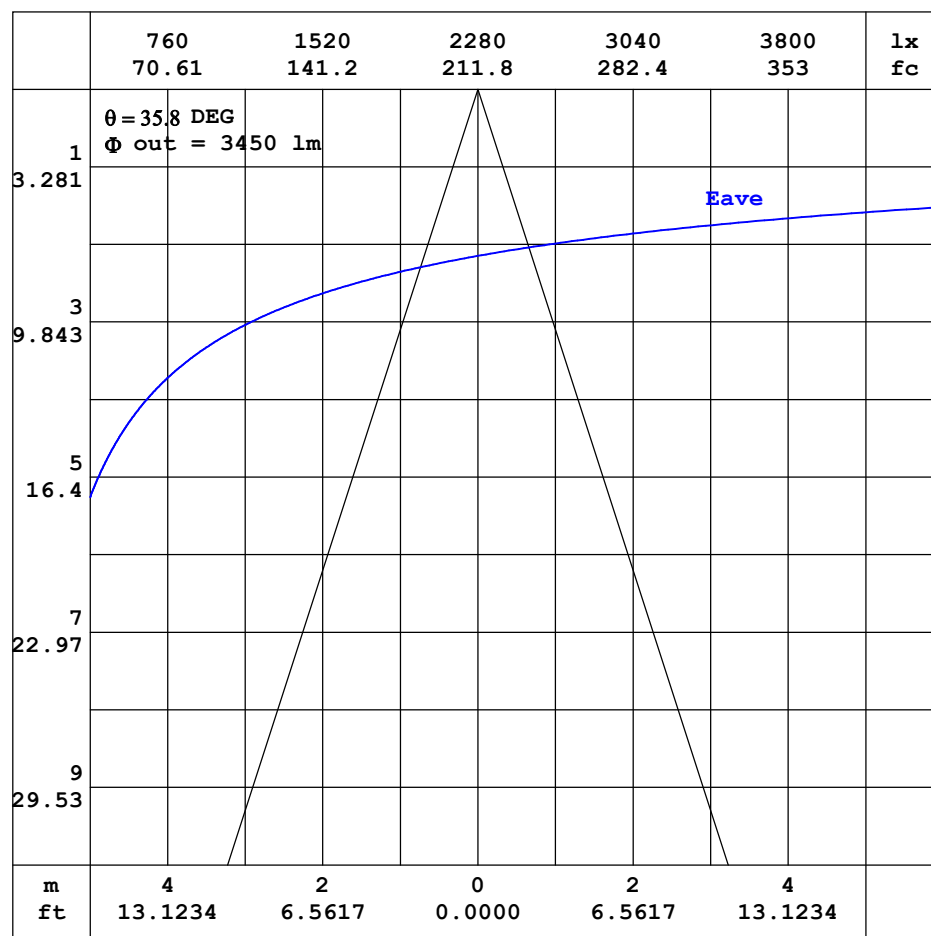


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-03-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.0V I:0.6500A P:77.60W PF:0.9930 Freq:50.00Hz Lamp Flux:7448.13x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*0.091	Shielding Angle:

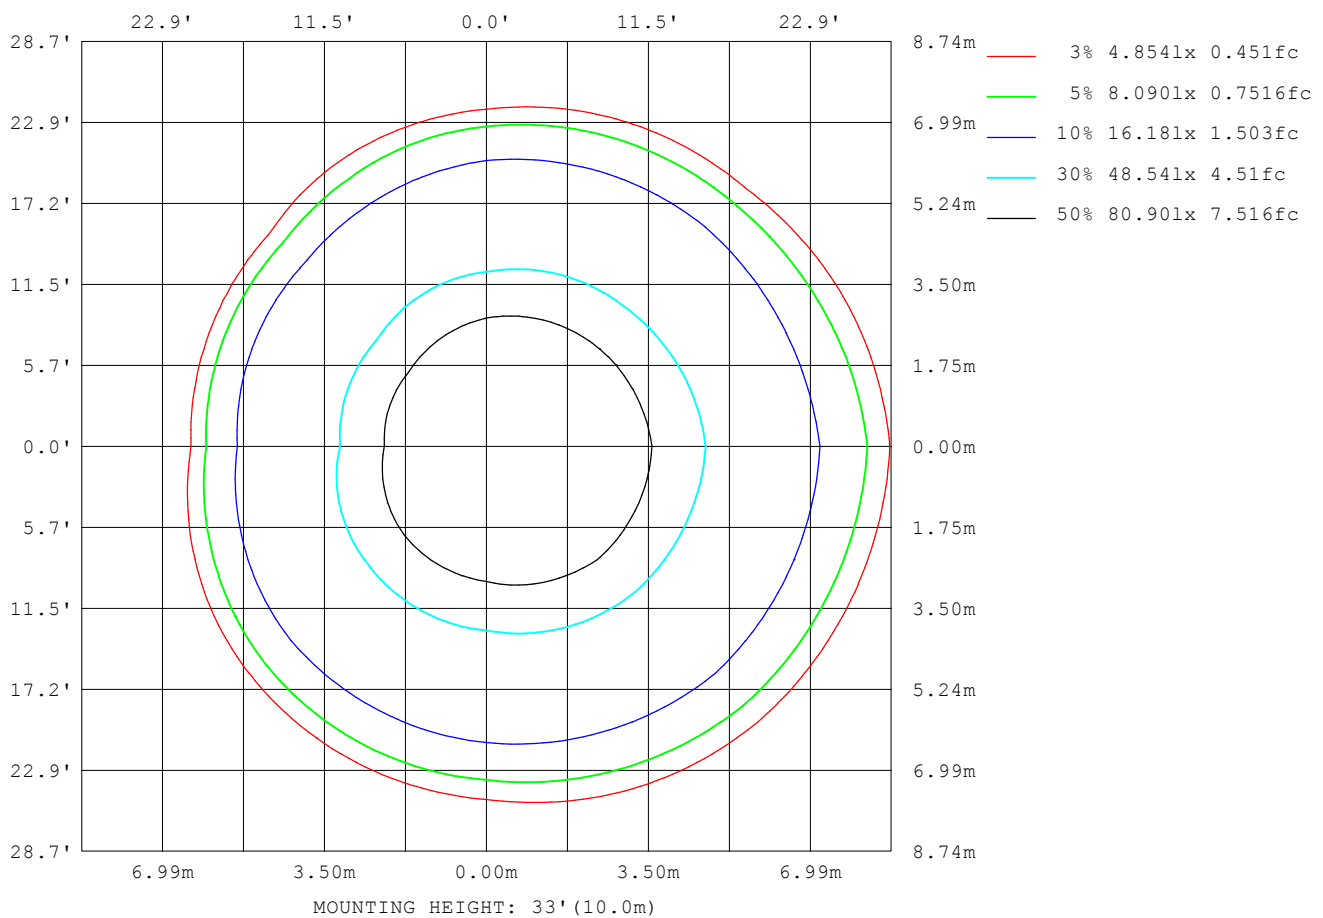

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.0V I:0.6500A P:77.60W PF:0.9930 Freq:50.00Hz Lamp Flux:7448.13x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*0.091	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	211
L_0~180 (75) av	115
L_0~180 (85) av	47
L_90~270 (65) av	215
L_90~270 (75) av	95
L_90~270 (85) av	6
L_45 (65) av	214
L_45 (75) av	102
L_45 (85) av	22

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

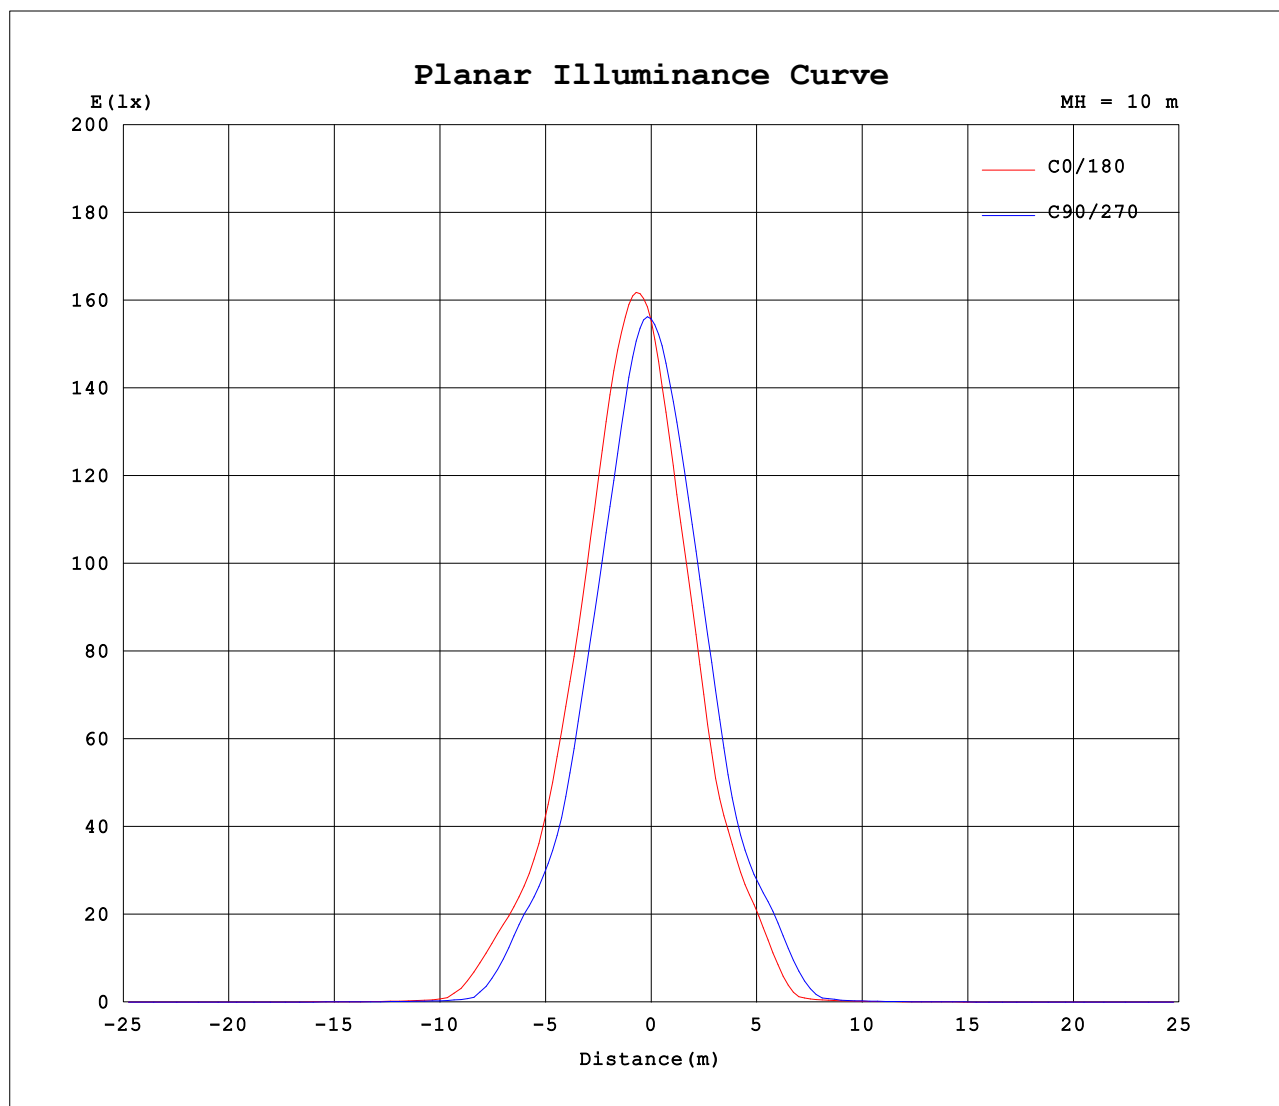

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-03-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.0V I:0.6500A P:77.60W PF:0.9930 Freq:50.00Hz Lamp Flux:7448.13x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*0.091	Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1559	1559	1559	1559	1559	1559	1559	1559										
5	1634	1594	1489	1402	1306	1346	1433	1516										
10	1513	1436	1246	1131	1018	1074	1205	1308										
15	1253	1193	985	854	705	761	931	1061										
20	954	903	698	567	475	503	625	784										
25	676	601	465	402	330	377	427	515										
30	454	432	339	279	174	209	320	380										
35	324	290	180	99.8	23.3	45.1	129	229										
40	154	104	25.5	14.9	9.84	11.5	18.5	53.0										
45	21.4	18.2	10.2	8.24	6.66	7.48	8.76	11.4										
50	9.82	8.69	6.92	5.97	5.06	5.50	6.12	7.09										
55	6.57	6.17	5.20	4.61	3.93	4.27	4.70	5.21										
60	5.00	4.76	4.08	3.51	2.91	3.18	3.67	4.04										
65	3.84	3.69	3.03	2.44	1.70	2.06	2.61	3.05										
70	2.80	2.62	1.81	1.21	0.81	0.97	1.41	2.00										
75	1.57	1.33	0.85	0.56	0.28	0.38	0.67	1.00										
80	0.76	0.62	0.32	0.14	0.01	0.04	0.20	0.41										
85	0.25	0.17	0.03	0.00	0.00	0.00	0.00	0.06										
90	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00										
115	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00										
120	0.01	0.01	0.01	0.02	0.01	0.01	0.00	0.00										
125	0.02	0.02	0.03	0.09	0.04	0.03	0.01	0.01										
130	0.05	0.07	0.19	0.30	0.08	0.07	0.04	0.02										
135	0.21	0.27	0.39	0.49	0.15	0.12	0.08	0.05										
140	0.41	0.46	0.57	0.71	0.24	0.20	0.14	0.10										
145	0.61	0.68	0.88	1.08	0.36	0.30	0.23	0.17										
150	0.94	1.04	1.20	1.44	0.50	0.43	0.33	0.27										
155	1.33	1.42	1.51	1.75	0.64	0.55	0.45	0.38										
160	1.70	1.72	1.75	1.93	0.86	0.73	0.58	0.51										
165	1.96	1.93	1.83	1.94	1.11	0.98	0.79	0.69										
170	2.04	1.95	1.76	1.78	1.27	1.16	1.01	0.95										
175	1.95	1.82	1.59	1.53	1.48	1.34	1.16	1.12										
180	1.74	1.59	1.36	1.28	1.74	1.60	1.37	1.30										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: