


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.9V I:0.7320A P:87.20W PF:0.9930 Freq:50.00Hz Lamp Flux:8117.79x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*0.091	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 93.09 lm/W			
MODEL	36度	I _{max} (cd)	17894	S/MH(C0/180)	0.73
NOMINAL POWER(W)	90	LOR(%)	100.0	S/MH(C90/270)	0.60
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	8117.8	η UP,DN(C0-180)	0.2,55.2
NOMINAL FLUX(lm)	8117.79	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,44.6
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120	η down(%)	99.8	CIBSE SHR MAX	0.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

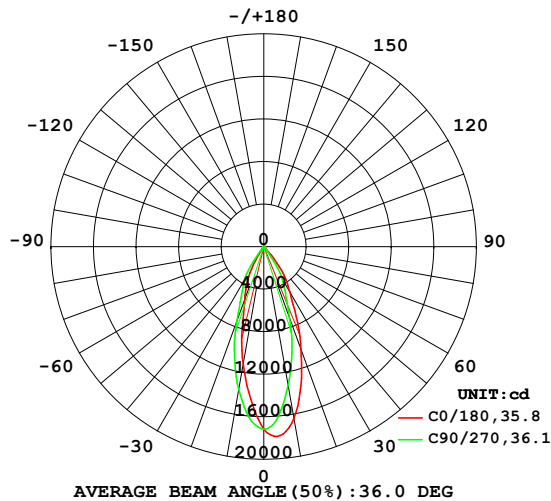

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

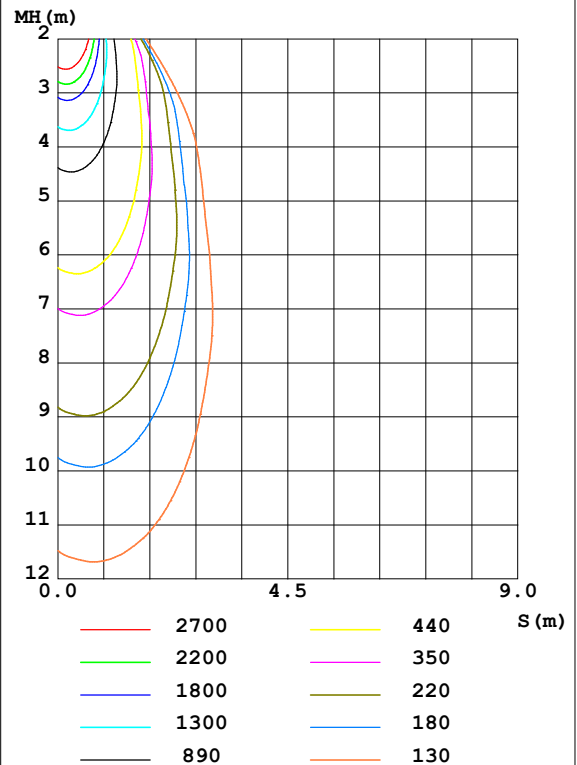

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1639	1526	1324	1254	1125	1212	1362	1428	0- 10	1453	1453	17.9,17.9
20	1027	940.2	711.1	633.2	527.3	574.0	743.8	848.8	10- 20	2904	4357	53.7,53.7
30	487.4	453.9	354.8	311.7	199.2	256.8	372.8	414.0	20- 30	2399	6756	83.2,83.2
40	151.9	88.42	22.16	17.50	10.98	13.40	22.74	53.04	30- 40	1127	7883	97.1,97.1
50	10.34	8.953	7.110	6.641	5.654	6.235	7.002	7.611	40- 50	125.5	8009	98.7,98.7
60	5.375	5.017	4.252	3.915	3.267	3.633	4.163	4.390	50- 60	50.30	8059	99.3,99.3
70	2.979	2.675	1.703	1.355	0.9184	1.139	1.737	2.148	60- 70	30.14	8089	99.6,99.6
80	0.7870	0.5915	0.2794	0.1652	0.0228	0.0784	0.2812	0.4356	70- 80	10.03	8099	99.8,99.8
90	0.0060	0.0007	0.0010	0.0014	0	0	0	0	80- 90	1.048	8100	99.8,99.8
100	0.0022	0.0029	0.0041	0.0048	0	0	0	0	90-100	0.0107	8100	99.8,99.8
110	0.0065	0.0073	0.0085	0.0089	0.0007	0.0005	0	0	100-110	0.0301	8100	99.8,99.8
120	0.0133	0.0147	0.0183	0.0224	0.0131	0.0068	0.0027	0.0026	110-120	0.0665	8100	99.8,99.8
130	0.0561	0.1028	0.2638	0.3313	0.0846	0.0637	0.0390	0.0295	120-130	0.4020	8101	99.8,99.8
140	0.4764	0.5708	0.7083	0.8035	0.2561	0.1987	0.1410	0.1238	130-140	1.985	8103	99.8,99.8
150	1.085	1.264	1.441	1.645	0.5311	0.4354	0.3508	0.3145	140-150	3.906	8107	99.9,99.9
160	1.946	2.065	2.050	2.240	0.9280	0.7596	0.6231	0.5871	150-160	5.251	8112	99.9,99.9
170	2.330	2.247	2.001	2.066	1.410	1.262	1.102	1.080	160-170	4.427	8116	100,100
180	1.952	1.758	1.489	1.462	1.956	1.761	1.496	1.463	170-180	1.609	8118	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.9V I:0.7320A P:87.20W PF:0.9930 Freq:50.00Hz Lamp Flux:8117.79x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*0.091	Shielding Angle:

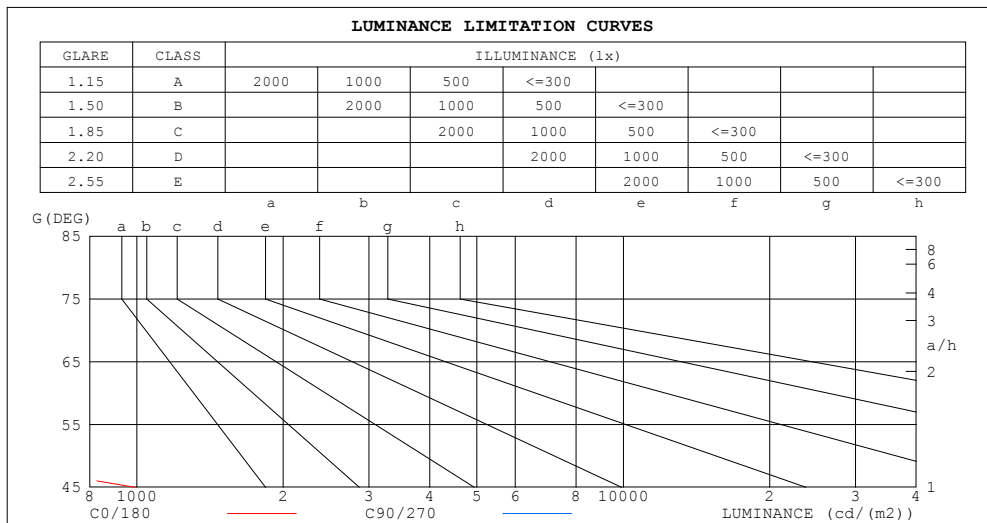


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.9V I:0.7320A P:87.20W PF:0.9930 Freq:50.00Hz Lamp Flux:8117.79x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*0.091	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.09	1.07	1.09	1.07	1.06	1.05	1.04	1.02	1.02	1.00	.99	.98	.97	.96	.95
2.0	1.05	1.01	.98	1.03	.90	.97	.90	.97	.95	.97	.95	.93	.94	.92	.91	.89
3.0	.99	.94	.91	.97	.93	.90	.95	.91	.89	.92	.90	.87	.90	.88	.86	.85
4.0	.93	.89	.85	.92	.88	.84	.90	.86	.83	.88	.85	.82	.86	.84	.81	.80
5.0	.89	.83	.80	.88	.83	.79	.86	.82	.79	.84	.81	.78	.83	.80	.77	.76
6.0	.84	.79	.75	.83	.78	.75	.82	.78	.74	.81	.77	.74	.79	.76	.73	.72
7.0	.80	.75	.71	.79	.74	.71	.78	.74	.70	.77	.73	.70	.76	.72	.70	.69
8.0	.76	.71	.67	.76	.71	.67	.75	.70	.67	.74	.70	.67	.73	.69	.66	.65
9.0	.73	.68	.64	.72	.67	.64	.72	.67	.64	.71	.67	.64	.70	.66	.63	.62
10.0	.70	.65	.61	.69	.64	.61	.69	.64	.61	.68	.64	.61	.67	.63	.61	.60

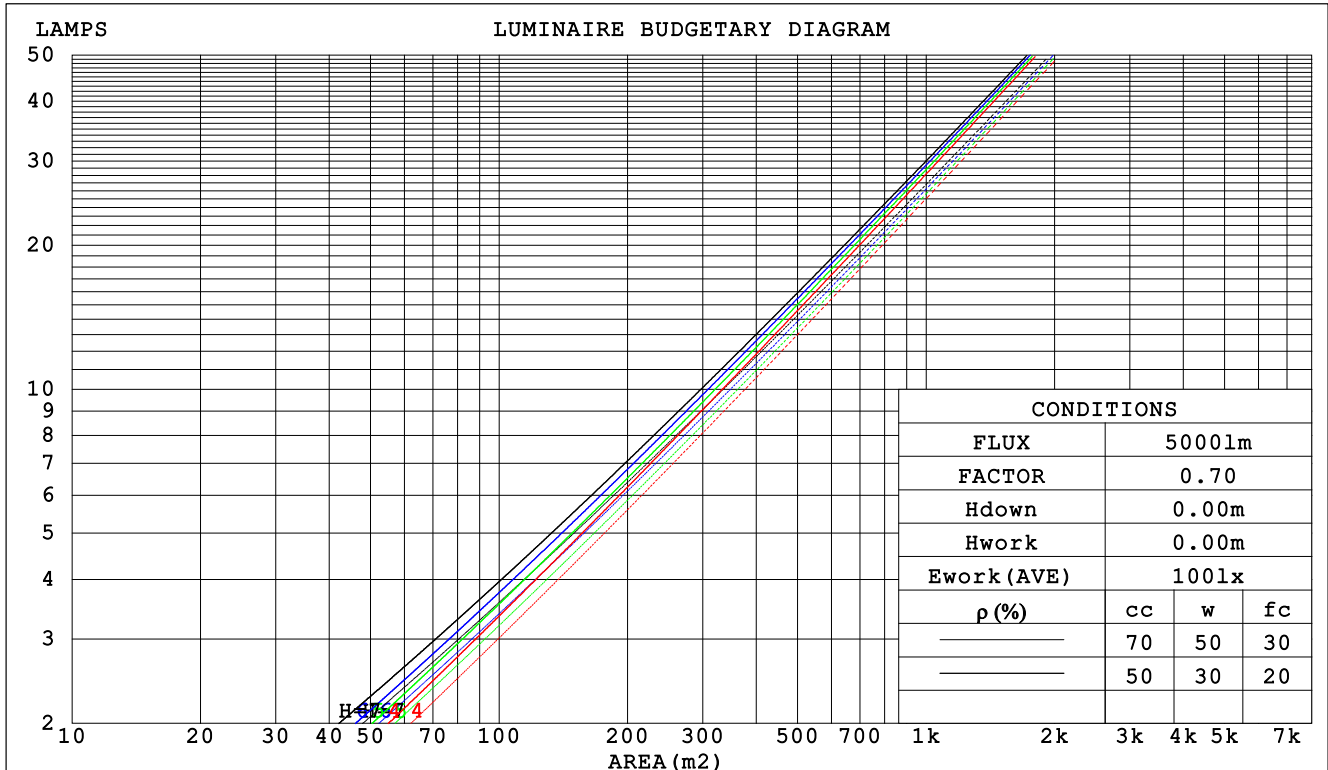

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.9V I:0.7320A P:87.20W PF:0.9930 Freq:50.00Hz Lamp Flux:8117.79x1 lm					
NAME: 8寸明装筒灯			TYPE:4000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:0.091*0.091		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.162	.092	.029	.155	.088	.028	.142	.082	.026	.131	.075	.024	.120	.070	.022		
2.0	.153	.084	.026	.147	.081	.025	.137	.076	.024	.127	.071	.022	.118	.067	.021		
3.0	.145	.077	.023	.140	.075	.023	.131	.071	.022	.123	.067	.021	.115	.064	.020		
4.0	.137	.071	.021	.133	.070	.021	.126	.067	.020	.119	.064	.019	.112	.061	.019		
5.0	.131	.067	.019	.127	.065	.019	.120	.063	.018	.114	.060	.018	.109	.058	.017		
6.0	.124	.062	.018	.121	.061	.018	.116	.059	.017	.110	.057	.017	.105	.055	.016		
7.0	.119	.059	.017	.116	.058	.017	.111	.056	.016	.106	.055	.016	.102	.053	.016		
8.0	.114	.056	.016	.111	.055	.016	.107	.053	.015	.103	.052	.015	.099	.051	.015		
9.0	.109	.053	.015	.107	.052	.015	.103	.051	.014	.099	.050	.014	.096	.049	.014		
10.0	.105	.050	.014	.103	.050	.014	.099	.049	.014	.096	.048	.014	.093	.047	.013		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.172	.159	.148	.147	.137	.127	.101	.094	.088	.058	.054	.051	.019	.018	.017	
2.0	.155	.134	.116	.133	.116	.101	.091	.080	.070	.053	.047	.041	.017	.015	.013	
3.0	.142	.115	.094	.122	.099	.081	.084	.069	.057	.048	.040	.034	.016	.013	.011	
4.0	.131	.100	.077	.112	.087	.067	.077	.060	.047	.045	.035	.028	.014	.012	.009	
5.0	.122	.088	.064	.105	.076	.055	.072	.053	.039	.042	.031	.023	.013	.010	.008	
6.0	.114	.079	.054	.098	.068	.047	.067	.048	.033	.039	.028	.020	.013	.009	.006	
7.0	.107	.071	.046	.092	.062	.040	.064	.043	.028	.037	.025	.017	.012	.008	.006	
8.0	.101	.065	.040	.087	.056	.035	.060	.039	.024	.035	.023	.015	.011	.008	.005	
9.0	.096	.059	.035	.083	.051	.030	.057	.036	.021	.033	.021	.013	.011	.007	.004	
10.0	.091	.055	.031	.079	.048	.027	.055	.033	.019	.032	.020	.011	.010	.007	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.9V I:0.7320A P:87.20W PF:0.9930 Freq:50.00Hz Lamp Flux:8117.79x1 lm										
NAME: 8寸明装筒灯					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:0.091*0.091			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	12.0	12.9	12.3	13.0	13.2	9.8	10.6	10.0	10.8	11.0
3H	11.9	12.7	12.2	12.9	13.1	9.7	10.4	9.9	10.6	10.8
4H	11.8	12.6	12.1	12.8	13.0	9.6	10.3	9.9	10.5	10.8
6H	11.8	12.4	12.1	12.7	12.9	9.5	10.2	9.8	10.4	10.7
8H	11.7	12.4	12.0	12.6	12.9	9.5	10.1	9.8	10.4	10.6
12H	11.7	12.3	12.0	12.6	12.8	9.4	10.1	9.7	10.3	10.6
4H 2H	11.8	12.5	12.1	12.7	13.0	9.6	10.3	9.9	10.5	10.8
3H	11.7	12.3	12.0	12.6	12.8	9.5	10.1	9.8	10.4	10.6
4H	11.6	12.2	11.9	12.5	12.8	9.4	10.0	9.7	10.3	10.6
6H	11.5	12.0	11.9	12.3	12.7	9.3	9.8	9.7	10.1	10.5
8H	11.5	11.9	11.9	12.3	12.7	9.2	9.7	9.6	10.1	10.4
12H	11.4	11.8	11.8	12.2	12.6	9.2	9.6	9.6	10.0	10.4
8H 4H	11.5	11.9	11.8	12.3	12.6	9.2	9.7	9.6	10.1	10.4
6H	11.4	11.7	11.8	12.1	12.6	9.2	9.5	9.6	9.9	10.3
8H	11.3	11.7	11.8	12.1	12.5	9.1	9.4	9.5	9.9	10.3
12H	11.3	11.5	11.7	12.0	12.5	9.0	9.3	9.5	9.8	10.2
12H 4H	11.4	11.8	11.8	12.2	12.6	9.2	9.6	9.6	10.0	10.4
6H	11.3	11.6	11.8	12.1	12.5	9.1	9.4	9.5	9.9	10.3
8H	11.3	11.5	11.7	12.0	12.5	9.0	9.3	9.5	9.8	10.3
Variations with the observer position at spacings:										
S = 1.0H	+ 4.5 / -10.6					+ 3.1 / - 6.8				
1.5H	+ 7.2 / - 9.9					+ 5.7 / - 6.3				
2.0H	+ 3.7 / - 1.2					+ 1.6 / - 1.0				

CIE Pub.117 Corrected 8118 lm Total Lamp Luminous Flux.(8log(F/F0) = 7.3)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.9V I:0.7320A P:87.20W PF:0.9930 Freq:50.00Hz Lamp Flux:8117.79x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*0.091	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	84	80	89	84	80	89	83	80	77
0.80	97	91	88	96	91	88	95	91	87	84
1.00	101	96	92	100	95	92	98	95	91	88
1.25	104	100	96	103	99	96	102	98	95	91
1.50	107	103	100	106	102	99	104	100	98	94
2.00	109	105	102	108	104	102	105	102	100	95
2.50	111	107	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	105	107	105	103	97
4.00	114	112	110	112	110	108	109	107	105	98
5.00	115	113	112	113	112	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-03-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.9V I:0.7320A P:87.20W PF:0.9930 Freq:50.00Hz Lamp Flux:8117.79x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*0.091	Shielding Angle:

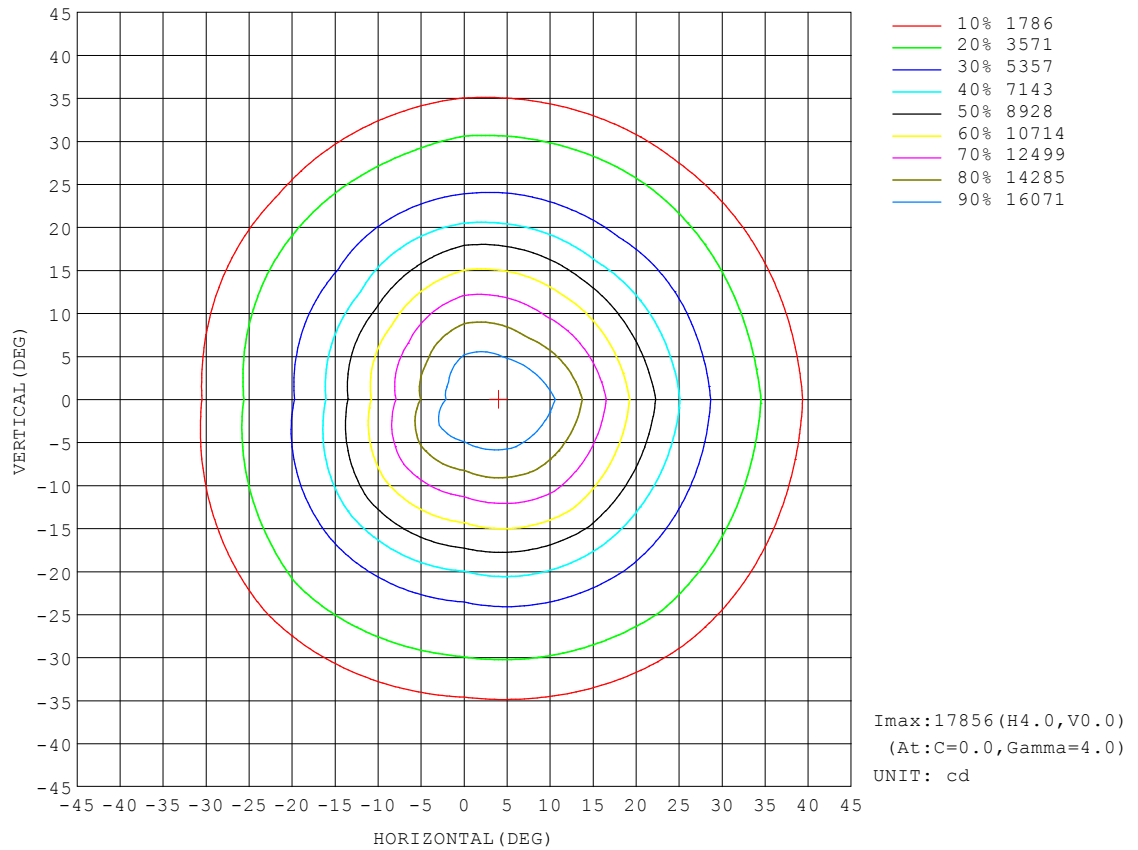


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:119.9V I:0.7320A P:87.20W PF:0.9930 Freq:50.00Hz Lamp Flux:8117.79x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*0.091	Shielding Angle:

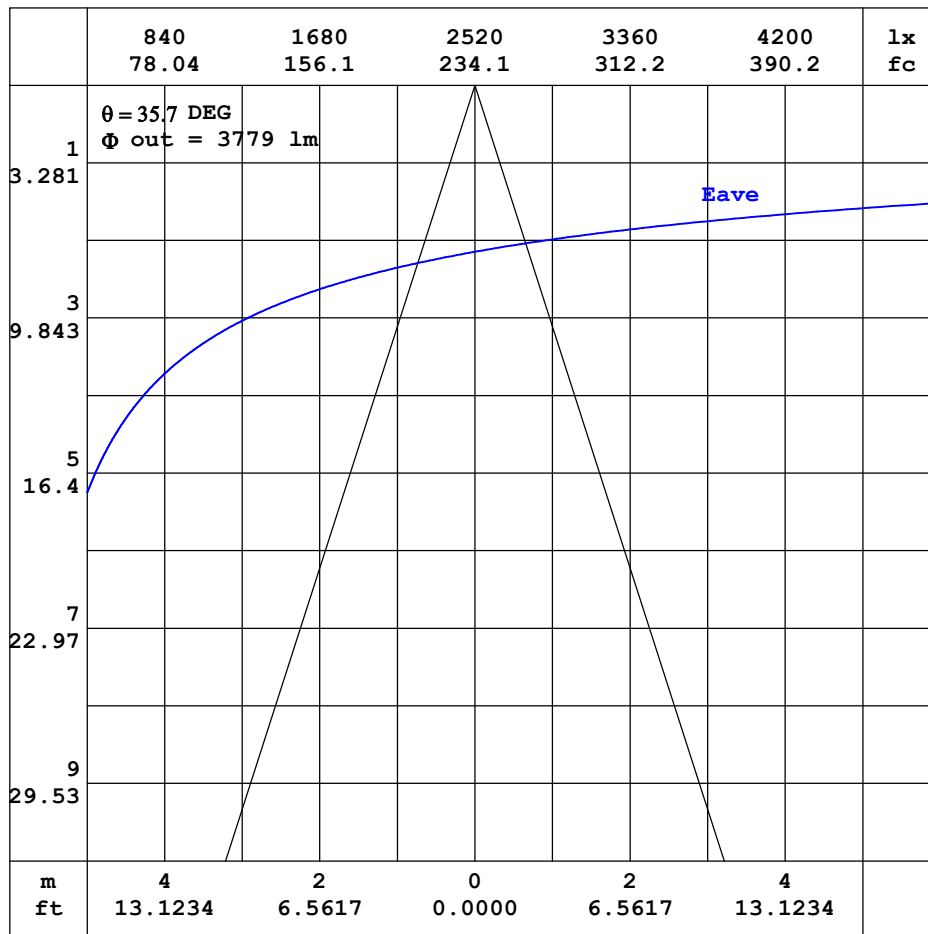


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.9V I:0.7320A P:87.20W PF:0.9930 Freq:50.00Hz Lamp Flux:8117.79x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*0.091	Shielding Angle:

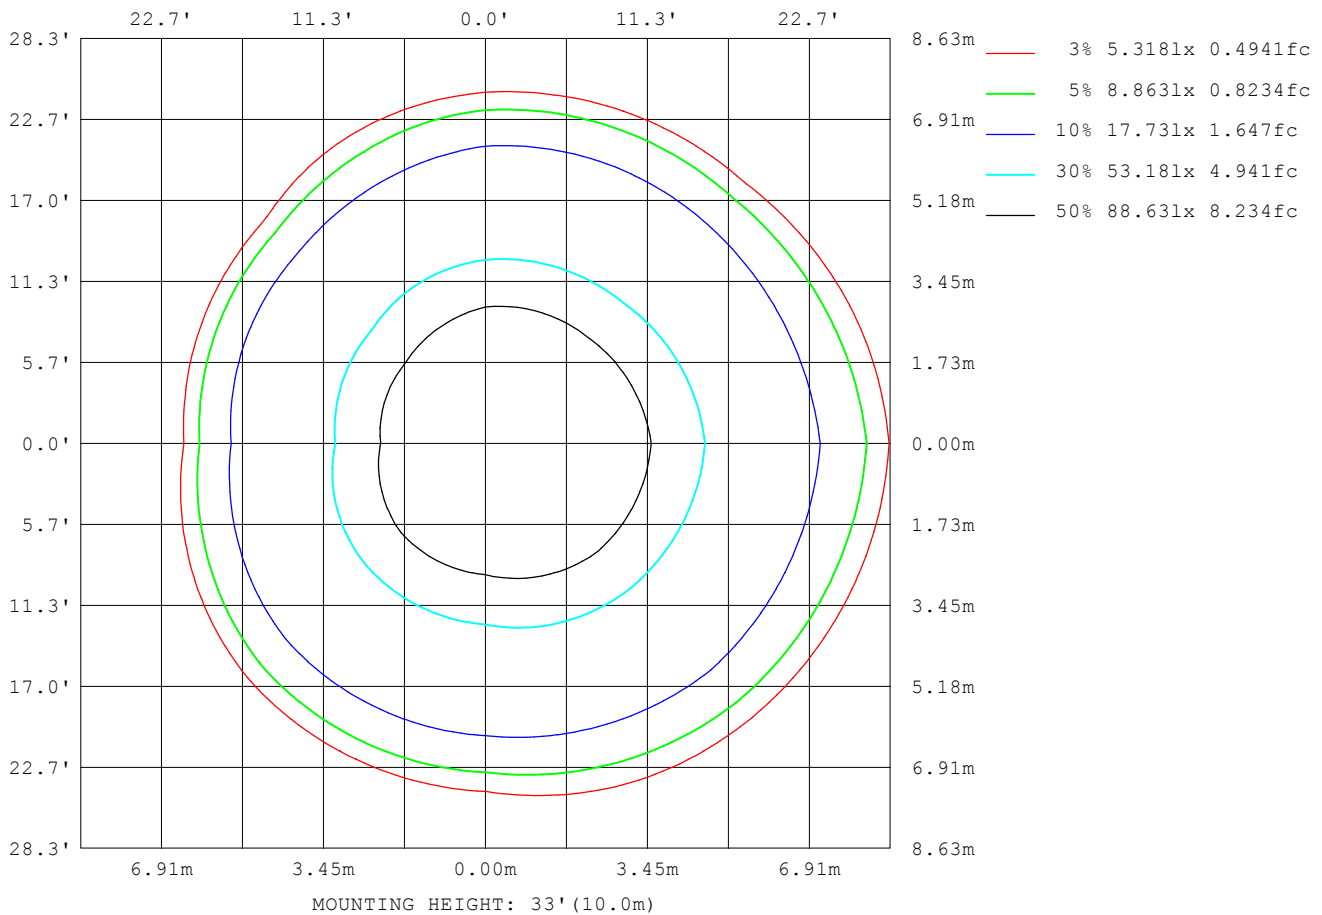

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.9V I:0.7320A P:87.20W PF:0.9930 Freq:50.00Hz Lamp Flux:8117.79x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*0.091	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	232
L_0~180 (75) av	122
L_0~180 (85) av	47
L_90~270 (65) av	235
L_90~270 (75) av	103
L_90~270 (85) av	4
L_45 (65) av	235
L_45 (75) av	108
L_45 (85) av	19

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

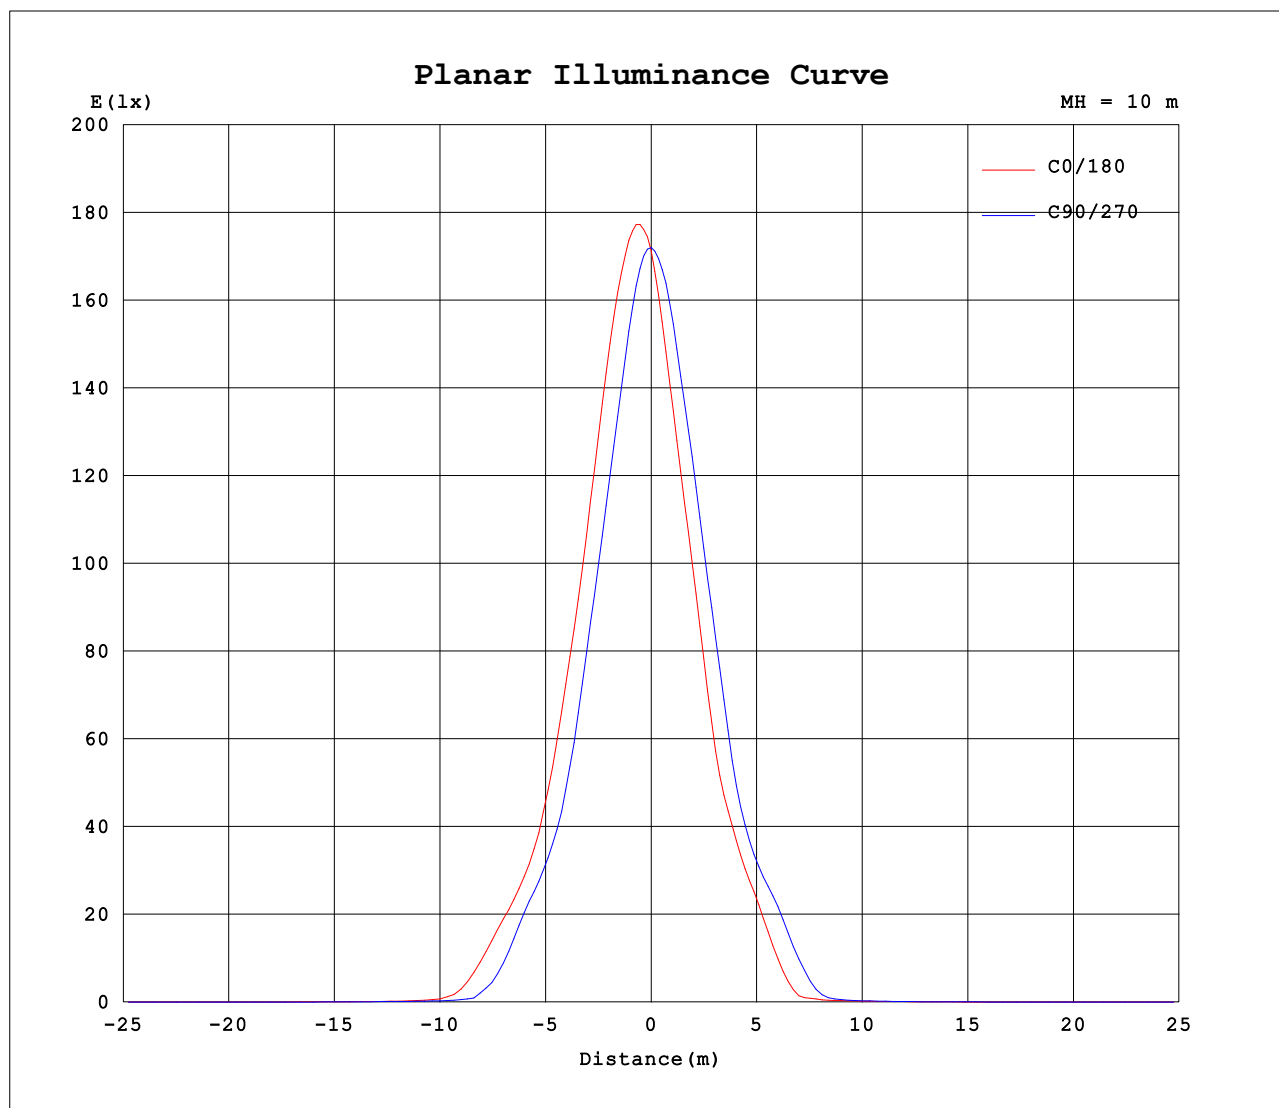

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-03-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.9V I:0.7320A P:87.20W PF:0.9930 Freq:50.00Hz Lamp Flux:8117.79x1 lm		
NAME: 8寸明装筒灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.091*0.091	Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1716	1716	1716	1716	1716	1716	1716	1716										
5	1783	1721	1600	1551	1435	1500	1611	1663										
10	1639	1526	1324	1254	1125	1212	1362	1428										
15	1352	1257	1029	950	788	875	1069	1157										
20	1027	940	711	633	527	574	744	849										
25	722	619	484	446	373	427	493	559										
30	487	454	355	312	199	257	373	414										
35	346	288	162	113	27.1	63.9	179	242										
40	152	88.4	22.2	17.5	11.0	13.4	22.7	53.0										
45	21.8	17.1	10.3	9.19	7.45	8.43	10.3	12.2										
50	10.3	8.95	7.11	6.64	5.65	6.23	7.00	7.61										
55	7.07	6.47	5.45	5.13	4.40	4.82	5.33	5.67										
60	5.38	5.02	4.25	3.92	3.27	3.63	4.16	4.39										
65	4.12	3.86	3.10	2.73	1.96	2.42	3.05	3.31										
70	2.98	2.67	1.70	1.35	0.92	1.14	1.74	2.15										
75	1.62	1.31	0.81	0.63	0.33	0.47	0.84	1.06										
80	0.79	0.59	0.28	0.17	0.02	0.08	0.28	0.44										
85	0.25	0.14	0.01	0.00	0.00	0.00	0.01	0.06										
90	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00										
110	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00										
115	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00										
120	0.01	0.01	0.02	0.02	0.01	0.01	0.00	0.00										
125	0.02	0.03	0.05	0.09	0.04	0.03	0.01	0.01										
130	0.06	0.10	0.26	0.33	0.08	0.06	0.04	0.03										
135	0.26	0.36	0.49	0.55	0.15	0.12	0.08	0.07										
140	0.48	0.57	0.71	0.80	0.26	0.20	0.14	0.12										
145	0.70	0.84	1.09	1.22	0.39	0.31	0.23	0.21										
150	1.08	1.26	1.44	1.65	0.53	0.44	0.35	0.31										
155	1.54	1.72	1.80	2.01	0.68	0.57	0.48	0.45										
160	1.95	2.06	2.05	2.24	0.93	0.76	0.62	0.59										
165	2.24	2.27	2.11	2.25	1.21	1.05	0.85	0.79										
170	2.33	2.25	2.00	2.07	1.41	1.26	1.10	1.08										
175	2.22	2.06	1.77	1.76	1.66	1.47	1.27	1.27										
180	1.95	1.76	1.49	1.46	1.96	1.76	1.50	1.46										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-03-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: