


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.0V I:0.2770A P:33.20W PF:0.9970 Freq:50.00Hz Lamp Flux:3025.58x1 lm		
NAME: 4FT 22代	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 110.53 lm/W			
MODEL		I _{max} (cd)	1272	S/MH(C0/180)	1.29
NOMINAL POWER(W)	40W	LOR(%)	121.3	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	3669.6	η UP,DN(C0-180)	0.1,63.6
NOMINAL FLUX(lm)	3025.58	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.2,57.3
LAMPS INSIDE	1	η up(%)	0.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	120.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

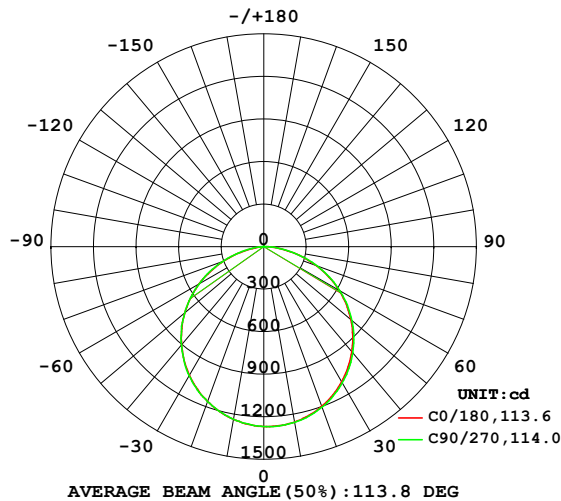

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

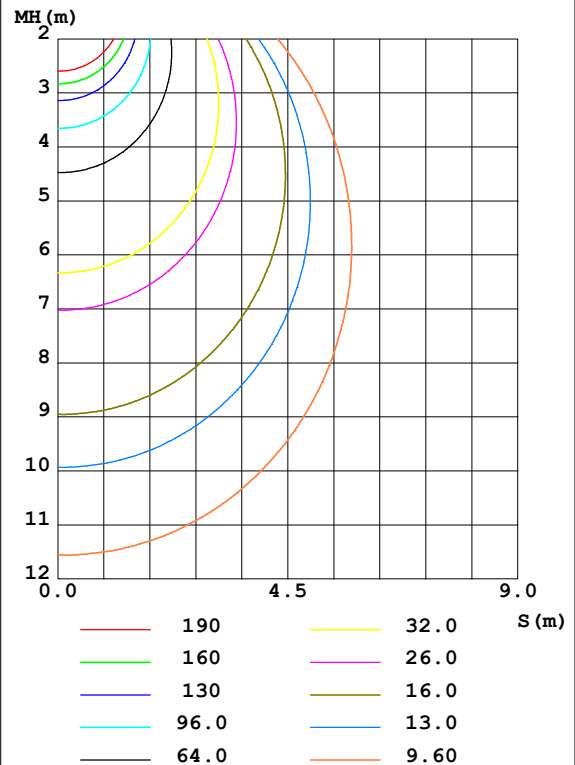

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1255	1264	1258	1244	1236	1227	1236	1251	0- 10	120.0	120.0	3.27,3.97
20	1198	1214	1203	1177	1162	1142	1162	1190	10- 20	344.0	464.0	12.6,15.3
30	1100	1123	1108	1072	1048	1020	1051	1090	20- 30	522.4	986.4	26.9,32.6
40	966.6	994.8	976.8	932.3	902.3	868.1	903.6	958.7	30- 40	632.9	1619	44.1,53.5
50	803.1	834.2	812.5	763.6	727.4	691.7	728.0	788.3	40- 50	660.8	2280	62.1,75.4
60	612.3	645.6	618.7	567.6	526.7	495.6	528.2	591.2	50- 60	602.1	2882	78.5,95.3
70	396.1	433.3	401.0	350.6	303.2	279.9	310.8	372.6	60- 70	461.2	3343	91.1,111
80	170.8	205.7	175.4	125.6	81.17	73.80	98.44	147.5	70- 80	257.2	3601	98.1,119
90	1.447	14.26	9.811	0.8279	0.2636	1.181	1.471	4.747	80- 90	58.43	3659	99.7,121
100	0.8221	2.208	0.4240	1.202	0.3669	1.699	1.982	4.235	90-100	1.926	3661	99.8,121
110	0.9107	1.477	0.6480	1.869	0.5132	2.410	1.984	3.171	100-110	1.718	3663	99.8,121
120	1.055	0.8658	0.8675	2.645	0.7361	3.240	1.926	1.879	110-120	1.608	3664	99.9,121
130	1.215	1.085	1.099	2.285	0.9375	4.019	1.839	1.443	120-130	1.536	3666	99.9,121
140	1.376	1.269	1.316	1.668	1.127	3.273	1.328	1.551	130-140	1.304	3667	99.9,121
150	1.546	1.476	1.387	1.597	1.436	2.320	1.473	1.800	140-150	1.005	3668	100,121
160	1.735	1.676	1.608	1.732	1.695	1.946	1.794	1.809	150-160	0.7802	3669	100,121
170	1.874	1.818	1.760	1.858	1.863	1.929	1.835	1.980	160-170	0.5117	3669	100,121
180	1.843	2.643	1.794	1.810	1.850	1.811	1.767	1.822	170-180	0.1802	3670	100,121
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.0V I:0.2770A P:33.20W PF:0.9970 Freq:50.00Hz Lamp Flux:3025.58x1 lm		
NAME: 4FT 22代	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

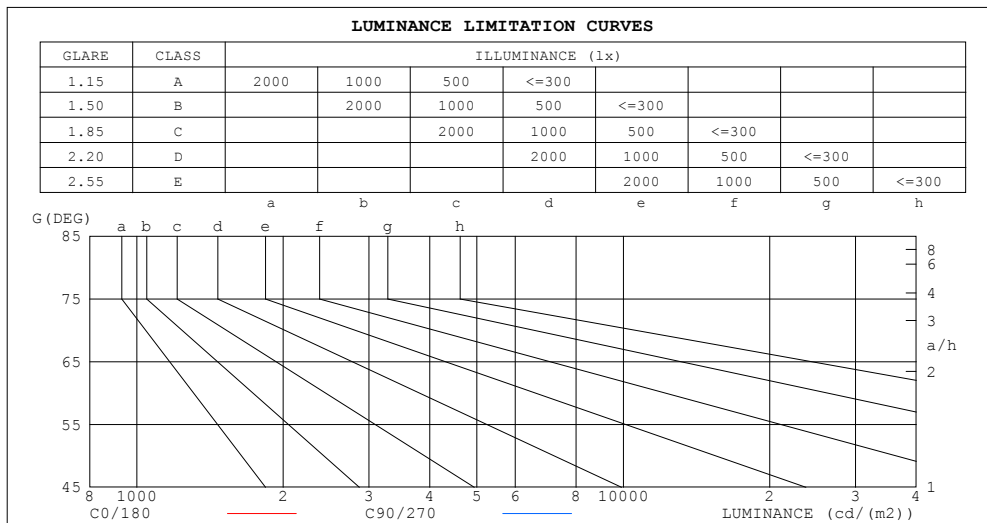

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	78387	88494
80	99349	100357
75	110468	110418
70	117015	116493
65	121333	120453
60	123721	122945
55	125252	124553
50	126240	125585
45	126888	126303


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.0V I:0.2770A P:33.20W PF:0.9970 Freq:50.00Hz Lamp Flux:3025.58x1 lm		
NAME: 4FT 22代	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.44	1.44	1.44	1.41	1.41	1.41	1.35	1.35	1.35	1.29	1.29	1.29	1.23	1.23	1.23	1.21
1.0	1.26	1.21	1.16	1.23	1.19	1.14	1.18	1.14	1.11	1.13	1.10	1.07	1.09	1.06	1.04	1.01
2.0	1.10	1.01	.94	1.07	.90	.93	1.03	.97	.91	.99	.94	.89	.95	.91	.87	.84
3.0	.96	.86	.78	.94	.85	.77	.91	.83	.76	.87	.80	.75	.84	.78	.73	.71
4.0	.85	.74	.66	.83	.73	.66	.80	.72	.65	.77	.70	.64	.75	.68	.63	.60
5.0	.76	.65	.57	.75	.64	.56	.72	.63	.56	.69	.61	.55	.67	.60	.55	.52
6.0	.68	.57	.49	.67	.57	.49	.65	.56	.49	.63	.55	.48	.61	.54	.48	.45
7.0	.62	.51	.44	.61	.51	.43	.59	.50	.43	.57	.49	.43	.55	.48	.42	.40
8.0	.56	.46	.39	.56	.46	.39	.54	.45	.38	.52	.44	.38	.51	.43	.38	.36
9.0	.52	.42	.35	.51	.41	.35	.50	.41	.35	.48	.40	.34	.47	.40	.34	.32
10.0	.48	.38	.32	.47	.38	.32	.46	.37	.31	.45	.37	.31	.44	.36	.31	.29

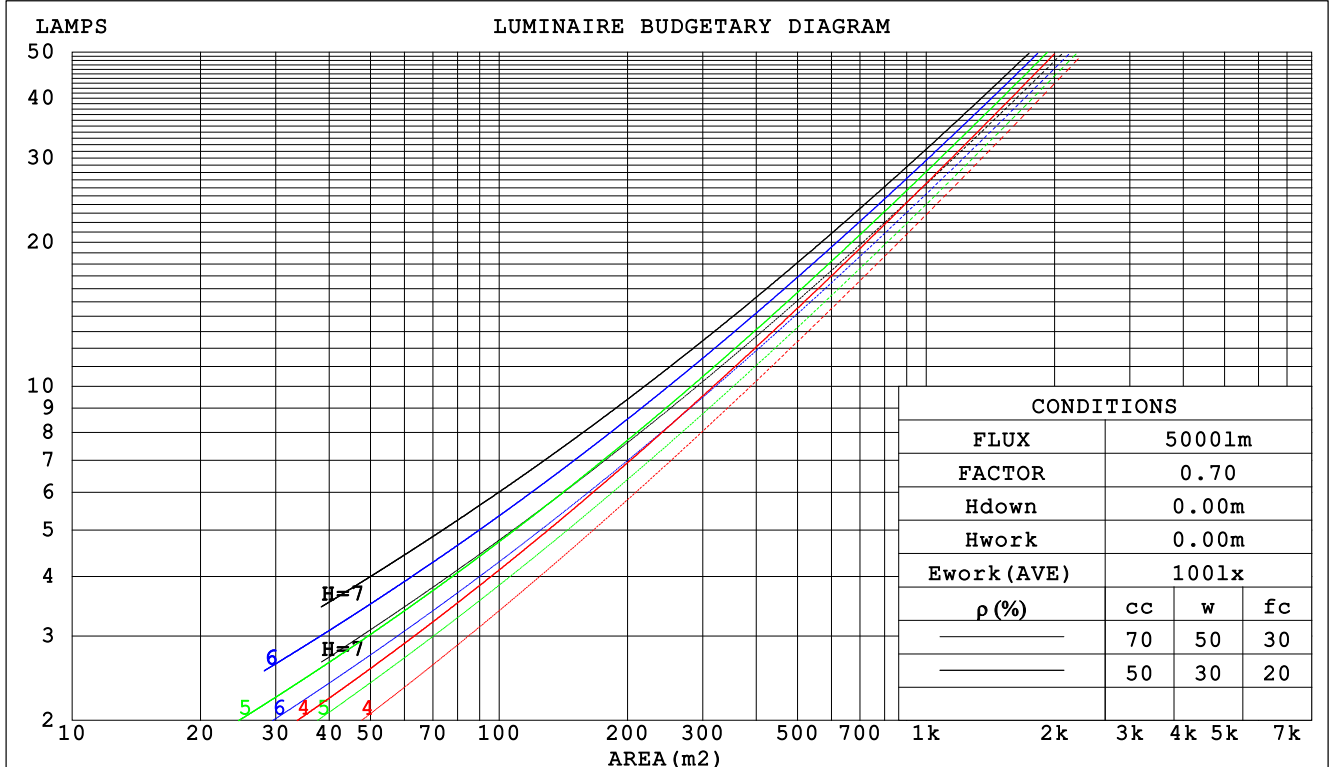

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.0V I:0.2770A P:33.20W PF:0.9970 Freq:50.00Hz Lamp Flux:3025.58x1 lm					
NAME: 4FT 22代			TYPE:3500K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.373	.212	.067	.365	.208	.066	.348	.200	.064	.334	.192	.062	.320	.185	.060		
2.0	.353	.194	.059	.346	.190	.059	.331	.184	.057	.318	.178	.056	.306	.173	.055		
3.0	.328	.174	.052	.321	.172	.052	.308	.167	.051	.296	.162	.050	.285	.158	.049		
4.0	.303	.157	.046	.297	.155	.046	.285	.151	.045	.275	.148	.045	.265	.144	.044		
5.0	.280	.143	.041	.275	.141	.041	.264	.138	.041	.255	.135	.040	.246	.132	.040		
6.0	.260	.130	.037	.255	.129	.037	.246	.126	.037	.238	.123	.036	.230	.121	.036		
7.0	.242	.119	.034	.237	.118	.034	.229	.116	.033	.222	.114	.033	.215	.112	.033		
8.0	.226	.110	.031	.222	.109	.031	.215	.107	.031	.208	.105	.030	.202	.104	.030		
9.0	.211	.102	.029	.208	.101	.028	.202	.100	.028	.196	.098	.028	.190	.096	.028		
10.0	.199	.095	.026	.196	.095	.026	.190	.093	.026	.184	.092	.026	.179	.090	.026		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.234	.234	.234	.200	.200	.200	.136	.136	.136	.078	.078	.078	.025	.025	.025	
1.0	.221	.192	.166	.189	.165	.143	.129	.113	.099	.075	.066	.057	.024	.021	.019	
2.0	.212	.163	.122	.181	.140	.105	.124	.097	.073	.072	.056	.043	.023	.018	.014	
3.0	.202	.141	.093	.173	.122	.080	.119	.085	.056	.069	.049	.033	.022	.016	.011	
4.0	.193	.125	.073	.166	.108	.064	.114	.075	.045	.066	.044	.027	.021	.014	.009	
5.0	.184	.113	.060	.158	.097	.052	.109	.068	.037	.063	.040	.022	.020	.013	.007	
6.0	.175	.102	.050	.151	.089	.044	.104	.062	.031	.060	.037	.018	.019	.012	.006	
7.0	.167	.094	.043	.144	.082	.037	.099	.057	.027	.058	.034	.016	.019	.011	.005	
8.0	.159	.087	.038	.137	.076	.033	.095	.053	.023	.055	.031	.014	.018	.010	.005	
9.0	.152	.081	.033	.131	.070	.029	.091	.049	.021	.053	.029	.012	.017	.010	.004	
10.0	.145	.076	.030	.125	.066	.026	.087	.046	.019	.051	.027	.011	.016	.009	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.0V I:0.2770A P:33.20W PF:0.9970 Freq:50.00Hz Lamp Flux:3025.58x1 lm										
NAME: 4FT 22代						TYPE:3500K			WEIGHT:	
SPEC.:						DIM.:			SERIAL No.:	
MFR.: EVERFINE						SUR.:			Shielding Angle:	
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	30.1	31.6	30.3	31.8	32.0	30.0	31.5	30.3	31.8	32.0
3H	31.7	33.1	32.0	33.3	33.6	31.7	33.1	32.0	33.3	33.6
4H	32.4	33.7	32.7	34.0	34.2	32.4	33.7	32.7	33.9	34.2
6H	32.9	34.1	33.2	34.4	34.7	32.8	34.1	33.2	34.4	34.7
8H	33.0	34.2	33.3	34.5	34.8	33.0	34.2	33.3	34.5	34.8
12H	33.1	34.2	33.4	34.5	34.9	33.1	34.3	33.5	34.6	34.9
4H 2H	30.8	32.1	31.1	32.4	32.6	30.7	32.1	31.1	32.3	32.6
3H	32.6	33.8	33.0	34.1	34.4	32.6	33.8	32.9	34.1	34.4
4H	33.4	34.5	33.8	34.8	35.2	33.4	34.5	33.8	34.8	35.1
6H	34.0	35.0	34.4	35.3	35.7	34.0	35.0	34.4	35.3	35.7
8H	34.2	35.1	34.7	35.5	35.9	34.2	35.1	34.7	35.5	35.9
12H	34.4	35.2	34.8	35.6	36.0	34.4	35.2	34.8	35.6	36.0
8H 4H	33.8	34.7	34.2	35.0	35.4	33.8	34.6	34.2	35.0	35.4
6H	34.6	35.3	35.0	35.7	36.1	34.6	35.3	35.0	35.7	36.1
8H	34.9	35.5	35.3	35.9	36.4	34.9	35.5	35.3	36.0	36.4
12H	35.1	35.6	35.6	36.1	36.6	35.1	35.7	35.6	36.1	36.6
12H 4H	33.8	34.6	34.2	35.0	35.4	33.8	34.6	34.2	35.0	35.4
6H	34.7	35.3	35.1	35.7	36.2	34.7	35.3	35.1	35.7	36.2
8H	35.0	35.6	35.5	36.0	36.5	35.0	35.6	35.5	36.0	36.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				

CIE Pub.117 Corrected 3026 lm Total Lamp Luminous Flux.(8log(F/F0) = 3.8)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.0V I:0.2770A P:33.20W PF:0.9970 Freq:50.00Hz Lamp Flux:3025.58x1 lm		
NAME: 4FT 22代	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	69	55	47	68	55	47	67	54	46	39
0.80	82	67	58	80	67	58	78	66	58	49
1.00	92	78	69	90	78	69	88	79	68	60
1.25	101	88	79	99	87	79	95	85	78	69
1.50	107	95	86	105	93	85	101	91	84	75
2.00	115	105	97	113	103	96	108	100	94	84
2.50	120	110	103	117	109	102	113	105	100	89
3.00	124	116	109	121	114	108	116	110	105	95
4.00	129	122	116	126	120	115	121	116	111	100
5.00	132	126	121	129	124	119	123	119	115	104
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-01-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.0V I:0.2770A P:33.20W PF:0.9970 Freq:50.00Hz Lamp Flux:3025.58x1 lm		
NAME: 4FT 22代	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

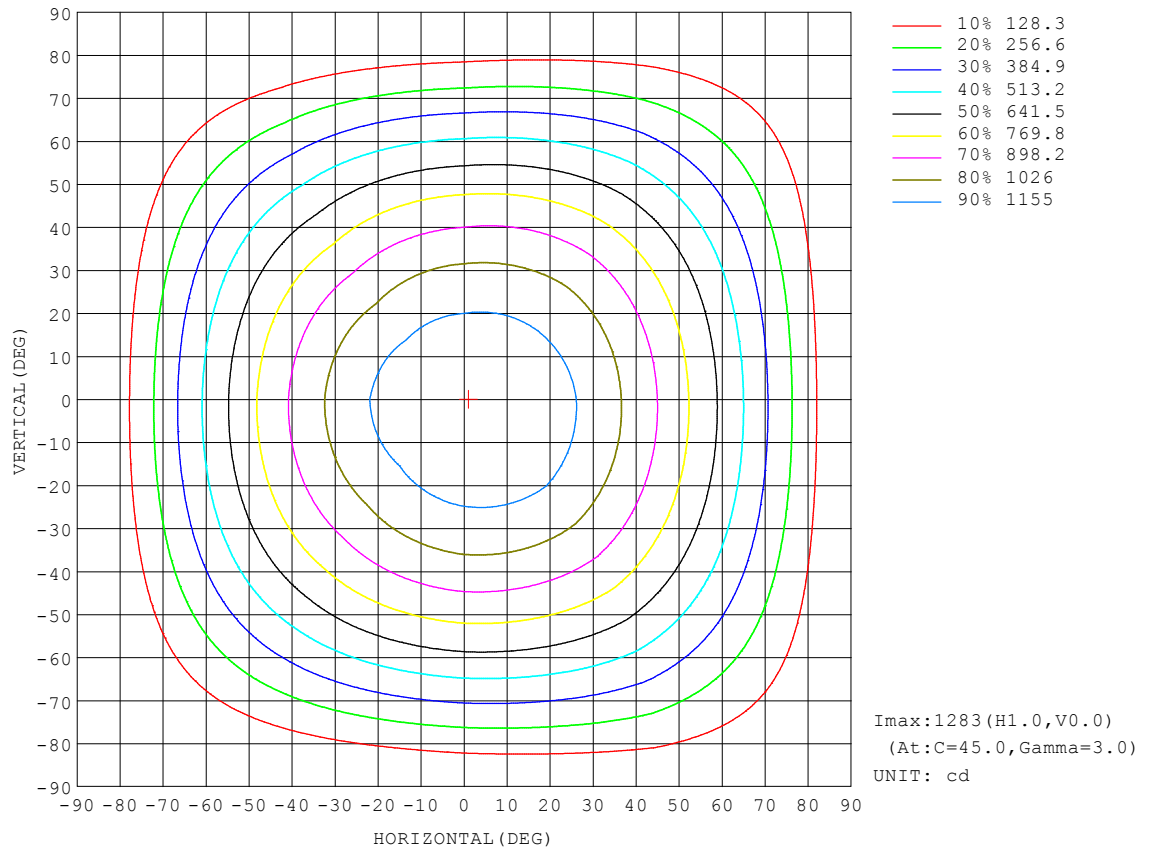


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.0V I:0.2770A P:33.20W PF:0.9970 Freq:50.00Hz Lamp Flux:3025.58x1 lm		
NAME: 4FT 22代	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

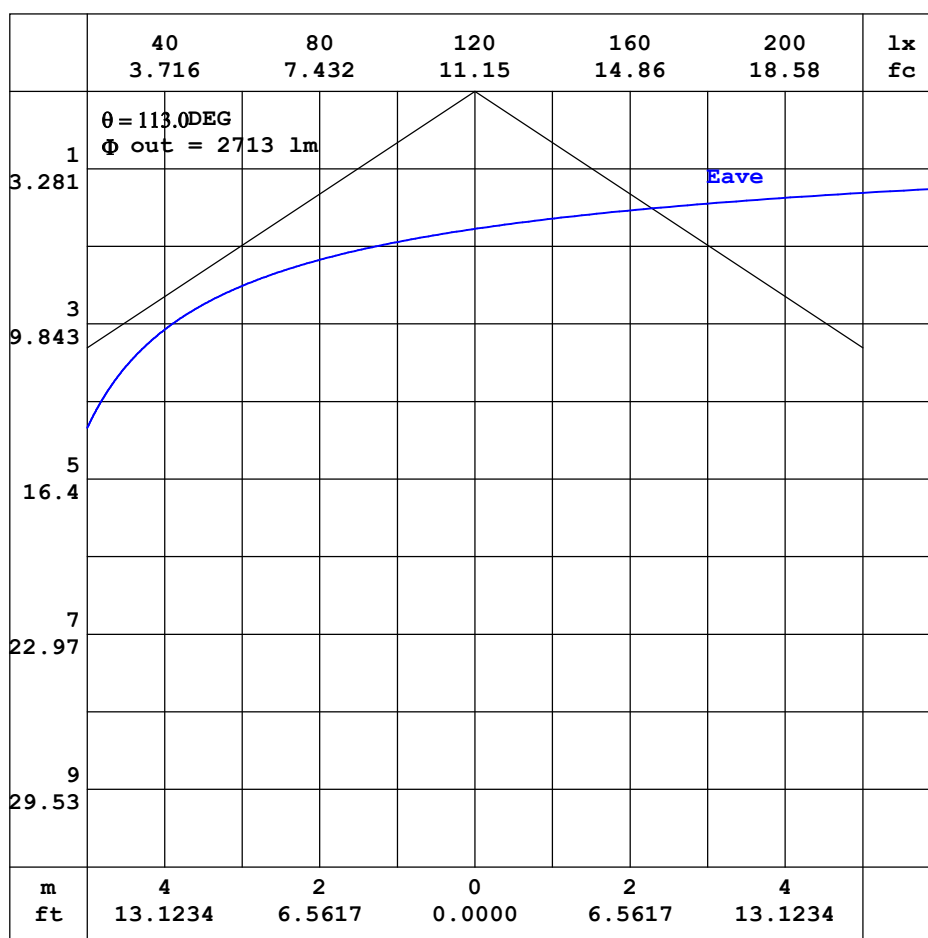


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-01-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.0V I:0.2770A P:33.20W PF:0.9970 Freq:50.00Hz Lamp Flux:3025.58x1 lm		
NAME: 4FT 22代	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

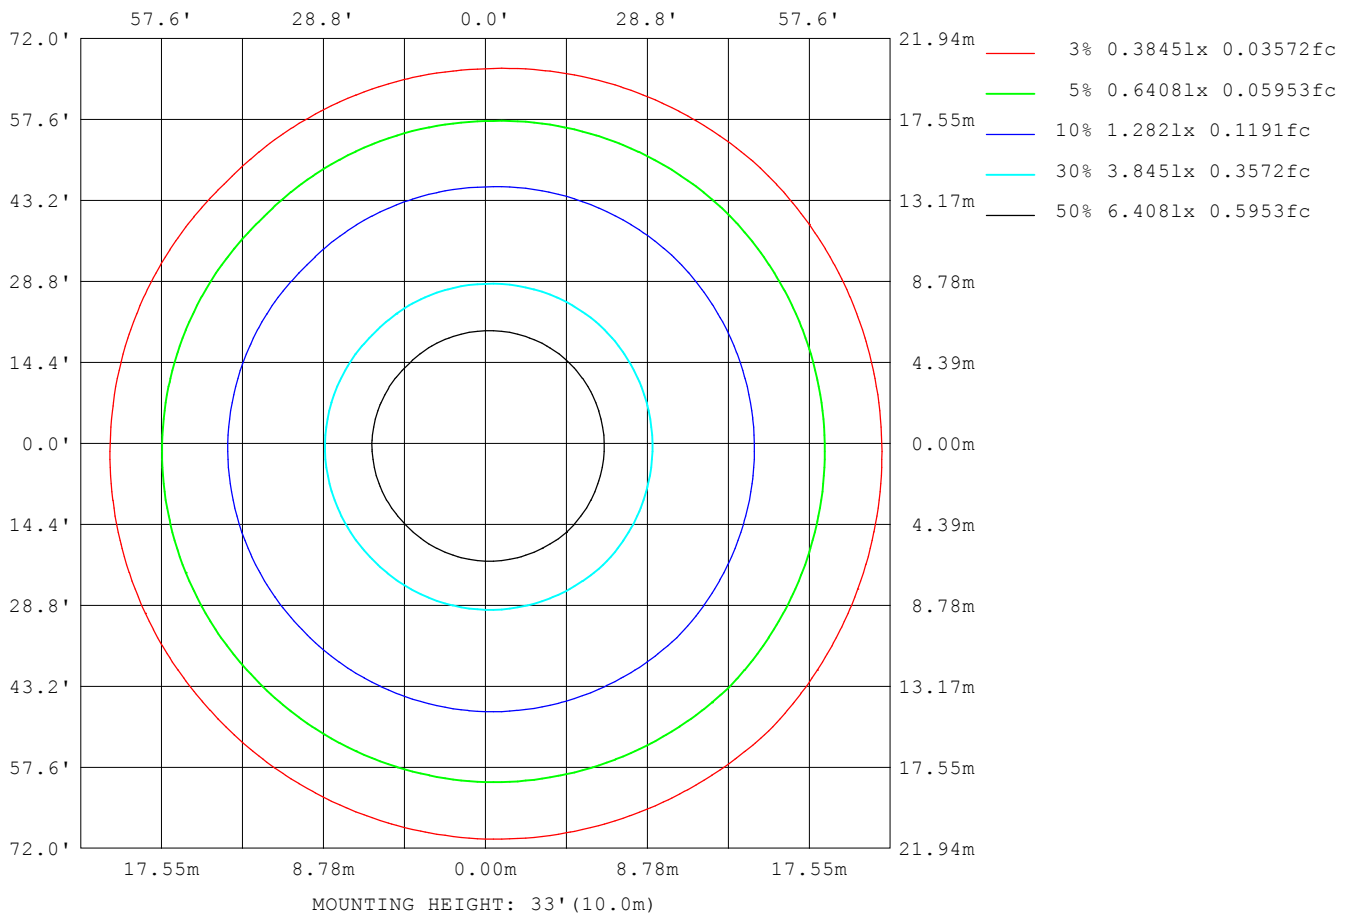

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.0V I:0.2770A P:33.20W PF:0.9970 Freq:50.00Hz Lamp Flux:3025.58x1 lm		
NAME: 4FT 22代	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	109369
L_0~180 (75) av	91468
L_0~180 (85) av	40582
L_90~270 (65) av	110386
L_90~270 (75) av	94385
L_90~270 (85) av	58375
L_45 (65) av	111117
L_45 (75) av	95338
L_45 (85) av	53438

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

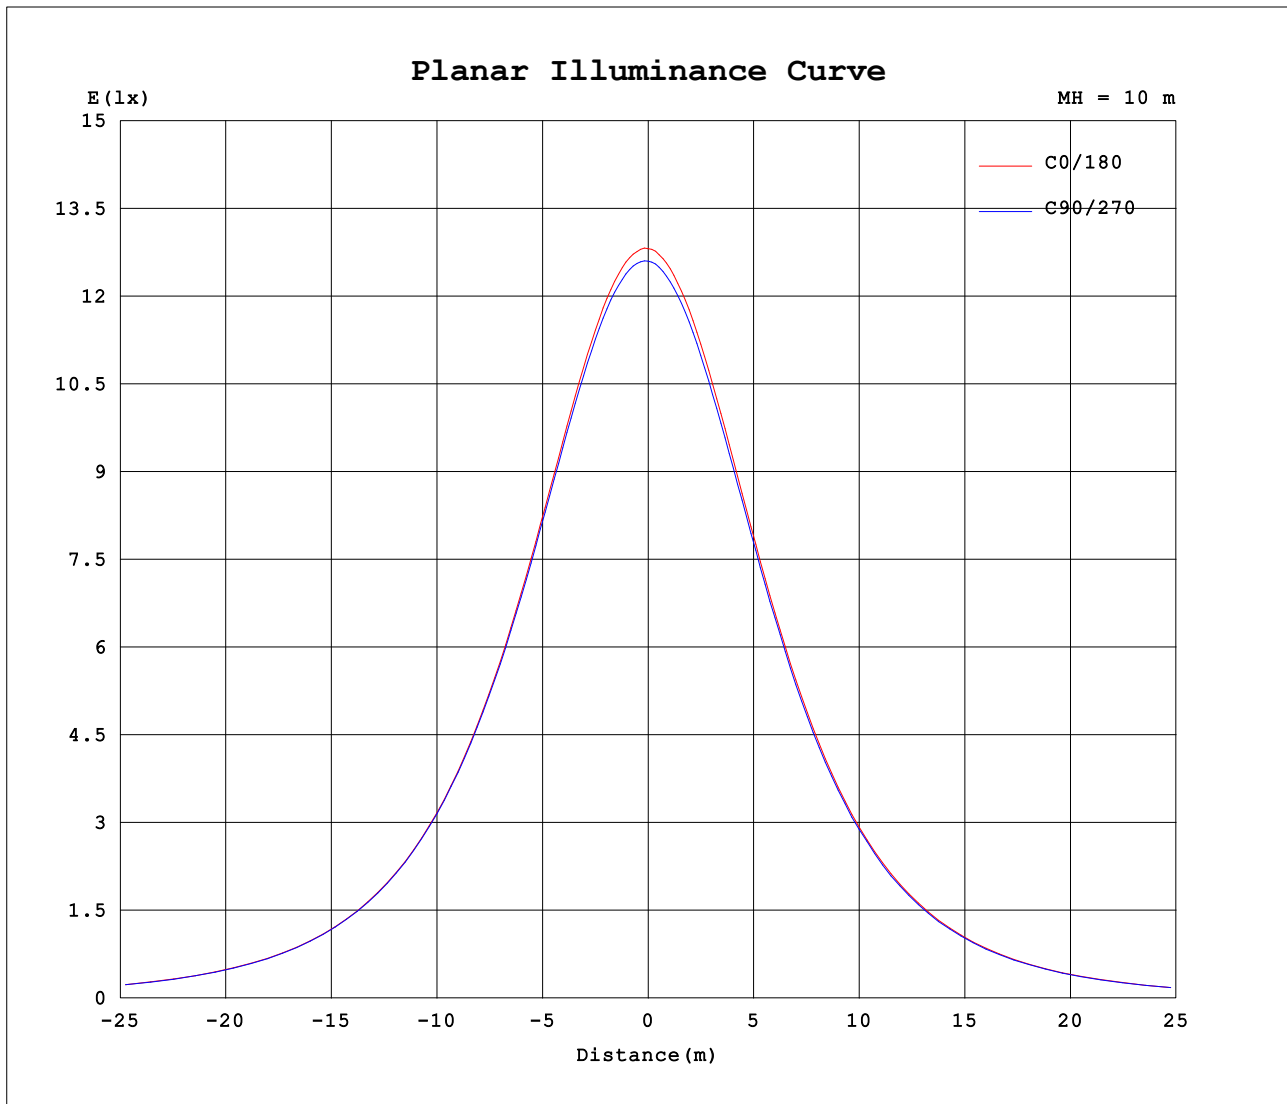

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.0V I:0.2770A P:33.20W PF:0.9970 Freq:50.00Hz Lamp Flux:3025.58x1 lm		
NAME: 4FT 22代	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1268	1268	1268	1268	1268	1268	1268	1268										
5	1268	1272	1268	1262	1258	1254	1257	1265										
10	1255	1264	1258	1244	1236	1227	1236	1251										
15	1232	1245	1236	1216	1205	1189	1204	1225										
20	1198	1214	1203	1177	1162	1142	1162	1190										
25	1154	1174	1161	1129	1110	1083	1113	1145										
30	1100	1123	1108	1072	1048	1020	1051	1090										
35	1037	1063	1047	1006	980	949	981	1033										
40	967	995	977	932	902	868	904	959										
45	888	918	899	852	819	780	821	878										
50	803	834	812	764	727	692	728	788										
55	711	743	719	669	630	597	631	694										
60	612	646	619	568	527	496	528	591										
65	508	543	512	461	417	390	421	484										
70	396	433	401	351	303	280	311	373										
75	283	321	288	236	190	172	201	258										
80	171	206	175	126	81.2	73.8	98.4	147										
85	67.6	97.3	77.6	33.2	3.12	3.03	24.1	52.7										
90	1.45	14.3	9.81	0.83	0.26	1.18	1.47	4.75										
95	0.79	2.24	0.36	0.96	0.30	1.41	1.81	4.77										
100	0.82	2.21	0.42	1.20	0.37	1.70	1.98	4.24										
105	0.86	1.96	0.52	1.50	0.43	2.03	2.02	3.72										
110	0.91	1.48	0.65	1.87	0.51	2.41	1.98	3.17										
115	0.99	0.97	0.78	2.27	0.61	2.81	1.95	2.53										
120	1.05	0.87	0.87	2.65	0.74	3.24	1.93	1.88										
125	1.15	0.98	0.99	2.74	0.85	3.68	1.92	1.49										
130	1.22	1.09	1.10	2.28	0.94	4.02	1.84	1.44										
135	1.29	1.19	1.21	1.89	1.04	3.92	1.48	1.49										
140	1.38	1.27	1.32	1.67	1.13	3.27	1.33	1.55										
145	1.46	1.36	1.40	1.59	1.23	2.68	1.34	1.63										
150	1.55	1.48	1.39	1.60	1.44	2.32	1.47	1.80										
155	1.63	1.58	1.49	1.65	1.56	2.12	1.66	1.83										
160	1.74	1.68	1.61	1.73	1.69	1.95	1.79	1.81										
165	1.82	1.76	1.71	1.80	1.81	1.90	1.83	1.87										
170	1.87	1.82	1.76	1.86	1.86	1.93	1.84	1.98										
175	1.89	2.19	1.79	1.85	1.86	1.86	1.81	1.95										
180	1.84	2.64	1.79	1.81	1.85	1.81	1.77	1.82										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: