


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.0V I:0.6300A P:74.60W PF:0.9950 Freq:60.00Hz Lamp Flux:7635.96x1 lm		
NAME: 22代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.2*0.07	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 102.36 lm/W			
MODEL		Imax(cd)	2765	S/MH(C0/180)	1.24
NOMINAL POWER(W)	75W	LOR(%)	100.0	S/MH(C90/270)	1.22
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	7636.0	η UP,DN(C0-180)	0.1,51.9
NOMINAL FLUX(lm)	7635.96	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,47.9
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120	η down(%)	99.8	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

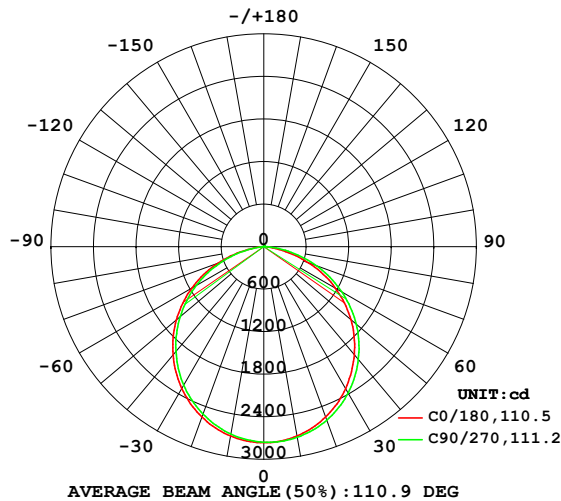

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

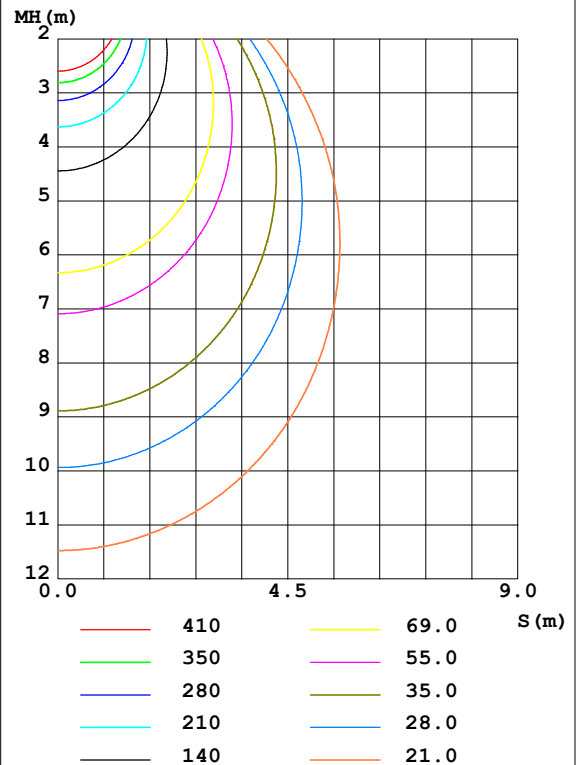

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-10-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2711	2727	2730	2728	2711	2691	2683	2679	0- 10	260.9	260.9	3.42,3.42
20	2557	2592	2603	2597	2556	2522	2512	2505	10- 20	745.9	1007	13.2,13.2
30	2310	2364	2382	2375	2313	2267	2258	2245	20- 30	1127	2134	27.9,27.9
40	1987	2056	2077	2070	1991	1938	1929	1914	30- 40	1353	3487	45.7,45.7
50	1608	1681	1705	1700	1610	1551	1538	1524	40- 50	1397	4884	64,64
60	1165	1250	1267	1271	1174	1113	1100	1083	50- 60	1252	6136	80.4,80.4
70	675.5	774.9	793.3	798.5	691.2	635.5	629.2	605.0	60- 70	932.7	7069	92.6,92.6
80	176.2	285.2	308.0	305.6	187.4	163.1	182.8	135.9	70- 80	480.0	7549	98.9,98.9
90	0.6318	0.8398	3.834	0.9876	0.1842	0.2566	0.2351	0.2978	80- 90	71.36	7620	99.8,99.8
100	1.377	1.417	1.348	1.265	0.3854	0.4914	0.5356	0.5568	90-100	0.7543	7621	99.8,99.8
110	2.212	2.243	2.191	2.078	0.7051	0.8472	0.9765	0.9320	100-110	1.283	7622	99.8,99.8
120	3.058	3.086	3.046	2.897	1.161	1.353	1.556	1.472	110-120	1.838	7624	99.8,99.8
130	3.864	3.827	3.625	3.706	1.737	1.925	2.217	2.051	120-130	2.283	7627	99.9,99.9
140	4.557	4.503	4.179	4.442	2.389	2.578	2.845	2.709	130-140	2.455	7629	99.9,99.9
150	5.155	5.089	4.855	5.001	3.866	4.129	4.368	4.213	140-150	2.575	7632	99.9,99.9
160	5.700	5.575	5.366	5.452	4.755	4.911	5.154	5.020	150-160	2.267	7634	100,100
170	5.999	5.822	5.701	5.694	5.437	5.507	5.590	5.524	160-170	1.545	7635	100,100
180	5.798	5.742	5.701	5.713	5.798	5.735	5.742	5.725	170-180	0.5452	7636	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-10-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.0V I:0.6300A P:74.60W PF:0.9950 Freq:60.00Hz Lamp Flux:7635.96x1 lm		
NAME: 22代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.2*0.07	Shielding Angle:

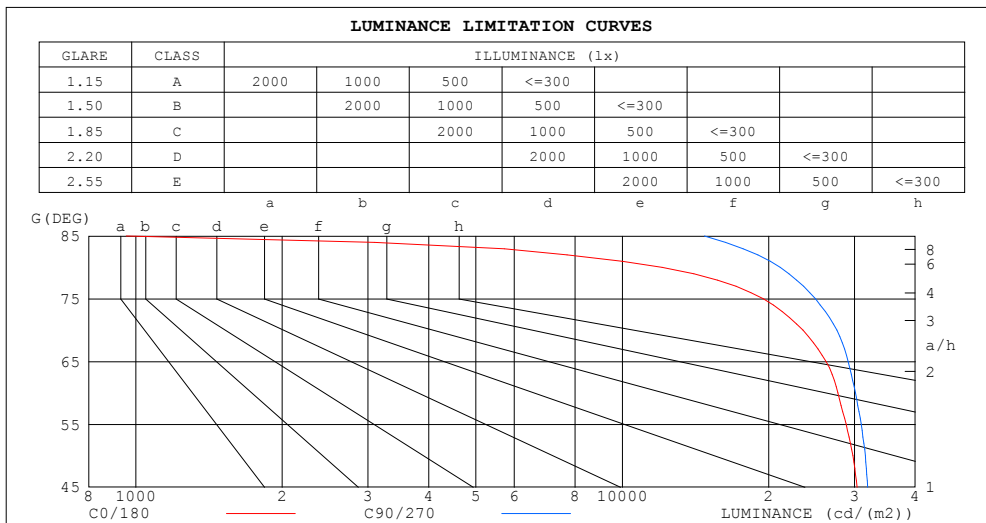

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	956	14742
80	12078	21113
75	19497	24956
70	23513	27614
65	26218	29115
60	27740	30155
55	28845	30975
50	29780	31583
45	30380	31959


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-10-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.0V I:0.6300A P:74.60W PF:0.9950 Freq:60.00Hz Lamp Flux:7635.96x1 lm		
NAME: 22代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.2*0.07	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.00	.97	1.02	.99	.95	.98	.95	.92	.94	.92	.89	.90	.88	.87	.84
2.0	.91	.85	.79	.89	.83	.78	.86	.81	.76	.82	.78	.74	.79	.76	.73	.71
3.0	.80	.72	.66	.79	.71	.65	.76	.69	.64	.73	.67	.63	.70	.66	.62	.60
4.0	.71	.62	.56	.70	.62	.55	.67	.60	.55	.65	.59	.54	.63	.57	.53	.51
5.0	.63	.55	.48	.62	.54	.48	.60	.53	.47	.58	.52	.47	.56	.51	.46	.44
6.0	.57	.48	.42	.56	.48	.42	.54	.47	.41	.53	.46	.41	.51	.45	.40	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.37	.48	.41	.36	.47	.41	.36	.34
8.0	.47	.39	.33	.47	.38	.33	.45	.38	.33	.44	.37	.32	.43	.37	.32	.30
9.0	.43	.35	.30	.43	.35	.30	.42	.34	.29	.41	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.27	.38	.31	.27	.37	.31	.26	.25

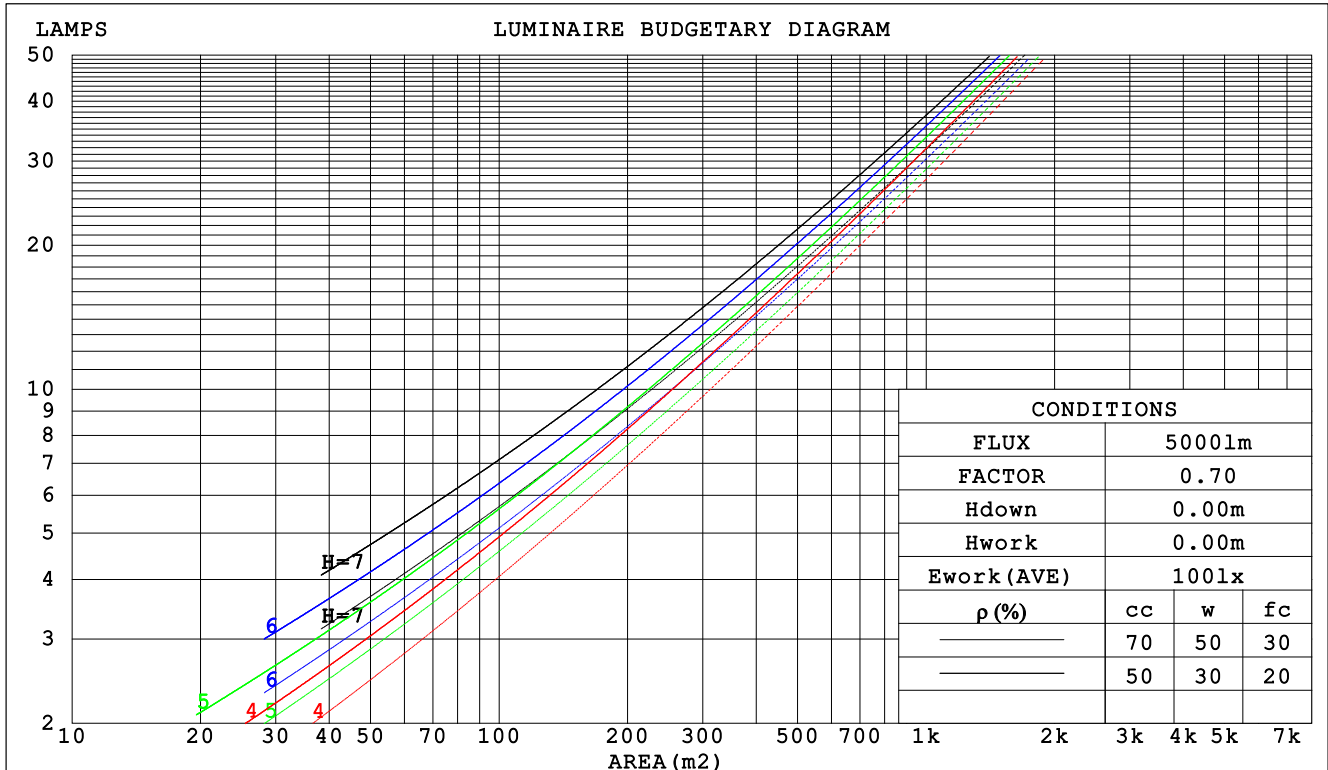

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-10-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.0V I:0.6300A P:74.60W PF:0.9950 Freq:60.00Hz Lamp Flux:7635.96x1 lm					
NAME: 22代			TYPE:4000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:1.2*0.07		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.296	.168	.053	.289	.165	.052	.276	.158	.050	.263	.152	.049	.252	.146	.047		
2.0	.283	.155	.048	.277	.153	.047	.265	.148	.046	.255	.143	.045	.245	.138	.044		
3.0	.264	.141	.042	.259	.139	.042	.248	.135	.041	.239	.131	.040	.230	.127	.039		
4.0	.245	.127	.037	.240	.126	.037	.231	.123	.037	.222	.119	.036	.215	.117	.036		
5.0	.227	.116	.034	.223	.114	.033	.215	.112	.033	.207	.109	.033	.200	.107	.032		
6.0	.211	.106	.030	.207	.105	.030	.200	.103	.030	.193	.100	.030	.187	.098	.029		
7.0	.197	.097	.028	.194	.096	.027	.187	.095	.027	.181	.093	.027	.175	.091	.027		
8.0	.184	.090	.025	.181	.089	.025	.175	.088	.025	.170	.086	.025	.165	.085	.025		
9.0	.173	.084	.023	.170	.083	.023	.165	.081	.023	.160	.080	.023	.155	.079	.023		
10.0	.163	.078	.022	.160	.077	.022	.155	.076	.021	.151	.075	.021	.147	.074	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.181	.158	.137	.155	.135	.118	.106	.093	.082	.061	.054	.047	.020	.017	.015	
2.0	.173	.134	.101	.148	.115	.087	.101	.080	.061	.058	.046	.036	.019	.015	.012	
3.0	.165	.116	.077	.141	.100	.066	.097	.069	.047	.056	.041	.027	.018	.013	.009	
4.0	.157	.102	.061	.135	.089	.053	.093	.062	.037	.054	.036	.022	.017	.012	.007	
5.0	.150	.092	.049	.129	.080	.043	.089	.056	.030	.051	.033	.018	.017	.011	.006	
6.0	.143	.084	.041	.123	.072	.036	.085	.051	.025	.049	.030	.015	.016	.010	.005	
7.0	.136	.077	.035	.117	.067	.031	.081	.047	.022	.047	.027	.013	.015	.009	.004	
8.0	.130	.071	.030	.112	.062	.027	.077	.043	.019	.045	.026	.011	.015	.008	.004	
9.0	.124	.066	.027	.107	.057	.024	.074	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.118	.062	.024	.102	.054	.021	.071	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-10-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.0V I:0.6300A P:74.60W PF:0.9950 Freq:60.00Hz Lamp Flux:7635.96x1 lm											
NAME: 22代						TYPE:4000K			WEIGHT:		
SPEC.:						DIM.:			SERIAL No.:		
MFR.: EVERFINE						SUR.:1.2*0.07			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	2H	24.7	26.2	25.0	26.4	26.6	25.0	26.5	25.3	26.7	26.9
	3H	26.1	27.5	26.4	27.7	28.0	26.6	27.9	26.9	28.2	28.4
	4H	26.6	27.9	26.9	28.1	28.4	27.1	28.5	27.5	28.7	29.0
	6H	26.8	28.0	27.1	28.3	28.5	27.5	28.8	27.9	29.0	29.3
	8H	26.7	27.9	27.1	28.2	28.5	27.6	28.8	28.0	29.1	29.4
	12H	26.7	27.8	27.1	28.1	28.5	27.7	28.8	28.0	29.1	29.4
4H	2H	25.4	26.7	25.7	27.0	27.2	25.6	26.9	25.9	27.2	27.4
	3H	27.0	28.1	27.3	28.4	28.7	27.3	28.5	27.7	28.8	29.1
	4H	27.5	28.6	27.9	28.9	29.2	28.0	29.1	28.4	29.4	29.8
	6H	27.8	28.7	28.2	29.1	29.5	28.5	29.5	28.9	29.8	30.2
	8H	27.8	28.7	28.2	29.1	29.4	28.7	29.5	29.1	29.9	30.3
	12H	27.8	28.6	28.2	29.0	29.4	28.7	29.5	29.2	29.9	30.3
8H	4H	27.8	28.7	28.2	29.0	29.4	28.3	29.1	28.7	29.5	29.9
	6H	28.2	28.9	28.7	29.3	29.8	28.9	29.6	29.3	30.0	30.4
	8H	28.3	28.9	28.7	29.3	29.8	29.1	29.7	29.5	30.1	30.6
	12H	28.2	28.8	28.7	29.2	29.7	29.2	29.7	29.7	30.2	30.7
12H	4H	27.8	28.6	28.2	29.0	29.4	28.3	29.1	28.7	29.4	29.8
	6H	28.3	28.9	28.7	29.3	29.8	28.9	29.5	29.4	30.0	30.4
	8H	28.3	28.9	28.8	29.3	29.8	29.1	29.7	29.6	30.1	30.6
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2					
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.3					

CIE Pub.117 Corrected 7636 lm Total Lamp Luminous Flux.(8log(F/F0) = 7.1)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-10-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.0V I:0.6300A P:74.60W PF:0.9950 Freq:60.00Hz Lamp Flux:7635.96x1 lm		
NAME: 22代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.2*0.07	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	47	40	57	46	39	56	46	39	33
0.80	68	57	49	67	56	49	65	55	49	42
1.00	77	66	59	75	65	58	73	66	58	51
1.25	84	74	66	82	73	66	80	71	65	58
1.50	89	79	72	87	78	72	84	76	71	63
2.00	96	87	81	94	86	80	90	84	79	71
2.50	100	92	86	97	91	85	94	88	83	75
3.00	103	96	91	101	95	90	97	92	88	79
4.00	107	101	97	104	100	95	100	96	93	84
5.00	109	105	101	107	103	99	102	99	96	87
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-10-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.0V I:0.6300A P:74.60W PF:0.9950 Freq:60.00Hz Lamp Flux:7635.96x1 lm		
NAME: 22代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.2*0.07	Shielding Angle:

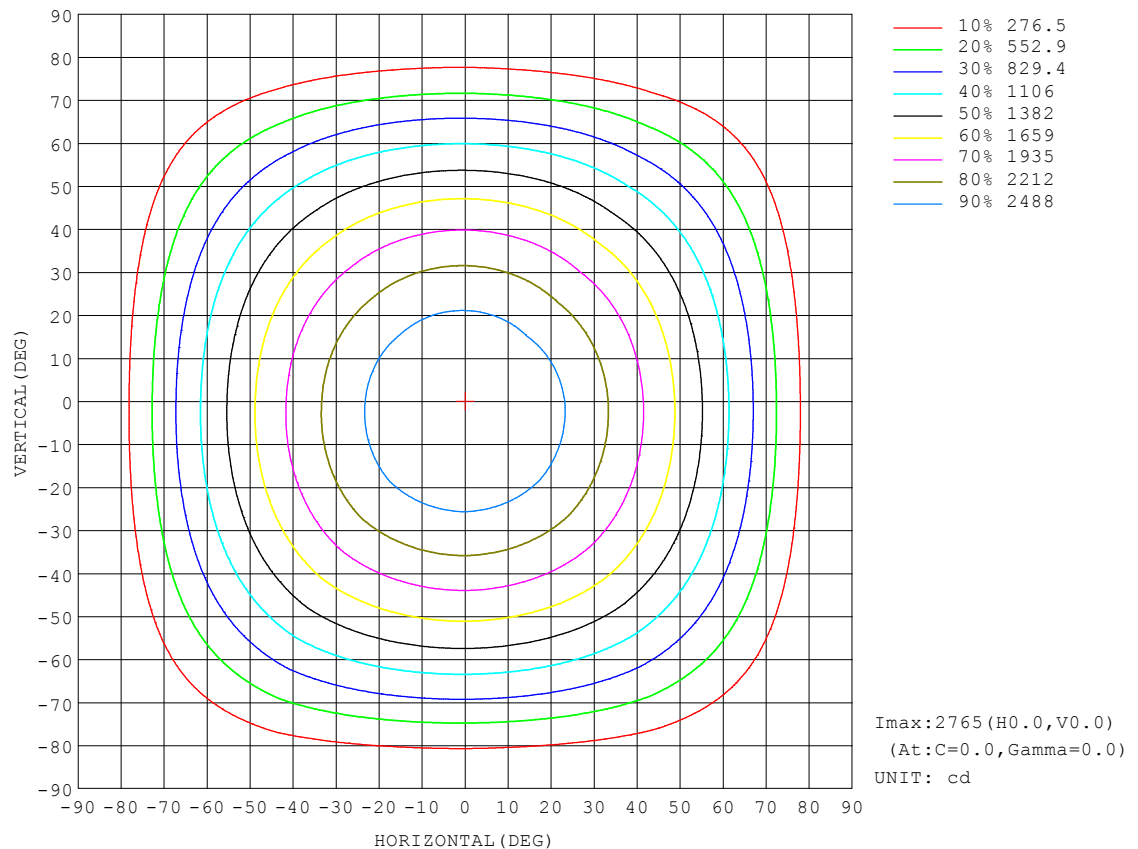


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-10-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:119.0V I:0.6300A P:74.60W PF:0.9950 Freq:60.00Hz Lamp Flux:7635.96x1 lm		
NAME: 22代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.2*0.07	Shielding Angle:

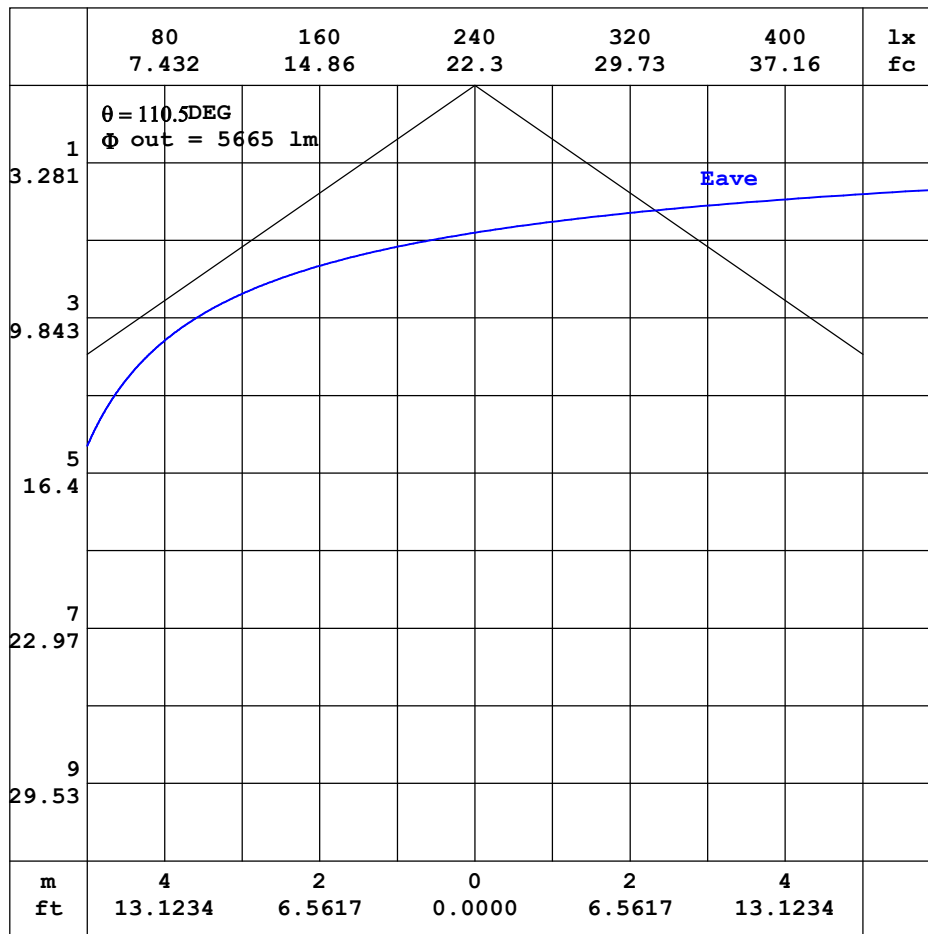


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-10-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.0V I:0.6300A P:74.60W PF:0.9950 Freq:60.00Hz Lamp Flux:7635.96x1 lm		
NAME: 22代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.2*0.07	Shielding Angle:

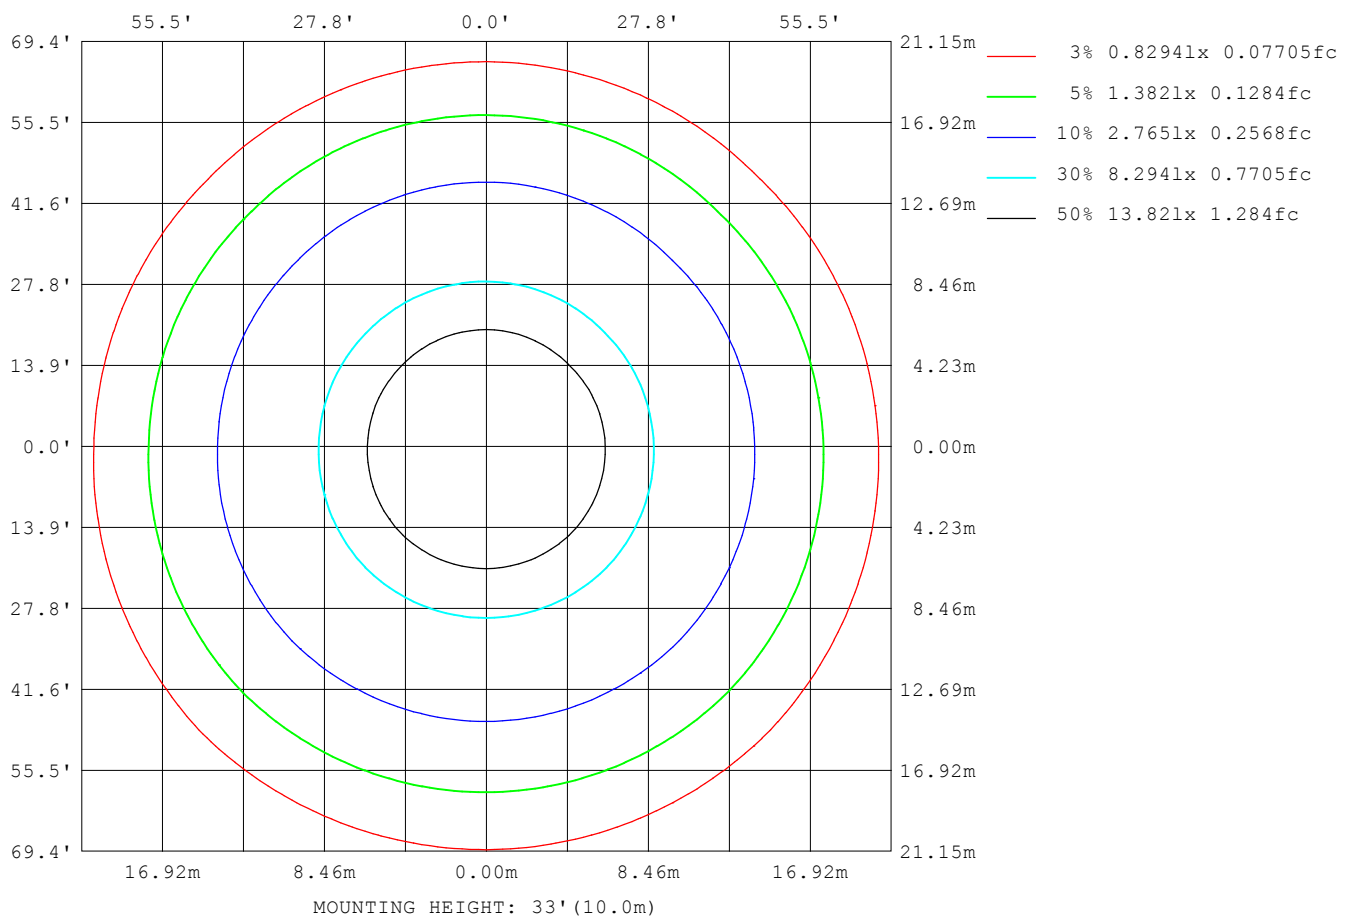

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-10-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.0V I:0.6300A P:74.60W PF:0.9950 Freq:60.00Hz Lamp Flux:7635.96x1 lm		
NAME: 22代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.2*0.07	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	26322
L_0~180 (75) av	19829
L_0~180 (85) av	930
L_90~270 (65) av	26771
L_90~270 (75) av	21551
L_90~270 (85) av	9384
L_45 (65) av	26673
L_45 (75) av	21102
L_45 (85) av	5250

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-10-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

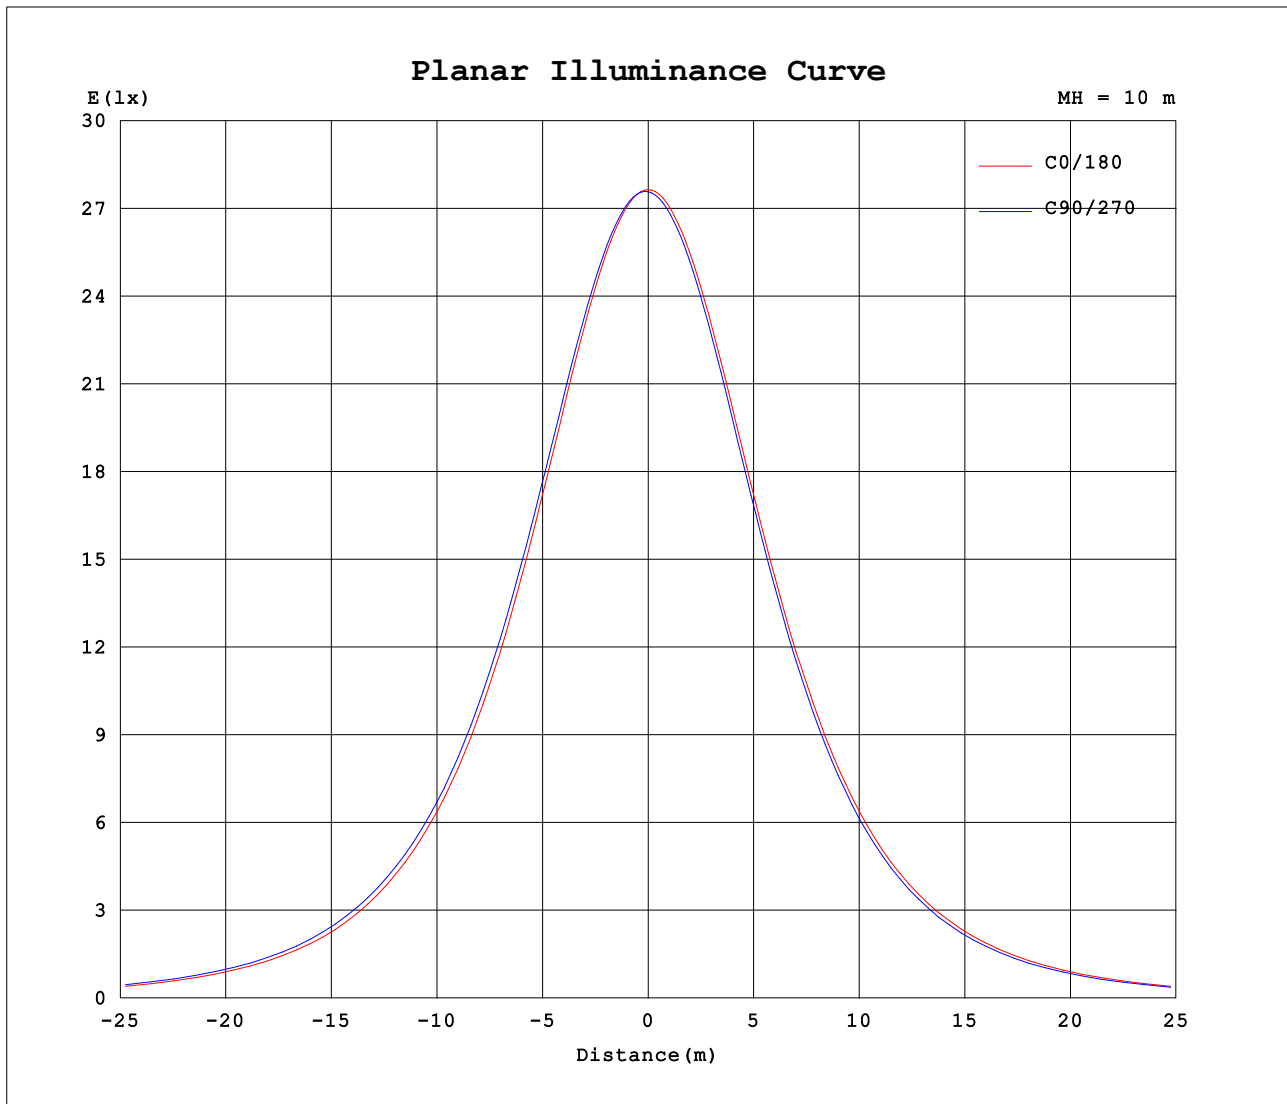

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-10-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.0V I:0.6300A P:74.60W PF:0.9950 Freq:60.00Hz Lamp Flux:7635.96x1 lm								
NAME: 22代					TYPE:4000K			WEIGHT:
SPEC.:					DIM.:			SERIAL No.:
MFR.: EVERFINE					SUR.:1.2*0.07			Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	2765	2761	2757	2756	2765	2761	2757	2756										
5	2752	2757	2757	2755	2752	2739	2732	2730										
10	2711	2727	2730	2728	2711	2691	2683	2679										
15	2646	2671	2679	2674	2647	2618	2609	2602										
20	2557	2592	2603	2597	2556	2522	2512	2505										
25	2445	2488	2503	2496	2445	2404	2394	2385										
30	2310	2364	2382	2375	2313	2267	2258	2245										
35	2155	2219	2239	2232	2160	2111	2101	2088										
40	1987	2056	2077	2070	1991	1938	1929	1914										
45	1805	1877	1898	1894	1808	1753	1740	1725										
50	1608	1681	1705	1700	1610	1551	1538	1524										
55	1390	1472	1492	1493	1398	1338	1324	1309										
60	1165	1250	1267	1271	1174	1113	1100	1083										
65	931	1017	1034	1040	938	880	867	851										
70	676	775	793	798	691	636	629	605										
75	424	527	543	550	438	394	395	364										
80	176	285	308	306	187	163	183	136										
85	7.00	66.9	108	79.5	6.61	5.08	29.5	2.29										
90	0.63	0.84	3.83	0.99	0.18	0.26	0.24	0.30										
95	1.00	1.03	0.96	0.89	0.27	0.36	0.36	0.42										
100	1.38	1.42	1.35	1.26	0.39	0.49	0.54	0.56										
105	1.79	1.81	1.76	1.67	0.53	0.65	0.75	0.73										
110	2.21	2.24	2.19	2.08	0.71	0.85	0.98	0.93										
115	2.65	2.67	2.61	2.50	0.90	1.07	1.24	1.17										
120	3.06	3.09	3.05	2.90	1.16	1.35	1.56	1.47										
125	3.48	3.45	3.46	3.32	1.45	1.65	1.90	1.77										
130	3.86	3.83	3.63	3.71	1.74	1.92	2.22	2.05										
135	4.23	4.19	3.84	4.06	2.03	2.21	2.50	2.34										
140	4.56	4.50	4.18	4.44	2.39	2.58	2.84	2.71										
145	4.87	4.78	4.55	4.72	3.36	3.65	3.89	3.78										
150	5.16	5.09	4.86	5.00	3.87	4.13	4.37	4.21										
155	5.44	5.33	5.12	5.23	4.30	4.54	4.79	4.62										
160	5.70	5.58	5.37	5.45	4.76	4.91	5.15	5.02										
165	5.86	5.73	5.57	5.61	5.17	5.24	5.41	5.31										
170	6.00	5.82	5.70	5.69	5.44	5.51	5.59	5.52										
175	5.95	5.87	5.74	5.73	5.65	5.66	5.66	5.64										
180	5.80	5.74	5.70	5.71	5.80	5.73	5.74	5.73										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-10-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: