


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.0V I:0.1630A P:19.70W PF:0.9970 Freq:60.00Hz Lamp Flux:2029.48x1 lm		
NAME: 22代 2FT	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 103.02 lm/W			
MODEL		I _{max} (cd)	730.1	S/MH(C0/180)	1.30
NOMINAL POWER(W)	20W	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	2029.5	η UP,DN(C0-180)	0.1,51.5
NOMINAL FLUX(lm)	2029.48	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,48.3
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	99.8	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

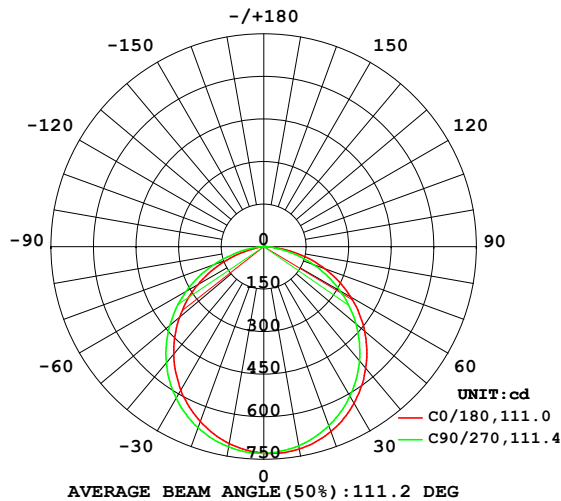

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

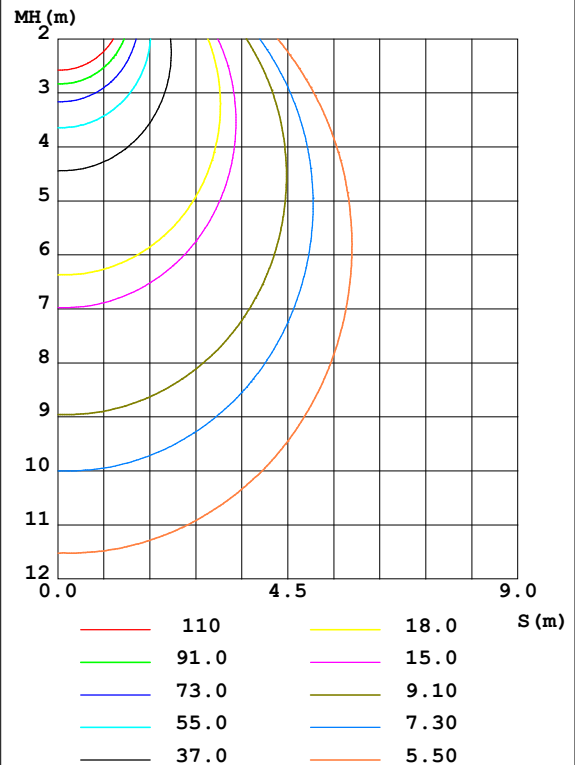

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-10-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	724.0	720.3	712.5	709.4	705.2	710.1	716.9	719.6	0- 10	68.88	68.88	3.39,3.39
20	693.0	685.5	671.7	665.1	655.8	665.2	679.1	684.5	10- 20	197.0	265.8	13.1,13.1
30	637.2	627.2	608.0	598.7	585.3	597.5	618.0	625.6	20- 30	297.8	563.7	27.8,27.8
40	559.4	547.8	525.1	512.7	493.9	509.0	534.4	544.4	30- 40	358.1	921.8	45.4,45.4
50	464.7	451.7	424.6	411.5	388.2	403.8	433.2	445.3	40- 50	370.2	1292	63.7,63.7
60	353.4	340.6	310.3	296.6	269.5	284.5	316.8	330.6	50- 60	332.1	1624	80,80
70	230.9	218.3	188.1	172.5	138.9	155.8	188.8	205.0	60- 70	247.9	1872	92.2,92.2
80	95.88	92.78	68.86	51.06	12.77	32.83	63.02	75.58	70- 80	130.1	2002	98.7,98.7
90	0.8126	0.7373	0.1574	0.1818	0.0509	0.0703	0.0267	0.1111	80- 90	23.18	2025	99.8,99.8
100	0.2609	0.3447	0.3654	0.4022	0.1475	0.1213	0.0994	0.1041	90-100	0.1954	2025	99.8,99.8
110	0.4735	0.5801	0.6148	0.6420	0.2708	0.2231	0.2109	0.1913	100-110	0.3302	2026	99.8,99.8
120	0.7055	0.8252	0.8811	0.8745	0.4256	0.3614	0.3561	0.3245	110-120	0.4900	2026	99.8,99.8
130	0.9400	1.070	1.116	1.080	0.6142	0.5434	0.5305	0.4867	120-130	0.6229	2027	99.9,99.9
140	1.150	1.272	1.281	1.252	0.7809	0.7011	0.6879	0.6442	130-140	0.6837	2028	99.9,99.9
150	1.320	1.427	1.407	1.383	1.250	1.152	1.083	1.000	140-150	0.6919	2028	99.9,99.9
160	1.498	1.575	1.504	1.473	1.501	1.381	1.286	1.211	150-160	0.6200	2029	100,100
170	1.641	1.643	1.535	1.487	1.658	1.531	1.443	1.366	160-170	0.4211	2029	100,100
180	1.711	1.594	1.511	1.444	1.699	1.553	1.513	1.465	170-180	0.1480	2029	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-10-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.0V I:0.1630A P:19.70W PF:0.9970 Freq:60.00Hz Lamp Flux:2029.48x1 lm		
NAME: 22代 2FT	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

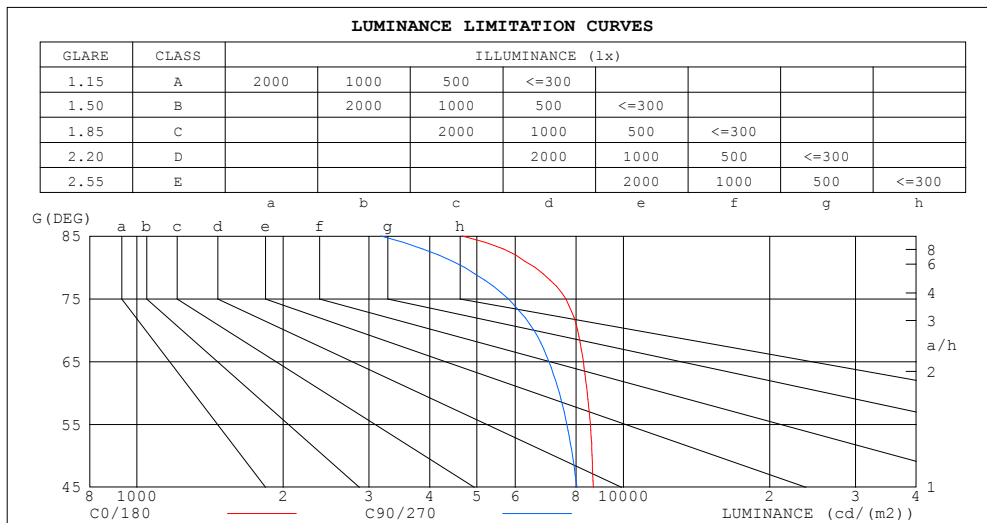

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	4662	3175
80	6586	4722
75	7615	5798
70	8054	6550
65	8282	7036
60	8431	7390
55	8555	7656
50	8623	7865
45	8676	8031


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-10-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.0V I:0.1630A P:19.70W PF:0.9970 Freq:60.00Hz Lamp Flux:2029.48x1 lm		
NAME: 22代 2FT	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	1.00	.96	1.02	.98	.95	.98	.95	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.79	.89	.83	.78	.86	.80	.76	.82	.78	.74	.79	.76	.72	.70
3.0	.80	.72	.65	.78	.71	.65	.75	.69	.64	.73	.67	.63	.70	.65	.61	.59
4.0	.71	.62	.55	.70	.61	.55	.67	.60	.54	.65	.59	.54	.62	.57	.53	.51
5.0	.63	.54	.48	.62	.54	.47	.60	.53	.47	.58	.52	.46	.56	.50	.46	.44
6.0	.57	.48	.42	.56	.48	.41	.54	.47	.41	.52	.46	.41	.51	.45	.40	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.36	.48	.41	.36	.46	.40	.36	.34
8.0	.47	.39	.33	.46	.38	.33	.45	.38	.32	.44	.37	.32	.43	.37	.32	.30
9.0	.43	.35	.30	.43	.35	.29	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.37	.31	.26	.25

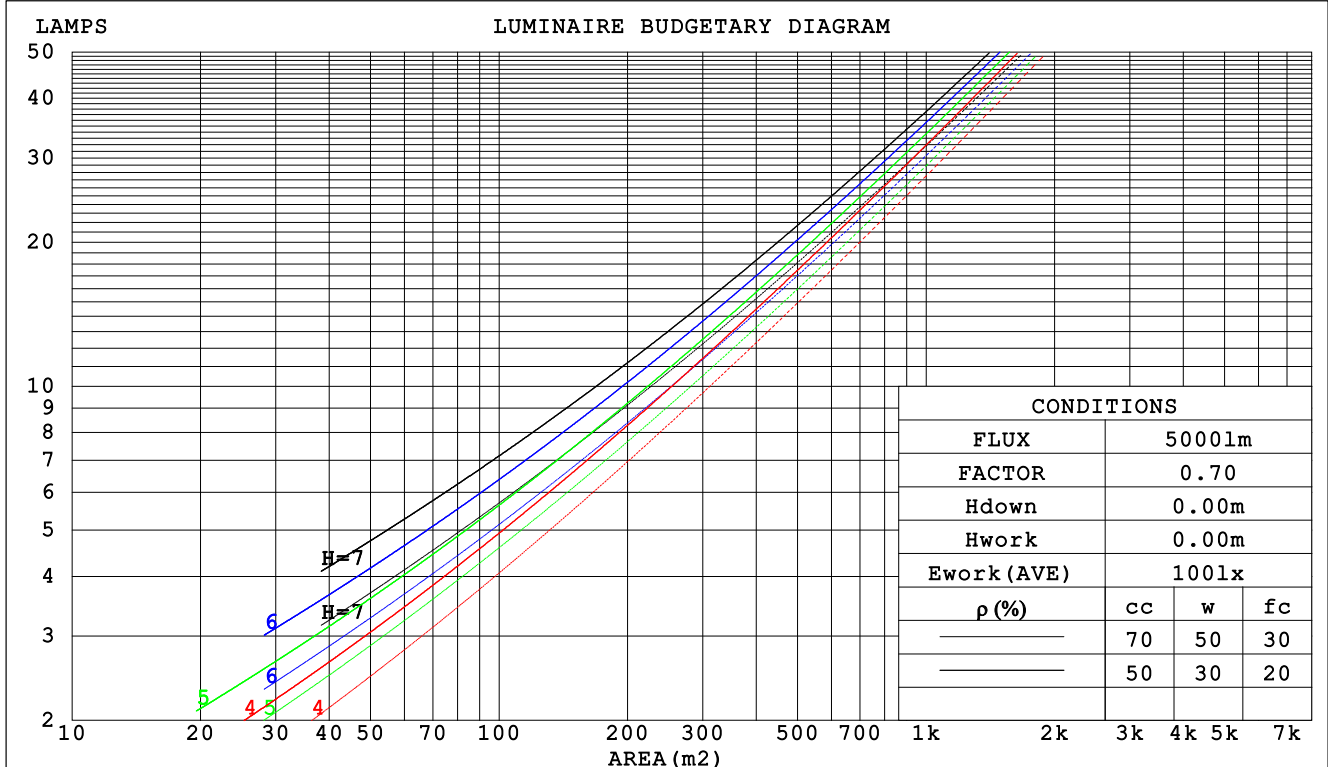

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-10-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.0V I:0.1630A P:19.70W PF:0.9970 Freq:60.00Hz Lamp Flux:2029.48x1 lm					
NAME: 22代 2FT			TYPE:4000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.299	.170	.054	.292	.166	.053	.278	.160	.051	.266	.154	.049	.255	.148	.048		
2.0	.285	.156	.048	.279	.154	.047	.267	.148	.046	.256	.144	.045	.246	.139	.044		
3.0	.265	.141	.042	.260	.139	.042	.250	.135	.041	.240	.131	.040	.231	.128	.040		
4.0	.246	.128	.038	.241	.126	.037	.232	.123	.037	.223	.120	.036	.215	.117	.036		
5.0	.228	.116	.034	.224	.115	.033	.215	.112	.033	.208	.110	.033	.201	.107	.032		
6.0	.212	.106	.030	.208	.105	.030	.201	.103	.030	.194	.101	.030	.187	.099	.029		
7.0	.197	.098	.028	.194	.097	.028	.187	.095	.027	.181	.093	.027	.176	.091	.027		
8.0	.184	.090	.025	.181	.089	.025	.176	.088	.025	.170	.086	.025	.165	.085	.025		
9.0	.173	.084	.023	.170	.083	.023	.165	.082	.023	.160	.080	.023	.155	.079	.023		
10.0	.163	.078	.022	.160	.077	.022	.156	.076	.021	.151	.075	.021	.147	.074	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.181	.158	.137	.155	.135	.118	.106	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.173	.134	.100	.148	.115	.087	.102	.080	.061	.059	.046	.035	.019	.015	.012	
3.0	.165	.116	.077	.142	.100	.066	.097	.069	.047	.056	.041	.027	.018	.013	.009	
4.0	.158	.103	.060	.135	.089	.052	.093	.062	.037	.054	.036	.022	.017	.012	.007	
5.0	.150	.092	.049	.129	.080	.043	.089	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.143	.084	.041	.123	.073	.036	.085	.051	.025	.049	.030	.015	.016	.010	.005	
7.0	.136	.077	.035	.117	.067	.031	.081	.047	.022	.047	.028	.013	.015	.009	.004	
8.0	.130	.071	.030	.112	.062	.027	.077	.043	.019	.045	.026	.011	.015	.008	.004	
9.0	.124	.066	.027	.107	.057	.024	.074	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.118	.062	.024	.102	.054	.021	.071	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-10-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.0V I:0.1630A P:19.70W PF:0.9970 Freq:60.00Hz Lamp Flux:2029.48x1 lm										
NAME: 22代 2FT					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.6	22.1	20.9	22.3	22.6	20.2	21.7	20.4	21.9	22.1
3H	22.3	23.7	22.6	23.9	24.2	21.6	23.0	21.9	23.3	23.5
4H	23.0	24.3	23.3	24.6	24.8	22.2	23.5	22.5	23.7	24.0
6H	23.5	24.7	23.8	25.0	25.3	22.5	23.7	22.8	24.0	24.3
8H	23.6	24.8	23.9	25.1	25.4	22.6	23.8	22.9	24.1	24.3
12H	23.6	24.8	24.0	25.1	25.4	22.6	23.7	22.9	24.0	24.3
4H 2H	21.2	22.6	21.6	22.8	23.1	20.9	22.2	21.2	22.5	22.7
3H	23.1	24.2	23.4	24.5	24.8	22.5	23.7	22.9	24.0	24.3
4H	23.9	25.0	24.3	25.3	25.6	23.2	24.2	23.6	24.6	24.9
6H	24.5	25.4	24.9	25.8	26.2	23.6	24.6	24.0	24.9	25.3
8H	24.7	25.5	25.1	25.9	26.3	23.8	24.6	24.2	25.0	25.4
12H	24.8	25.6	25.2	26.0	26.4	23.8	24.6	24.2	25.0	25.4
8H 4H	24.2	25.0	24.6	25.4	25.8	23.5	24.4	23.9	24.8	25.2
6H	24.9	25.6	25.3	26.0	26.5	24.1	24.8	24.6	25.3	25.7
8H	25.2	25.8	25.6	26.2	26.7	24.3	25.0	24.8	25.4	25.8
12H	25.3	25.9	25.8	26.3	26.8	24.4	25.0	24.9	25.4	25.9
12H 4H	24.2	25.0	24.6	25.3	25.8	23.6	24.4	24.0	24.7	25.1
6H	24.9	25.6	25.4	26.0	26.5	24.2	24.8	24.7	25.3	25.7
8H	25.2	25.8	25.7	26.2	26.7	24.4	25.0	24.9	25.4	25.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117 Corrected 2029 lm Total Lamp Luminous Flux. (8log(F/F0) = 2.5)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-10-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.0V I:0.1630A P:19.70W PF:0.9970 Freq:60.00Hz Lamp Flux:2029.48x1 lm		
NAME: 22代 2FT	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	46	39	33
0.80	68	56	49	67	56	49	65	55	49	42
1.00	77	66	58	75	65	58	73	66	57	50
1.25	84	73	66	82	73	66	80	71	65	58
1.50	89	79	72	87	78	72	84	76	70	63
2.00	95	87	81	94	86	80	90	84	79	71
2.50	99	92	86	97	90	85	93	88	83	75
3.00	103	96	91	101	94	90	96	92	87	79
4.00	107	101	97	104	99	95	100	96	93	84
5.00	109	104	100	107	102	99	102	99	96	87
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-10-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:121.0V I:0.1630A P:19.70W PF:0.9970 Freq:60.00Hz Lamp Flux:2029.48x1 lm		
NAME: 22代 2FT	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

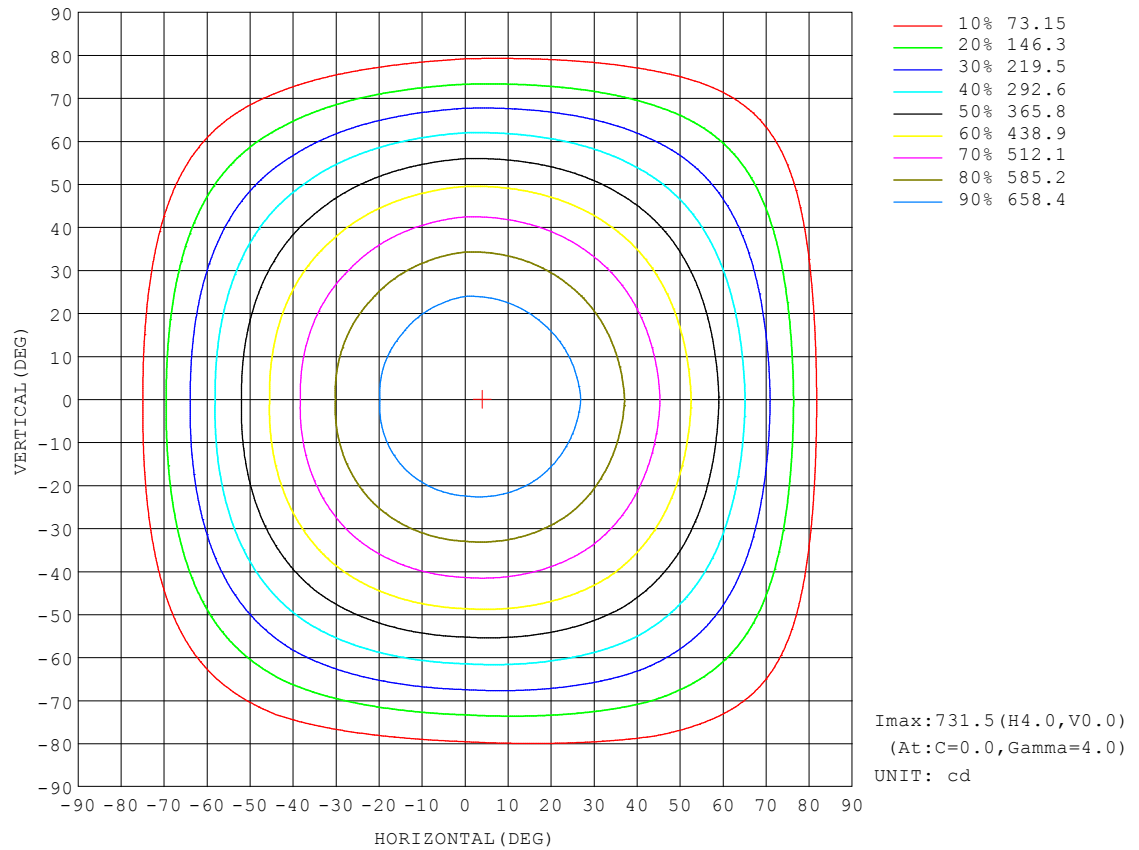


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-10-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:121.0V I:0.1630A P:19.70W PF:0.9970 Freq:60.00Hz Lamp Flux:2029.48x1 lm		
NAME: 22代 2FT	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

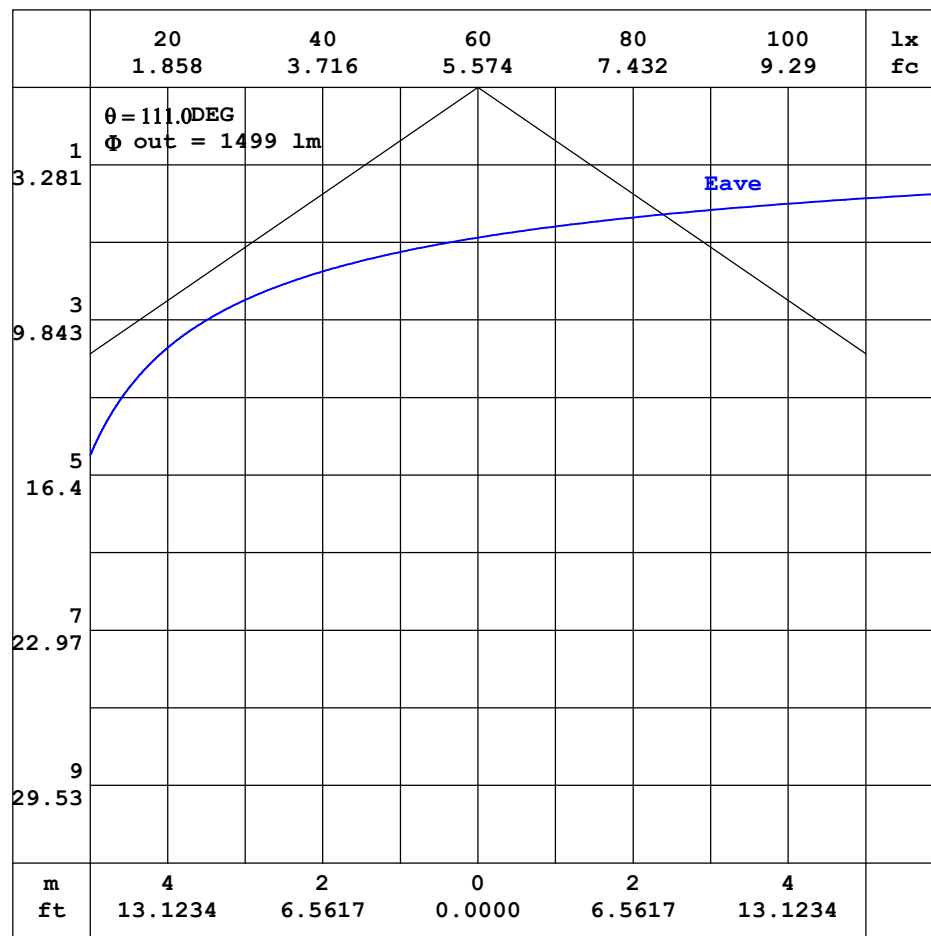


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-10-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:121.0V I:0.1630A P:19.70W PF:0.9970 Freq:60.00Hz Lamp Flux:2029.48x1 lm		
NAME: 22代 2FT	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

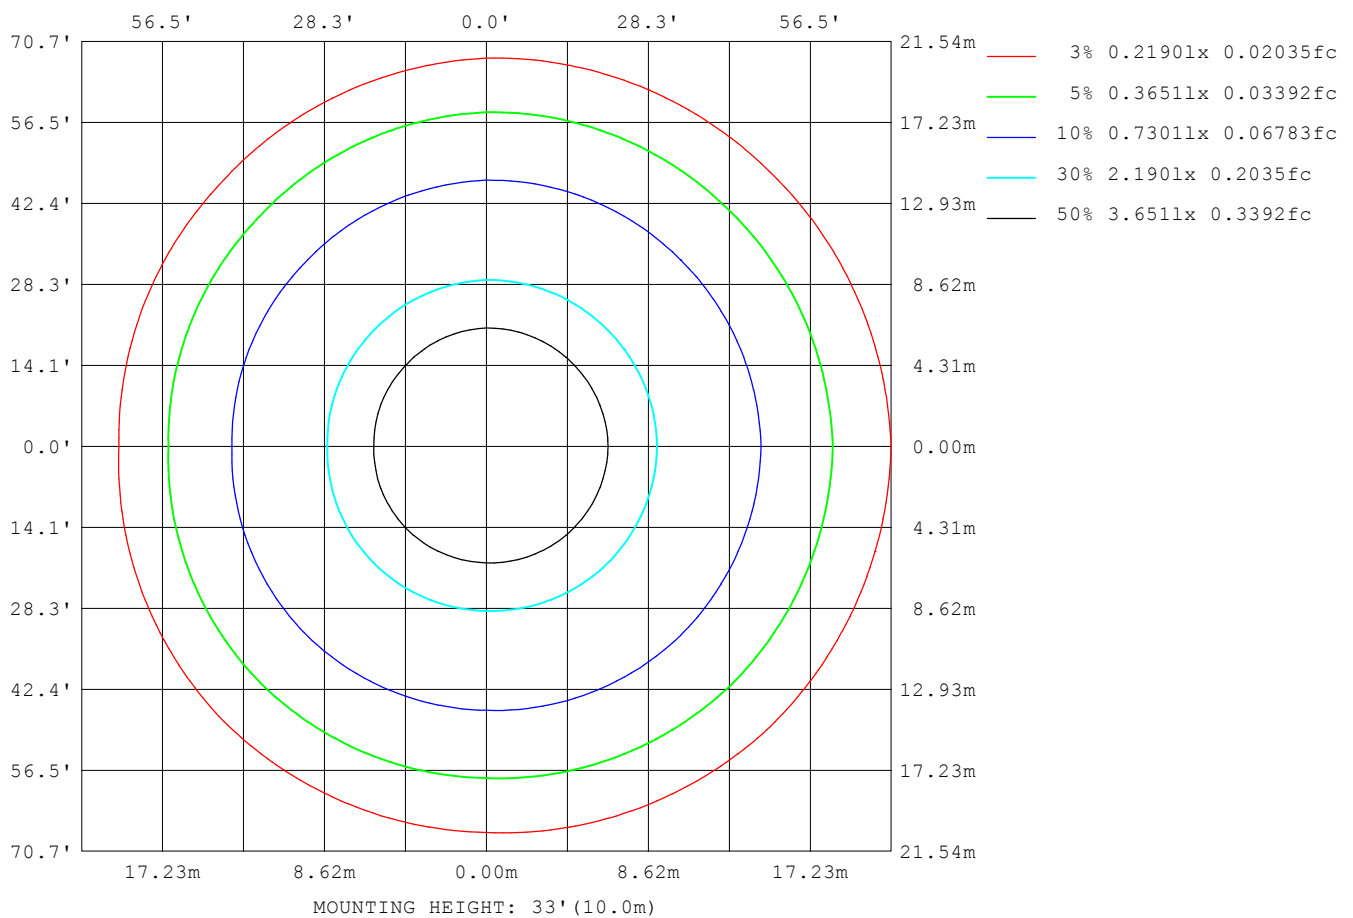

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-10-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:121.0V I:0.1630A P:19.70W PF:0.9970 Freq:60.00Hz Lamp Flux:2029.48x1 lm		
NAME: 22代 2FT	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	7018
L_0~180 (75) av	5448
L_0~180 (85) av	2348
L_90~270 (65) av	7093
L_90~270 (75) av	5713
L_90~270 (85) av	2772
L_45 (65) av	7084
L_45 (75) av	5717
L_45 (85) av	1971

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-10-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

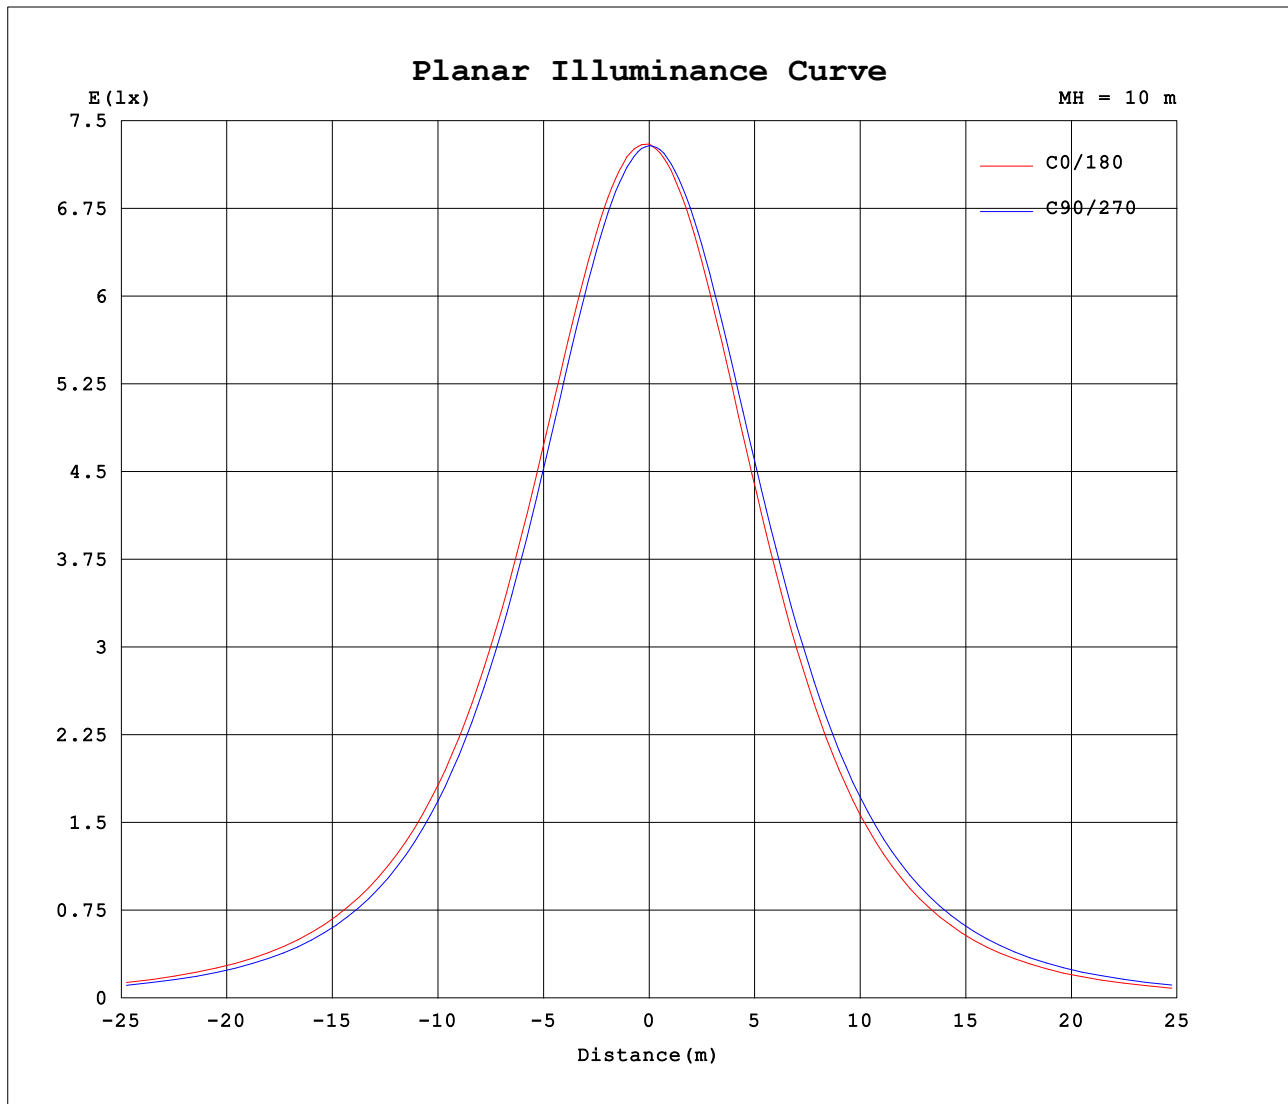

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2024-10-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.0V I:0.1630A P:19.70W PF:0.9970 Freq:60.00Hz Lamp Flux:2029.48x1 lm		
NAME: 22代 2FT	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	729	729	729	729	729	729	729	729										
5	730	728	723	722	720	723	726	727										
10	724	720	713	709	705	710	717	720										
15	712	706	695	691	684	691	701	706										
20	693	686	672	665	656	665	679	684										
25	668	659	643	634	623	634	651	658										
30	637	627	608	599	585	597	618	626										
35	601	590	569	558	542	556	579	587										
40	559	548	525	513	494	509	534	544										
45	514	502	477	464	443	458	486	497										
50	465	452	425	411	388	404	433	445										
55	411	398	369	356	330	345	377	389										
60	353	341	310	297	270	285	317	331										
65	293	281	250	235	205	221	254	269										
70	231	218	188	172	139	156	189	205										
75	165	155	126	109	71.6	92.9	122	140										
80	95.9	92.8	68.9	51.1	12.8	32.8	63.0	75.6										
85	34.1	35.3	23.2	3.48	0.31	0.61	17.3	18.3										
90	0.81	0.74	0.16	0.18	0.05	0.07	0.03	0.11										
95	0.16	0.23	0.25	0.29	0.09	0.09	0.06	0.09										
100	0.26	0.34	0.37	0.40	0.15	0.12	0.10	0.10										
105	0.36	0.45	0.48	0.52	0.20	0.16	0.16	0.15										
110	0.47	0.58	0.61	0.64	0.27	0.22	0.21	0.19										
115	0.58	0.71	0.74	0.76	0.34	0.28	0.28	0.25										
120	0.71	0.83	0.88	0.87	0.43	0.36	0.36	0.32										
125	0.82	0.95	1.00	0.98	0.52	0.44	0.44	0.40										
130	0.94	1.07	1.12	1.08	0.61	0.54	0.53	0.49										
135	1.04	1.17	1.21	1.17	0.69	0.62	0.61	0.56										
140	1.15	1.27	1.28	1.25	0.78	0.70	0.69	0.64										
145	1.23	1.35	1.34	1.32	0.99	0.91	0.87	0.83										
150	1.32	1.43	1.41	1.38	1.25	1.15	1.08	1.00										
155	1.41	1.51	1.46	1.46	1.38	1.27	1.18	1.11										
160	1.50	1.57	1.50	1.47	1.50	1.38	1.29	1.21										
165	1.58	1.62	1.54	1.48	1.59	1.47	1.37	1.30										
170	1.64	1.64	1.54	1.49	1.66	1.53	1.44	1.37										
175	1.66	1.64	1.52	1.48	1.69	1.58	1.47	1.41										
180	1.71	1.59	1.51	1.44	1.70	1.55	1.51	1.47										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-10-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: