


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.6V I:0.1230A P:14.70W PF:0.9950 Lamp Flux:2355.72x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 160.25 lm/W			
MODEL		Imax(cd)	1590	S/MH(C0/180)	1.11
NOMINAL POWER(W)	14	LOR(%)	100.0	S/MH(C90/270)	1.18
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2355.7	□ UP,DN(C0-180)	0.1,50.4
NOMINAL FLUX(lm)	2355.72	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.1,49.4
LAMPS INSIDE	1	□ up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	119.5	□ down(%)	99.8	CIBSE SHR MAX	1.25

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

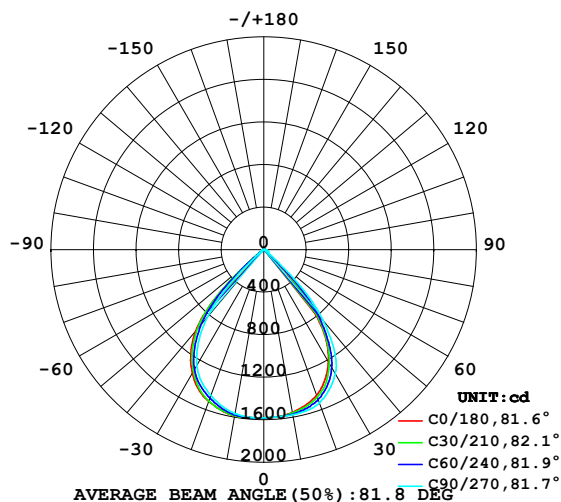

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

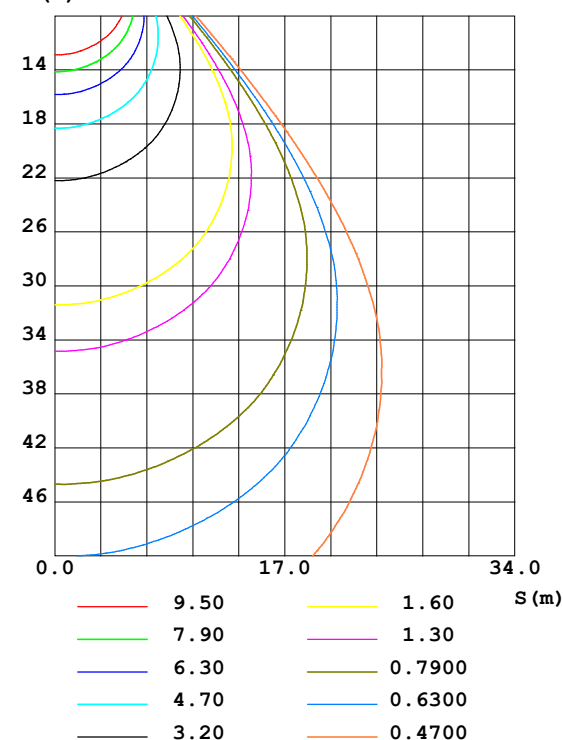


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
佑明B档
3500K

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	zone	total	%lum, lamp
5	1578	1577	1579	1578	1585	1587	1582	1576	0- 5	37.79	37.79	1.6,1.6
10	1554	1564	1575	1577	1587	1581	1567	1550	5- 10	112.7	150.5	6.39,6.39
15	1515	1536	1568	1571	1560	1551	1522	1504	10- 15	184.5	335.0	14.2,14.2
20	1456	1488	1531	1540	1517	1500	1459	1433	15- 20	250.0	585.0	24.8,24.8
25	1359	1399	1455	1480	1451	1426	1379	1329	20- 25	304.4	889.4	37.8,37.8
30	1217	1257	1347	1385	1342	1314	1260	1182	25- 30	341.8	1231	52.3,52.3
35	1012	1047	1156	1231	1196	1157	1076	970.1	30- 35	353.3	1585	67.3,67.3
40	670.1	752.4	865.9	997.2	993.8	941.5	823.3	668.0	35- 40	325.9	1910	81.1,81.1
45	212.3	308.6	497.5	692.9	631.3	614.6	432.2	258.4	40- 45	243.0	2153	91.4,91.4
50	54.64	66.27	119.1	249.0	162.8	185.4	98.17	67.10	45- 50	110.7	2264	96.1,96.1
55	32.18	38.73	51.36	57.18	42.72	45.22	39.51	32.65	50- 55	31.40	2296	97.4,97.4
60	20.14	28.41	39.87	35.82	27.43	27.79	30.34	22.46	55- 60	16.00	2312	98.1,98.1
65	12.27	20.47	33.76	26.91	18.05	20.33	25.26	16.18	60- 65	12.11	2324	98.6,98.6
70	10.43	14.41	28.11	19.72	11.94	14.55	20.83	11.87	65- 70	9.420	2333	99,99
75	13.72	8.406	21.23	12.88	10.52	9.702	16.49	7.652	70- 75	7.186	2340	99.3,99.3
80	14.44	5.170	13.38	6.723	13.61	5.790	11.25	4.817	75- 80	5.264	2346	99.6,99.6
85	8.327	2.989	3.927	3.592	11.69	3.370	4.463	2.696	80- 85	3.438	2349	99.7,99.7
90	4.536	1.968	0.0305	1.506	5.352	1.327	0.0445	1.562	85- 90	1.657	2351	99.8,99.8
95	2.896	1.681	0.0401	0.1185	0.1454	0.1357	0.0420	1.278	90- 95	0.6558	2351	99.8,99.8
100	3.173	1.259	0.0592	0.1051	0.1316	0.1233	0.0726	1.164	95-100	0.3976	2352	99.8,99.8
105	4.397	1.186	0.0802	0.1050	0.1571	0.1252	0.0725	1.062	100-105	0.4108	2352	99.8,99.8
110	3.780	1.087	0.1070	0.1492	0.3245	0.1749	0.1031	0.9852	105-110	0.4067	2353	99.9,99.9
115	2.922	1.022	0.1452	0.2109	0.4091	0.2047	0.1242	0.8278	110-115	0.3696	2353	99.9,99.9
120	2.352	0.9760	0.1853	0.2110	0.2356	0.1988	0.1375	0.8163	115-120	0.3074	2353	99.9,99.9
125	2.102	0.9987	0.2217	0.2749	0.2911	0.2638	0.1756	0.8306	120-125	0.2858	2354	99.9,99.9
130	1.879	1.023	0.2771	0.3734	0.3775	0.3594	0.2462	0.8869	125-130	0.2815	2354	99.9,99.9
135	1.827	1.101	0.3515	0.4879	0.4426	0.4617	0.3246	0.9587	130-135	0.2862	2354	99.9,99.9
140	1.745	1.157	0.4242	0.6158	0.5536	0.5621	0.3877	1.003	135-140	0.2904	2354	99.9,99.9
145	1.702	1.229	0.4834	0.7189	0.5936	0.6567	0.4526	1.080	140-145	0.2836	2355	100,100
150	1.788	1.327	0.5502	0.8145	0.5689	0.7111	0.5061	1.135	145-150	0.2703	2355	100,100
155	1.911	1.379	0.6132	0.9071	0.7703	0.7675	0.5615	1.109	150-155	0.2479	2355	100,100
160	1.760	1.260	0.6649	0.8539	0.9887	0.8794	0.6265	0.9731	155-160	0.2126	2355	100,100
165	1.535	0.9822	0.7145	0.9843	1.279	0.9100	0.7009	0.8079	160-165	0.1629	2356	100,100
170	1.020	0.8133	0.7622	0.7726	0.8079	0.7846	0.7353	0.7791	165-170	0.1033	2356	100,100
175	0.8356	0.8096	0.7870	0.7647	0.7755	0.7504	0.7507	0.7706	170-175	0.0565	2356	100,100
180	0.8254	0.7962	0.7736	0.7543	0.8254	0.8019	0.7698	0.7514	175-180	0.0186	2356	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

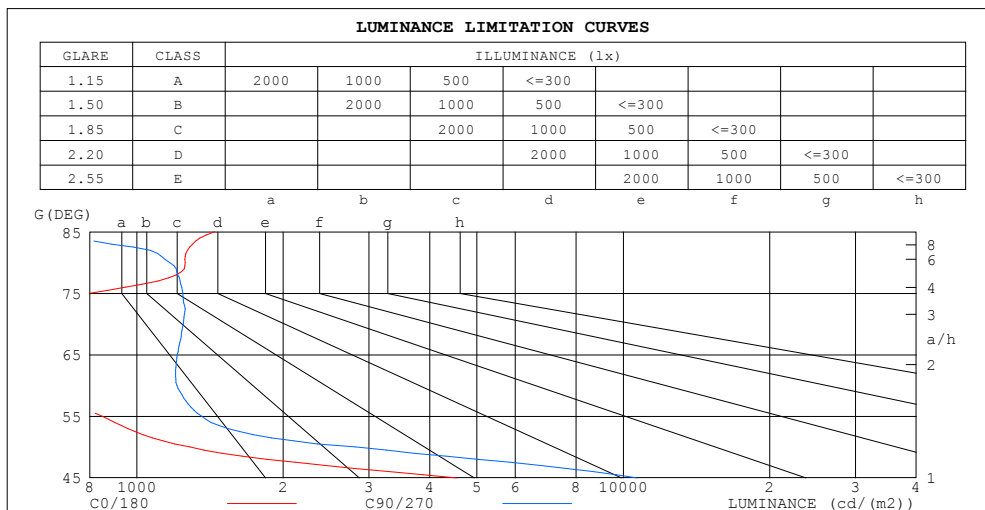


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
佑明B档
3500K

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.6V I:0.1230A P:14.70W PF:0.9950 Lamp Flux:2355.72x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11	PROTECTION ANGLE:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

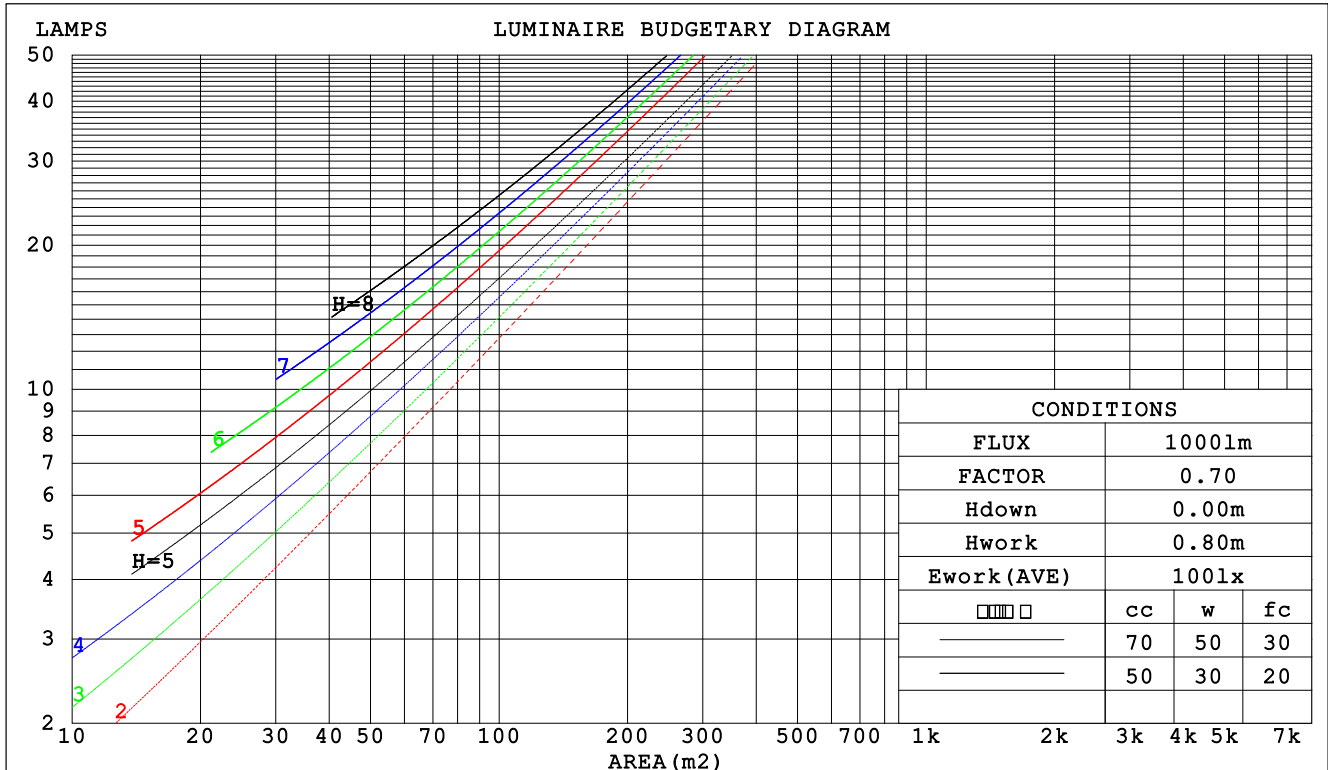

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: BQE46-0650-42-PV-S1
 佑明B档
 3500K

WEC AND CCEC

Test:U:119.6V I:0.1230A P:14.70W PF:0.9950 Lamp Flux:2355.72x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11	PROTECTION ANGLE:

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.202 .115 .036	.195 .111 .035	.183 .105 .033	.171 .098 .032	.160 .093 .030	
2.0	.195 .107 .033	.190 .104 .032	.179 .099 .031	.169 .095 .030	.159 .090 .028	
3.0	.187 .100 .030	.182 .097 .029	.173 .094 .028	.164 .090 .028	.156 .086 .027	
4.0	.178 .093 .027	.174 .091 .027	.166 .088 .026	.158 .085 .026	.151 .082 .025	
5.0	.170 .087 .025	.166 .085 .025	.159 .083 .024	.152 .080 .024	.146 .078 .023	
6.0	.162 .081 .023	.159 .080 .023	.152 .078 .023	.146 .076 .022	.141 .074 .022	
7.0	.155 .077 .022	.152 .076 .022	.146 .074 .021	.141 .072 .021	.136 .070 .021	
8.0	.148 .072 .020	.145 .071 .020	.140 .070 .020	.135 .068 .020	.130 .067 .020	
9.0	.141 .068 .019	.139 .068 .019	.134 .066 .019	.130 .065 .019	.126 .064 .018	
10.0	.135 .065 .018	.133 .064 .018	.129 .063 .018	.125 .062 .018	.121 .061 .017	

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.192 .192 .192	.164 .164 .164	.112 .112 .112	.064 .064 .064	.021 .021 .021	
1.0	.175 .159 .145	.149 .136 .124	.102 .094 .086	.059 .054 .050	.019 .017 .016	
2.0	.161 .134 .111	.138 .115 .096	.095 .080 .067	.055 .046 .039	.017 .015 .013	
3.0	.150 .115 .088	.129 .100 .076	.088 .069 .053	.051 .040 .031	.016 .013 .010	
4.0	.141 .101 .071	.121 .087 .061	.083 .061 .043	.048 .036 .026	.015 .012 .008	
5.0	.133 .090 .058	.115 .078 .050	.079 .054 .036	.046 .032 .021	.015 .010 .007	
6.0	.127 .081 .048	.109 .070 .042	.075 .049 .030	.044 .029 .018	.014 .009 .006	
7.0	.120 .074 .041	.104 .064 .036	.072 .045 .025	.042 .026 .015	.013 .009 .005	
8.0	.115 .068 .035	.099 .059 .031	.069 .041 .022	.040 .024 .013	.013 .008 .004	
9.0	.110 .063 .031	.095 .054 .027	.066 .038 .019	.038 .023 .011	.012 .007 .004	
10.0	.105 .058 .027	.091 .051 .024	.063 .036 .017	.037 .021 .010	.012 .007 .003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
佑明B档
3500K

Uncorrected UGR Table

Test:U:119.6V I:0.1230A P:14.70W PF:0.9950 Lamp Flux:2355.72x1 lm										
NAME: 磁铁灯条					TYPE:T5窄灯条 3500K			WEIGHT:		
DIM.: 2FT*2					SPEC.:透镜款			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co,ltd					SUR.:0.6*0.11			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.3	16.4	15.5	16.5	16.7	16.3	17.5	16.6	17.6	17.8
3H	15.1	16.1	15.4	16.3	16.5	16.3	17.3	16.5	17.5	17.7
4H	15.0	16.0	15.3	16.2	16.5	16.3	17.2	16.5	17.4	17.7
6H	15.0	15.9	15.3	16.2	16.4	16.2	17.1	16.5	17.4	17.6
8H	15.0	15.9	15.4	16.2	16.4	16.2	17.1	16.5	17.3	17.6
12H	15.0	15.9	15.4	16.1	16.4	16.2	17.0	16.5	17.3	17.6
4H 2H	15.0	16.0	15.3	16.2	16.4	16.1	17.1	16.4	17.3	17.5
3H	14.9	15.7	15.2	16.0	16.2	16.1	16.9	16.4	17.2	17.4
4H	14.8	15.5	15.2	15.9	16.2	16.1	16.8	16.4	17.1	17.4
6H	14.8	15.5	15.2	15.8	16.2	16.1	16.7	16.4	17.1	17.4
8H	14.9	15.5	15.3	15.8	16.2	16.1	16.7	16.5	17.0	17.4
12H	14.9	15.5	15.3	15.9	16.2	16.0	16.6	16.4	17.0	17.4
8H 4H	14.7	15.3	15.1	15.6	16.0	15.9	16.5	16.3	16.9	17.3
6H	14.7	15.2	15.2	15.6	16.1	15.9	16.4	16.4	16.8	17.3
8H	14.8	15.2	15.2	15.6	16.1	15.9	16.4	16.4	16.8	17.2
12H	14.9	15.2	15.3	15.7	16.2	15.9	16.3	16.4	16.7	17.2
12H 4H	14.6	15.2	15.1	15.6	16.0	15.9	16.4	16.3	16.8	17.2
6H	14.7	15.1	15.2	15.6	16.0	15.9	16.3	16.4	16.8	17.2
8H	14.8	15.1	15.2	15.6	16.0	15.9	16.3	16.4	16.7	17.2
Variations with the observer position at spacings:										
S = 1.0H	+ 2.3 / - 7.9					+ 2.5 / - 6.9				
1.5H	+ 4.7 / - 7.5					+ 4.4 / - 7.4				
2.0H	+ 5.3 / - 2.1					+ 7.7 / - 3.9				

CIE Pub.117 Corrected 2356 lm Total Lamp Luminous Flux.(8log(F/F0) = 3.0)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
佑明B档
3500K

UTILIZATION FACTORS TABLE

Test:U:119.6V I:0.1230A P:14.70W PF:0.9950 Lamp Flux:2355.72x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	80	72	67	79	72	67	78	71	67	63
0.80	88	81	77	88	81	76	86	80	76	72
1.00	94	88	83	93	87	83	92	87	82	78
1.25	99	93	89	98	92	88	96	91	88	83
1.50	103	97	93	101	96	92	99	95	91	86
2.00	106	101	98	105	100	97	102	98	95	90
2.50	108	104	100	107	102	99	103	100	97	91
3.00	110	106	103	108	105	102	105	102	100	93
4.00	112	109	106	110	107	105	106	104	102	95
5.00	114	111	109	111	109	107	107	106	104	96
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: BQE46-0650-42-PV-S1
 佑明B档
 3500K

ISOCANDELA DIAGRAM

Test:U:119.6V I:0.1230A P:14.70W PF:0.9950 Lamp Flux:2355.72x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11	PROTECTION ANGLE:

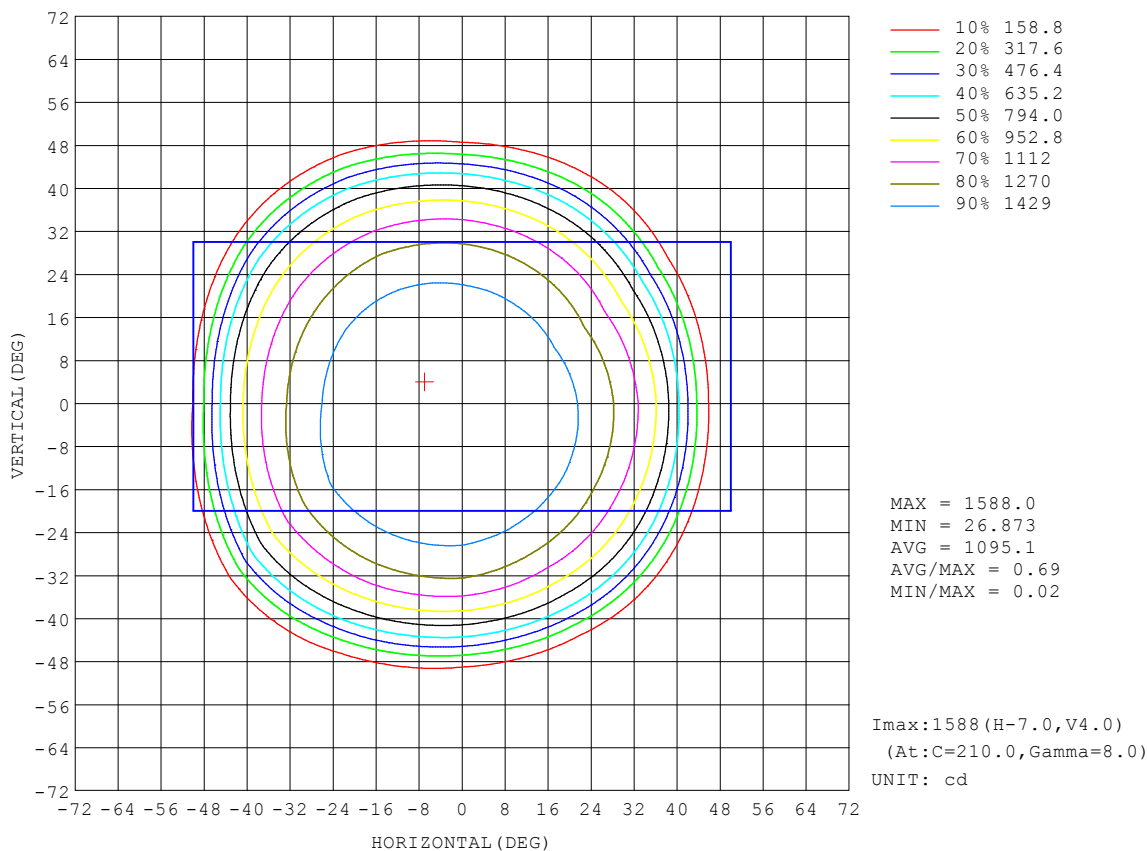


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
佑明B档
3500K

AAI Figure

Test:U:119.6V I:0.1230A P:14.70W PF:0.9950 Lamp Flux:2355.72x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11	PROTECTION ANGLE:

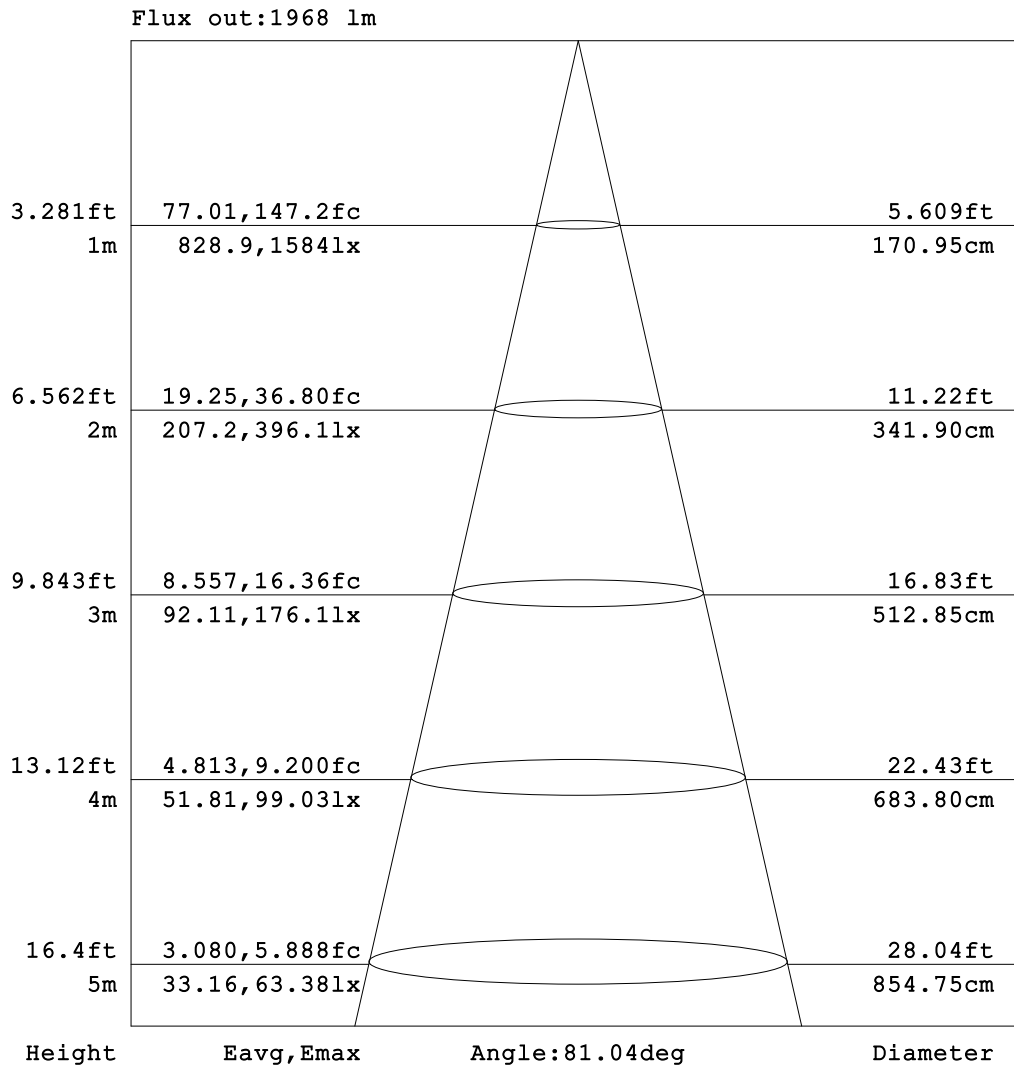


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
佑明B档
3500K

ISOLUX DIAGRAM


Test:U:119.6V I:0.1230A P:14.70W PF:0.9950 Lamp Flux:2355.72x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11	PROTECTION ANGLE:

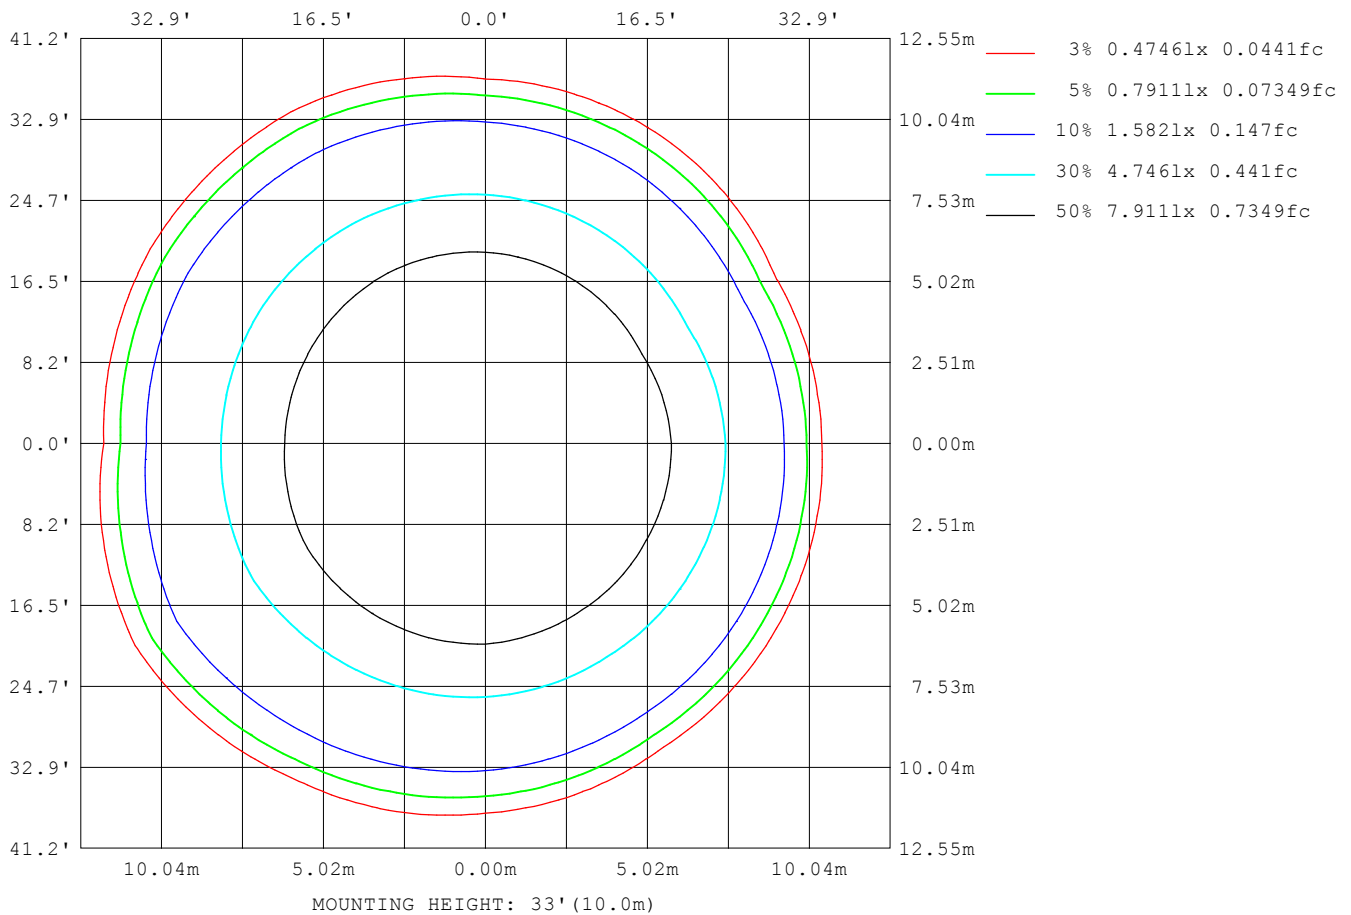

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
佑明B档
3500K

Planar Illuminance Curve

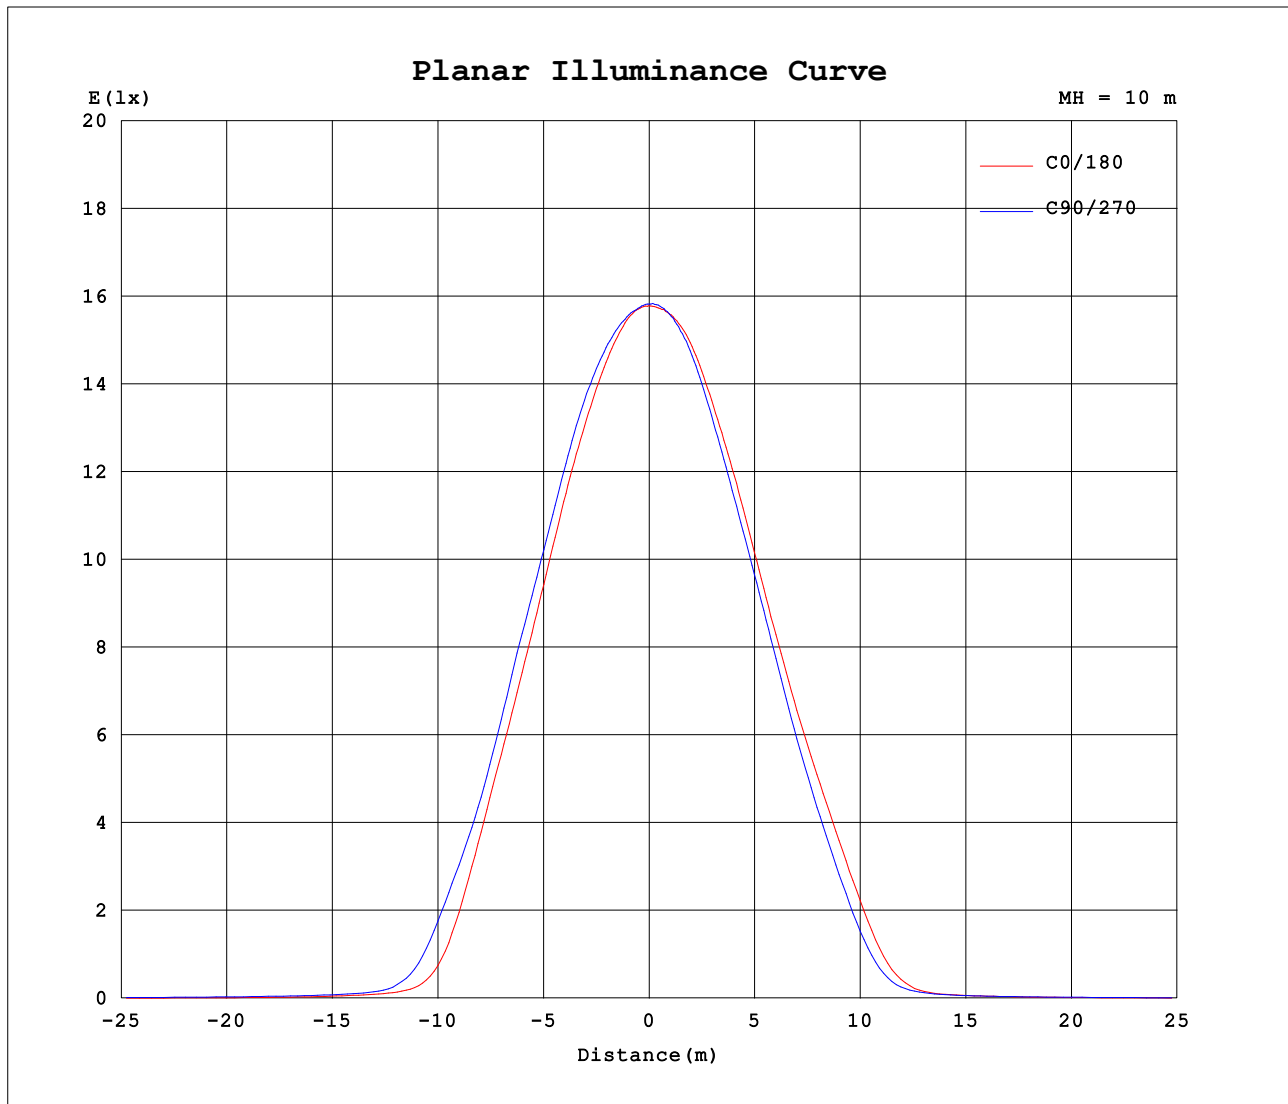

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
佑明B档
3500K

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.6V I:0.1230A P:14.70W PF:0.9950 Lamp Flux:2355.72x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11	PROTECTION ANGLE:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1582	1582	1582	1582	1582	1582	1582	1582	1582	1582	1582	1582						
5	1578	1577	1578	1579	1576	1579	1585	1588	1585	1582	1577	1574						
10	1554	1558	1570	1575	1573	1581	1587	1584	1577	1567	1554	1547						
15	1515	1527	1546	1568	1567	1575	1560	1561	1542	1522	1508	1499						
20	1456	1476	1500	1531	1537	1544	1517	1514	1486	1459	1438	1428						
25	1359	1385	1414	1455	1473	1487	1451	1439	1413	1379	1346	1313						
30	1217	1233	1280	1347	1373	1397	1342	1323	1305	1260	1206	1158						
35	1012	1029	1065	1156	1211	1250	1196	1178	1136	1076	1005	935						
40	670	726	779	866	949	1045	994	969	914	823	724	611						
45	212	272	345	497	623	762	631	650	579	432	322	195						
50	54.6	56.4	76.1	119	186	312	163	195	175	98.2	81.2	53.0						
55	32.2	34.6	42.8	51.4	55.0	59.4	42.7	43.3	47.1	39.5	36.2	29.1						
60	20.1	23.9	32.9	39.9	38.2	33.5	27.4	26.5	29.1	30.3	26.0	18.9						
65	12.3	14.3	26.6	33.8	30.2	23.6	18.1	18.2	22.5	25.3	20.6	11.8						
70	10.4	8.86	19.9	28.1	24.7	14.7	11.9	11.3	17.8	20.8	15.9	7.80						
75	13.7	6.29	10.5	21.2	17.2	8.53	10.5	7.45	12.0	16.5	9.93	5.37						
80	14.4	4.67	5.66	13.4	7.86	5.58	13.6	4.88	6.70	11.3	5.95	3.69						
85	8.33	3.67	2.31	3.93	3.40	3.79	11.7	3.53	3.21	4.46	2.66	2.73						
90	4.54	3.04	0.89	0.03	0.72	2.29	5.35	1.94	0.72	0.04	0.94	2.18						
95	2.90	2.48	0.88	0.04	0.11	0.12	0.15	0.14	0.13	0.04	0.79	1.76						
100	3.17	1.67	0.85	0.06	0.08	0.13	0.13	0.14	0.11	0.07	0.82	1.51						
105	4.40	1.48	0.89	0.08	0.08	0.13	0.16	0.15	0.10	0.07	0.83	1.30						
110	3.78	1.40	0.77	0.11	0.10	0.20	0.32	0.23	0.12	0.10	0.77	1.21						
115	2.92	1.25	0.79	0.15	0.14	0.28	0.41	0.25	0.16	0.12	0.67	0.98						
120	2.35	1.22	0.73	0.19	0.21	0.21	0.24	0.21	0.19	0.14	0.64	1.00						
125	2.10	1.23	0.77	0.22	0.28	0.27	0.29	0.28	0.25	0.18	0.64	1.02						
130	1.88	1.29	0.75	0.28	0.38	0.37	0.38	0.37	0.35	0.25	0.70	1.07						
135	1.83	1.34	0.87	0.35	0.51	0.46	0.44	0.47	0.46	0.32	0.79	1.13						
140	1.74	1.36	0.95	0.42	0.66	0.57	0.55	0.55	0.57	0.39	0.84	1.17						
145	1.70	1.44	1.02	0.48	0.75	0.69	0.59	0.64	0.67	0.45	0.92	1.24						
150	1.79	1.55	1.10	0.55	0.83	0.80	0.57	0.70	0.72	0.51	0.85	1.42						
155	1.91	1.71	1.05	0.61	0.90	0.92	0.77	0.77	0.76	0.56	0.76	1.46						
160	1.76	1.68	0.84	0.66	0.64	1.07	0.99	1.02	0.74	0.63	0.71	1.24						
165	1.54	1.20	0.76	0.71	0.70	1.26	1.28	1.06	0.76	0.70	0.72	0.90						
170	1.02	0.85	0.78	0.76	0.74	0.81	0.81	0.80	0.77	0.74	0.77	0.79						
175	0.84	0.81	0.80	0.79	0.74	0.79	0.78	0.76	0.75	0.75	0.77	0.77						
180	0.83	0.81	0.78	0.77	0.75	0.76	0.83	0.81	0.79	0.77	0.75	0.76						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
佑明B档
3500K