


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.60V I:0.1200A P:14.500W PF:0.9980 Freq:50.00Hz Lamp Flux:2211.92x1 lm		
NAME: WL-2RTST2215D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:0.6*0.6	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 152.55 lm/W			
MODEL		I _{max} (cd)	1701	S/MH(C0/180)	1.06
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	1.07
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2211.9	η UP, DN(C0-180)	0.0,49.2
NOMINAL FLUX(lm)	2211.92	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,50.7
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	119.9	η down(%)	99.9	CIBSE SHR MAX	1.10

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

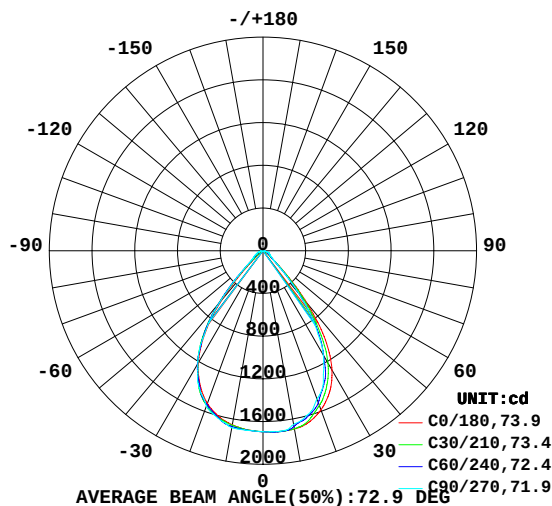

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

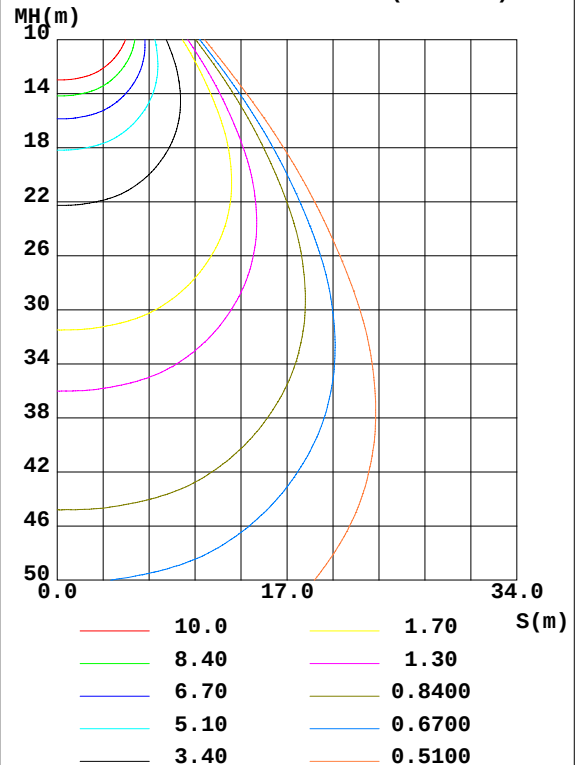

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-11

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1694	1681	1652	1663	1654	1665	1683	1687	0- 10	161.0	161.0	7.28, 7.28
20	1586	1529	1480	1505	1522	1538	1549	1565	10- 20	456.1	617.2	27.9, 27.9
30	1291	1178	1132	1172	1210	1226	1221	1230	20- 30	637.9	1255	56.7, 56.7
40	639.7	563.0	518.2	596.7	599.4	647.7	634.3	602.2	30- 40	574.8	1830	82.7, 82.7
50	105.3	113.6	120.4	117.7	77.49	117.4	143.5	125.4	40- 50	228.0	2058	93, 93
60	51.44	58.58	74.48	60.13	45.89	61.98	86.49	65.33	50- 60	73.91	2132	96.4, 96.4
70	21.14	30.45	49.18	35.19	16.32	34.19	51.93	31.49	60- 70	47.66	2180	98.5, 98.5
80	4.974	13.09	18.55	11.70	4.902	13.26	20.83	10.35	70- 80	24.90	2204	99.7, 99.7
90	0.0197	0.0325	0.0344	0.2855	0.0289	0.2204	0.0908	0.0457	80- 90	6.288	2211	99.9, 99.9
100	0.0384	0.0527	0.0553	0.0429	0.0500	0.0564	0.0594	0.0609	90-100	0.0538	2211	99.9, 99.9
110	0.0404	0.1090	0.0668	0.1275	0.0539	0.0594	0.0649	0.0695	100-110	0.0688	2211	100, 100
120	0.0940	0.1159	0.1126	0.1257	0.1192	0.1244	0.0991	0.1199	110-120	0.0992	2211	100, 100
130	0.2112	0.2325	0.2540	0.2247	0.2289	0.2030	0.1907	0.2114	120-130	0.1473	2211	100, 100
140	0.3193	0.3337	0.3302	0.3085	0.2826	0.2719	0.2980	0.2857	130-140	0.2026	2211	100, 100
150	0.3689	0.4173	0.4048	0.4066	0.3577	0.3551	0.3835	0.3552	140-150	0.2126	2212	100, 100
160	0.4862	0.5987	0.5288	0.5150	0.4865	0.4729	0.4522	0.4618	150-160	0.1984	2212	100, 100
170	0.6092	0.6222	0.6470	0.6094	0.6036	0.5963	0.5782	0.5636	160-170	0.1578	2212	100, 100
180	0.6170	0.6107	0.6146	0.6008	0.6151	0.6097	0.6146	0.6017	170-180	0.0582	2212	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-05-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 γ Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity: 50.0%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.60V I:0.1200A P:14.500W PF:0.9980 Freq:50.00Hz Lamp Flux:2211.92x1 lm		
NAME: WL-2RTST2215D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:0.6*0.6	Shielding Angle:

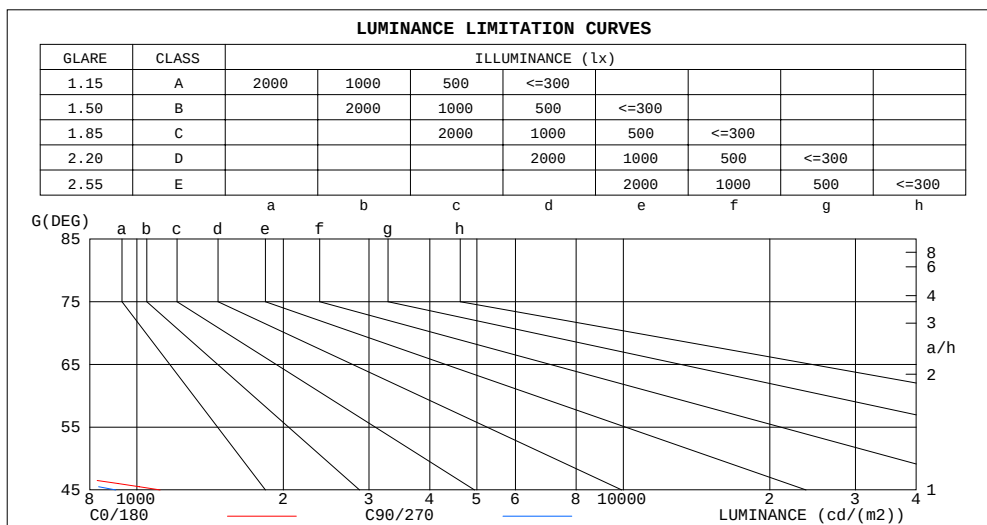

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	86	294
80	79	297
75	228	368
70	171	400
65	249	405
60	284	414
55	328	438
50	452	521
45	1116	905


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-11

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.60V I:0.1200A P:14.500W PF:0.9980 Freq:50.00Hz Lamp Flux:2211.92x1 lm		
NAME: WL-2RTST2215D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:0.6*0.6	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.09	1.06	1.04	1.07	1.05	1.02	1.03	1.01	.99	.99	.98	.96	.96	.95	.93	.91
2.0	1.00	.96	.92	.99	.94	.91	.95	.92	.89	.92	.89	.87	.89	.87	.85	.83
3.0	.92	.87	.82	.91	.86	.81	.88	.84	.80	.86	.82	.79	.83	.80	.77	.76
4.0	.85	.79	.74	.84	.78	.74	.82	.77	.73	.80	.75	.72	.78	.74	.71	.69
5.0	.79	.72	.67	.78	.72	.67	.76	.70	.66	.74	.69	.66	.72	.68	.65	.63
6.0	.73	.66	.61	.72	.66	.61	.71	.65	.61	.69	.64	.60	.68	.63	.60	.58
7.0	.68	.61	.56	.67	.61	.56	.66	.60	.56	.65	.59	.56	.63	.59	.55	.54
8.0	.63	.57	.52	.63	.56	.52	.62	.56	.52	.60	.55	.51	.59	.55	.51	.50
9.0	.59	.53	.48	.59	.52	.48	.58	.52	.48	.57	.52	.48	.56	.51	.48	.46
10.0	.56	.49	.45	.55	.49	.45	.54	.49	.45	.53	.48	.44	.53	.48	.44	.43

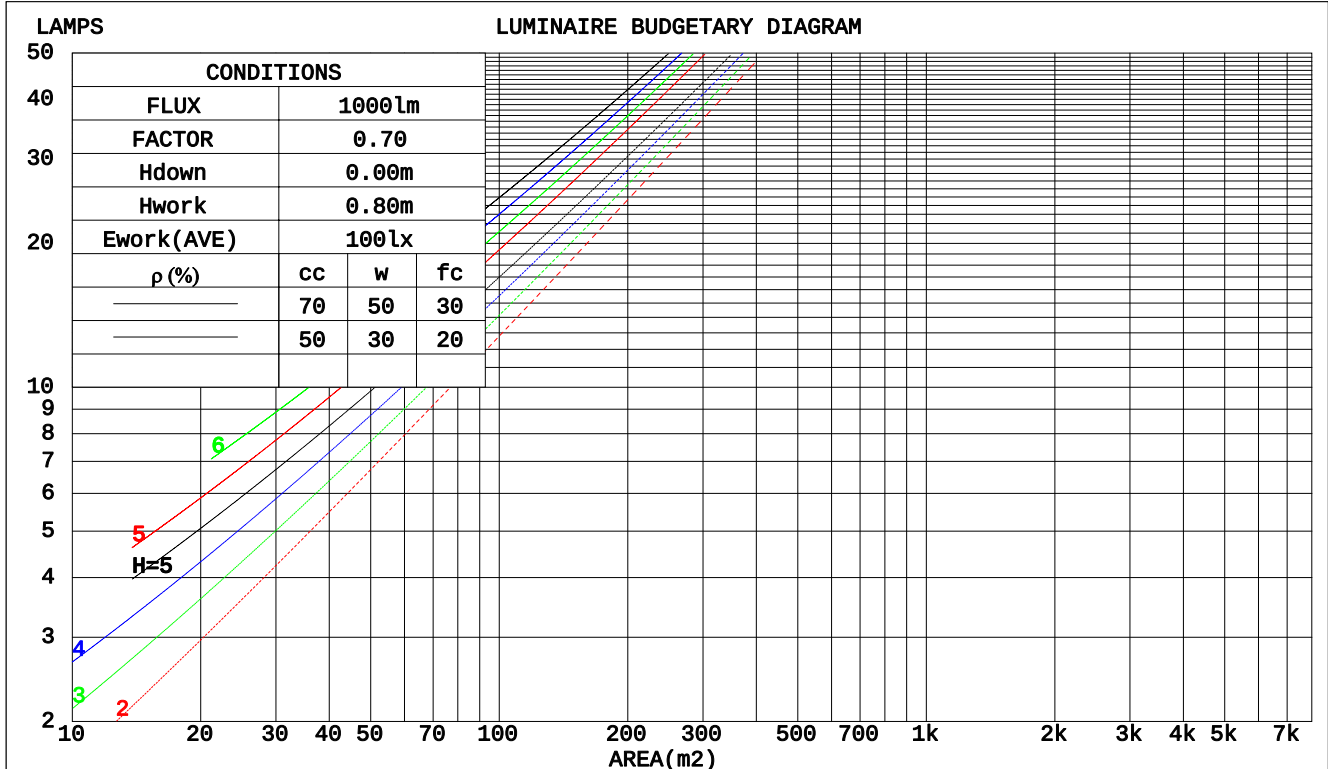

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-05-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity: 50.0%
Test Distance: 6.770m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.60V I:0.1200A P:14.500W PF:0.9980 Freq:50.00Hz Lamp Flux:2211.92x1 lm									
NAME: WL-2RTST2215D(5000K)					TYPE:			WEIGHT:	
SPEC.:					DIM.:			SERIAL No.:	
MFR.: Shenzhen Wisdom Light Co., ltd					SUR.:0.6*0.6			Shielding Angle:	

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.205	.117	.037	.198	.113	.036	.185	.106	.034	.174	.100	.032	.163	.094	.030		
2.0	.197	.108	.033	.191	.105	.032	.180	.100	.031	.170	.095	.030	.161	.091	.029		
3.0	.187	.100	.030	.182	.098	.029	.173	.094	.028	.164	.090	.028	.156	.086	.027		
4.0	.178	.092	.027	.173	.091	.027	.165	.088	.026	.158	.085	.026	.151	.082	.025		
5.0	.169	.086	.025	.165	.085	.025	.158	.082	.024	.151	.080	.024	.145	.077	.023		
6.0	.160	.080	.023	.157	.079	.023	.151	.077	.022	.145	.075	.022	.139	.073	.022		
7.0	.152	.075	.021	.150	.074	.021	.144	.073	.021	.139	.071	.021	.134	.069	.020		
8.0	.145	.071	.020	.143	.070	.020	.138	.069	.020	.133	.067	.019	.128	.066	.019		
9.0	.139	.067	.019	.136	.066	.019	.132	.065	.018	.127	.064	.018	.123	.063	.018		
10.0	.132	.064	.018	.130	.063	.018	.126	.062	.017	.122	.061	.017	.119	.060	.017		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.173	.157	.143	.148	.135	.123	.102	.093	.085	.058	.054	.050	.019	.017	.016	
2.0	.160	.133	.110	.137	.114	.095	.094	.079	.066	.054	.046	.039	.017	.015	.013	
3.0	.149	.114	.086	.128	.098	.075	.088	.068	.053	.051	.040	.031	.016	.013	.010	
4.0	.140	.100	.069	.120	.086	.060	.082	.060	.042	.048	.035	.025	.015	.011	.008	
5.0	.132	.089	.057	.113	.077	.049	.078	.054	.035	.045	.031	.021	.015	.010	.007	
6.0	.125	.080	.047	.107	.069	.041	.074	.048	.029	.043	.028	.017	.014	.009	.006	
7.0	.118	.072	.040	.102	.063	.035	.070	.044	.025	.041	.026	.015	.013	.008	.005	
8.0	.113	.066	.034	.097	.057	.030	.067	.040	.021	.039	.024	.013	.013	.008	.004	
9.0	.108	.061	.030	.093	.053	.026	.064	.037	.018	.037	.022	.011	.012	.007	.004	
10.0	.103	.057	.026	.089	.049	.023	.062	.035	.016	.036	.021	.010	.012	.007	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.60V I:0.1200A P:14.500W PF:0.9980 Freq:50.00Hz Lamp Flux:2211.92x1 lm											
NAME: WL-2RTST2215D(5000K)						TYPE:			WEIGHT:		
SPEC.:						DIM.:			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co., ltd						SUR.:0.6*0.6			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	9.4	10.5	9.7	10.7	10.9	9.0	10.1	9.3	10.3	10.5
	3H	9.4	10.4	9.7	10.6	10.8	9.4	10.4	9.7	10.6	10.8
	4H	9.4	10.4	9.7	10.6	10.8	9.6	10.6	9.9	10.8	11.0
	6H	9.5	10.4	9.8	10.7	10.9	9.8	10.7	10.1	10.9	11.2
	8H	9.5	10.3	9.8	10.6	10.9	9.8	10.6	10.1	10.9	11.2
	12H	9.5	10.3	9.8	10.5	10.8	9.8	10.6	10.1	10.9	11.2
4H	2H	9.3	10.3	9.6	10.5	10.7	8.9	9.9	9.2	10.1	10.4
	3H	9.4	10.2	9.7	10.5	10.7	9.5	10.3	9.8	10.6	10.8
	4H	9.4	10.2	9.8	10.5	10.8	9.8	10.5	10.1	10.8	11.1
	6H	9.6	10.3	10.0	10.6	10.9	10.0	10.6	10.4	11.0	11.3
	8H	9.6	10.2	10.0	10.5	10.9	10.0	10.6	10.4	11.0	11.4
	12H	9.5	10.1	10.0	10.5	10.9	10.1	10.6	10.5	11.0	11.4
8H	4H	9.4	10.0	9.8	10.4	10.7	9.7	10.3	10.1	10.7	11.1
	6H	9.6	10.1	10.1	10.5	10.9	10.0	10.5	10.4	10.9	11.3
	8H	9.6	10.0	10.1	10.5	10.9	10.1	10.5	10.5	11.0	11.4
	12H	9.6	10.0	10.1	10.4	10.9	10.2	10.6	10.7	11.0	11.5
12H	4H	9.4	9.9	9.8	10.3	10.7	9.7	10.2	10.1	10.6	11.0
	6H	9.6	10.0	10.1	10.5	10.9	10.0	10.4	10.4	10.8	11.3
	8H	9.6	10.0	10.1	10.4	10.9	10.1	10.5	10.6	10.9	11.4
Variations with the observer position at spacings:											
S = 1.0H	+ 2.4 / - 4.3					+ 1.7 / - 2.2					
1.5H	+ 4.4 / - 4.1					+ 3.4 / - 2.1					
2.0H	+ 4.4 / - 1.6					+ 2.2 / - 0.8					

CIE Pub.117, 2212 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 2.8$)
Area: 0.36 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.60V I:0.1200A P:14.500W PF:0.9980 Freq:50.00Hz Lamp Flux:2211.92x1 lm		
NAME: WL-2RTST2215D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:0.6*0.6	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	81	73	69	80	73	69	79	73	69	64
0.80	89	82	77	88	82	77	87	81	77	73
1.00	95	88	84	94	87	83	92	88	83	78
1.25	99	93	89	98	93	89	96	91	88	83
1.50	103	97	93	101	96	92	99	94	91	86
2.00	106	101	97	105	100	97	102	98	95	89
2.50	108	104	100	106	102	99	103	100	97	91
3.00	110	106	103	108	105	102	105	102	99	93
4.00	112	109	106	110	107	105	107	104	102	95
5.00	114	111	109	112	109	107	108	106	104	96
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-05-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:121.60V I:0.1200A P:14.500W PF:0.9980 Freq:50.00Hz Lamp Flux:2211.92x1 lm		
NAME: WL-2RTST2215D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:0.6*0.6	Shielding Angle:

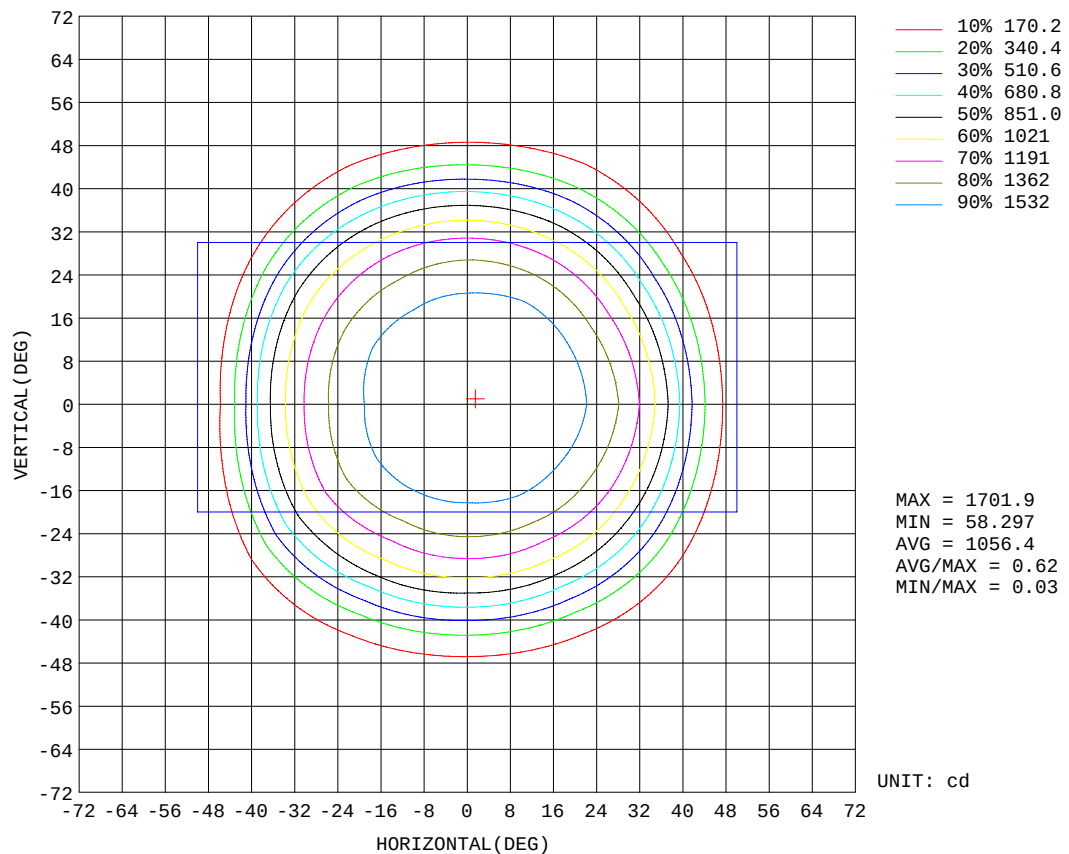


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-05-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity: 50.0%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

AAI Figure

Test:U:121.60V I:0.1200A P:14.500W PF:0.9980 Freq:50.00Hz Lamp Flux:2211.92x1 lm		
NAME: WL-2RTST2215D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:0.6*0.6	Shielding Angle:

Flux out:1630 lm

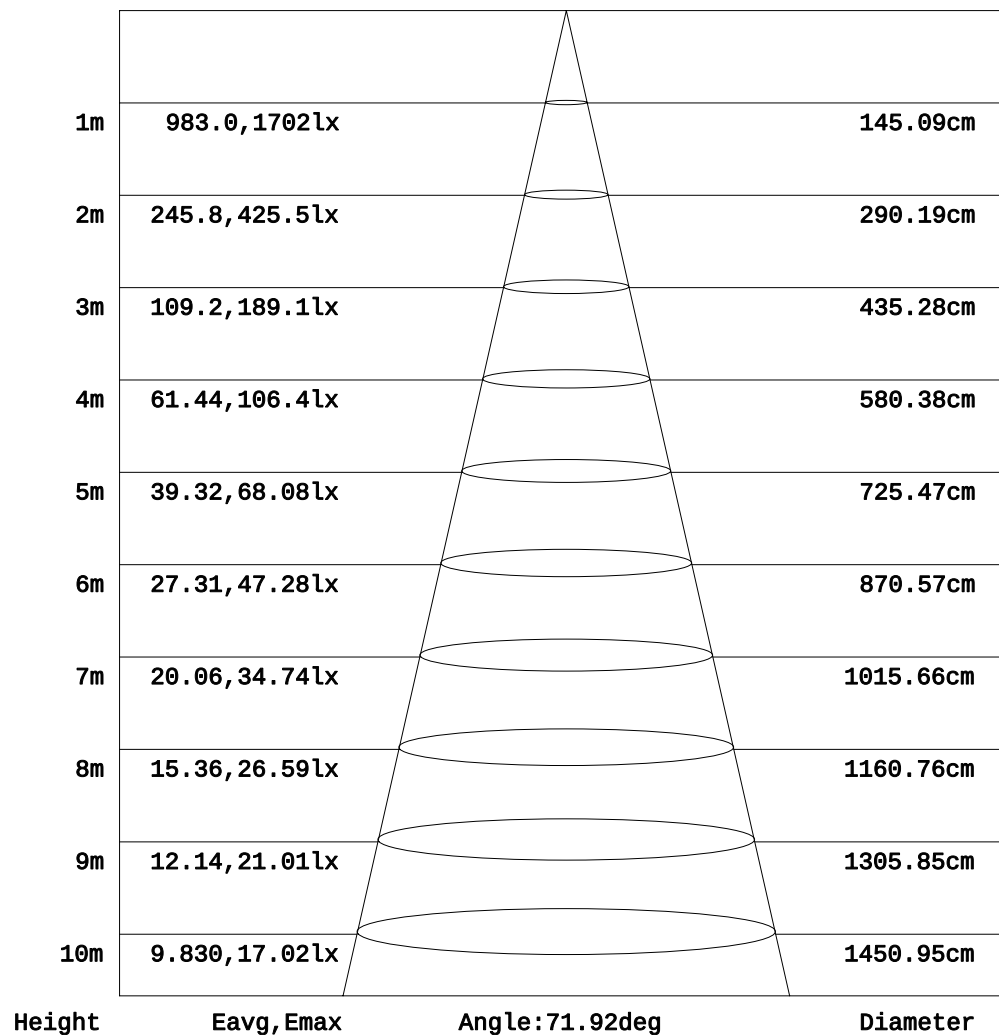


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-05-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity: 50.0%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:121.60V I:0.1200A P:14.500W PF:0.9980 Freq:50.00Hz Lamp Flux:2211.92x1 lm		
NAME: WL-2RTST2215D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:0.6*0.6	Shielding Angle:

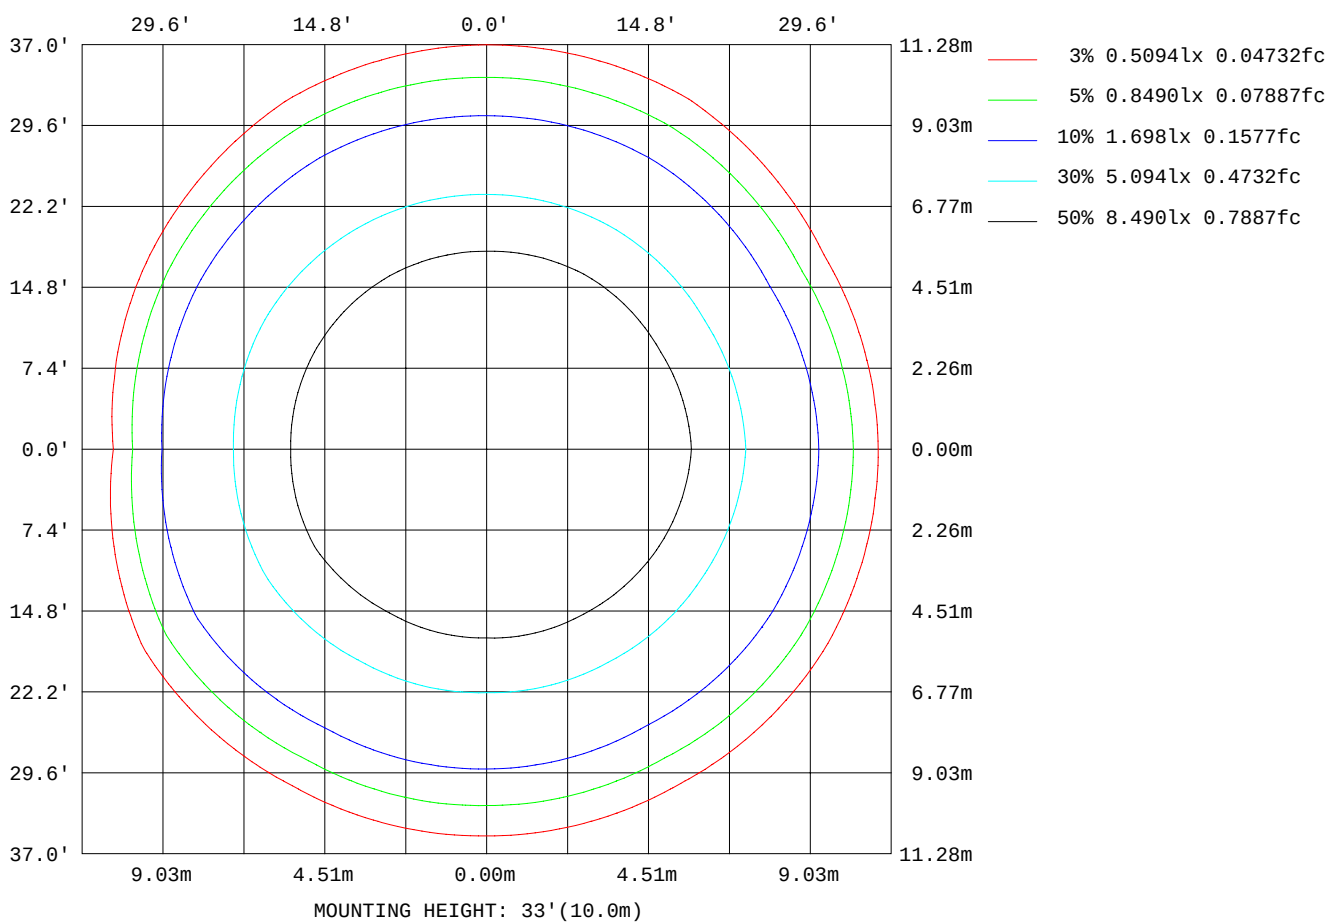

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-05-11

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity: 50.0%
Test Distance: 6.770m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:121.60V I:0.1200A P:14.500W PF:0.9980 Freq:50.00Hz Lamp Flux:2211.92x1 lm		
NAME: WL-2RTST2215D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:0.6*0.6	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	244
L_0~180(75)av	226
L_0~180(85)av	83
L_90~270(65)av	426
L_90~270(75)av	384
L_90~270(85)av	296
L_45(65)av	308
L_45(75)av	221
L_45(85)av	193

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-11

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

Planar Illuminance Curve

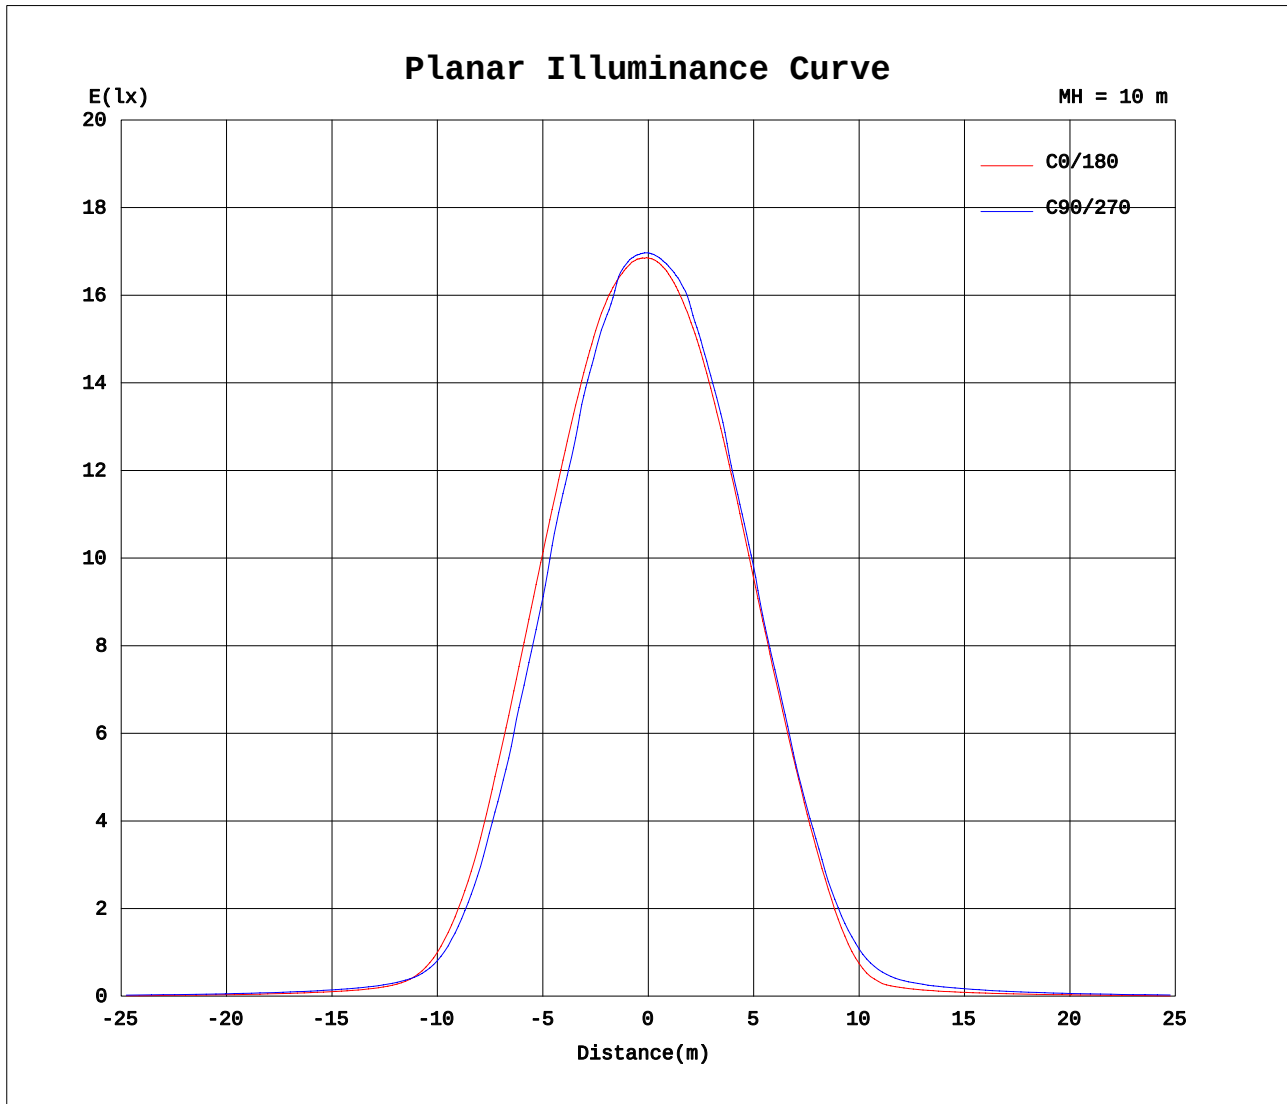

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-05-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity: 50.0%
Test Distance: 6.770m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.60V I:0.1200A P:14.500W PF:0.9980 Freq:50.00Hz Lamp Flux:2211.92x1 lm																	
NAME: WL-2RTST2215D(5000K)									TYPE:			WEIGHT:					
SPEC.:									DIM.:			SERIAL No.:					
MFR.: Shenzhen Wisdom Light Co., ltd									SUR.:0.6*0.6			Shielding Angle:					

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1695	1695	1695	1695	1695	1695	1695	1695	1695	1695	1695	1695						
5	1699	1701	1701	1699	1693	1689	1684	1683	1686	1688	1691	1694						
10	1694	1692	1669	1652	1658	1668	1654	1659	1671	1683	1687	1687						
15	1661	1647	1610	1596	1591	1618	1605	1618	1618	1624	1637	1653						
20	1586	1543	1515	1480	1496	1514	1522	1542	1534	1549	1561	1570						
25	1469	1408	1361	1339	1344	1393	1392	1419	1402	1415	1416	1421						
30	1291	1219	1138	1132	1128	1215	1210	1223	1229	1221	1235	1225						
35	1020	930	870	851	881	958	953	985	974	961	960	947						
40	640	600	526	518	542	652	599	649	646	634	622	582						
45	286	274	230	230	240	304	213	278	315	305	300	257						
50	105	112	115	120	119	116	77.5	98.0	137	143	143	108						
55	68.0	68.4	83.8	90.3	89.2	67.6	56.8	64.2	95.4	107	101	69.4						
60	51.4	50.7	66.5	74.5	71.4	48.9	45.9	48.9	75.0	86.5	79.0	51.7						
65	38.1	37.9	52.4	61.6	55.7	38.6	36.2	38.9	56.7	68.2	60.3	38.2						
70	21.1	21.9	39.0	49.2	41.0	29.4	16.3	26.9	41.5	51.9	43.1	19.9						
75	21.3	17.8	25.4	34.2	26.9	14.8	20.7	15.5	28.9	37.3	27.5	15.0						
80	4.97	11.9	14.3	18.6	12.3	11.1	4.90	11.9	14.6	20.8	13.2	7.52						
85	2.73	4.25	6.79	9.22	8.09	5.64	2.50	4.53	7.60	9.38	7.79	3.68						
90	0.02	0.03	0.04	0.03	0.04	0.53	0.03	0.06	0.38	0.09	0.05	0.04						
95	0.03	0.03	0.04	0.07	0.04	0.03	0.04	0.04	0.06	0.05	0.05	0.05						
100	0.04	0.05	0.05	0.06	0.04	0.04	0.05	0.05	0.06	0.06	0.06	0.06						
105	0.04	0.05	0.10	0.06	0.17	0.06	0.05	0.06	0.05	0.06	0.06	0.06						
110	0.04	0.06	0.16	0.07	0.17	0.09	0.05	0.05	0.07	0.06	0.09	0.05						
115	0.06	0.08	0.19	0.08	0.14	0.14	0.08	0.10	0.08	0.08	0.09	0.11						
120	0.09	0.13	0.10	0.11	0.11	0.14	0.12	0.14	0.11	0.10	0.10	0.14						
125	0.14	0.19	0.15	0.15	0.16	0.21	0.19	0.20	0.13	0.13	0.14	0.18						
130	0.21	0.25	0.21	0.25	0.21	0.24	0.23	0.24	0.17	0.19	0.19	0.23						
135	0.27	0.31	0.26	0.31	0.26	0.26	0.26	0.25	0.22	0.26	0.24	0.25						
140	0.32	0.31	0.36	0.33	0.31	0.30	0.28	0.28	0.27	0.30	0.29	0.28						
145	0.33	0.34	0.39	0.37	0.36	0.35	0.32	0.31	0.31	0.33	0.34	0.32						
150	0.37	0.38	0.45	0.40	0.42	0.39	0.36	0.35	0.36	0.38	0.34	0.37						
155	0.41	0.44	0.47	0.48	0.46	0.45	0.41	0.41	0.40	0.40	0.39	0.41						
160	0.49	0.63	0.56	0.53	0.52	0.51	0.49	0.48	0.46	0.45	0.45	0.48						
165	0.56	0.64	0.61	0.60	0.58	0.56	0.56	0.55	0.54	0.52	0.51	0.51						
170	0.61	0.60	0.65	0.65	0.62	0.60	0.60	0.60	0.59	0.58	0.57	0.56						
175	0.63	0.62	0.64	0.63	0.62	0.62	0.61	0.61	0.60	0.60	0.60	0.58						
180	0.62	0.60	0.62	0.61	0.61	0.60	0.62	0.61	0.61	0.61	0.61	0.60						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-11

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks: