


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.1980A P:23.50W PF:0.9940 Lamp Flux:3789.46x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 161.25 lm/W			
MODEL		Imax(cd)	2659	S/MH(C0/180)	1.13
NOMINAL POWER(W)	24	LOR(%)	100.0	S/MH(C90/270)	1.21
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	3789.5	□ UP,DN(C0-180)	0.2,55.0
NOMINAL FLUX(lm)	3789.46	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.2,44.5
LAMPS INSIDE	1	□ up(%)	0.5	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	119.5	□ down(%)	99.5	CIBSE SHR MAX	1.15

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

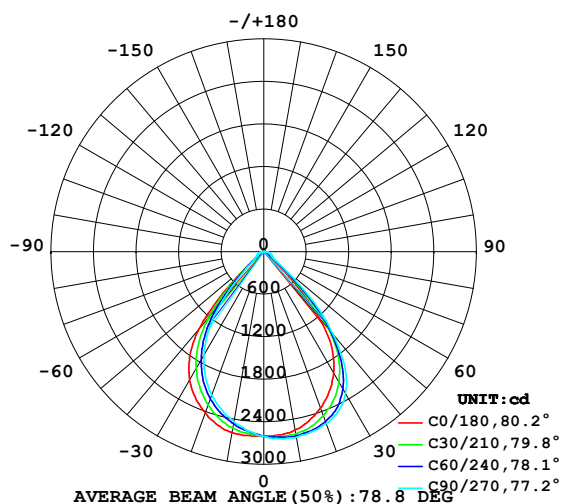

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

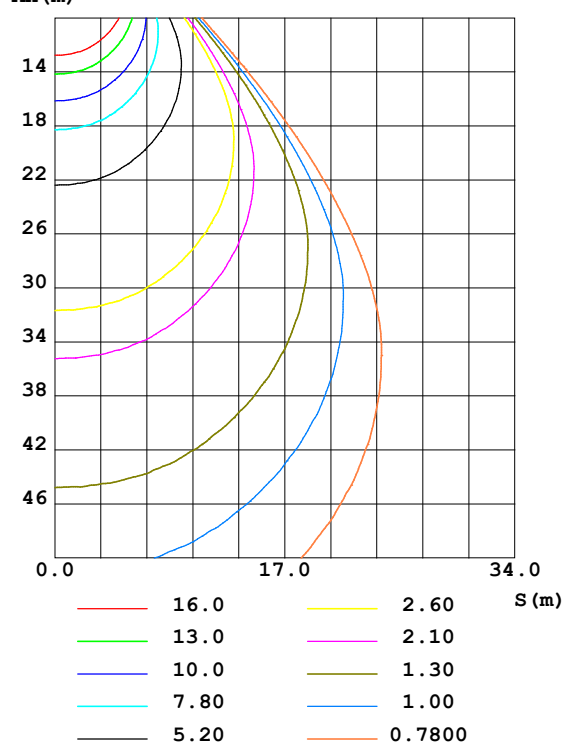


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	zone	total	%lum, lamp
5	2595	2619	2649	2633	2600	2558	2537	2540	0- 5	62.10	62.10	1.64,1.64
10	2555	2623	2658	2653	2592	2495	2434	2456	5- 10	184.2	246.3	6.5,6.5
15	2472	2585	2625	2643	2531	2395	2304	2327	10- 15	299.2	545.5	14.4,14.4
20	2346	2506	2581	2582	2419	2252	2153	2162	15- 20	400.8	946.3	25,25
25	2182	2378	2487	2485	2277	2073	1948	1959	20- 25	482.8	1429	37.7,37.7
30	1973	2179	2307	2322	2095	1835	1688	1699	25- 30	536.5	1966	51.9,51.9
35	1686	1877	2001	2058	1826	1535	1356	1357	30- 35	549.4	2515	66.4,66.4
40	1197	1440	1518	1660	1421	1123	906.8	857.3	35- 40	499.7	3015	79.6,79.6
45	514.8	782.0	958.5	1079	742.1	588.9	420.7	362.7	40- 45	362.8	3378	89.1,89.1
50	112.9	226.6	367.2	399.1	182.5	199.3	189.2	148.6	45- 50	173.2	3551	93.7,93.7
55	60.35	106.0	168.8	133.4	68.61	97.29	139.8	99.27	50- 55	66.74	3617	95.5,95.5
60	41.29	75.68	131.2	89.10	44.77	67.75	114.3	73.15	55- 60	42.31	3660	96.6,96.6
65	28.11	57.65	112.9	69.50	30.91	50.51	93.12	54.46	60- 65	33.67	3693	97.5,97.5
70	19.73	41.48	96.62	52.20	21.04	35.81	73.49	40.40	65- 70	26.90	3720	98.2,98.2
75	15.87	26.75	78.22	34.83	17.31	21.63	59.44	26.44	70- 75	20.36	3741	98.7,98.7
80	27.27	15.86	53.82	18.96	44.29	13.61	41.33	14.22	75- 80	15.84	3757	99.1,99.1
85	15.19	12.20	18.75	11.31	15.43	10.63	11.63	9.789	80- 85	9.831	3766	99.4,99.4
90	7.934	4.487	0.2711	5.881	9.077	5.966	0.2127	5.833	85- 90	4.840	3771	99.5,99.5
95	4.728	4.563	0.2056	4.899	5.676	3.872	0.2677	3.526	90- 95	2.281	3773	99.6,99.6
100	3.925	3.267	0.4117	3.959	5.061	3.743	0.3732	2.741	95-100	1.855	3775	99.6,99.6
105	3.907	3.569	0.4613	3.812	4.552	3.715	0.5053	3.049	100-105	1.667	3777	99.7,99.7
110	4.190	2.857	0.2886	3.292	4.852	3.214	0.5056	2.536	105-110	1.546	3779	99.7,99.7
115	3.644	2.562	0.2336	3.045	4.522	3.095	0.5112	2.239	110-115	1.373	3780	99.7,99.7
120	3.376	2.402	0.2681	2.733	4.477	2.992	0.5359	2.190	115-120	1.203	3781	99.8,99.8
125	3.425	2.406	0.2871	2.881	4.526	3.314	0.6221	2.385	120-125	1.154	3782	99.8,99.8
130	3.887	2.537	0.3390	3.064	4.794	3.972	0.5840	2.659	125-130	1.173	3783	99.8,99.8
135	4.839	2.493	0.4347	3.473	6.031	3.865	0.6507	2.489	130-135	1.205	3785	99.9,99.9
140	3.942	2.221	0.5362	3.438	5.283	3.172	0.7503	2.186	135-140	1.079	3786	99.9,99.9
145	3.228	1.963	0.6415	2.848	4.117	2.820	0.8402	2.108	140-145	0.8367	3787	99.9,99.9
150	3.194	1.790	0.8311	2.705	3.564	2.728	0.9474	2.401	145-150	0.6782	3787	99.9,99.9
155	4.155	2.129	0.9152	3.180	3.978	3.370	1.037	2.814	150-155	0.6300	3788	100,100
160	4.795	2.315	0.9994	3.590	5.008	4.112	1.112	2.783	155-160	0.6291	3789	100,100
165	4.321	1.947	1.078	3.506	4.132	3.924	1.179	2.043	160-165	0.4907	3789	100,100
170	2.704	1.440	1.147	3.111	3.115	2.569	1.219	1.398	165-170	0.3054	3789	100,100
175	1.294	1.229	1.193	1.833	1.299	1.300	1.226	1.230	170-175	0.1222	3789	100,100
180	1.257	1.209	1.219	1.240	1.259	1.213	1.219	1.233	175-180	0.0304	3789	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

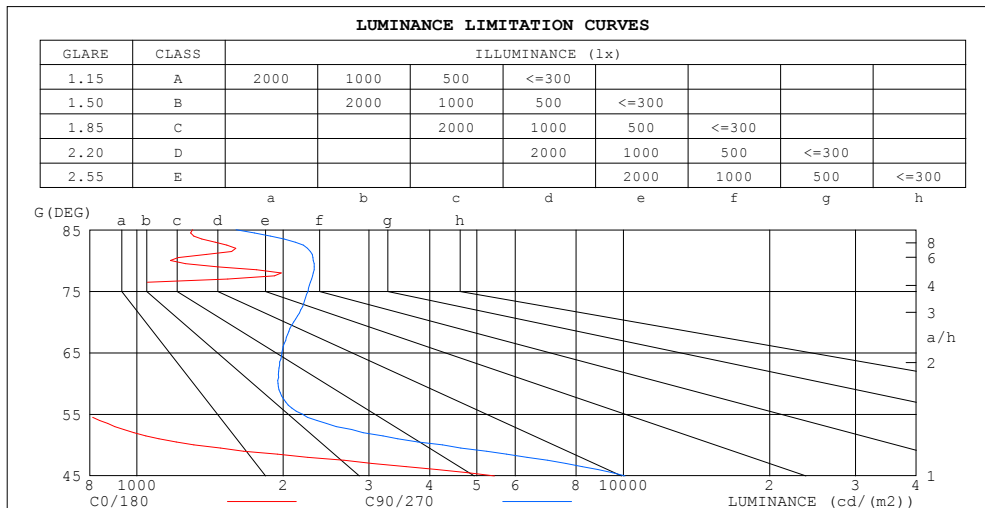


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.5V I:0.1980A P:23.50W PF:0.9940 Lamp Flux:3789.46x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

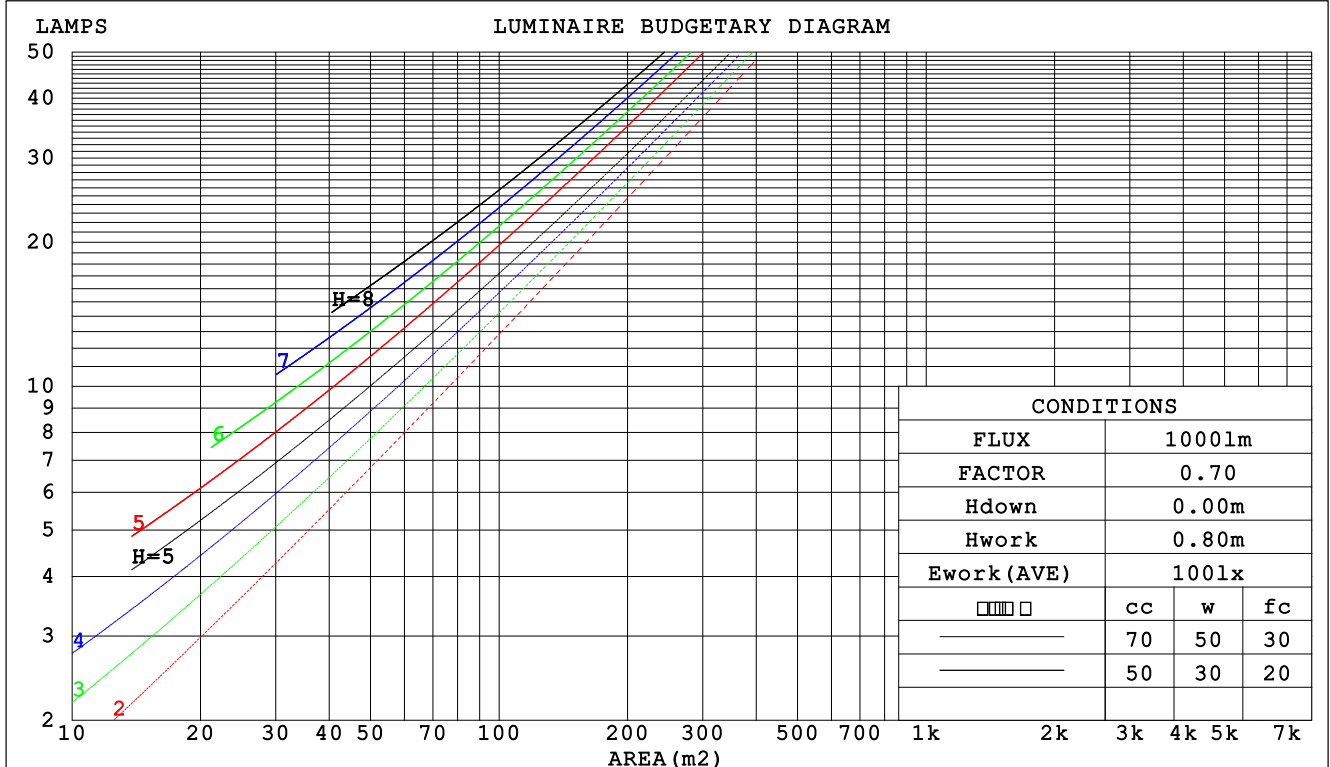

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

WEC AND CCEC

Test:U:119.5V I:0.1980A P:23.50W PF:0.9940 Lamp Flux:3789.46x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

□cc	80%	70%	50%	30%	10%	0
□w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
□fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.208 .119 .038	.201 .115 .037	.188 .108 .035	.176 .102 .033	.165 .096 .031	
2.0	.200 .110 .034	.194 .107 .033	.183 .102 .032	.173 .097 .030	.164 .093 .029	
3.0	.191 .102 .030	.186 .100 .030	.176 .095 .029	.167 .092 .028	.159 .088 .027	
4.0	.182 .094 .028	.177 .093 .027	.169 .089 .027	.161 .086 .026	.154 .083 .025	
5.0	.173 .088 .025	.169 .087 .025	.161 .084 .025	.154 .081 .024	.148 .079 .024	
6.0	.164 .082 .024	.161 .081 .023	.154 .079 .023	.148 .077 .023	.142 .075 .022	
7.0	.156 .077 .022	.153 .076 .022	.147 .074 .021	.142 .073 .021	.137 .071 .021	
8.0	.149 .073 .020	.146 .072 .020	.141 .070 .020	.136 .069 .020	.131 .067 .020	
9.0	.142 .069 .019	.140 .068 .019	.135 .067 .019	.130 .065 .019	.126 .064 .019	
10.0	.136 .065 .018	.133 .064 .018	.129 .063 .018	.125 .062 .018	.121 .061 .017	

□cc	80%	70%	50%	30%	10%	0
□w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
□fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.194 .194 .194	.166 .166 .166	.113 .113 .113	.065 .065 .065	.021 .021 .021	
1.0	.177 .161 .146	.151 .138 .126	.104 .095 .087	.060 .055 .051	.019 .018 .016	
2.0	.164 .136 .113	.140 .117 .098	.096 .081 .068	.055 .047 .040	.018 .015 .013	
3.0	.153 .118 .089	.131 .101 .077	.090 .070 .054	.052 .041 .032	.017 .013 .010	
4.0	.144 .103 .072	.124 .089 .063	.085 .062 .044	.049 .036 .026	.016 .012 .009	
5.0	.136 .092 .060	.117 .080 .052	.081 .056 .037	.047 .033 .022	.015 .011 .007	
6.0	.129 .083 .050	.111 .072 .044	.077 .050 .031	.044 .030 .018	.014 .010 .006	
7.0	.123 .076 .043	.106 .066 .037	.073 .046 .026	.043 .027 .016	.014 .009 .005	
8.0	.118 .070 .037	.101 .061 .032	.070 .043 .023	.041 .025 .014	.013 .008 .005	
9.0	.113 .065 .033	.097 .056 .029	.067 .040 .020	.039 .023 .012	.013 .008 .004	
10.0	.108 .061 .029	.093 .053 .026	.065 .037 .018	.038 .022 .011	.012 .007 .004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: BQE46-1000-42-PV-S1
 佑明B档
 3500K

Uncorrected UGR Table

Test:U:119.5V I:0.1980A P:23.50W PF:0.9940 Lamp Flux:3789.46x1 lm										
NAME: 磁铁灯条					TYPE:T5窄灯条 3500K			WEIGHT:		
DIM.: 4FT*2					SPEC.:透镜款			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co,ltd					SUR.:1.22*0.11m			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.7	16.8	15.9	17.0	17.2	16.9	18.1	17.2	18.3	18.4
3H	15.5	16.5	15.8	16.8	17.0	17.1	18.1	17.3	18.3	18.5
4H	15.4	16.4	15.7	16.6	16.9	17.2	18.1	17.5	18.4	18.6
6H	15.5	16.4	15.8	16.7	17.0	17.3	18.2	17.6	18.5	18.8
8H	15.6	16.4	15.9	16.7	17.0	17.4	18.3	17.7	18.5	18.8
12H	15.6	16.4	15.9	16.7	17.0	17.4	18.2	17.7	18.5	18.8
4H 2H	15.5	16.4	15.8	16.7	16.9	16.7	17.7	17.0	17.9	18.2
3H	15.3	16.2	15.7	16.4	16.7	16.9	17.7	17.2	18.0	18.3
4H	15.3	16.0	15.6	16.3	16.7	17.1	17.8	17.4	18.1	18.5
6H	15.4	16.1	15.8	16.4	16.8	17.3	18.0	17.7	18.3	18.7
8H	15.5	16.1	15.9	16.5	16.9	17.4	18.0	17.8	18.4	18.8
12H	15.6	16.1	16.0	16.5	16.9	17.5	18.0	17.9	18.4	18.8
8H 4H	15.2	15.8	15.6	16.2	16.5	17.0	17.6	17.4	17.9	18.3
6H	15.4	15.9	15.8	16.3	16.7	17.2	17.7	17.7	18.1	18.5
8H	15.5	15.9	16.0	16.4	16.8	17.4	17.8	17.8	18.2	18.7
12H	15.6	16.0	16.1	16.5	16.9	17.4	17.8	17.9	18.3	18.7
12H 4H	15.1	15.7	15.6	16.1	16.5	16.9	17.5	17.3	17.9	18.3
6H	15.3	15.8	15.8	16.2	16.7	17.2	17.6	17.6	18.0	18.5
8H	15.5	15.9	16.0	16.3	16.8	17.3	17.7	17.8	18.1	18.6
Variations with the observer position at spacings:										
S = 1.0H	+ 2.3 / - 5.9					+ 1.7 / - 3.6				
1.5H	+ 4.0 / - 5.9					+ 3.1 / - 4.3				
2.0H	+ 5.1 / - 2.7					+ 5.4 / - 2.5				

CIE Pub.117 Corrected 3789 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.6)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.1980A P:23.50W PF:0.9940 Lamp Flux:3789.46x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	71	66	78	71	66	77	70	66	62
0.80	87	80	75	87	80	75	85	79	75	70
1.00	93	86	82	92	86	82	91	86	81	76
1.25	98	92	88	97	91	87	95	90	86	81
1.50	102	96	92	100	95	91	98	93	90	85
2.00	106	100	97	104	99	96	101	97	94	88
2.50	108	103	99	106	102	98	103	99	96	90
3.00	110	105	102	108	104	101	104	101	99	92
4.00	112	108	106	110	107	104	106	104	102	94
5.00	113	110	108	111	109	106	107	105	103	95
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: BQE46-1000-42-PV-S1
 佑明B档
 3500K

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.1980A P:23.50W PF:0.9940 Lamp Flux:3789.46x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

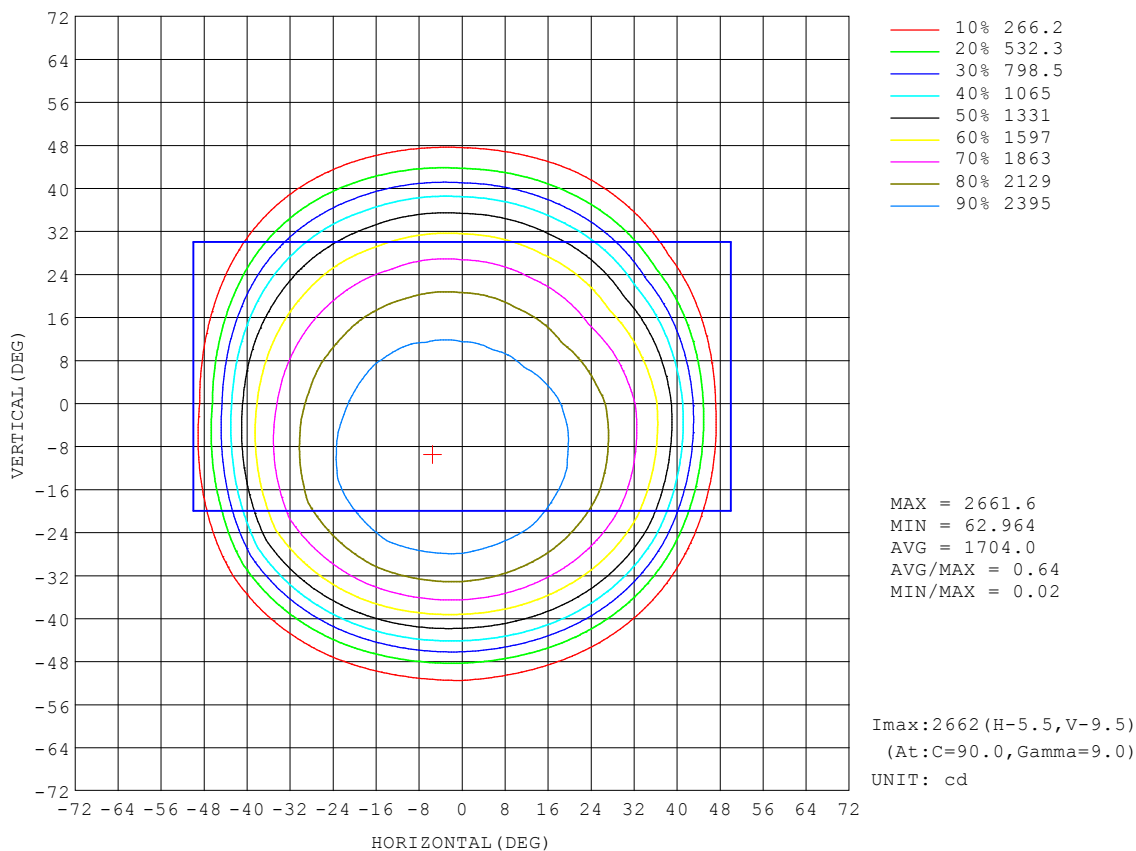


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

AAI Figure

Test:U:119.5V I:0.1980A P:23.50W PF:0.9940 Lamp Flux:3789.46x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

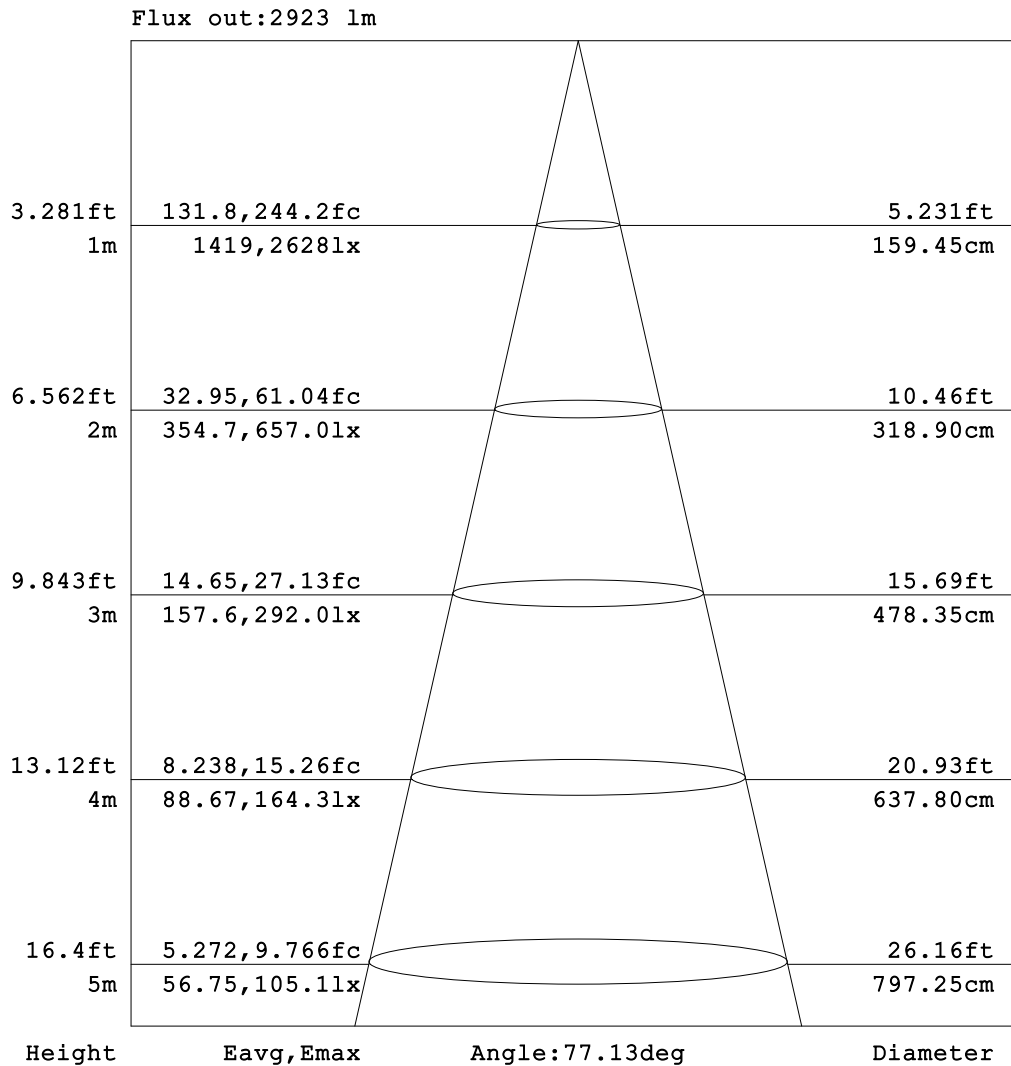


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

ISOLUX DIAGRAM


Test:U:119.5V I:0.1980A P:23.50W PF:0.9940 Lamp Flux:3789.46x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

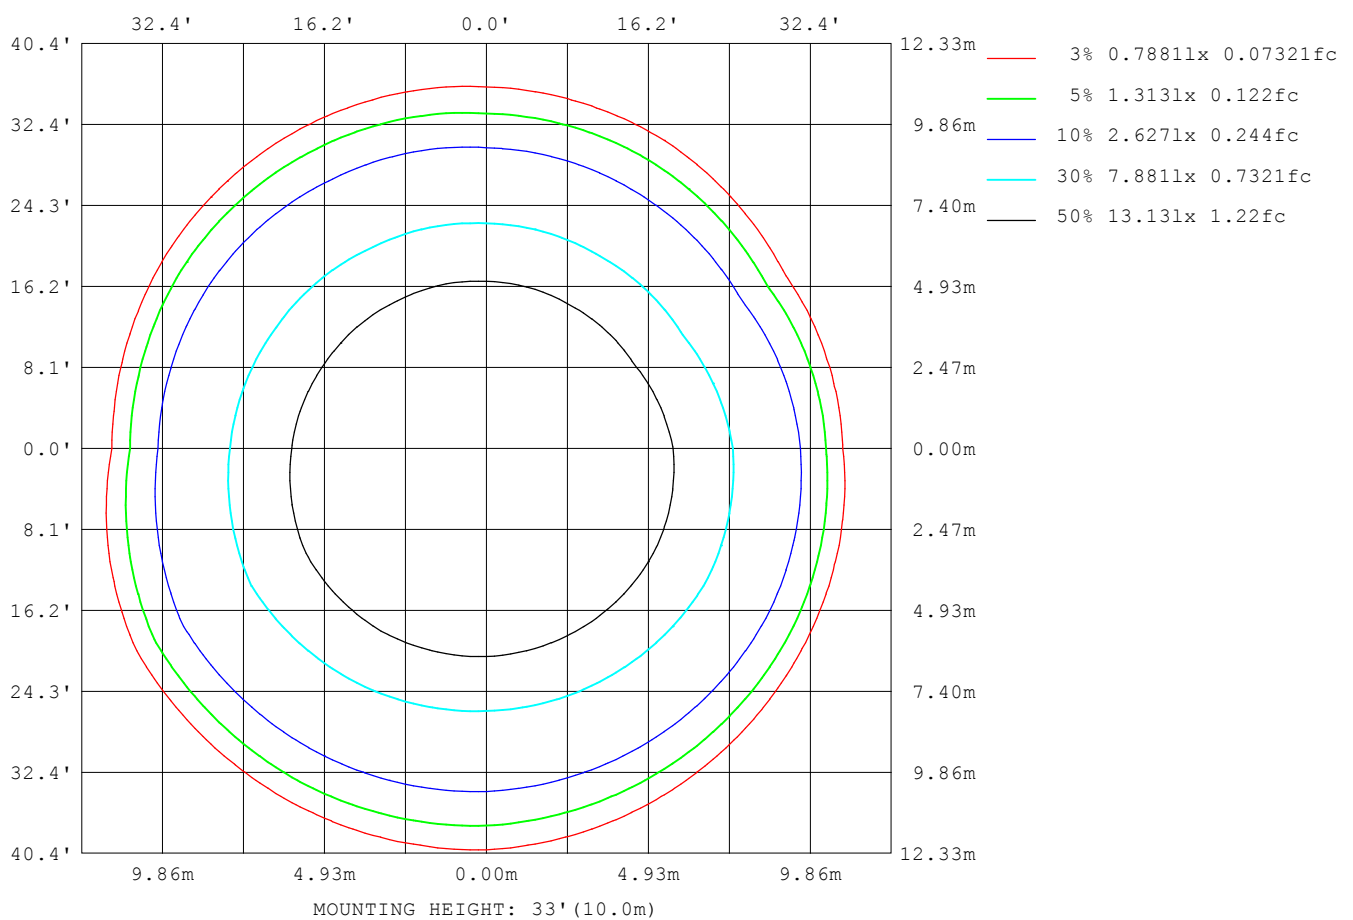

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

Planar Illuminance Curve

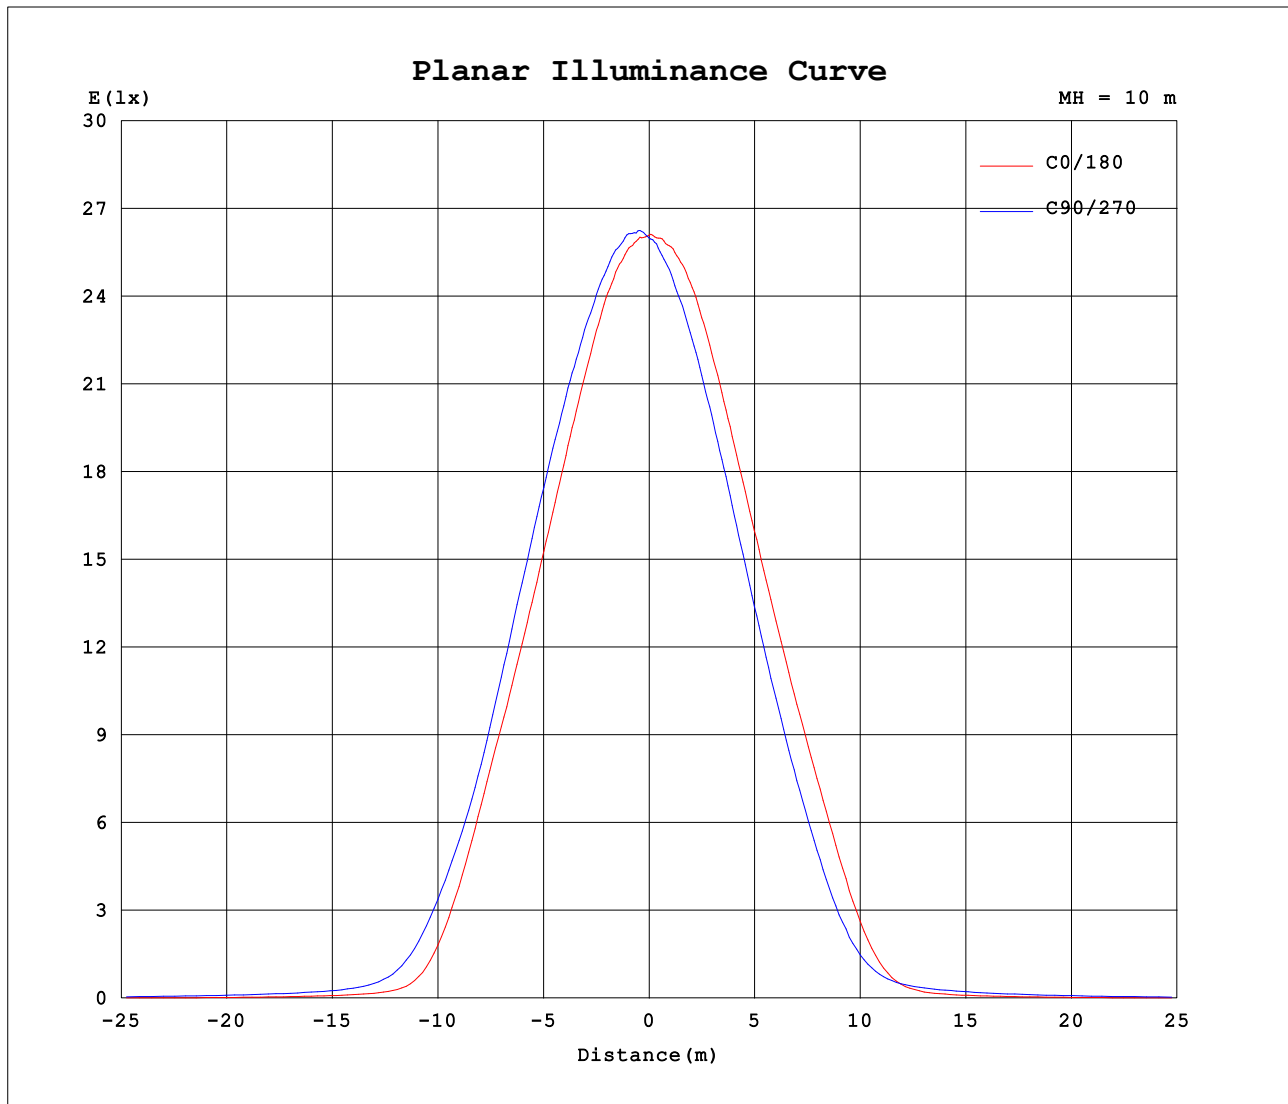

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.1980A P:23.50W PF:0.9940 Lamp Flux:3789.46x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2604	2604	2604	2604	2604	2604	2604	2604	2604	2604	2604	2604						
5	2595	2613	2625	2649	2636	2630	2600	2576	2540	2537	2517	2564						
10	2555	2610	2637	2658	2650	2656	2592	2525	2464	2434	2424	2488						
15	2472	2558	2612	2625	2646	2641	2531	2434	2356	2304	2299	2355						
20	2346	2463	2549	2581	2596	2568	2419	2298	2205	2153	2134	2189						
25	2182	2320	2435	2487	2513	2456	2277	2128	2018	1948	1929	1990						
30	1973	2125	2232	2307	2345	2300	2095	1906	1764	1688	1664	1735						
35	1686	1841	1913	2001	2053	2063	1826	1618	1452	1356	1327	1388						
40	1197	1417	1464	1518	1620	1700	1421	1212	1034	907	850	865						
45	515	711	853	958	1044	1114	742	651	526	421	387	338						
50	113	178	275	367	392	406	182	195	203	189	171	126						
55	60.3	79.9	132	169	153	113	68.6	72.9	122	140	125	73.8						
60	41.3	56.3	95.2	131	110	67.8	44.8	44.2	91.3	114	100.0	46.2						
65	28.1	39.5	75.9	113	88.5	50.4	30.9	31.4	69.7	93.1	78.4	30.4						
70	19.7	24.7	58.4	96.6	70.4	33.9	21.0	21.6	50.1	73.5	59.0	21.7						
75	15.9	16.6	36.9	78.2	50.0	19.6	17.3	15.4	27.9	59.4	37.2	15.7						
80	27.3	13.7	18.0	53.8	24.1	13.8	44.3	10.7	16.5	41.3	17.9	10.5						
85	15.2	15.5	8.91	18.7	11.0	11.6	15.4	12.9	8.35	11.6	8.56	11.0						
90	7.93	6.39	2.57	0.27	3.06	8.72	9.08	9.41	2.51	0.21	1.80	9.89						
95	4.73	6.72	2.39	0.21	2.46	7.35	5.68	5.08	2.66	0.27	1.82	5.24						
100	3.93	3.86	2.67	0.41	2.55	5.37	5.06	4.28	3.20	0.37	1.86	3.63						
105	3.91	3.46	3.68	0.46	3.17	4.45	4.55	4.04	3.39	0.51	2.82	3.28						
110	4.19	3.58	2.14	0.29	2.48	4.11	4.85	3.95	2.48	0.51	1.85	3.22						
115	3.64	3.13	1.99	0.23	2.09	4.01	4.52	3.76	2.43	0.51	1.64	2.84						
120	3.38	2.97	1.83	0.27	2.01	3.46	4.48	3.57	2.42	0.54	1.58	2.80						
125	3.43	2.99	1.81	0.29	2.06	3.71	4.53	3.75	2.88	0.62	1.82	2.95						
130	3.89	3.20	1.87	0.34	2.19	3.94	4.79	4.66	3.28	0.58	1.90	3.42						
135	4.84	3.36	1.62	0.43	2.42	4.53	6.03	5.00	2.72	0.65	1.73	3.25						
140	3.94	3.06	1.38	0.54	2.26	4.62	5.28	3.86	2.48	0.75	1.72	2.66						
145	3.23	2.62	1.30	0.64	2.11	3.59	4.12	3.29	2.35	0.84	1.82	2.40						
150	3.19	2.20	1.38	0.83	2.19	3.22	3.56	3.04	2.41	0.95	2.00	2.81						
155	4.15	2.59	1.67	0.92	2.63	3.74	3.98	3.72	3.02	1.04	2.18	3.45						
160	4.80	2.84	1.79	1.00	2.73	4.45	5.01	4.56	3.66	1.11	1.99	3.58						
165	4.32	2.12	1.78	1.08	2.75	4.27	4.13	4.87	2.98	1.18	1.26	2.83						
170	2.70	1.67	1.21	1.15	2.19	4.03	3.11	3.04	2.10	1.22	1.21	1.58						
175	1.29	1.26	1.20	1.19	1.23	2.43	1.30	1.36	1.24	1.23	1.21	1.25						
180	1.26	1.22	1.20	1.22	1.22	1.26	1.26	1.22	1.20	1.22	1.21	1.25						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K