


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.2360A P:28.10W PF:0.9950 Lamp Flux:4335.03x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*3	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 154.27 lm/W			
MODEL		I _{max} (cd)	2929	S/MH (C0/180)	1.16
NOMINAL POWER (W)	28	LOR (%)	100.0	S/MH (C90/270)	1.17
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	4335.0	□ UP, DN (C0-180)	0.1, 51.3
NOMINAL FLUX (lm)	4335.03	CIE CLASS	DIRECT	□ UP, DN (C180-360)	0.1, 48.5
LAMPS INSIDE	1	□ up (%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	119.5	□ down (%)	99.8	CIBSE SHR MAX	1.25

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

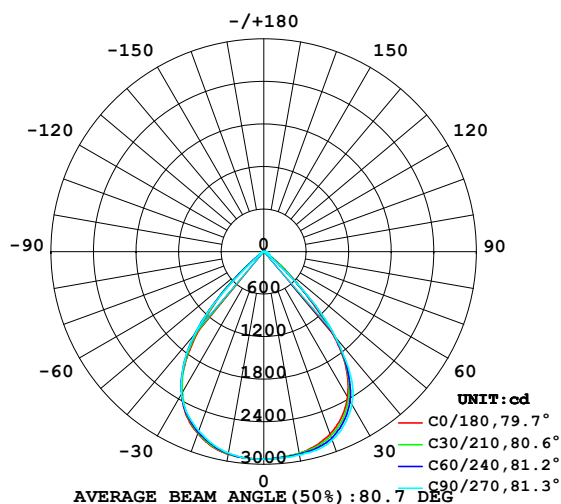

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

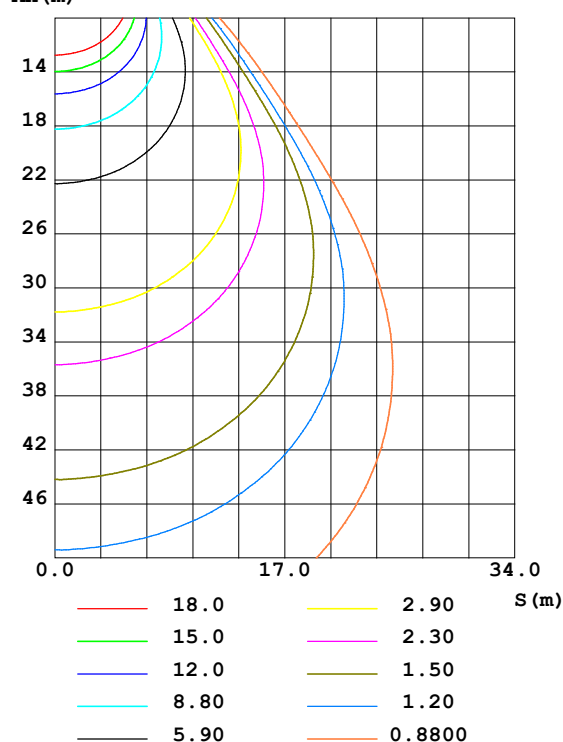


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: BQE46-1000-42-PV-S1
 佑明B档
 3500K

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	zone	total	%lum, lamp
5	2914	2912	2921	2922	2922	2923	2922	2913	0- 5	69.87	69.87	1.61,1.61
10	2887	2892	2910	2909	2899	2893	2883	2876	5- 10	207.9	277.8	6.41,6.41
15	2831	2860	2894	2879	2842	2824	2804	2800	10- 15	340.4	618.2	14.3,14.3
20	2738	2783	2828	2808	2729	2710	2689	2680	15- 20	460.7	1079	24.9,24.9
25	2587	2640	2691	2670	2570	2550	2537	2512	20- 25	560.5	1639	37.8,37.8
30	2366	2414	2487	2457	2318	2308	2320	2276	25- 30	628.9	2268	52.3,52.3
35	2035	2064	2138	2111	1941	1966	1977	1930	30- 35	648.4	2917	67.3,67.3
40	1507	1564	1570	1581	1394	1477	1509	1421	35- 40	591.4	3508	80.9,80.9
45	803.3	823.5	860.6	959.4	832.9	870.9	805.1	751.6	40- 45	435.6	3944	91,91
50	383.4	299.3	218.5	338.3	234.7	274.9	180.6	266.8	45- 50	214.8	4158	95.9,95.9
55	105.5	101.3	94.68	91.87	65.58	73.01	70.03	79.39	50- 55	68.40	4227	97.5,97.5
60	45.61	58.16	73.59	59.43	40.91	44.80	52.41	45.02	55- 60	29.99	4257	98.2,98.2
65	26.88	41.61	62.41	43.95	27.68	32.43	43.27	31.79	60- 65	21.78	4279	98.7,98.7
70	18.79	28.69	51.48	31.63	22.22	23.01	35.59	22.41	65- 70	16.74	4295	99.1,99.1
75	20.29	16.61	38.20	19.86	24.29	15.49	28.04	14.36	70- 75	12.65	4308	99.4,99.4
80	19.14	8.892	23.55	11.10	23.75	9.825	19.08	8.314	75- 80	8.988	4317	99.6,99.6
85	10.59	4.550	6.770	6.425	18.09	5.944	7.582	4.139	80- 85	5.589	4323	99.7,99.7
90	5.536	2.511	0.0593	3.267	6.566	2.356	0.0859	2.003	85- 90	2.524	4325	99.8,99.8
95	3.532	2.013	0.0747	1.872	3.172	1.464	0.0936	1.597	90- 95	1.106	4326	99.8,99.8
100	3.753	1.628	0.1071	1.576	4.623	1.382	0.1606	1.456	95-100	0.9204	4327	99.8,99.8
105	4.689	1.354	0.1321	1.486	4.859	1.328	0.1873	1.322	100-105	0.9322	4328	99.8,99.8
110	3.758	1.224	0.1799	1.451	4.395	1.266	0.2313	1.247	105-110	0.8688	4329	99.9,99.9
115	3.143	1.126	0.2411	1.374	3.440	1.155	0.2639	1.077	110-115	0.7472	4330	99.9,99.9
120	2.575	1.178	0.3061	1.309	2.637	1.118	0.2735	1.046	115-120	0.6315	4330	99.9,99.9
125	2.407	1.252	0.3769	1.339	2.432	1.227	0.3306	1.143	120-125	0.5803	4331	99.9,99.9
130	2.212	1.383	0.4823	1.421	2.424	1.329	0.4549	1.242	125-130	0.5731	4331	99.9,99.9
135	2.215	1.497	0.6238	1.500	2.379	1.457	0.6023	1.397	130-135	0.5679	4332	99.9,99.9
140	2.216	1.637	0.7615	1.596	2.248	1.536	0.7361	1.468	135-140	0.5569	4333	99.9,99.9
145	2.234	1.797	0.8800	1.674	2.225	1.625	0.8491	1.611	140-145	0.5289	4333	100,100
150	2.393	1.958	0.9929	1.813	2.187	1.665	0.9466	1.709	145-150	0.4968	4334	100,100
155	2.587	2.043	1.111	1.885	2.059	1.699	1.054	1.729	150-155	0.4475	4334	100,100
160	2.541	1.994	1.224	1.770	1.972	1.683	1.178	1.575	155-160	0.3733	4334	100,100
165	2.316	1.759	1.322	1.814	2.088	1.652	1.321	1.429	160-165	0.2853	4335	100,100
170	1.821	1.540	1.412	1.529	1.556	1.509	1.392	1.428	165-170	0.1904	4335	100,100
175	1.535	1.485	1.450	1.467	1.453	1.419	1.410	1.431	170-175	0.1071	4335	100,100
180	1.507	1.451	1.427	1.405	1.505	1.454	1.427	1.403	175-180	0.0345	4335	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

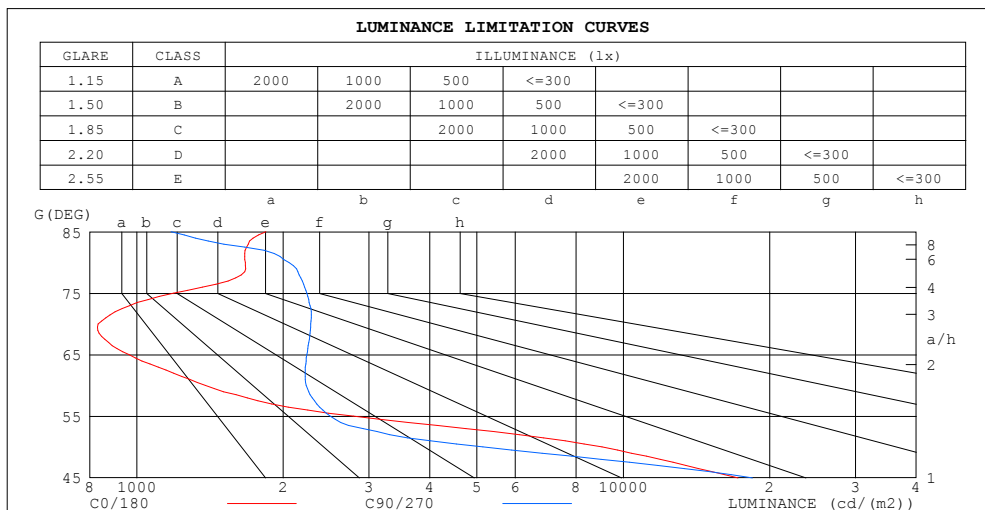

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1843	1176
80	1671	2053
75	1189	2235
70	833	2279
65	964	2236
60	1383	2228
55	2788	2499
50	9045	5146
45	17227	18426


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.5V I:0.2360A P:28.10W PF:0.9950 Lamp Flux:4335.03x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*3	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11	PROTECTION ANGLE:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

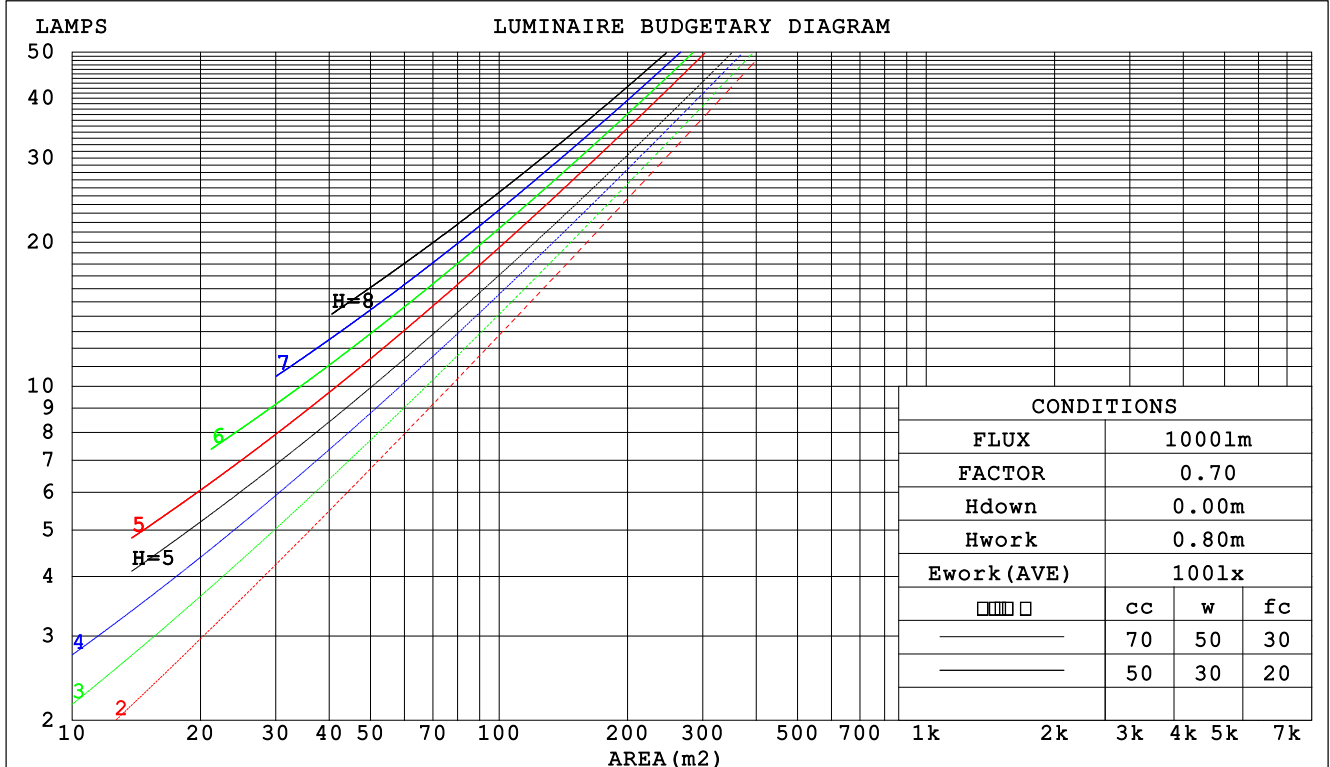

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

WEC AND CCEC

Test:U:119.5V I:0.2360A P:28.10W PF:0.9950 Lamp Flux:4335.03x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*3	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11	PROTECTION ANGLE:

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.202 .115 .036	.195 .111 .035	.182 .105 .033	.170 .098 .032	.160 .092 .030	
2.0	.195 .107 .033	.190 .104 .032	.179 .099 .031	.169 .095 .030	.159 .090 .028	
3.0	.187 .100 .030	.182 .097 .029	.173 .094 .028	.164 .090 .028	.156 .086 .027	
4.0	.178 .093 .027	.174 .091 .027	.166 .088 .026	.158 .085 .026	.151 .082 .025	
5.0	.170 .087 .025	.166 .085 .025	.159 .083 .024	.152 .080 .024	.146 .078 .023	
6.0	.162 .081 .023	.159 .080 .023	.152 .078 .023	.146 .076 .022	.141 .074 .022	
7.0	.155 .077 .022	.152 .076 .022	.146 .074 .021	.141 .072 .021	.136 .070 .021	
8.0	.148 .072 .020	.145 .071 .020	.140 .070 .020	.135 .068 .020	.130 .067 .020	
9.0	.141 .068 .019	.139 .068 .019	.134 .066 .019	.130 .065 .019	.126 .064 .018	
10.0	.135 .065 .018	.133 .064 .018	.129 .063 .018	.125 .062 .018	.121 .061 .017	

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.192 .192 .192	.164 .164 .164	.112 .112 .112	.064 .064 .064	.021 .021 .021	
1.0	.175 .159 .145	.149 .136 .125	.102 .094 .086	.059 .054 .050	.019 .017 .016	
2.0	.161 .134 .111	.138 .115 .096	.095 .080 .067	.055 .046 .039	.017 .015 .013	
3.0	.150 .116 .088	.129 .100 .076	.088 .069 .053	.051 .040 .031	.016 .013 .010	
4.0	.141 .101 .071	.121 .087 .061	.083 .061 .043	.048 .036 .026	.016 .012 .008	
5.0	.133 .090 .058	.115 .078 .050	.079 .054 .036	.046 .032 .021	.015 .010 .007	
6.0	.127 .081 .048	.109 .070 .042	.075 .049 .030	.044 .029 .018	.014 .009 .006	
7.0	.121 .074 .041	.104 .064 .036	.072 .045 .025	.042 .026 .015	.013 .009 .005	
8.0	.115 .068 .035	.099 .059 .031	.069 .041 .022	.040 .024 .013	.013 .008 .004	
9.0	.110 .063 .031	.095 .055 .027	.066 .038 .019	.038 .023 .011	.012 .007 .004	
10.0	.106 .059 .027	.091 .051 .024	.063 .036 .017	.037 .021 .010	.012 .007 .003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: BQE46-1000-42-PV-S1
 佑明B档
 3500K

Uncorrected UGR Table

Test:U:119.5V I:0.2360A P:28.10W PF:0.9950 Lamp Flux:4335.03x1 lm										
NAME: 磁铁灯条					TYPE:T5窄灯条 3500K			WEIGHT:		
DIM.: 2FT*3					SPEC.:透镜款			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co,ltd					SUR.:0.6*0.11			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.0	20.1	19.2	20.3	20.5	19.0	20.1	19.2	20.2	20.4
3H	18.8	19.8	19.1	20.0	20.3	18.9	19.9	19.1	20.1	20.3
4H	18.7	19.7	19.0	19.9	20.2	18.8	19.8	19.1	20.0	20.3
6H	18.7	19.6	19.0	19.8	20.1	18.8	19.7	19.1	20.0	20.2
8H	18.6	19.5	19.0	19.8	20.0	18.8	19.6	19.1	19.9	20.2
12H	18.6	19.4	18.9	19.7	20.0	18.7	19.6	19.1	19.8	20.1
4H 2H	18.7	19.7	19.0	19.9	20.2	18.7	19.7	19.0	19.9	20.1
3H	18.6	19.4	18.9	19.7	20.0	18.7	19.5	19.0	19.8	20.0
4H	18.5	19.2	18.9	19.5	19.9	18.6	19.4	19.0	19.7	20.0
6H	18.4	19.1	18.8	19.4	19.8	18.6	19.3	19.0	19.6	20.0
8H	18.4	19.0	18.8	19.4	19.8	18.6	19.2	19.0	19.6	20.0
12H	18.4	19.0	18.8	19.3	19.7	18.6	19.1	19.0	19.5	19.9
8H 4H	18.4	19.0	18.8	19.3	19.7	18.5	19.1	18.9	19.5	19.9
6H	18.3	18.8	18.8	19.2	19.6	18.5	19.0	19.0	19.4	19.8
8H	18.3	18.7	18.8	19.2	19.6	18.5	18.9	19.0	19.4	19.8
12H	18.3	18.7	18.8	19.1	19.6	18.5	18.9	19.0	19.3	19.8
12H 4H	18.3	18.9	18.7	19.2	19.6	18.5	19.0	18.9	19.4	19.8
6H	18.3	18.7	18.7	19.1	19.6	18.5	18.9	18.9	19.3	19.8
8H	18.3	18.6	18.7	19.1	19.6	18.5	18.8	18.9	19.3	19.8
Variations with the observer position at spacings:										
S = 1.0H	+ 2.4 / - 9.3					+ 2.3 / - 7.3				
1.5H	+ 3.7 / - 8.7					+ 3.9 / - 7.5				
2.0H	+ 6.2 / - 6.6					+ 6.8 / - 4.2				

CIE Pub.117 Corrected 4335 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.1)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.2360A P:28.10W PF:0.9950 Lamp Flux:4335.03x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*3	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	80	72	67	79	72	67	78	71	67	63
0.80	88	81	76	87	81	76	86	80	76	71
1.00	94	87	83	93	87	83	92	87	82	78
1.25	99	93	89	98	92	88	96	91	88	83
1.50	103	97	93	101	96	92	99	94	91	86
2.00	106	101	98	105	100	97	102	98	95	90
2.50	108	104	100	106	102	99	103	100	97	91
3.00	110	106	103	108	105	102	105	102	100	93
4.00	112	109	106	110	107	105	106	104	102	95
5.00	114	111	109	111	109	107	107	106	104	96
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: BQE46-1000-42-PV-S1
 佑明B档
 3500K

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.2360A P:28.10W PF:0.9950 Lamp Flux:4335.03x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*3	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11	PROTECTION ANGLE:

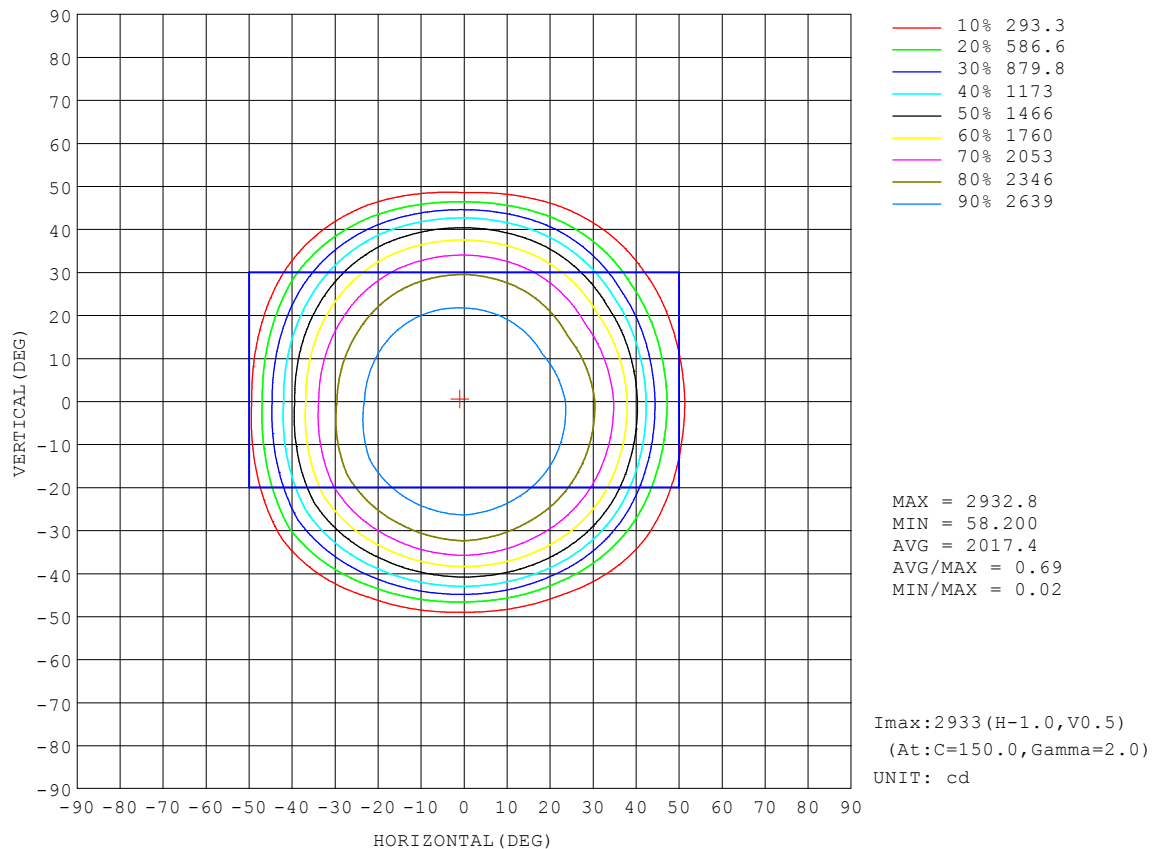


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

AAI Figure

Test:U:119.5V I:0.2360A P:28.10W PF:0.9950 Lamp Flux:4335.03x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*3	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11	PROTECTION ANGLE:

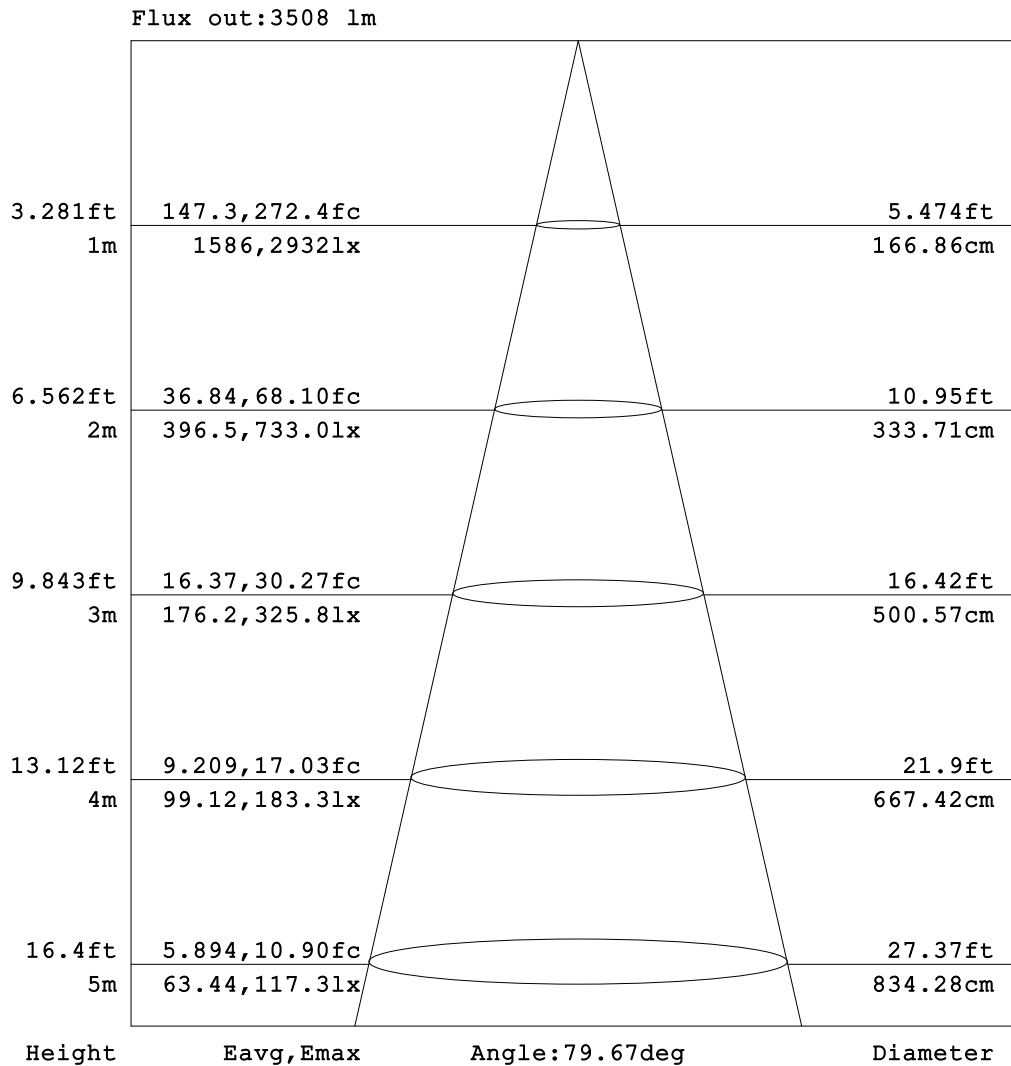


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

ISOLUX DIAGRAM


Test:U:119.5V I:0.2360A P:28.10W PF:0.9950 Lamp Flux:4335.03x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*3	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11	PROTECTION ANGLE:

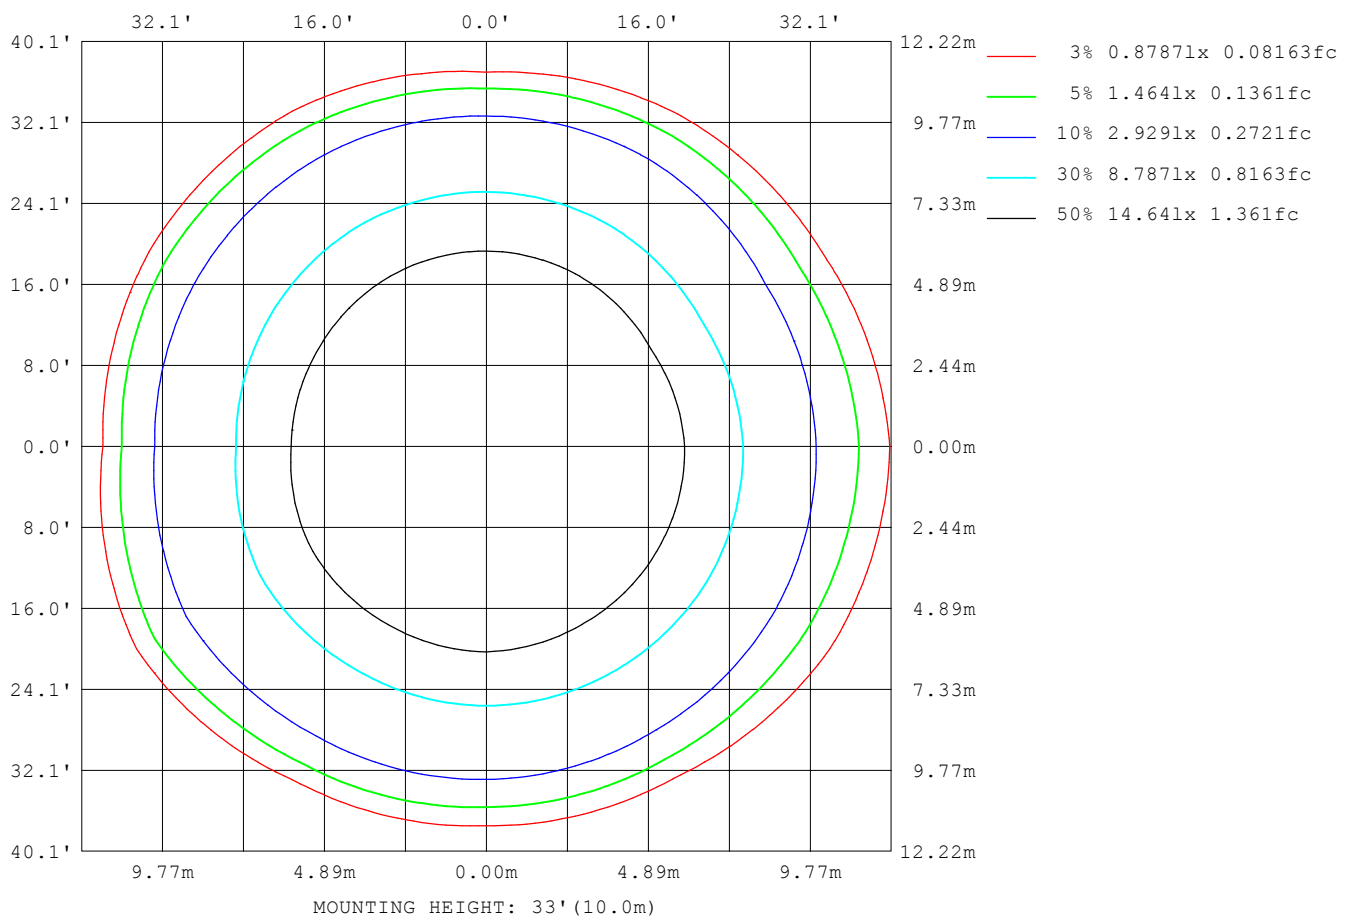

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

Planar Illuminance Curve

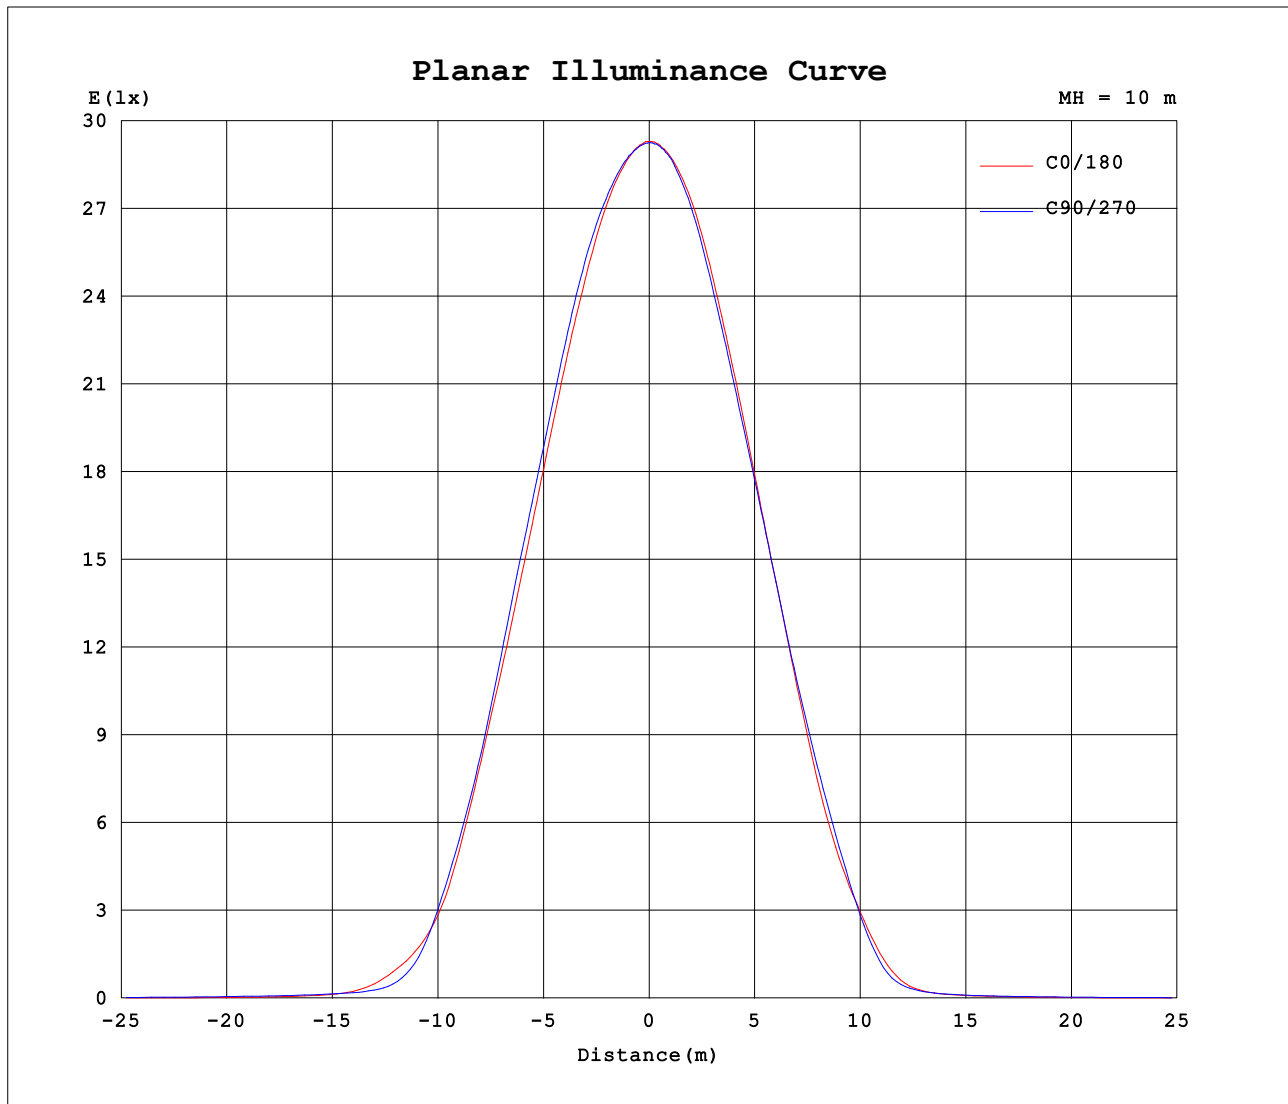

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.2360A P:28.10W PF:0.9950 Lamp Flux:4335.03x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*3	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11	PROTECTION ANGLE:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2927	2927	2927	2927	2927	2927	2927	2927	2927	2927	2927	2927						
5	2914	2911	2914	2921	2919	2926	2922	2924	2921	2922	2914	2912						
10	2887	2884	2900	2910	2909	2908	2899	2895	2891	2883	2877	2874						
15	2831	2850	2871	2894	2880	2878	2842	2831	2816	2804	2801	2799						
20	2738	2767	2799	2828	2809	2807	2729	2716	2704	2689	2677	2683						
25	2587	2623	2657	2691	2675	2665	2570	2551	2548	2537	2519	2504						
30	2366	2396	2432	2487	2461	2454	2318	2299	2318	2320	2296	2256						
35	2035	2054	2074	2138	2107	2115	1941	1952	1981	1977	1954	1905						
40	1507	1568	1561	1570	1547	1616	1394	1443	1511	1509	1472	1371						
45	803	835	812	861	901	1018	833	876	866	805	798	705						
50	383	354	245	218	256	421	235	282	268	181	248	286						
55	105	111	92.0	94.7	91.2	92.6	65.6	67.2	78.8	70.0	77.6	81.2						
60	45.6	51.6	64.7	73.6	66.3	52.5	40.9	40.8	48.8	52.4	48.6	41.4						
65	26.9	31.8	51.5	62.4	52.7	35.2	27.7	27.4	37.5	43.3	37.8	25.7						
70	18.8	18.6	38.8	51.5	40.8	22.4	22.2	17.6	28.5	35.6	29.3	15.5						
75	20.3	11.1	22.1	38.2	26.0	13.7	24.3	12.1	18.9	28.0	19.1	9.60						
80	19.1	7.52	10.3	23.5	12.5	9.66	23.7	8.81	10.8	19.1	10.6	6.00						
85	10.6	5.18	3.92	6.77	5.46	7.39	18.1	6.57	5.31	7.58	4.42	3.86						
90	5.54	3.86	1.16	0.06	1.37	5.17	6.57	3.35	1.36	0.09	1.27	2.74						
95	3.53	2.99	1.03	0.07	1.12	2.63	3.17	1.90	1.03	0.09	1.01	2.19						
100	3.75	2.20	1.06	0.11	1.22	1.93	4.62	1.72	1.05	0.16	1.04	1.88						
105	4.69	1.74	0.96	0.13	1.19	1.78	4.86	1.64	1.01	0.19	1.05	1.60						
110	3.76	1.42	1.02	0.18	1.08	1.83	4.39	1.70	0.83	0.23	1.00	1.49						
115	3.14	1.26	0.99	0.24	1.03	1.72	3.44	1.42	0.89	0.26	0.90	1.25						
120	2.57	1.33	1.03	0.31	1.07	1.55	2.64	1.35	0.89	0.27	0.80	1.29						
125	2.41	1.47	1.03	0.38	1.06	1.62	2.43	1.52	0.93	0.33	0.89	1.39						
130	2.21	1.66	1.11	0.48	1.13	1.71	2.42	1.59	1.07	0.45	1.03	1.46						
135	2.22	1.73	1.26	0.62	1.27	1.73	2.38	1.70	1.21	0.60	1.17	1.62						
140	2.22	1.84	1.43	0.76	1.40	1.79	2.25	1.73	1.34	0.74	1.30	1.63						
145	2.23	2.05	1.54	0.88	1.47	1.88	2.22	1.83	1.42	0.85	1.42	1.80						
150	2.39	2.24	1.68	0.99	1.54	2.09	2.19	1.88	1.45	0.95	1.38	2.04						
155	2.59	2.45	1.64	1.11	1.62	2.16	2.06	1.92	1.48	1.05	1.29	2.17						
160	2.54	2.50	1.48	1.22	1.32	2.22	1.97	1.96	1.40	1.18	1.29	1.86						
165	2.32	2.03	1.49	1.32	1.41	2.22	2.09	1.88	1.43	1.32	1.31	1.55						
170	1.82	1.62	1.46	1.41	1.45	1.61	1.56	1.52	1.50	1.39	1.42	1.44						
175	1.54	1.50	1.47	1.45	1.41	1.53	1.45	1.43	1.41	1.41	1.43	1.43						
180	1.51	1.45	1.45	1.43	1.40	1.41	1.50	1.45	1.45	1.43	1.40	1.41						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K