


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.4700A P:55.50W PF:0.9870 Lamp Flux:8788.13x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 158.34 lm/W			
MODEL		I _{max} (cd)	6300	S/MH (C0/180)	1.09
NOMINAL POWER(W)	56	LOR(%)	100.0	S/MH (C90/270)	1.18
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	8788.1	□ UP,DN(C0-180)	0.2,53.8
NOMINAL FLUX(lm)	8788.13	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.2,45.9
LAMPS INSIDE	1	□ up (%)	0.3	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	119.5	□ down (%)	99.7	CIBSE SHR MAX	1.15

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

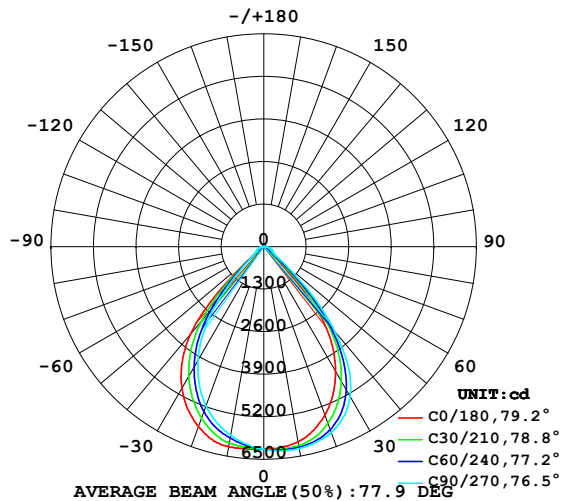

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

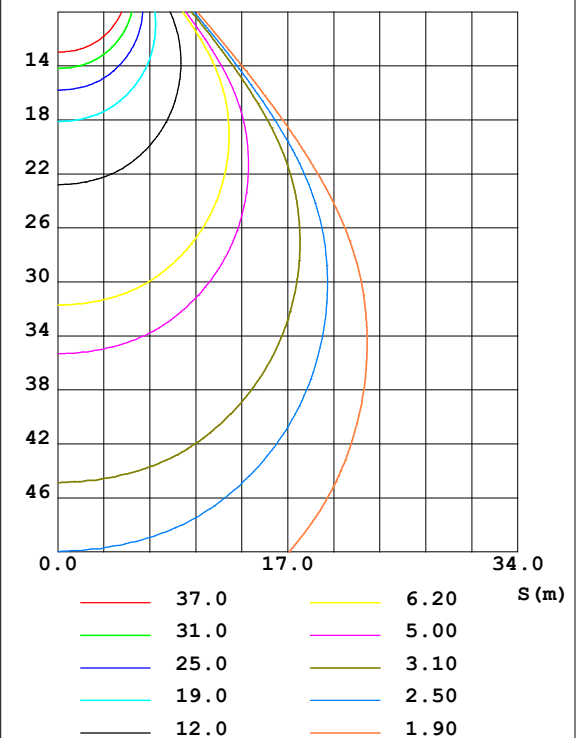


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE65-1500-43-PV
佑明B档
3500K

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	zone	total	%lum, lamp
5	6155	6224	6265	6254	6196	6130	6061	6079	0- 5	147.8	147.8	1.68,1.68
10	6050	6194	6263	6286	6208	6010	5849	5878	5- 10	438.8	586.6	6.68,6.68
15	5826	6086	6184	6258	6102	5805	5563	5585	10- 15	713.7	1300	14.8,14.8
20	5468	5843	6047	6122	5852	5470	5176	5164	15- 20	954.4	2255	25.7,25.7
25	5001	5456	5756	5821	5490	5007	4661	4627	20- 25	1141	3396	38.6,38.6
30	4396	4895	5281	5354	5008	4425	4026	3970	25- 30	1253	4649	52.9,52.9
35	3628	4107	4517	4687	4364	3699	3238	3153	30- 35	1267	5917	67.3,67.3
40	2518	3056	3369	3733	3484	2728	2174	2016	35- 40	1142	7059	80.3,80.3
45	753.4	1545	2063	2415	1979	1422	1000	799.0	40- 45	815.7	7874	89.6,89.6
50	207.8	449.4	834.8	903.5	460.2	438.5	417.5	313.0	45- 50	376.7	8251	93.9,93.9
55	135.2	231.3	382.0	307.5	181.2	221.7	302.8	211.6	50- 55	147.0	8398	95.6,95.6
60	102.8	173.6	299.8	213.2	122.7	165.5	261.4	167.3	55- 60	97.43	8496	96.7,96.7
65	76.03	133.6	261.7	169.6	93.80	127.9	224.4	133.9	60- 65	80.87	8576	97.6,97.6
70	56.15	93.44	227.6	127.3	56.46	88.81	186.0	98.13	65- 70	66.13	8643	98.3,98.3
75	43.28	61.61	180.3	79.71	39.65	54.27	149.1	61.12	70- 75	48.85	8691	98.9,98.9
80	107.3	37.18	116.2	40.60	39.27	31.81	94.96	34.32	75- 80	35.49	8727	99.3,99.3
85	36.41	30.91	37.70	20.20	28.26	21.55	24.36	25.31	80- 85	21.77	8749	99.6,99.6
90	20.05	9.837	0.6352	12.33	15.20	9.077	0.2744	10.15	85- 90	9.769	8758	99.7,99.7
95	6.090	6.511	0.3553	7.661	12.40	7.582	0.3504	4.607	90- 95	3.946	8762	99.7,99.7
100	4.942	4.077	0.5984	7.812	9.025	8.298	0.5900	3.318	95-100	2.979	8765	99.7,99.7
105	4.713	4.530	0.7342	6.676	7.940	6.857	0.8470	3.621	100-105	2.594	8768	99.8,99.8
110	4.935	3.452	0.6264	5.343	7.577	6.155	0.9046	3.066	105-110	2.370	8770	99.8,99.8
115	4.954	3.768	0.5675	4.512	7.282	5.720	1.014	2.854	110-115	2.115	8772	99.8,99.8
120	4.251	3.318	0.6691	4.614	6.638	5.139	1.115	2.868	115-120	1.857	8774	99.8,99.8
125	4.444	3.341	0.7245	4.605	6.444	5.021	1.208	3.154	120-125	1.719	8776	99.9,99.9
130	5.150	3.607	0.8380	4.935	6.356	5.741	1.278	3.614	125-130	1.700	8778	99.9,99.9
135	6.537	3.799	1.041	5.728	7.246	6.449	1.455	3.834	130-135	1.774	8779	99.9,99.9
140	5.770	3.531	1.273	6.251	9.041	6.642	1.656	3.557	135-140	1.778	8781	99.9,99.9
145	5.103	3.464	1.517	5.764	8.193	5.753	1.861	3.581	140-145	1.553	8783	99.9,99.9
150	5.139	3.466	1.862	5.166	6.645	5.271	2.062	4.034	145-150	1.283	8784	100,100
155	6.382	4.111	2.080	5.597	6.408	5.999	2.284	4.809	150-155	1.137	8785	100,100
160	8.402	4.667	2.285	6.416	7.535	7.184	2.493	4.642	155-160	1.107	8786	100,100
165	6.862	4.129	2.481	7.200	8.668	6.794	2.683	3.711	160-165	0.9125	8787	100,100
170	4.750	3.401	2.638	4.881	4.942	4.727	2.787	3.180	165-170	0.5621	8788	100,100
175	3.241	2.935	2.745	3.670	3.271	3.165	2.804	2.850	170-175	0.2576	8788	100,100
180	2.950	2.795	2.800	2.885	2.964	2.792	2.791	2.889	175-180	0.0710	8788	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

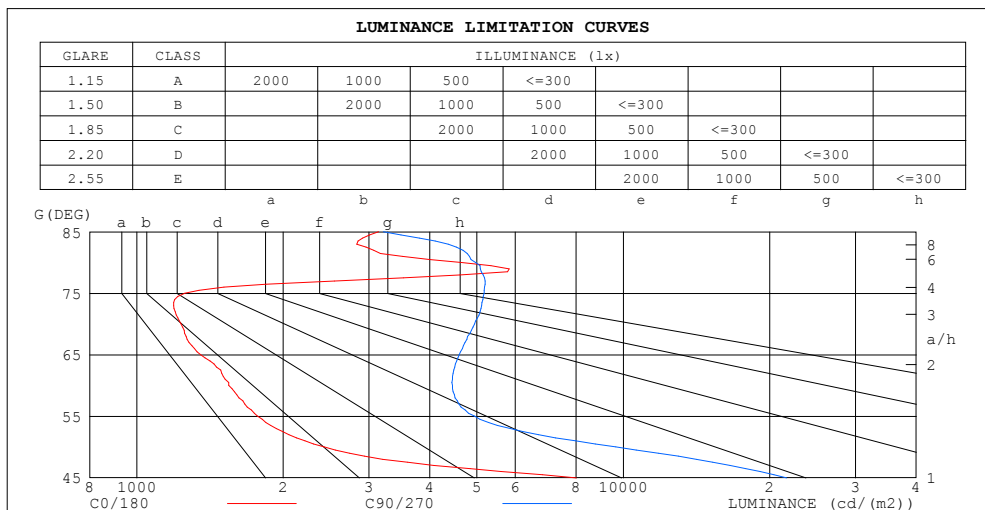

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3138	3214
80	4643	4973
75	1256	5175
70	1233	4943
65	1351	4601
60	1545	4455
55	1770	4949
50	2429	9650
45	8003	21675


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE65-1500-43-PV
佑明B档
3500K

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.5V I:0.4700A P:55.50W PF:0.9870 Lamp Flux:8788.13x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

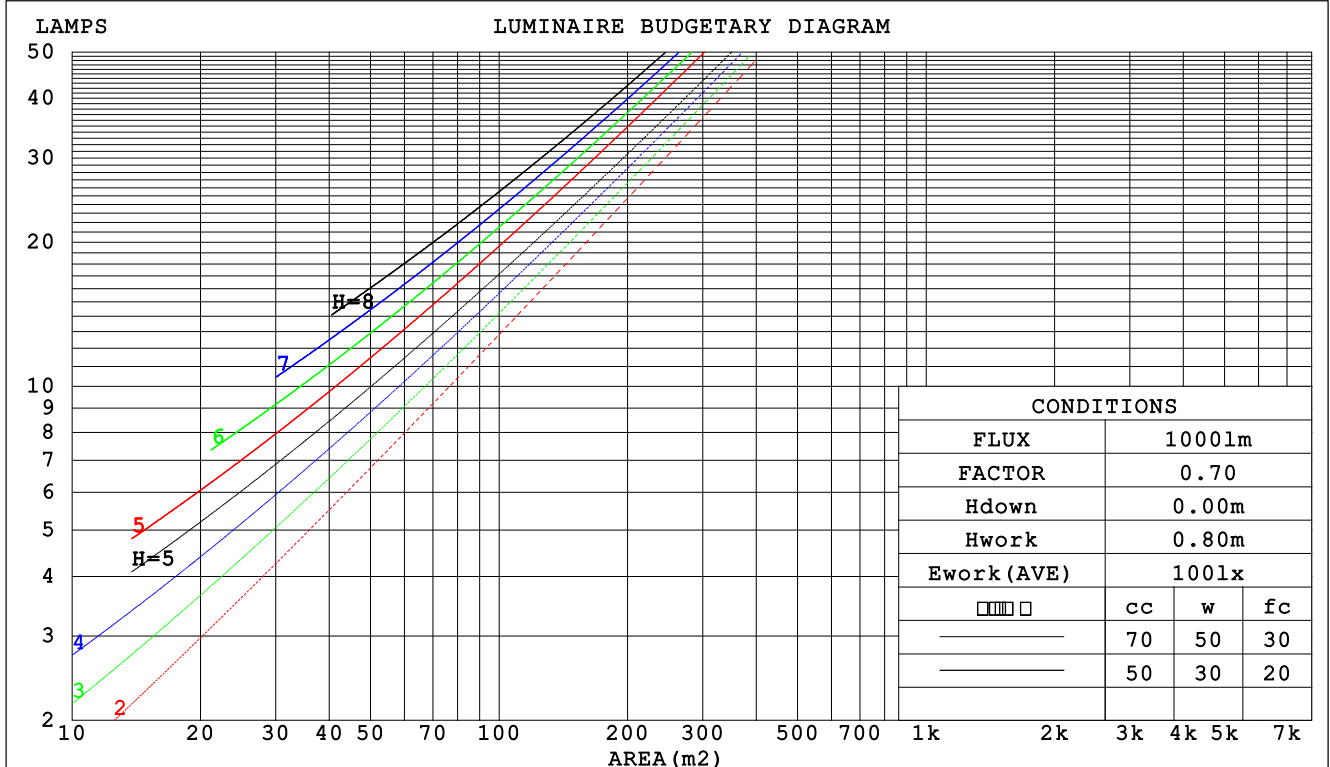

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: BQE65-1500-43-PV
 佑明B档
 3500K

WEC AND CCEC

Test:U:119.5V I:0.4700A P:55.50W PF:0.9870 Lamp Flux:8788.13x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.207 .118 .037	.200 .114 .036	.187 .108 .034	.175 .101 .032	.165 .095 .031	
2.0	.199 .109 .033	.193 .107 .033	.182 .101 .031	.172 .097 .030	.163 .092 .029	
3.0	.190 .101 .030	.185 .099 .030	.175 .095 .029	.166 .091 .028	.158 .088 .027	
4.0	.180 .094 .028	.176 .092 .027	.168 .089 .027	.160 .086 .026	.153 .083 .025	
5.0	.171 .087 .025	.168 .086 .025	.160 .083 .025	.153 .081 .024	.147 .079 .024	
6.0	.163 .082 .023	.160 .081 .023	.153 .078 .023	.147 .076 .022	.141 .074 .022	
7.0	.155 .077 .022	.152 .076 .022	.146 .074 .021	.141 .072 .021	.136 .071 .021	
8.0	.148 .072 .020	.145 .072 .020	.140 .070 .020	.135 .068 .020	.131 .067 .020	
9.0	.141 .068 .019	.139 .068 .019	.134 .066 .019	.130 .065 .019	.125 .064 .018	
10.0	.135 .065 .018	.133 .064 .018	.128 .063 .018	.124 .062 .018	.121 .061 .017	

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.193 .193 .193	.165 .165 .165	.113 .113 .113	.065 .065 .065	.021 .021 .021	
1.0	.176 .160 .145	.150 .137 .125	.103 .094 .086	.059 .055 .050	.019 .018 .016	
2.0	.163 .135 .112	.139 .116 .097	.095 .080 .067	.055 .047 .040	.018 .015 .013	
3.0	.152 .116 .088	.130 .100 .077	.089 .070 .054	.052 .041 .032	.017 .013 .010	
4.0	.143 .102 .071	.122 .088 .062	.084 .061 .044	.049 .036 .026	.016 .012 .008	
5.0	.135 .091 .059	.116 .079 .051	.080 .055 .036	.046 .032 .021	.015 .011 .007	
6.0	.128 .082 .049	.110 .071 .043	.076 .050 .030	.044 .029 .018	.014 .010 .006	
7.0	.122 .075 .042	.105 .065 .036	.072 .045 .026	.042 .027 .015	.014 .009 .005	
8.0	.116 .069 .036	.100 .060 .032	.069 .042 .022	.040 .025 .013	.013 .008 .004	
9.0	.111 .064 .032	.096 .055 .028	.066 .039 .020	.039 .023 .012	.013 .008 .004	
10.0	.106 .059 .028	.092 .052 .025	.064 .036 .017	.037 .021 .010	.012 .007 .003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE65-1500-43-PV
佑明B档
3500K

Uncorrected UGR Table

Test:U:119.5V I:0.4700A P:55.50W PF:0.9870 Lamp Flux:8788.13x1 lm										
NAME: 磁铁灯条					TYPE:T5窄灯条 3500K			WEIGHT:		
DIM.: 4FT*4					SPEC.:透镜款			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co,ltd					SUR.:1.22*0.11m			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.9	19.0	18.1	19.2	19.3	19.4	20.6	19.7	20.8	20.9
3H	17.7	18.7	18.0	19.0	19.2	19.6	20.6	19.9	20.8	21.1
4H	17.7	18.6	18.0	18.9	19.1	19.7	20.7	20.0	20.9	21.2
6H	17.9	18.8	18.2	19.1	19.3	19.9	20.8	20.2	21.1	21.3
8H	17.9	18.8	18.3	19.1	19.3	19.9	20.8	20.3	21.1	21.4
12H	18.0	18.8	18.3	19.1	19.4	20.0	20.8	20.3	21.1	21.4
4H 2H	17.7	18.6	18.0	18.9	19.1	19.2	20.2	19.5	20.4	20.7
3H	17.6	18.4	17.9	18.7	19.0	19.4	20.3	19.8	20.6	20.8
4H	17.5	18.3	17.9	18.6	18.9	19.6	20.4	20.0	20.7	21.0
6H	17.9	18.5	18.3	18.9	19.2	19.9	20.5	20.3	20.9	21.2
8H	18.0	18.6	18.4	18.9	19.3	20.0	20.6	20.4	20.9	21.3
12H	18.0	18.6	18.5	19.0	19.4	20.0	20.6	20.4	20.9	21.3
8H 4H	17.5	18.1	17.9	18.4	18.8	19.5	20.1	19.9	20.5	20.9
6H	17.8	18.3	18.3	18.7	19.2	19.8	20.3	20.2	20.7	21.1
8H	18.0	18.4	18.4	18.8	19.3	19.9	20.4	20.4	20.8	21.2
12H	18.1	18.5	18.6	19.0	19.4	20.0	20.4	20.5	20.8	21.3
12H 4H	17.4	18.0	17.8	18.4	18.8	19.5	20.0	19.9	20.4	20.8
6H	17.8	18.2	18.3	18.7	19.1	19.8	20.2	20.2	20.6	21.1
8H	18.0	18.4	18.5	18.8	19.3	19.9	20.3	20.4	20.7	21.2
Variations with the observer position at spacings:										
S = 1.0H	+ 2.1 / - 5.2					+ 1.8 / - 3.4				
1.5H	+ 4.1 / - 5.3					+ 3.3 / - 4.2				
2.0H	+ 3.5 / - 1.6					+ 5.3 / - 2.4				

CIE Pub.117 Corrected 8788 lm Total Lamp Luminous Flux.(8log(F/F0) = 7.6)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE65-1500-43-PV
佑明B档
3500K

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.4700A P:55.50W PF:0.9870 Lamp Flux:8788.13x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	71	67	79	71	67	78	71	67	62
0.80	88	80	76	87	80	76	86	79	75	71
1.00	94	87	82	93	86	82	91	87	82	77
1.25	99	92	88	98	92	88	95	90	87	82
1.50	102	96	92	101	95	91	98	94	90	85
2.00	106	101	97	104	100	96	101	97	94	89
2.50	108	103	100	106	102	99	103	99	97	90
3.00	110	106	102	108	104	101	104	101	99	92
4.00	112	109	106	110	107	104	106	104	102	94
5.00	113	111	108	111	109	107	107	105	103	95
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: BQE65-1500-43-PV
 佑明B档
 3500K

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.4700A P:55.50W PF:0.9870 Lamp Flux:8788.13x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

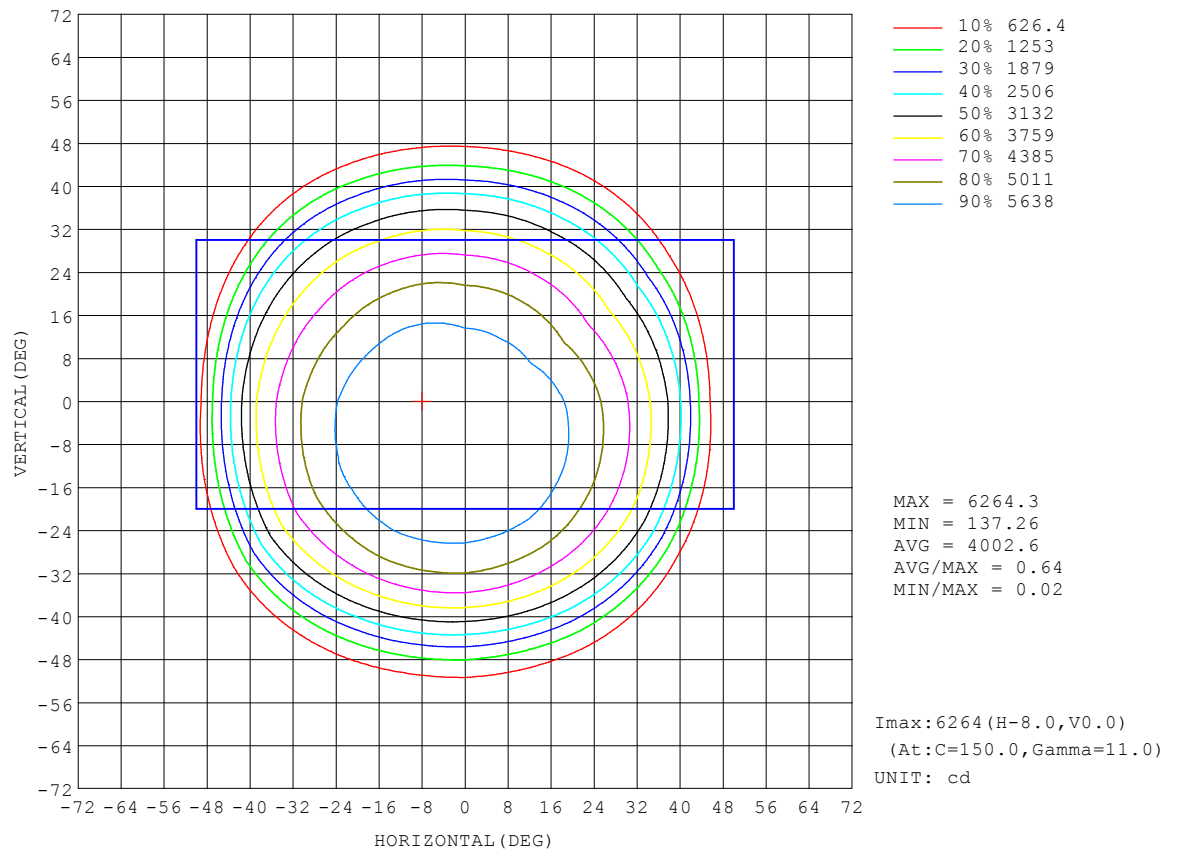


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE65-1500-43-PV
佑明B档
3500K

AAI Figure

Test:U:119.5V I:0.4700A P:55.50W PF:0.9870 Lamp Flux:8788.13x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

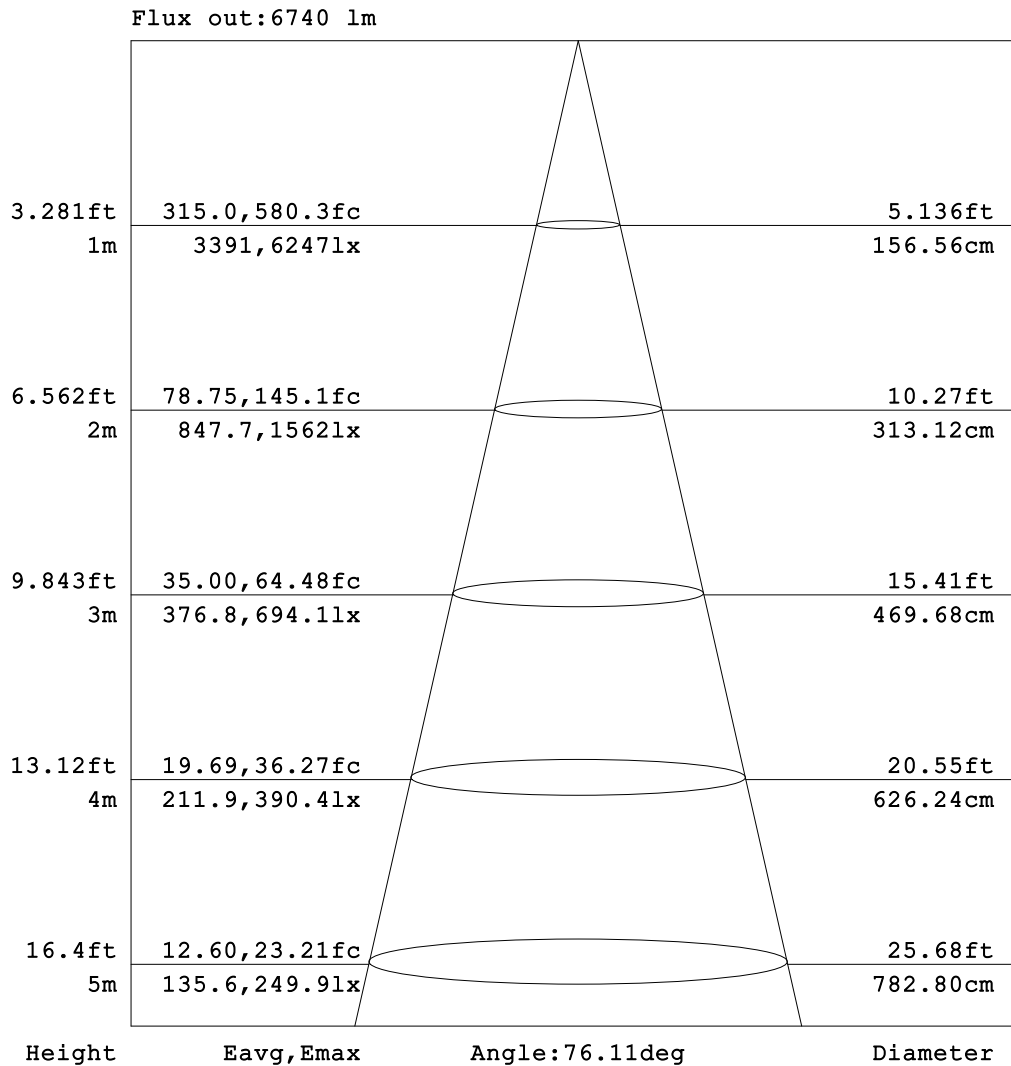


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE65-1500-43-PV
佑明B档
3500K

ISOLUX DIAGRAM


Test:U:119.5V I:0.4700A P:55.50W PF:0.9870 Lamp Flux:8788.13x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

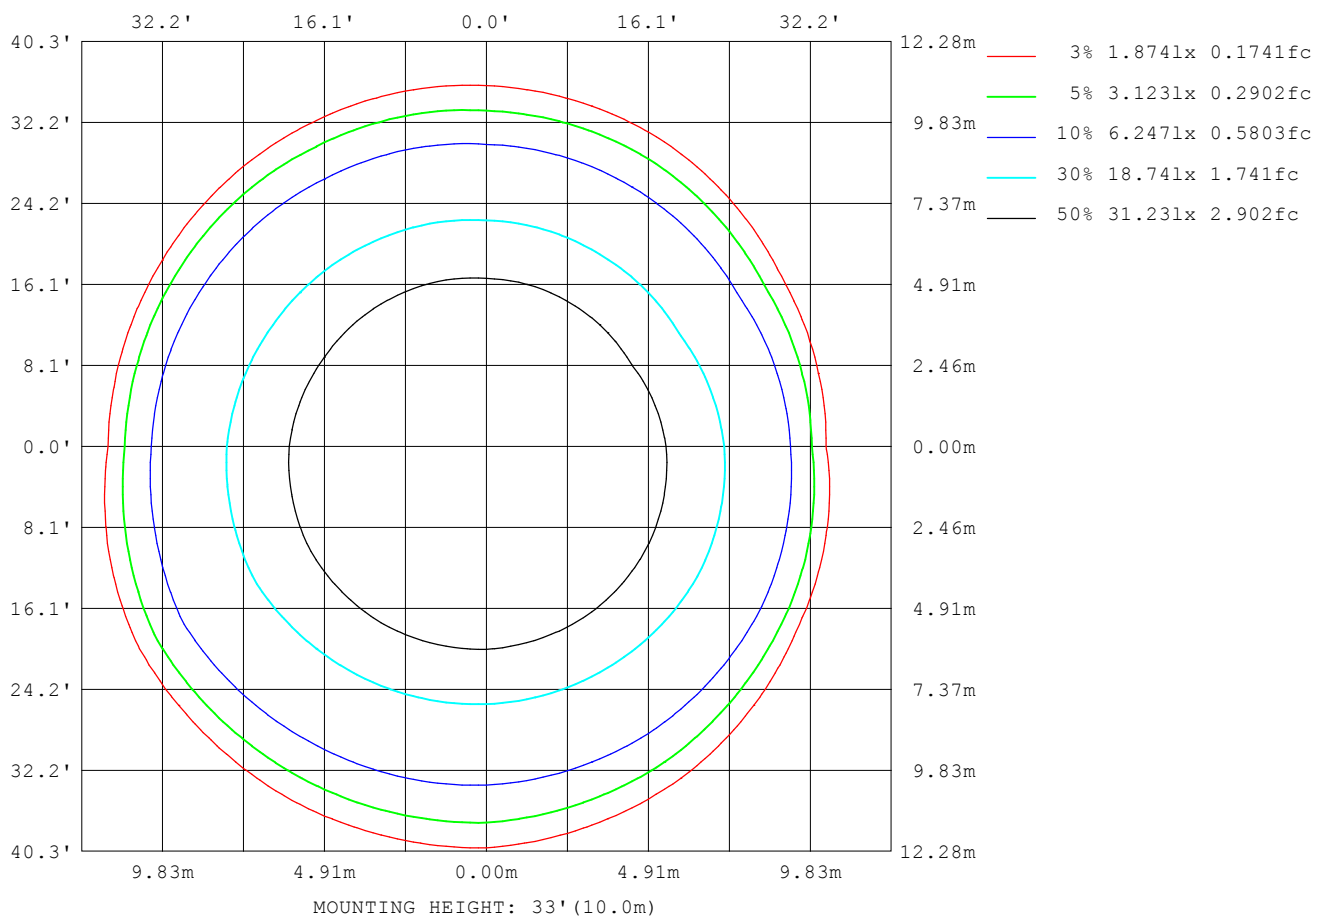

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE65-1500-43-PV
佑明B档
3500K

Planar Illuminance Curve

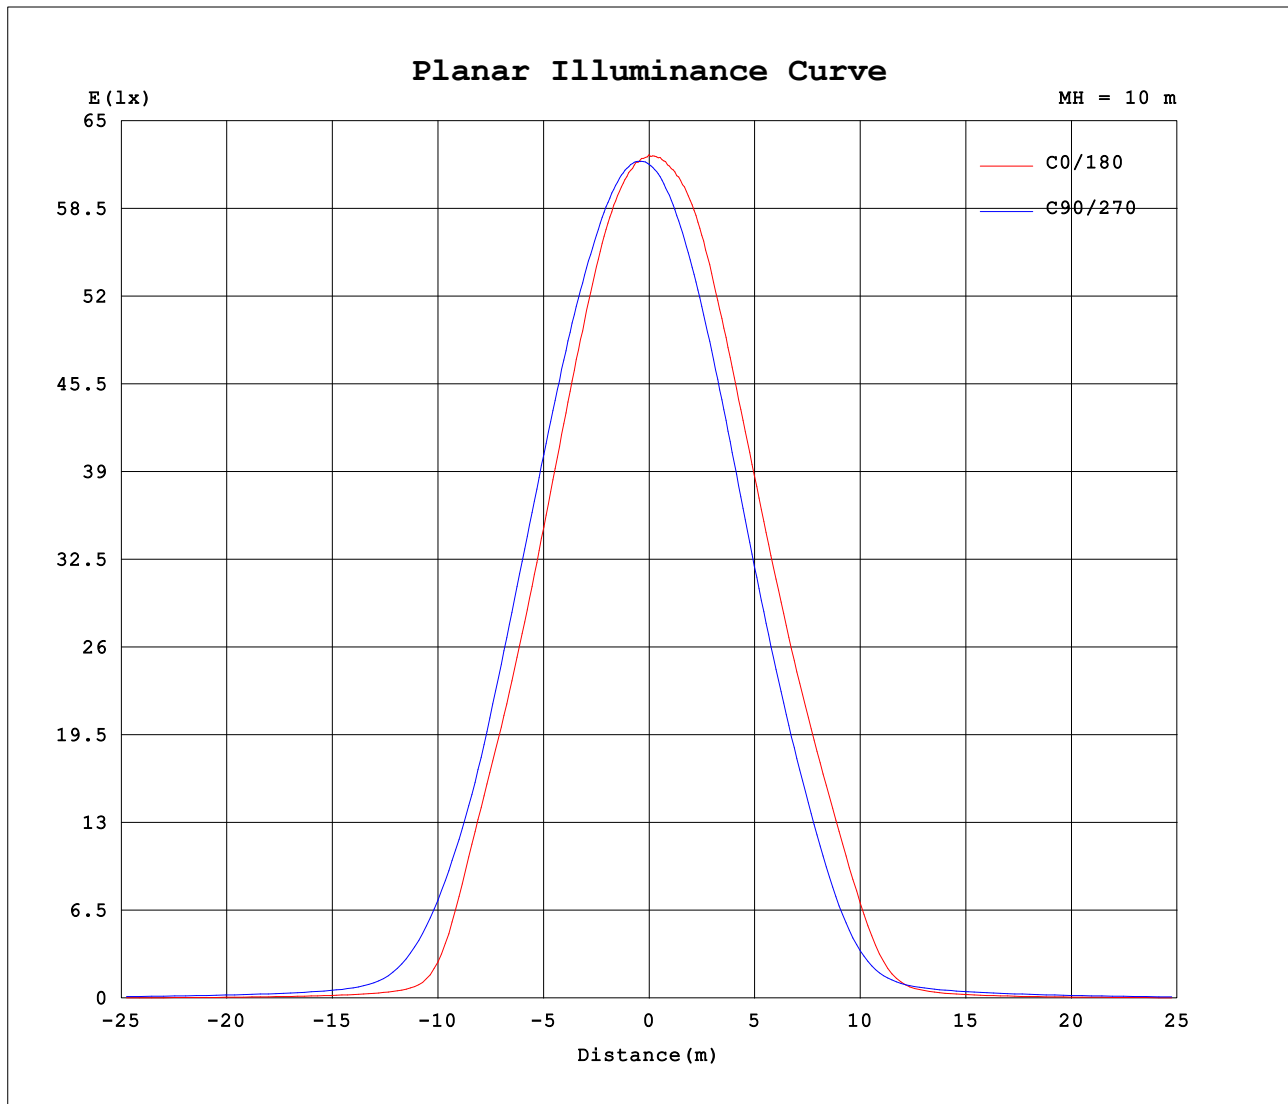

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: BQE65-1500-43-PV
佑明B档
3500K

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.4700A P:55.50W PF:0.9870 Lamp Flux:8788.13x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	6197	6197	6197	6197	6197	6197	6197	6197	6197	6197	6197	6197						
5	6155	6211	6237	6265	6262	6247	6196	6158	6103	6061	6060	6098						
10	6050	6165	6222	6263	6282	6290	6208	6087	5934	5849	5846	5910						
15	5826	6029	6144	6184	6242	6274	6102	5899	5712	5563	5561	5610						
20	5468	5736	5952	6047	6133	6110	5852	5573	5367	5176	5153	5175						
25	5001	5314	5598	5756	5850	5793	5490	5136	4877	4661	4615	4639						
30	4396	4746	5044	5281	5378	5329	5008	4587	4263	4026	3956	3984						
35	3628	3987	4226	4517	4656	4719	4364	3893	3503	3238	3140	3166						
40	2518	2965	3147	3369	3602	3865	3484	2955	2501	2174	2028	2005						
45	753	1333	1758	2063	2260	2572	1979	1607	1237	1000	888	710						
50	208	305	594	835	893	914	460	435	442	418	368	258						
55	135	174	289	382	355	260	181	175	268	303	268	156						
60	103	129	218	300	261	165	123	117	214	261	226	109						
65	76.0	94.3	173	262	216	123	93.8	89.5	166	224	185	82.9						
70	56.2	58.9	128	228	170	84.9	56.5	64.7	113	186	137	59.3						
75	43.3	44.2	79.1	180	112	47.4	39.6	42.1	66.4	149	80.0	42.2						
80	107	32.9	41.5	116	49.8	31.4	39.3	27.1	36.6	95.0	40.9	27.8						
85	36.4	41.5	20.3	37.7	22.0	18.4	28.3	25.6	17.5	24.4	20.2	30.4						
90	20.0	14.2	5.46	0.64	5.45	19.2	15.2	13.3	4.87	0.27	2.63	17.7						
95	6.09	10.1	2.90	0.36	3.67	11.7	12.4	10.9	4.24	0.35	2.13	7.09						
100	4.94	4.94	3.21	0.60	4.12	11.5	9.03	8.07	8.53	0.59	2.17	4.47						
105	4.71	4.41	4.65	0.73	5.79	7.56	7.94	7.56	6.15	0.85	3.32	3.92						
110	4.93	4.14	2.76	0.63	3.80	6.89	7.58	7.57	4.74	0.90	2.34	3.80						
115	4.95	4.76	2.77	0.57	2.46	6.57	7.28	7.64	3.79	1.01	2.14	3.57						
120	4.25	3.93	2.70	0.67	2.98	6.25	6.64	6.81	3.46	1.12	2.20	3.53						
125	4.44	4.05	2.63	0.72	3.49	5.73	6.44	6.17	3.87	1.21	2.54	3.77						
130	5.15	4.32	2.89	0.84	4.05	5.82	6.36	6.61	4.87	1.28	3.00	4.23						
135	6.54	4.99	2.61	1.04	4.79	6.67	7.25	8.17	4.73	1.45	3.15	4.52						
140	5.77	4.66	2.40	1.27	4.58	7.93	9.04	8.62	4.66	1.66	3.16	3.95						
145	5.10	4.38	2.54	1.52	4.39	7.14	8.19	6.79	4.72	1.86	3.26	3.90						
150	5.14	4.07	2.86	1.86	4.38	5.96	6.64	5.79	4.75	2.06	3.48	4.59						
155	6.38	4.67	3.55	2.08	5.06	6.14	6.41	6.49	5.50	2.28	3.62	6.01						
160	8.40	5.36	3.97	2.29	4.89	7.94	7.54	8.33	6.04	2.49	3.60	5.68						
165	6.86	4.65	3.61	2.48	5.26	9.15	8.67	8.34	5.25	2.68	3.12	4.30						
170	4.75	3.74	3.06	2.64	4.06	5.70	4.94	5.38	4.07	2.79	2.88	3.48						
175	3.24	3.06	2.81	2.75	3.04	4.30	3.27	3.33	3.00	2.80	2.78	2.92						
180	2.95	2.83	2.76	2.80	2.83	2.94	2.96	2.82	2.76	2.79	2.84	2.94						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE65-1500-43-PV
佑明B档
3500K