


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.1670A P:19.90W PF:0.9970 Lamp Flux:2839.02x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11m	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 142.66 lm/W			
MODEL		Imax(cd)	968.4	S/MH(C0/180)	1.20
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	1.23
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2839.0	□ UP,DN(C0-180)	2.3,48.2
NOMINAL FLUX(lm)	2839.02	CIE CLASS	DIRECT	□ UP,DN(C180-360)	2.3,47.2
LAMPS INSIDE	1	□ up(%)	4.6	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	119.5	□ down(%)	95.4	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

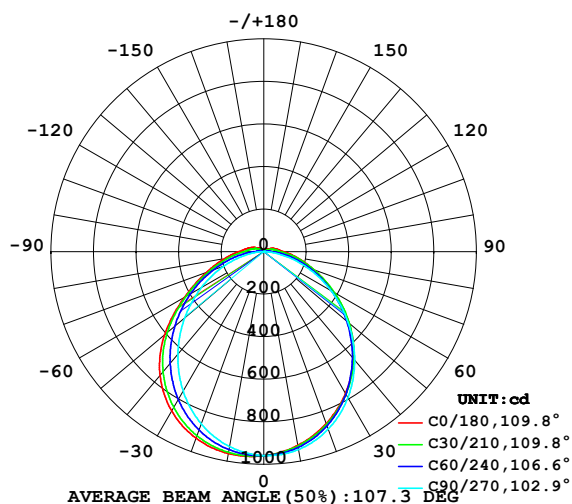

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

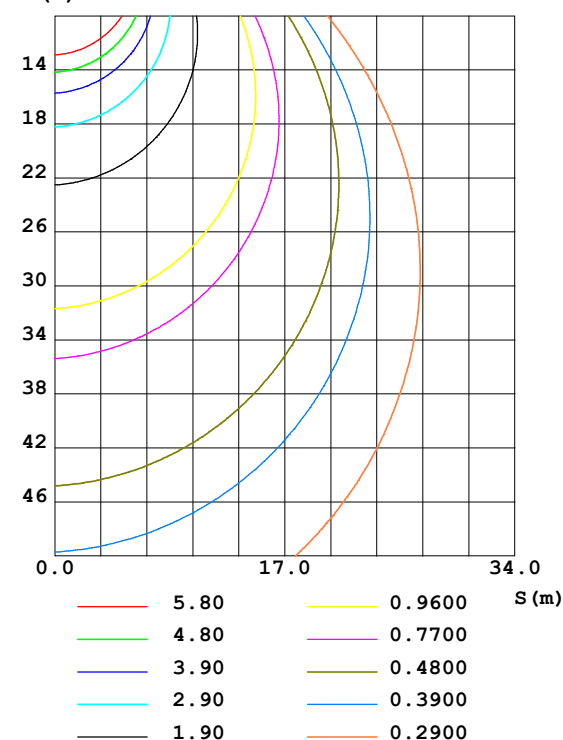


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
源磊A-档
3500K

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	zone	total	%lum, lamp
5	945.6	949.5	957.1	964.6	965.6	959.8	949.9	943.9	0- 5	22.87	22.87	0.81,0.81
10	924.1	931.3	944.6	961.3	963.8	951.3	930.2	920.2	5- 10	67.81	90.68	3.19,3.19
15	896.0	904.0	921.0	948.4	952.9	933.7	900.8	887.7	10- 15	110.3	201.0	7.08,7.08
20	859.9	867.8	887.6	926.0	932.8	906.3	861.5	846.8	15- 20	148.7	349.7	12.3,12.3
25	817.2	824.0	844.0	893.7	904.3	869.8	813.7	799.2	20- 25	181.7	531.4	18.7,18.7
30	769.6	773.3	791.8	852.2	865.5	825.0	757.7	744.6	25- 30	208.0	739.4	26,26
35	715.7	716.0	731.6	802.5	817.5	771.6	695.8	685.3	30- 35	226.9	966.2	34,34
40	657.7	653.9	664.7	744.6	759.2	711.6	629.0	621.6	35- 40	237.5	1204	42.4,42.4
45	592.7	587.6	592.7	677.8	690.5	643.4	558.3	555.7	40- 45	239.7	1443	50.8,50.8
50	523.4	517.9	518.0	605.6	608.6	569.6	485.6	487.5	45- 50	233.4	1677	59.1,59.1
55	450.7	446.6	441.7	526.6	518.7	490.3	412.4	418.3	50- 55	218.9	1896	66.8,66.8
60	377.9	375.2	364.4	443.9	431.5	410.0	339.8	350.3	55- 60	197.4	2093	73.7,73.7
65	311.1	306.5	288.1	362.2	354.1	333.6	268.7	285.3	60- 65	171.3	2265	79.8,79.8
70	251.5	242.5	213.6	286.6	287.6	263.2	199.8	225.1	65- 70	142.8	2407	84.8,84.8
75	201.1	185.4	143.4	219.2	232.5	201.5	133.8	170.5	70- 75	114.0	2521	88.8,88.8
80	157.7	134.9	76.34	160.9	186.3	148.8	74.31	122.1	75- 80	86.42	2608	91.9,91.9
85	121.2	89.91	24.41	111.8	147.4	103.5	26.11	79.54	80- 85	61.13	2669	94,94
90	93.25	57.27	0.4010	76.54	118.0	67.82	0.4832	47.52	85- 90	40.00	2709	95.4,95.4
95	76.66	45.49	0.7001	54.84	97.63	55.35	0.7502	38.44	90- 95	28.69	2738	96.4,96.4
100	65.24	32.60	2.083	45.30	83.30	45.15	1.662	30.56	95-100	23.25	2761	97.2,97.2
105	54.65	28.73	2.114	37.73	70.82	36.92	1.721	24.68	100-105	18.91	2780	97.9,97.9
110	45.84	22.05	2.190	30.90	58.91	28.58	1.788	19.93	105-110	15.19	2795	98.4,98.4
115	37.22	16.35	2.194	25.68	49.28	20.89	1.472	13.96	110-115	11.64	2807	98.9,98.9
120	28.86	11.61	2.079	19.26	31.68	13.77	0.6963	10.91	115-120	8.456	2815	99.2,99.2
125	23.52	10.81	1.703	15.04	28.38	13.52	0.7478	8.980	120-125	6.341	2821	99.4,99.4
130	18.83	8.172	0.6567	12.99	25.87	12.92	0.8629	7.116	125-130	5.089	2826	99.6,99.6
135	14.65	6.589	0.4381	10.86	21.15	11.00	1.029	5.294	130-135	3.921	2830	99.7,99.7
140	10.89	5.386	0.5148	9.333	16.80	9.182	0.8647	4.006	135-140	2.933	2833	99.8,99.8
145	7.868	3.943	0.7041	7.934	13.12	7.599	0.8225	2.664	140-145	2.109	2835	99.9,99.9
150	5.236	2.669	0.7687	6.544	10.09	6.167	0.7919	1.730	145-150	1.448	2837	99.9,99.9
155	3.159	1.626	0.6923	5.335	7.521	4.953	0.7689	1.067	150-155	0.9400	2838	100,100
160	1.679	1.303	0.6828	4.198	5.354	3.876	0.9304	0.7742	155-160	0.5844	2838	100,100
165	0.9562	1.281	0.6675	3.328	3.748	3.100	0.9968	0.8579	160-165	0.3574	2839	100,100
170	1.522	1.115	0.7039	2.676	2.494	2.468	0.8666	0.7546	165-170	0.2135	2839	100,100
175	0.5997	0.6296	0.6787	1.782	0.5955	1.095	0.7175	0.6837	170-175	0.0957	2839	100,100
180	0.5823	0.6191	0.6350	0.6320	0.5880	0.6191	0.6273	0.6339	175-180	0.0178	2839	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

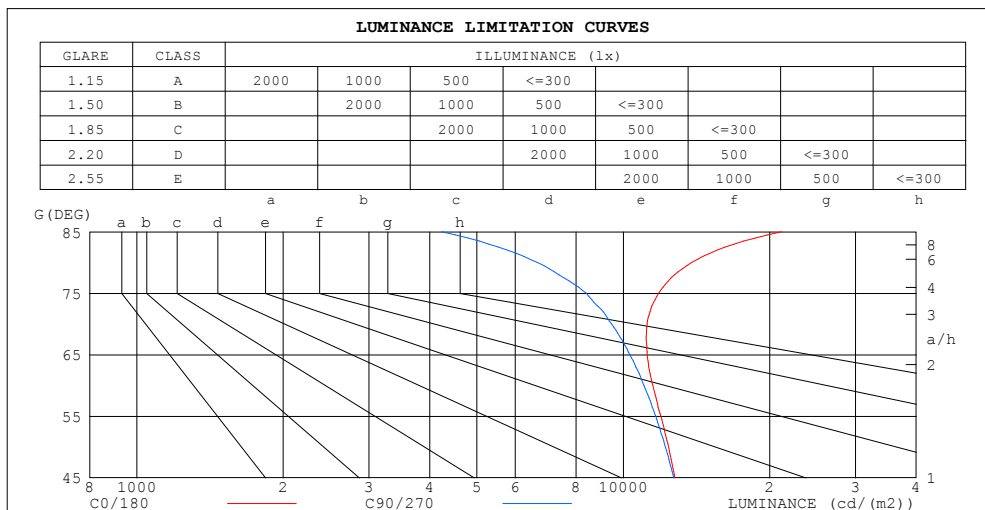

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	21161	4240
80	13817	6657
75	11826	8390
70	11190	9457
65	11202	10323
60	11501	11034
55	11956	11660
50	12392	12201
45	12756	12692


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
源磊A-档
3500K

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.5V I:0.1670A P:19.90W PF:0.9970 Lamp Flux:2839.02x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11m	PROTECTION ANGLE:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

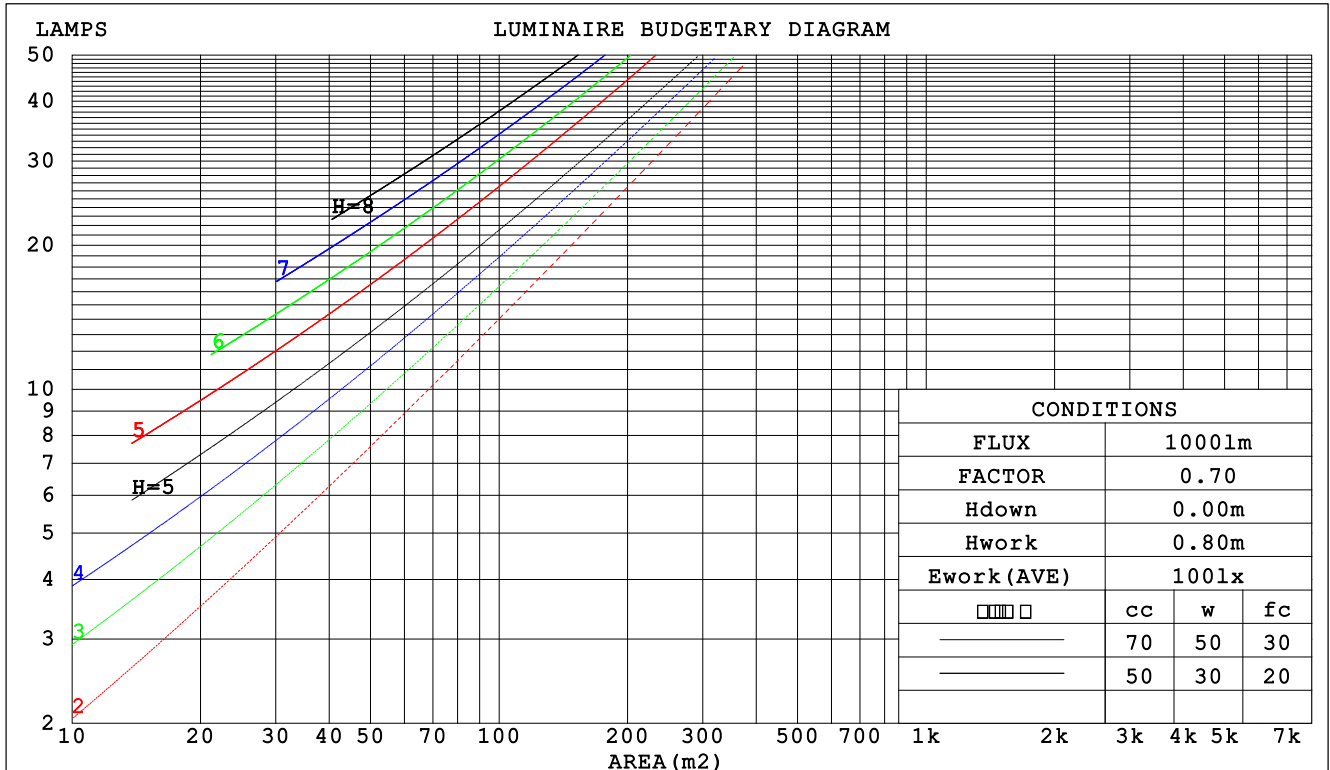

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
源磊A-档
3500K

WEC AND CCEC

Test:U:119.5V I:0.1670A P:19.90W PF:0.9970 Lamp Flux:2839.02x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11m	PROTECTION ANGLE:

□cc	80%	70%	50%	30%	10%	0
□w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
□fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.325 .185 .059	.316 .180 .057	.300 .172 .055	.286 .165 .053	.272 .158 .051	
2.0	.297 .163 .050	.290 .160 .049	.276 .153 .048	.263 .147 .046	.251 .142 .045	
3.0	.272 .145 .043	.265 .142 .043	.253 .137 .042	.241 .132 .041	.230 .128 .039	
4.0	.250 .130 .038	.244 .128 .038	.232 .123 .037	.222 .119 .036	.212 .115 .035	
5.0	.230 .117 .034	.225 .115 .034	.215 .112 .033	.205 .108 .032	.196 .105 .032	
6.0	.213 .107 .031	.208 .105 .030	.199 .102 .030	.191 .099 .029	.183 .096 .029	
7.0	.198 .098 .028	.194 .096 .027	.185 .094 .027	.178 .091 .027	.171 .089 .026	
8.0	.185 .090 .025	.181 .089 .025	.173 .087 .025	.166 .084 .024	.160 .082 .024	
9.0	.173 .084 .023	.169 .083 .023	.163 .080 .023	.156 .078 .022	.150 .076 .022	
10.0	.163 .078 .022	.159 .077 .021	.153 .075 .021	.147 .073 .021	.142 .071 .020	

□cc	80%	70%	50%	30%	10%	0
□w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
□fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.225 .225 .225	.193 .193 .193	.131 .131 .131	.076 .076 .076	.024 .024 .024	
1.0	.217 .191 .168	.185 .164 .145	.127 .113 .100	.073 .065 .058	.023 .021 .019	
2.0	.208 .167 .133	.179 .144 .115	.122 .100 .080	.071 .058 .047	.023 .019 .015	
3.0	.201 .150 .110	.172 .129 .095	.118 .090 .067	.068 .052 .039	.022 .017 .013	
4.0	.193 .137 .094	.165 .118 .082	.114 .082 .058	.066 .048 .034	.021 .016 .011	
5.0	.185 .127 .083	.159 .109 .072	.110 .076 .051	.063 .045 .030	.020 .015 .010	
6.0	.178 .118 .075	.153 .102 .066	.106 .072 .046	.061 .042 .028	.020 .014 .009	
7.0	.171 .111 .069	.147 .097 .061	.102 .068 .043	.059 .040 .026	.019 .013 .008	
8.0	.165 .106 .065	.142 .092 .057	.098 .064 .040	.057 .038 .024	.018 .012 .008	
9.0	.159 .101 .062	.137 .087 .054	.095 .061 .038	.055 .036 .023	.018 .012 .008	
10.0	.153 .096 .059	.132 .084 .051	.091 .059 .036	.053 .035 .022	.017 .011 .007	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
源磊A-档
3500K

Uncorrected UGR Table

Test:U:119.5V I:0.1670A P:19.90W PF:0.9970 Lamp Flux:2839.02x1 lm										
NAME: 磁铁灯条					TYPE:T5窄灯条 3500K			WEIGHT:		
DIM.: 2FT*2					SPEC.:乳白PC罩			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co,ltd					SUR.:0.6*0.11m			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.0	22.5	21.3	22.7	23.0	20.8	22.2	21.1	22.5	22.8
3H	22.6	23.9	23.0	24.3	24.6	22.2	23.5	22.5	23.8	24.2
4H	23.4	24.7	23.8	25.0	25.4	22.7	24.0	23.1	24.3	24.7
6H	24.2	25.4	24.6	25.8	26.1	23.0	24.2	23.4	24.6	25.0
8H	24.6	25.8	25.0	26.2	26.5	23.1	24.3	23.5	24.6	25.0
12H	25.1	26.2	25.5	26.6	27.0	23.1	24.2	23.5	24.6	25.0
4H 2H	21.6	22.8	21.9	23.2	23.5	21.4	22.7	21.8	23.0	23.4
3H	23.4	24.5	23.8	24.9	25.3	23.0	24.1	23.4	24.5	24.9
4H	24.3	25.4	24.8	25.8	26.2	23.7	24.7	24.1	25.1	25.5
6H	25.3	26.2	25.8	26.7	27.1	24.1	25.1	24.6	25.5	26.0
8H	25.9	26.7	26.3	27.2	27.6	24.3	25.1	24.8	25.6	26.1
12H	26.5	27.2	27.0	27.7	28.2	24.4	25.1	24.9	25.6	26.1
8H 4H	24.6	25.5	25.1	25.9	26.4	24.0	24.9	24.5	25.3	25.8
6H	25.9	26.6	26.4	27.1	27.6	24.8	25.5	25.3	26.0	26.5
8H	26.6	27.2	27.1	27.7	28.3	25.0	25.7	25.6	26.2	26.7
12H	27.4	27.9	27.9	28.4	29.0	25.2	25.8	25.7	26.3	26.9
12H 4H	24.7	25.4	25.2	25.9	26.4	24.1	24.9	24.6	25.4	25.9
6H	26.0	26.6	26.5	27.1	27.7	24.9	25.6	25.5	26.1	26.6
8H	26.7	27.3	27.3	27.8	28.4	25.3	25.8	25.8	26.4	26.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117 Corrected 2839 lm Total Lamp Luminous Flux.(8log(F/F0) = 3.6)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
源磊A-档
3500K

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.1670A P:19.90W PF:0.9970 Lamp Flux:2839.02x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	56	44	37	55	44	37	54	44	37	31
0.80	66	54	47	65	54	46	63	53	46	39
1.00	74	63	55	73	62	55	70	63	54	47
1.25	81	70	63	79	69	62	76	68	61	54
1.50	86	76	68	84	75	68	81	72	66	58
2.00	93	84	77	91	82	76	87	80	74	65
2.50	97	88	82	94	87	81	90	84	79	69
3.00	100	93	87	97	91	85	93	87	83	73
4.00	104	98	93	101	96	91	96	92	88	78
5.00	107	101	97	104	99	95	98	95	91	81
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: BQE46-0650-42-PV-S1
 源磊A-档
 3500K

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.1670A P:19.90W PF:0.9970 Lamp Flux:2839.02x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11m	PROTECTION ANGLE:

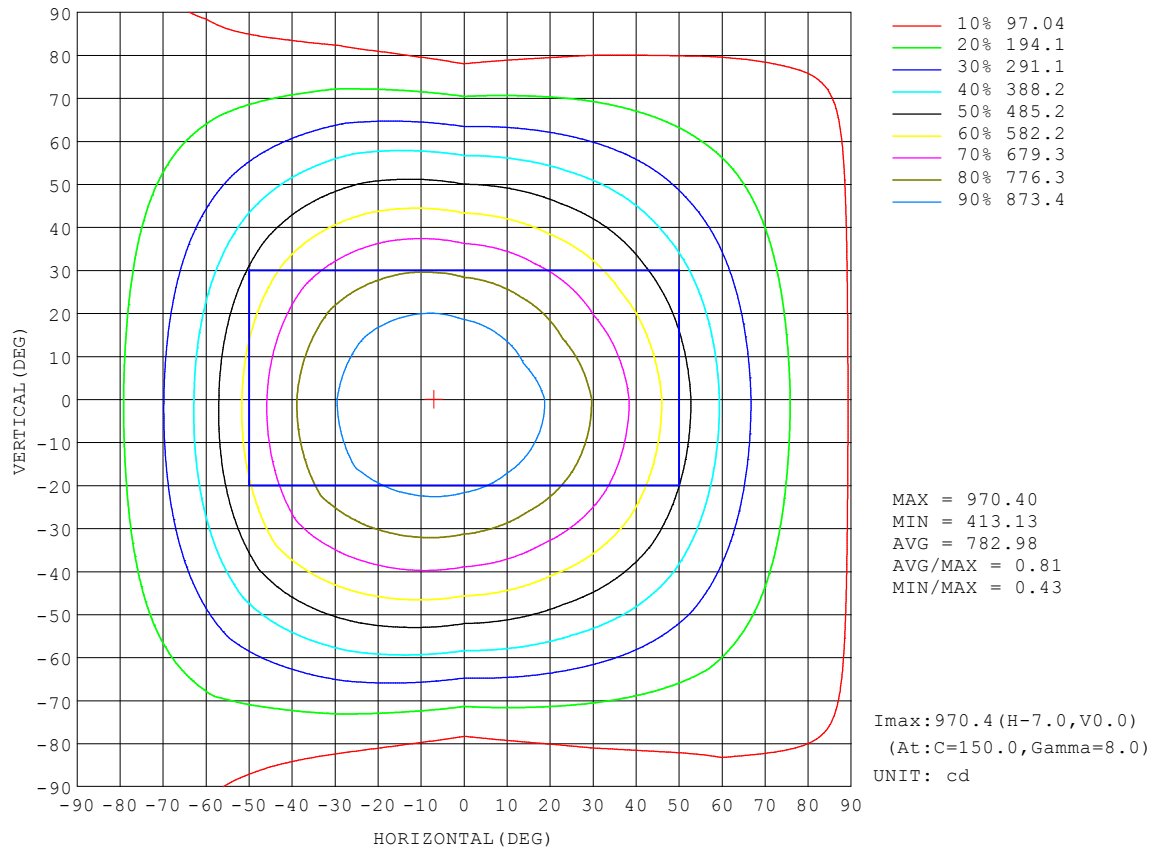


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
源磊A-档
3500K

AAI Figure

Test:U:119.5V I:0.1670A P:19.90W PF:0.9970 Lamp Flux:2839.02x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11m	PROTECTION ANGLE:

Flux out:1767 lm

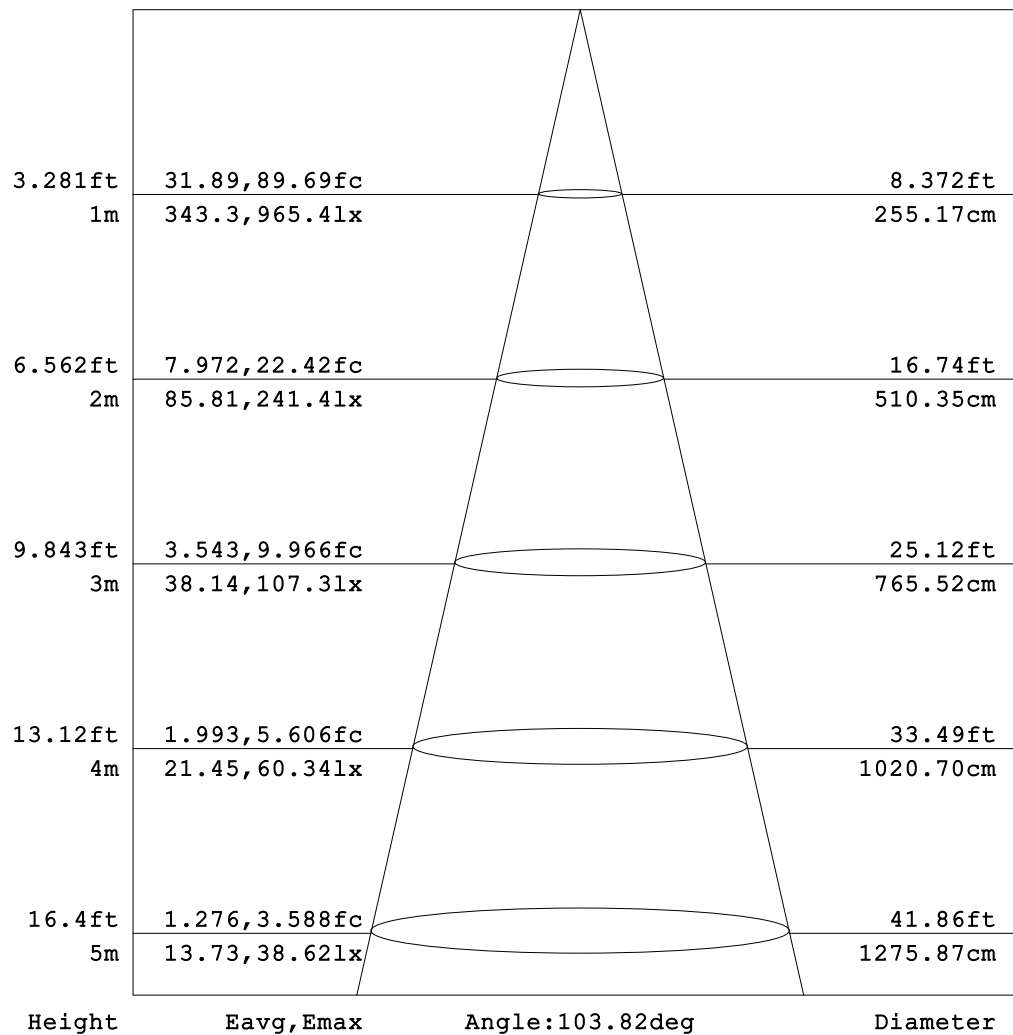


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
源磊A-档
3500K

ISOLUX DIAGRAM


Test:U:119.5V I:0.1670A P:19.90W PF:0.9970 Lamp Flux:2839.02x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11m	PROTECTION ANGLE:

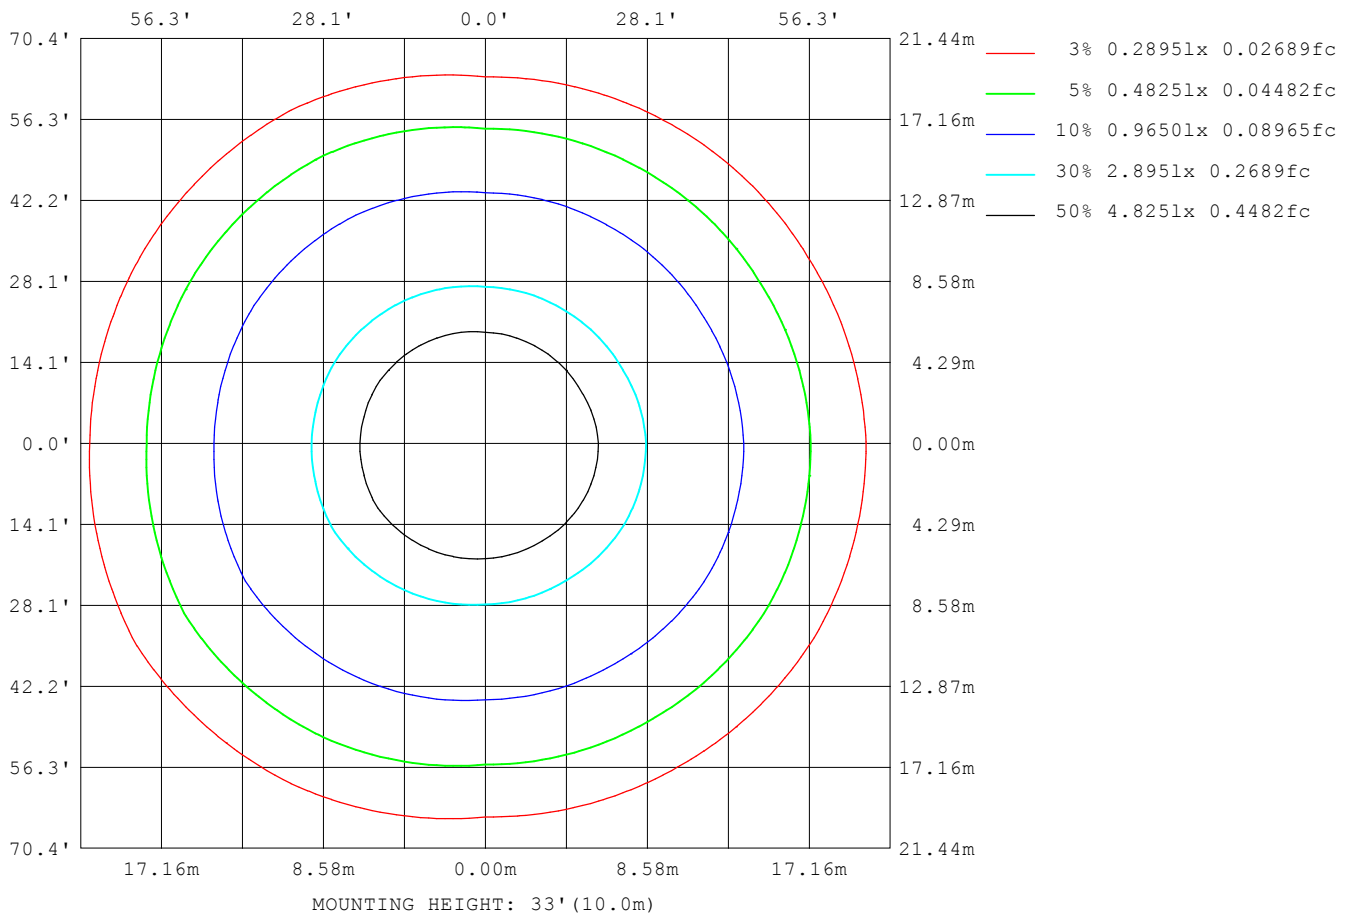

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
源磊A-档
3500K

Planar Illuminance Curve

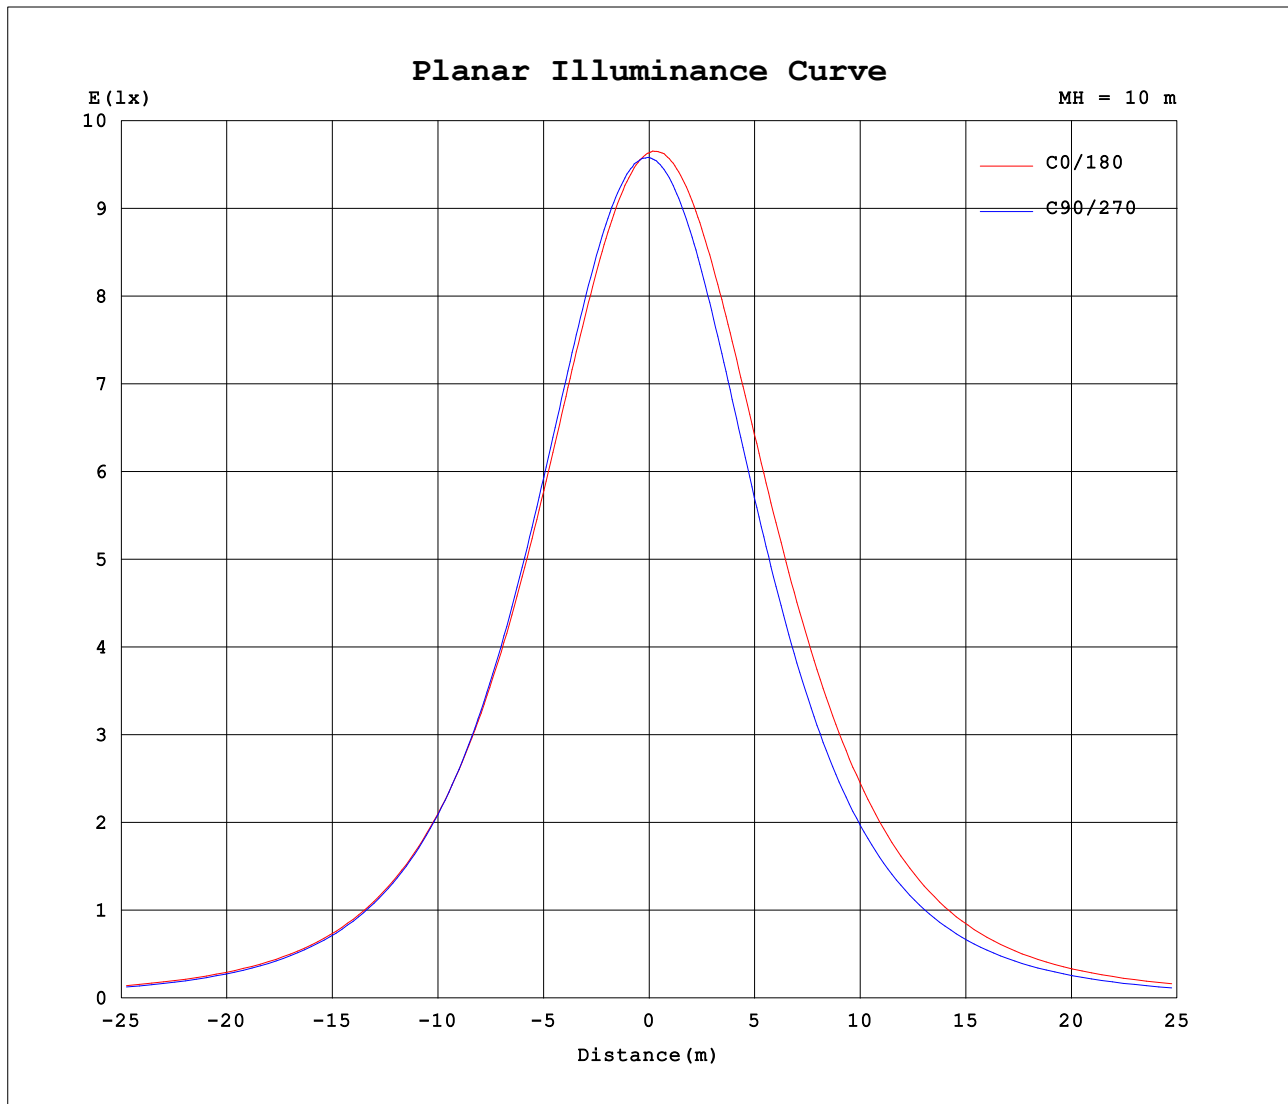

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
源磊A-档
3500K

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.1670A P:19.90W PF:0.9970 Lamp Flux:2839.02x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11m	PROTECTION ANGLE:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	959	959	959	959	959	959	959	959	959	959	959	959							
5	946	947	952	957	962	967	966	963	957	950	945	942							
10	924	928	935	945	956	967	964	958	945	930	923	918							
15	896	900	908	921	939	958	953	944	923	901	890	885							
20	860	865	871	888	913	939	933	920	892	861	849	844							
25	817	822	826	844	876	911	904	888	852	814	800	798							
30	770	773	773	792	832	873	865	847	803	758	744	745							
35	716	719	713	732	777	828	818	796	747	696	683	688							
40	658	659	649	665	716	773	759	737	686	629	618	625							
45	593	595	580	593	648	708	691	669	618	558	551	561							
50	523	526	510	518	576	635	609	593	546	486	481	494							
55	451	455	438	442	500	554	519	508	472	412	412	424							
60	378	383	367	364	422	466	431	422	398	340	345	356							
65	311	314	299	288	344	380	354	344	323	269	280	291							
70	252	252	233	214	268	305	288	274	252	200	218	232							
75	201	198	173	143	198	240	232	216	187	134	161	180							
80	158	151	119	76.3	135	187	186	167	131	74.3	109	135							
85	121	109	71.2	24.4	82.1	142	147	125	82.0	26.1	63.8	95.3							
90	93.2	78.7	35.8	0.40	47.8	105	118	93.5	42.1	0.48	27.6	67.4							
95	76.7	64.6	26.3	0.70	29.2	80.5	97.6	78.4	32.3	0.75	20.6	56.3							
100	65.2	53.0	12.1	2.08	23.0	67.7	83.3	65.4	24.8	1.66	15.3	45.9							
105	54.7	44.0	13.4	2.11	18.5	57.0	70.8	54.3	19.5	1.72	11.6	37.8							
110	45.8	32.4	11.7	2.19	15.2	46.7	58.9	44.9	12.2	1.79	8.85	31.0							
115	37.2	22.6	10.1	2.19	12.8	38.6	49.3	30.8	10.9	1.47	6.75	21.2							
120	28.9	15.0	8.21	2.08	11.3	27.2	31.7	19.1	8.48	0.70	4.41	17.4							
125	23.5	15.4	6.15	1.70	9.42	20.7	28.4	19.1	7.94	0.75	4.15	13.8							
130	18.8	12.7	3.65	0.66	6.80	19.2	25.9	18.6	7.25	0.86	3.24	11.0							
135	14.6	10.5	2.67	0.44	5.54	16.2	21.2	15.6	6.39	1.03	2.55	8.05							
140	10.9	8.08	2.68	0.51	5.14	13.5	16.8	12.7	5.61	0.86	1.54	6.47							
145	7.87	5.82	2.07	0.70	4.92	11.0	13.1	10.2	4.95	0.82	0.83	4.50							
150	5.24	3.89	1.45	0.77	4.36	8.73	10.1	8.08	4.25	0.79	0.68	2.78							
155	3.16	2.34	0.91	0.69	3.75	6.92	7.52	6.22	3.69	0.77	0.76	1.37							
160	1.68	1.30	1.30	0.68	3.15	5.24	5.35	4.62	3.13	0.93	0.73	0.81							
165	0.96	0.94	1.62	0.67	2.71	3.94	3.75	3.45	2.75	1.00	0.87	0.85							
170	1.52	1.61	0.62	0.70	2.34	3.02	2.49	2.62	2.32	0.87	0.83	0.68							
175	0.60	0.62	0.64	0.68	1.28	2.29	0.60	1.47	0.72	0.72	0.70	0.67							
180	0.58	0.61	0.63	0.63	0.62	0.64	0.59	0.61	0.63	0.63	0.62	0.64							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: BQE46-0650-42-PV-S1
 源磊A-档
 3500K