


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.2340A P:27.90W PF:0.9960 Lamp Flux:4017.77x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11m	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 144.01 lm/W			
MODEL		Imax(cd)	1351	S/MH(C0/180)	1.23
NOMINAL POWER(W)	28	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	4017.8	□ UP,DN(C0-180)	2.1,49.0
NOMINAL FLUX(lm)	4017.77	CIE CLASS	DIRECT	□ UP,DN(C180-360)	2.1,46.7
LAMPS INSIDE	1	□ up(%)	4.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	119.5	□ down(%)	95.7	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

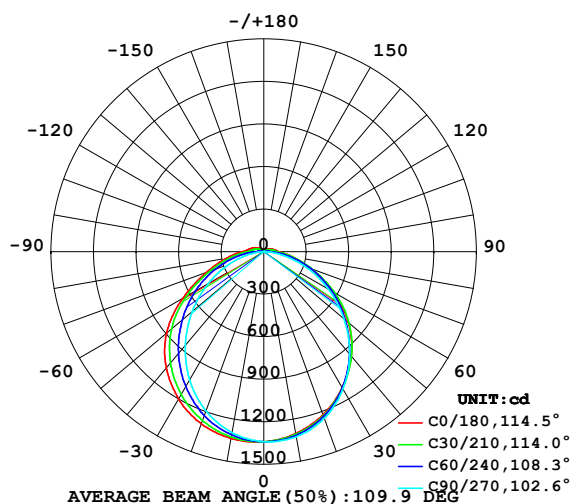

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

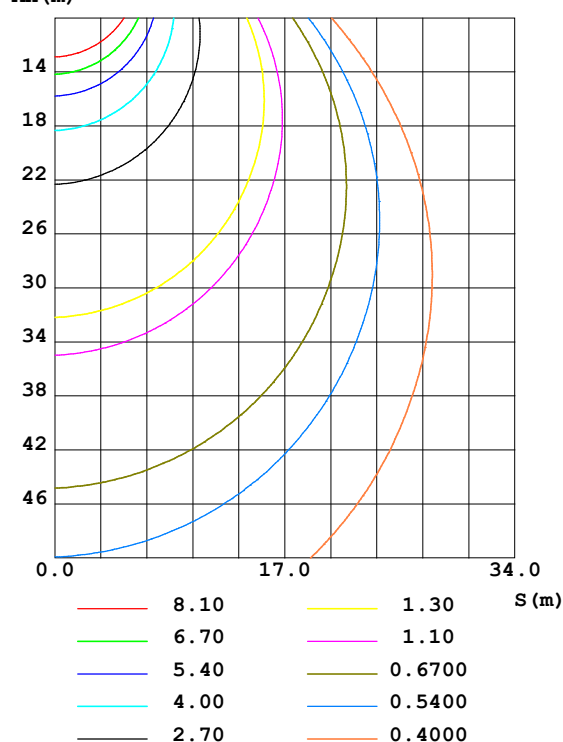


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	zone	total	%lum, lamp
5	1327	1331	1340	1348	1344	1336	1325	1321	0- 5	31.97	31.97	0.80,0.80
10	1301	1311	1325	1342	1338	1319	1295	1289	5- 10	94.77	126.7	3.15,3.15
15	1268	1279	1295	1323	1319	1290	1251	1245	10- 15	154.2	280.9	6.99,6.99
20	1224	1233	1250	1290	1292	1249	1194	1189	15- 20	208.1	489.0	12.2,12.2
25	1169	1177	1190	1247	1251	1195	1126	1125	20- 25	254.4	743.4	18.5,18.5
30	1107	1110	1118	1192	1202	1132	1046	1050	25- 30	291.7	1035	25.8,25.8
35	1036	1034	1036	1121	1139	1060	956.4	969.6	30- 35	318.7	1354	33.7,33.7
40	960.9	952.1	943.0	1045	1070	980.1	861.4	882.7	35- 40	334.9	1689	42,42
45	874.6	862.8	844.0	959.6	989.7	893.8	761.6	791.9	40- 45	340.0	2029	50.5,50.5
50	779.5	768.6	739.4	866.9	895.0	800.3	659.4	697.4	45- 50	333.8	2363	58.8,58.8
55	673.6	669.7	632.7	767.5	782.9	699.8	556.6	599.9	50- 55	316.3	2679	66.7,66.7
60	559.6	566.1	524.3	661.7	660.7	595.1	453.3	499.9	55- 60	288.1	2967	73.8,73.8
65	447.8	460.5	417.4	550.1	539.3	486.9	354.5	402.5	60- 65	250.9	3218	80.1,80.1
70	351.2	360.1	312.5	441.7	432.7	384.2	259.2	310.5	65- 70	208.6	3426	85.3,85.3
75	269.7	268.3	210.9	338.8	342.4	290.8	169.5	226.5	70- 75	164.8	3591	89.4,89.4
80	200.6	185.9	115.4	245.1	266.6	209.3	89.30	152.1	75- 80	122.0	3713	92.4,92.4
85	142.6	116.6	39.34	165.8	202.1	137.8	27.98	87.76	80- 85	82.80	3796	94.5,94.5
90	104.2	66.44	0.8028	103.2	150.2	84.89	0.7622	51.12	85- 90	50.68	3847	95.7,95.7
95	87.65	54.23	0.7992	70.17	122.4	69.01	1.118	42.70	90- 95	34.77	3882	96.6,96.6
100	74.78	44.55	2.325	59.35	105.2	58.26	1.908	34.46	95-100	28.54	3910	97.3,97.3
105	63.41	36.31	2.445	50.51	90.73	46.25	1.980	28.42	100-105	23.64	3934	97.9,97.9
110	53.49	29.51	2.556	40.92	77.61	37.36	2.090	23.51	105-110	19.16	3953	98.4,98.4
115	44.99	23.20	2.554	33.50	64.93	28.48	1.522	16.92	110-115	15.16	3968	98.8,98.8
120	34.62	17.68	2.493	27.52	46.31	22.36	1.035	13.97	115-120	11.30	3979	99,99
125	28.89	13.93	2.265	23.08	39.71	18.97	1.325	11.97	120-125	8.794	3988	99.3,99.3
130	23.97	12.24	1.098	19.99	36.18	18.29	1.692	9.729	125-130	7.091	3995	99.4,99.4
135	19.66	10.72	0.7961	17.78	30.59	16.91	1.873	9.026	130-135	5.814	4001	99.6,99.6
140	16.05	9.489	1.013	16.16	25.55	15.34	1.663	7.823	135-140	4.677	4006	99.7,99.7
145	12.86	7.997	1.328	14.84	20.98	14.26	1.622	6.407	140-145	3.687	4009	99.8,99.8
150	10.12	6.663	1.446	14.10	18.26	13.30	1.578	5.253	145-150	2.880	4012	99.9,99.9
155	7.689	5.798	1.433	12.76	15.99	12.35	1.534	3.602	150-155	2.179	4014	99.9,99.9
160	5.366	4.561	1.485	11.18	14.48	10.71	1.820	2.548	155-160	1.547	4016	100,100
165	3.901	3.102	1.513	8.512	12.43	7.956	2.068	1.885	160-165	1.006	4017	100,100
170	2.968	1.680	1.596	5.592	5.722	4.321	2.028	1.357	165-170	0.5093	4018	100,100
175	1.277	1.063	1.724	2.982	2.224	2.580	1.917	1.297	170-175	0.1794	4018	100,100
180	1.311	1.579	1.810	1.992	1.304	1.570	1.812	2.019	175-180	0.0426	4018	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

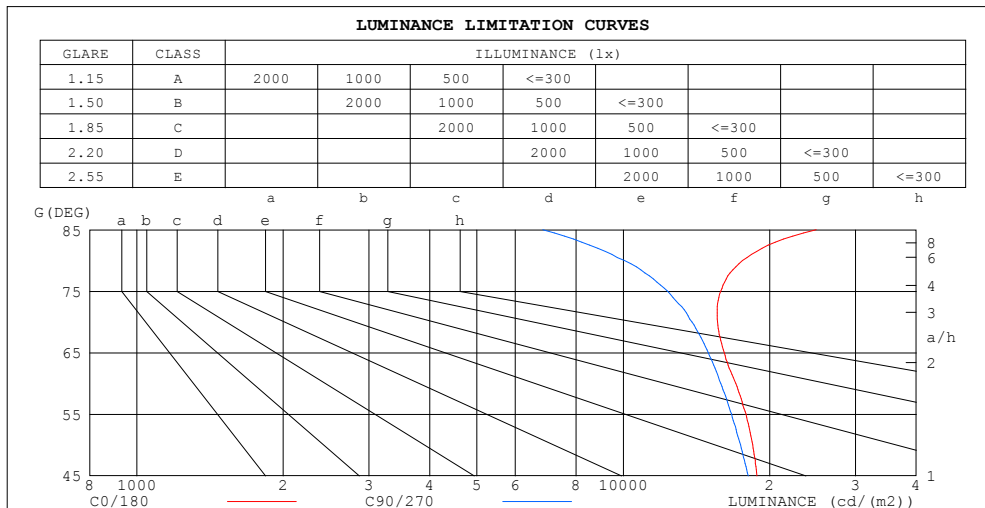

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	24895	6832
80	17577	10060
75	15854	12333
70	15621	13832
65	16121	14949
60	17028	15873
55	17866	16697
50	18448	17413
45	18816	18067


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.5V I:0.2340A P:27.90W PF:0.9960 Lamp Flux:4017.77x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11m	PROTECTION ANGLE:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

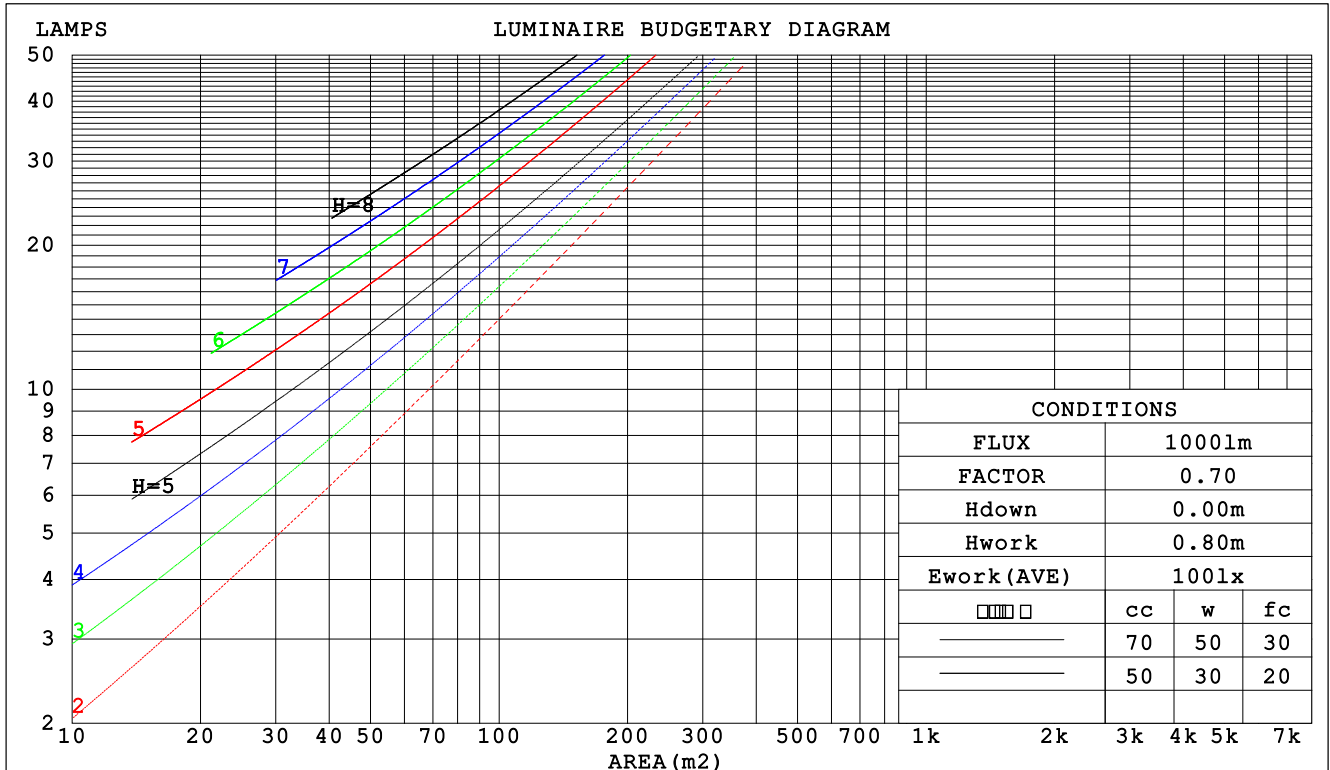

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

WEC AND CCEC

Test:U:119.5V I:0.2340A P:27.90W PF:0.9960 Lamp Flux:4017.77x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11m	PROTECTION ANGLE:

□cc	80%	70%	50%	30%	10%	0
□w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
□fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.324 .184 .058	.316 .180 .057	.300 .172 .055	.286 .165 .053	.272 .158 .051	
2.0	.298 .163 .050	.290 .160 .049	.276 .154 .048	.264 .148 .046	.252 .142 .045	
3.0	.273 .145 .044	.266 .143 .043	.254 .138 .042	.242 .133 .041	.232 .128 .040	
4.0	.251 .130 .038	.245 .128 .038	.234 .124 .037	.223 .120 .036	.214 .116 .035	
5.0	.231 .118 .034	.226 .116 .034	.216 .112 .033	.206 .109 .032	.198 .106 .032	
6.0	.214 .107 .031	.209 .106 .030	.200 .103 .030	.192 .100 .029	.184 .097 .029	
7.0	.199 .098 .028	.194 .097 .028	.186 .094 .027	.179 .092 .027	.172 .089 .026	
8.0	.185 .091 .025	.181 .089 .025	.174 .087 .025	.167 .085 .024	.161 .083 .024	
9.0	.174 .084 .023	.170 .083 .023	.163 .081 .023	.157 .079 .023	.151 .077 .022	
10.0	.163 .078 .022	.160 .077 .022	.154 .075 .021	.148 .074 .021	.143 .072 .021	

□cc	80%	70%	50%	30%	10%	0
□w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
□fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.223 .223 .223	.191 .191 .191	.130 .130 .130	.075 .075 .075	.024 .024 .024	
1.0	.214 .189 .166	.183 .162 .143	.125 .111 .099	.072 .064 .057	.023 .021 .019	
2.0	.206 .165 .130	.176 .142 .113	.121 .098 .078	.070 .057 .046	.022 .018 .015	
3.0	.198 .147 .107	.170 .127 .093	.117 .088 .065	.067 .052 .038	.022 .017 .013	
4.0	.190 .134 .091	.163 .116 .079	.112 .081 .056	.065 .047 .033	.021 .015 .011	
5.0	.183 .124 .080	.157 .107 .070	.108 .075 .049	.063 .044 .029	.020 .014 .010	
6.0	.176 .116 .073	.151 .100 .063	.104 .070 .045	.060 .041 .027	.020 .013 .009	
7.0	.169 .109 .067	.145 .094 .058	.100 .066 .041	.058 .039 .025	.019 .013 .008	
8.0	.162 .103 .062	.140 .089 .054	.097 .063 .039	.056 .037 .023	.018 .012 .008	
9.0	.156 .098 .059	.135 .085 .051	.093 .060 .036	.054 .035 .022	.018 .012 .007	
10.0	.151 .094 .056	.130 .082 .049	.090 .057 .035	.053 .034 .021	.017 .011 .007	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

Uncorrected UGR Table

Test:U:119.5V I:0.2340A P:27.90W PF:0.9960 Lamp Flux:4017.77x1 lm										
NAME: 磁铁灯条					TYPE:T5窄灯条 3500K			WEIGHT:		
DIM.: 2FT					SPEC.:乳白PC罩			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co,ltd					SUR.:0.6*0.11m			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.6	24.0	22.9	24.3	24.6	22.2	23.7	22.6	24.0	24.3
3H	24.0	25.4	24.4	25.7	26.0	23.7	25.0	24.0	25.3	25.6
4H	24.7	26.0	25.1	26.3	26.7	24.2	25.5	24.6	25.8	26.2
6H	25.4	26.6	25.8	26.9	27.3	24.5	25.7	24.9	26.1	26.5
8H	25.7	26.9	26.1	27.2	27.6	24.6	25.8	25.0	26.1	26.5
12H	26.1	27.2	26.5	27.6	28.0	24.6	25.8	25.0	26.1	26.5
4H 2H	23.1	24.4	23.5	24.8	25.1	22.9	24.2	23.3	24.5	24.9
3H	24.8	26.0	25.3	26.3	26.7	24.5	25.7	24.9	26.0	26.4
4H	25.7	26.7	26.1	27.1	27.5	25.2	26.2	25.6	26.6	27.1
6H	26.5	27.4	27.0	27.8	28.3	25.7	26.6	26.2	27.0	27.5
8H	26.9	27.8	27.4	28.2	28.7	25.8	26.7	26.3	27.1	27.6
12H	27.4	28.2	27.9	28.6	29.1	25.9	26.7	26.4	27.2	27.7
8H 4H	26.0	26.8	26.5	27.3	27.8	25.6	26.4	26.0	26.9	27.3
6H	27.0	27.7	27.5	28.2	28.7	26.3	27.0	26.8	27.5	28.0
8H	27.6	28.2	28.1	28.7	29.3	26.5	27.2	27.1	27.7	28.2
12H	28.2	28.8	28.8	29.3	29.9	26.7	27.3	27.2	27.8	28.3
12H 4H	26.0	26.8	26.5	27.2	27.7	25.6	26.4	26.1	26.9	27.4
6H	27.1	27.7	27.6	28.2	28.8	26.4	27.0	26.9	27.5	28.1
8H	27.7	28.3	28.3	28.8	29.4	26.7	27.3	27.3	27.8	28.4
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117 Corrected 4018 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.8)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.2340A P:27.90W PF:0.9960 Lamp Flux:4017.77x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	56	44	37	55	44	37	54	43	37	30
0.80	66	54	46	65	53	46	63	52	46	39
1.00	74	63	55	73	62	55	70	63	54	47
1.25	81	70	63	79	69	62	76	68	61	53
1.50	86	76	68	84	75	68	81	72	66	58
2.00	93	84	77	91	82	76	87	80	74	66
2.50	97	88	82	94	87	81	90	84	79	69
3.00	100	93	87	98	91	86	93	88	83	73
4.00	104	98	93	101	96	91	97	92	88	78
5.00	107	101	97	104	99	95	99	95	91	81
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: BQE46-1000-42-PV-S1
 源磊A-档
 3500K

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.2340A P:27.90W PF:0.9960 Lamp Flux:4017.77x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11m	PROTECTION ANGLE:

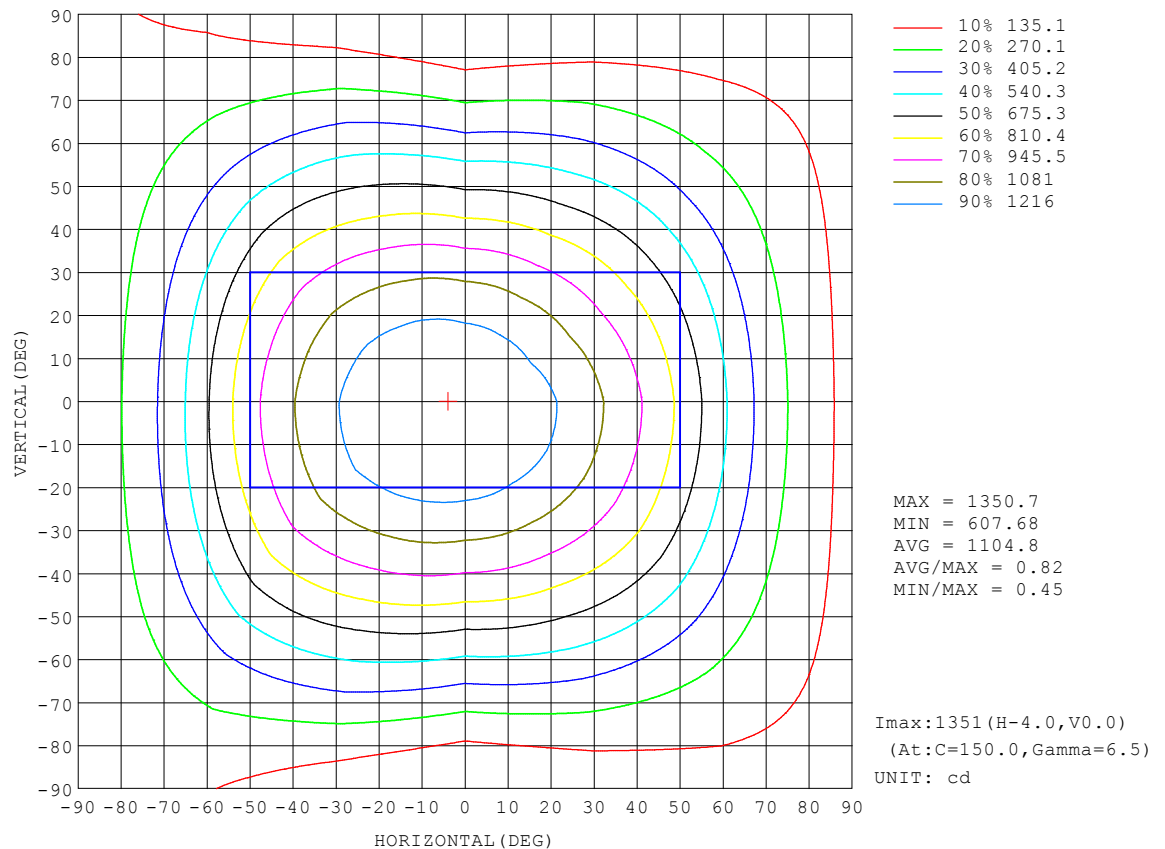


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

AAI Figure

Test:U:119.5V I:0.2340A P:27.90W PF:0.9960 Lamp Flux:4017.77x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11m	PROTECTION ANGLE:

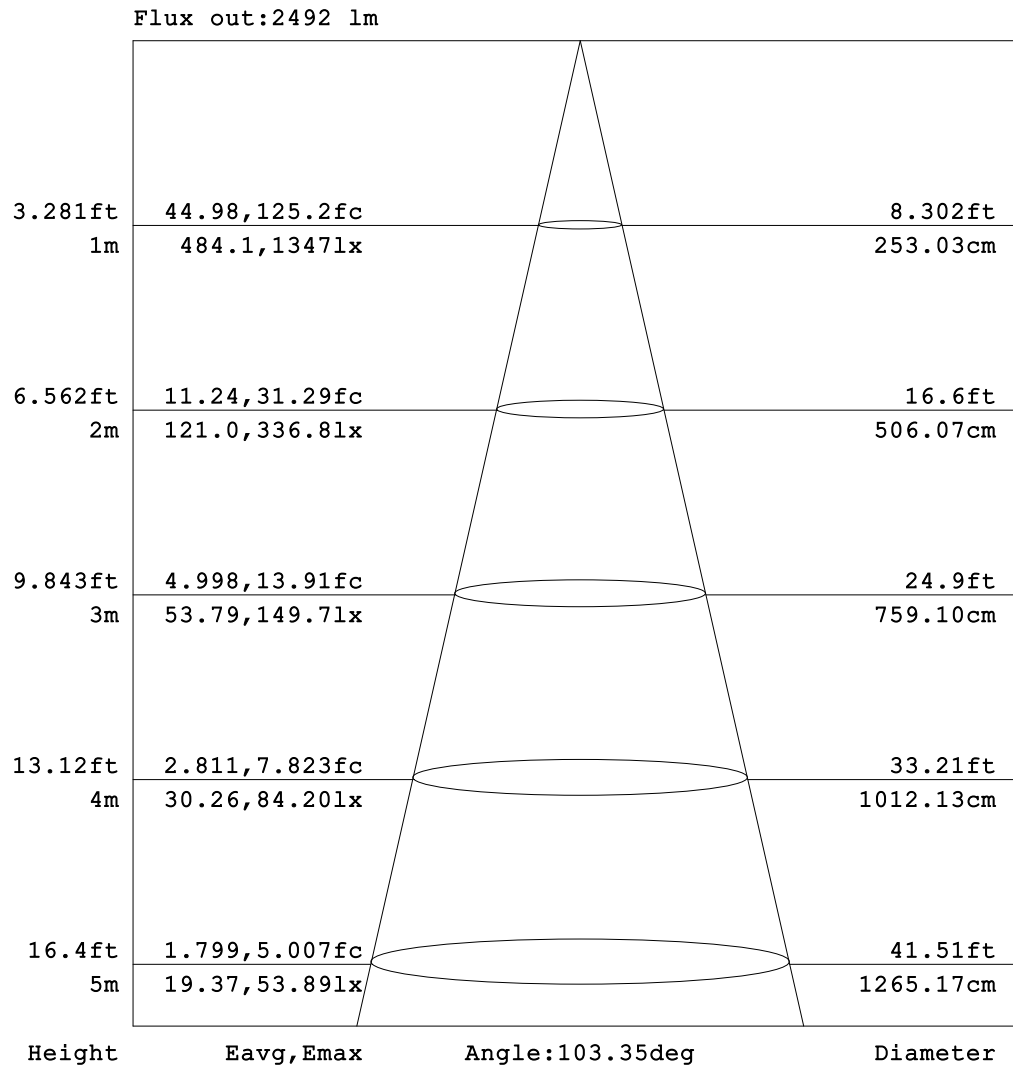


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

ISOLUX DIAGRAM


Test:U:119.5V I:0.2340A P:27.90W PF:0.9960 Lamp Flux:4017.77x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11m	PROTECTION ANGLE:

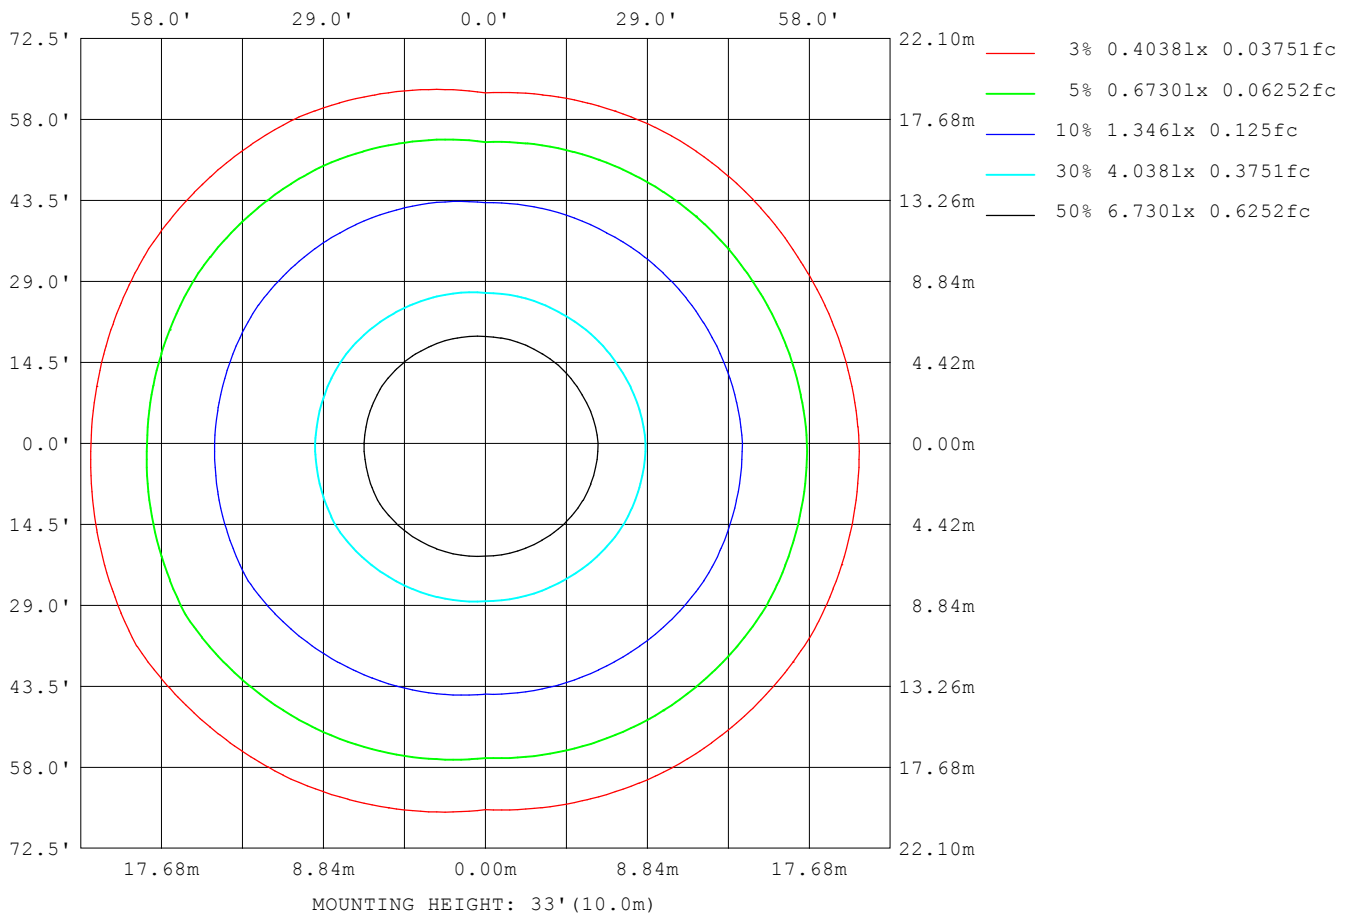

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

Planar Illuminance Curve

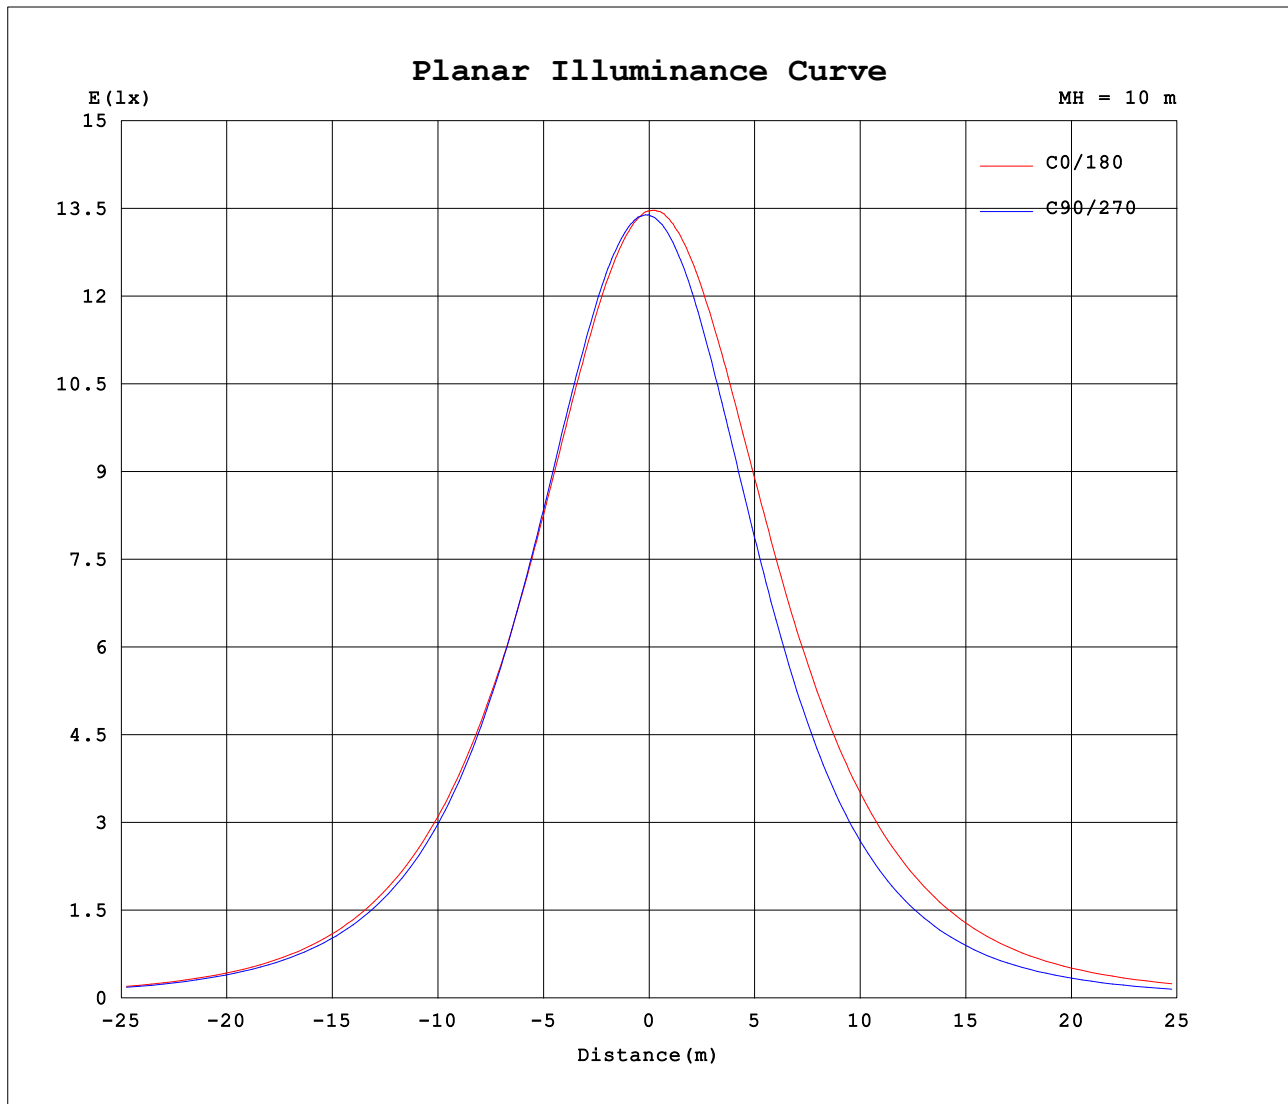

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.2340A P:27.90W PF:0.9960 Lamp Flux:4017.77x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 2FT	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.6*0.11m	PROTECTION ANGLE:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1341	1341	1341	1341	1341	1341	1341	1341	1341	1341	1341	1341							
5	1327	1328	1334	1340	1345	1350	1344	1339	1332	1325	1321	1321							
10	1301	1307	1315	1325	1336	1347	1338	1327	1311	1295	1289	1289							
15	1268	1275	1282	1295	1314	1333	1319	1303	1277	1251	1244	1247							
20	1224	1231	1236	1250	1276	1305	1292	1267	1230	1194	1184	1194							
25	1169	1174	1179	1190	1227	1267	1251	1221	1169	1126	1117	1133							
30	1107	1111	1109	1118	1164	1219	1202	1164	1099	1046	1039	1061							
35	1036	1040	1029	1036	1090	1153	1139	1098	1021	956	955	985							
40	961	962	942	943	1007	1083	1070	1024	936	861	864	902							
45	875	877	848	844	917	1003	990	941	846	762	770	814							
50	779	785	752	739	820	914	895	850	751	659	674	721							
55	674	685	654	633	719	816	783	745	654	557	579	621							
60	560	577	555	524	618	706	661	632	558	453	485	515							
65	448	467	454	417	514	587	539	513	460	354	394	411							
70	351	364	356	313	412	471	433	406	363	259	304	317							
75	270	276	261	211	310	368	342	313	269	169	218	235							
80	201	200	172	115	211	280	267	235	184	89.3	140	164							
85	143	135	98.4	39.3	127	204	202	168	108	28.0	70.9	105							
90	104	89.8	43.0	0.80	65.2	141	150	117	53.0	0.76	28.8	73.5							
95	87.7	75.1	33.3	0.80	38.7	102	122	96.2	41.7	1.12	22.1	63.3							
100	74.8	63.5	25.5	2.33	31.8	87.0	105	83.1	33.3	1.91	17.1	51.8							
105	63.4	52.7	19.9	2.45	25.8	75.2	90.7	69.9	22.6	1.98	13.5	43.3							
110	53.5	44.1	14.9	2.56	21.6	60.2	77.6	55.4	19.3	2.09	10.9	36.2							
115	45.0	34.5	11.8	2.55	18.4	48.6	64.9	42.0	14.9	1.52	8.59	25.3							
120	34.6	26.6	8.68	2.49	15.9	39.1	46.3	32.7	12.0	1.03	6.53	21.4							
125	28.9	19.0	8.82	2.26	14.1	32.1	39.7	26.7	11.2	1.33	6.46	17.5							
130	24.0	17.7	6.79	1.10	12.1	27.9	36.2	26.0	10.5	1.69	5.83	13.6							
135	19.7	15.2	6.22	0.80	11.2	24.4	30.6	22.7	11.1	1.87	5.59	12.5							
140	16.0	12.3	6.67	1.01	11.1	21.2	25.5	19.5	11.2	1.66	4.86	10.8							
145	12.9	9.39	6.60	1.33	11.6	18.1	21.0	17.1	11.4	1.62	3.76	9.06							
150	10.1	7.25	6.08	1.45	11.5	16.7	18.3	15.3	11.2	1.58	2.99	7.52							
155	7.69	7.21	4.38	1.43	10.2	15.3	16.0	14.2	10.5	1.53	2.10	5.10							
160	5.37	6.46	2.65	1.48	8.27	14.1	14.5	13.0	8.37	1.82	1.55	3.55							
165	3.90	4.45	1.75	1.51	4.82	12.2	12.4	10.6	5.29	2.07	1.62	2.15							
170	2.97	2.07	1.29	1.60	3.48	7.71	5.72	5.21	3.43	2.03	1.29	1.42							
175	1.28	1.20	0.93	1.72	2.55	3.42	2.22	2.72	2.44	1.92	1.51	1.08							
180	1.31	1.49	1.67	1.81	1.93	2.06	1.30	1.47	1.67	1.81	1.93	2.10							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K